

Well Name: JICARILLA APACHE F	Well Location: T25N / R5W / SEC 16 / NENW / 36.404007 / -107.367428	County or Parish/State: RIO ARRIBA / NM
Well Number: 10	Type of Well: CONVENTIONAL GAS WELL	Allottee or Tribe Name: JICARILLA APACHE
Lease Number: JIC149	Unit or CA Name:	Unit or CA Number:
US Well Number: 3003982339	Well Status: Producing Gas Well	Operator: DJR OPERATING LLC

Notice of Intent

Sundry ID: 2681648

Type of Submission: Notice of Intent	Type of Action: Plug and Abandonment
Date Sundry Submitted: 07/13/2022	Time Sundry Submitted: 08:29
Date proposed operation will begin: 07/13/2022	

Procedure Description: This request is being submitted for engineering & geological review prior to onsite inspection as approved by Dave M. of the BLM. DJR Operating, LLC requests permission to Plug & Abandon the subject well according to the attached Procedure, Current & Proposed Wellbore Diagram.

Surface Disturbance

Is any additional surface disturbance proposed?: No

NOI Attachments

Procedure Description

NOI_PA_BLM_Submittal_20220713082909.pdf

Received by OCD: 7/19/2022 11:24:56 AM

Page 2 of 11

Well Name: JICARILLA APACHE F	Well Location: T25N / R5W / SEC 16 / NENW / 36.404007 / -107.367428	County or Parish/State: RIO ARRIBA / NM
Well Number: 10	Type of Well: CONVENTIONAL GAS WELL	Allottee or Tribe Name: JICARILLA APACHE
Lease Number: JIC149	Unit or CA Name:	Unit or CA Number:
US Well Number: 3003982339	Well Status: Producing Gas Well	Operator: DJR OPERATING LLC

Conditions of Approval

Specialist Review

25N5W16JicarillaApacheF10KGR_20220719102841.pdf
General_Requirement_PxA_20220719102827.pdf
2681648_NOIA_F_10_3003982339_KR_07192022_20220719102747.pdf

Operator

I certify that the foregoing is true and correct. Title 18 U.S.C. Section 1001 and Title 43 U.S.C. Section 1212, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction. Electronic submission of Sundry Notices through this system satisfies regulations requiring a

Operator Electronic Signature: SHAW-MARIE FORD	Signed on: JUL 13, 2022 08:29 AM
Name: DJR OPERATING LLC	
Title: Regulatory Specialist	
Street Address: 1 Road 3263	
City: Aztec	State: NM
Phone: (505) 632-3476	
Email address: sford@djrlc.com	

Field

Representative Name:		
Street Address:		
City:	State:	Zip:
Phone:		
Email address:		

BLM Point of Contact

BLM POC Name: KENNETH G RENNICK	BLM POC Title: Petroleum Engineer
BLM POC Phone: 5055647742	BLM POC Email Address: krennick@blm.gov
Disposition: Approved	Disposition Date: 07/19/2022
Signature: Kenneth Rennick	

Plug and Abandonment Procedure

DJR Operating, LLC

Jicarilla Apache F 10

API # 30-039-82339

NE/NW, Unit C, Sec. 16, T25N, R5W

Rio Arriba County, NM

1. Hold Pre job meeting, comply with all NMOCD, BLM and environmental regulations.
2. MIRU P&A rig.
3. Check and record tubing, casing and bradenhead pressures.
4. Remove existing piping from casing valve, RU blow lines from casing valves and blow down casing pressure. Kill well as necessary. Ensure that well is dead or on a vacuum.
5. ND WH, NU BOP, function test BOP.
6. Trip out of hole with 1 ½" tubing. LD tubing to be sent in for storage/salvage.
7. MIRU P&A rig and equipment.
8. PU 1 ½" workstring, TIH with bit and scraper, make sure that the bit and scraper will go below 7287'. TOOH.
9. Plug 1: Dakota top and Graneros perms: TIH with 1 ½" workstring to 7287'. Spot balanced plug from 7287-7053'. PU and pump water to assure tubing is clear. WOC.
10. Tag TOC. Roll hole with water. Drop standing valve and pressure test tubing to 1000 psi. Test casing to 600 psi. If casing does not test, contact engineering. TOOH.
11. MIRU logging truck. Run CBL log from TOC to surface.
12. Plug 2: Gallup: Spot balanced plug from 6281-6181'. PU and pump water to assure tubing is clear. WOC.

13. Plug 3: Mancos: Perforate holes at 5312'. TIH with tubing. Mix, pump, and displace sufficient volume to bring TOC to 5212', inside and outside. Pump water to assure tubing is clear. SI casing with pressure. WOC. Tag TOC.
14. Plug 4: Mesa Verde: Perforate holes at 4563'. TIH with tubing. Mix, pump, and displace sufficient volume to bring TOC to 4463', inside and outside. Pump water to assure tubing is clear. SI casing with pressure. WOC. Tag TOC.
15. Plug 5: Chacra: Spot balanced plug from 3774-3674'. PU and pump water to assure tubing is clear. WOC.
16. Plug 6: Pictured Cliffs and Fruitland: Spot balanced plug from 2918-2623'. PU and pump water to assure tubing is clear. WOC.
17. Plug 7: Kirtland and Ojo Alamo: Perforate holes at close to TOC under Kirtland as possible, based on CBL results. Mix, pump, and displace sufficient volume to bring TOC to 2230', inside and outside. Pump water to assure tubing is clear. SI casing with pressure. WOC.
18. Plug 8: Nacimiento: Perforate holes at 1040'. Mix, pump, and displace sufficient volume to bring TOC to 940', inside and outside. Pump water to assure tubing is clear. SI casing with pressure. WOC. Tag TOC.
19. Plug 9: Surface plug: Perforate at 265'. Tie onto 3-1/2" casing. Mix and pump sufficient volume to bring TOC to surface, inside and outside. Top off as needed.
20. RD cementing equipment. Cut off wellhead, fill any exposed annulus with cement as necessary. Install P&A marker as per BIA requirements. Record GPS coordinates for P&A marker and the Final P&A Report. Photograph the P&A marker and attach to the report.
21. RD and MO all rig and cement equipment. Assure that location is free of trash before moving off.
22. Send all reports and attachments to DJR Aztec office for regulatory filings.

Note: All cement is to be Class G mixed at 15.8 ppg, yield 1.15 ft³/sk. Cement volumes are based on inside capacities + 50' excess and outside capacities + 100% excess.

P&A marker is to be 12"x18" with rounded corners, and installed below grade no deeper than 2'.

Current Wellbore Diagram
DJR Operating, LLC
Jicarilla Apache F 10
 API # 30-039-82339
 NE/NW, Unit C, Sec 16, T25N, R5W
 Rio Arriba County, NM

GL 6703'
 KB 6715'
 Spud Date 1/26/1963

PROD TBG DETAIL:

1-1/2" landed at 7201'.

SURF CSG

Hole size 13.75"
 Csg Size: 9.625"
 Wt: 25.4#
 Grade: N/A
 ID: 8.95"
 Depth 215'
 Csg cap ft³: 0.448
 Csg/Csg Ann 0.3144
 Csg/OH cap 0.8307
 TOC: Cir surf


FORMATION TOPS

Nacimiento 990'
 Ojo Alamo 2280'
 Kirtland 2479'
 Fruitland 2673'
 Pictured Cliffs 2868'
 Chacra 3724'
 Mesa Verde 4513'
 Mancos 5262'
 Gallup 6231'
 Dakota 7237'

PROD CSG

Hole size 7.875"
 Csg Size: 3.5"
 Wt: 9.2#
 Grade: J-55
 ID: 2.992"
 Depth 7399'
 Csg cap ft³: 0.0488
 Csg/Csg Ann ft³: 0.3144
 Csg/OH cap ft³: 0.2714
 Stg 1 TOC: 5893' (Calc)
 Stg 2 TOC: 2476' (Calc)

Perfs 7103-7295'
 PBD 7316'
 TD 7428'

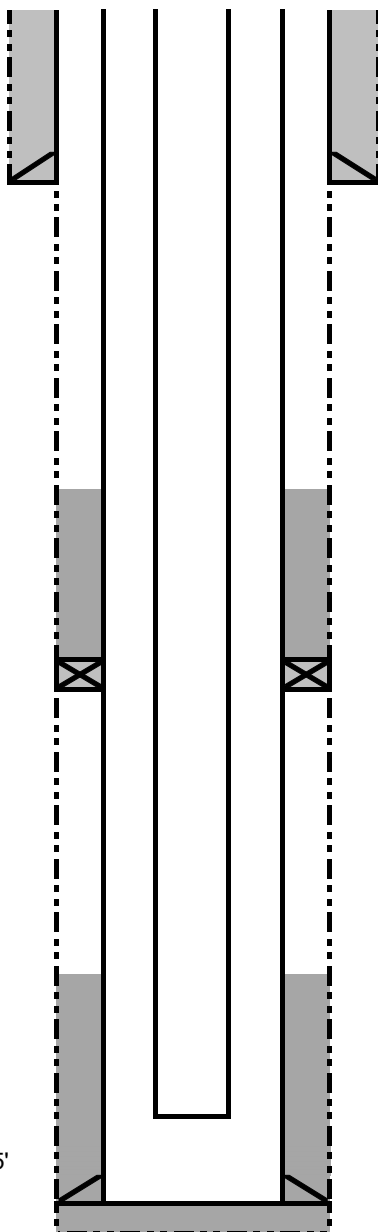

TOC 2476'

DV Tool 3911'

TOC 5893'

Current Wellbore Diagram
DJR Operating, LLC
Jicarilla Apache F 10
API # 30-039-82339
NE/NW, Unit C, Sec 16, T25N, R5W
Rio Arriba County, NM

GL 6703'
KB 6715'
Spud Date 1/26/1963

SURF CSG

Hole size 13.75"
Csg Size: 9.625"
Wt: 25.4#
Grade: N/A
ID: 8.95"
Depth 215'
Csg cap ft3: 0.448
Csg/Csg Ann 0.3144
Csg/OH cap 0.8307
TOC: Cir surf

FORMATION TOPS

Nacimiento 990'
Ojo Alamo 2280'
Kirtland 2479'
Fruitland 2673'
Pictured Cliffs 2868'
Chacra 3724'
Mesa Verde 4513'
Mancos 5262'
Gallup 6231'
Dakota 7237'


PROD CSG

Hole size 7.875"
Csg Size: 3.5"
Wt: 9.2#
Grade: J-55
ID: 2.992"
Depth 7399'
Csg cap ft3: 0.0488
Csg/Csg Ann ft3: 0.3144
Csg/OH cap ft3: 0.2714
Stg 1 TOC: 5893' (Calc)
Stg 2 TOC: 2476' (Calc)

TOC 2476'

DV Tool 3911'

Perfs 7103-7295'
PBTD 7316'
TD 7428'

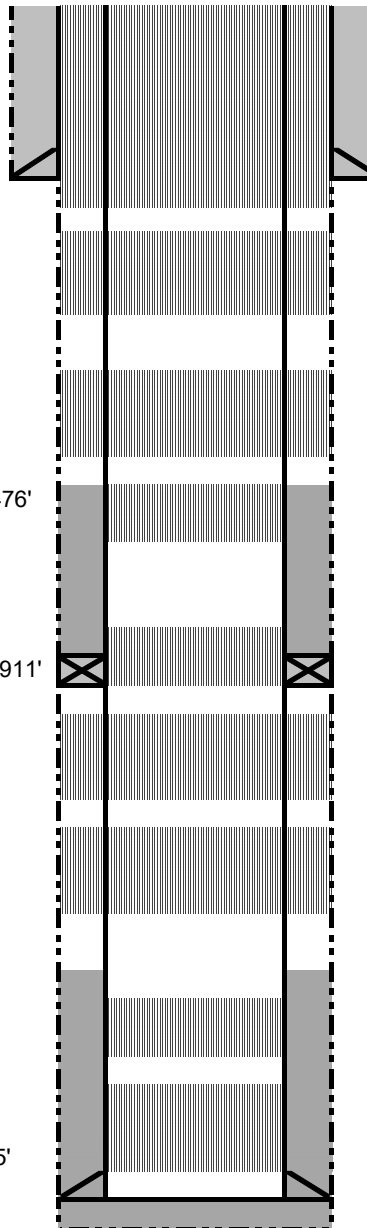

Plug 9: Surface casing shoe and plug:
Perf holes at 265'. Tie onto 3-1/2" casing.
Mix and pump sufficient volume to bring
TOC to surface, inside and outside.

Plug 8: Nacimiento: Perf holes at 1040'. Mix
and pump sufficient volume to bring TOC to
940', inside and outside. SI casing with
pressure.

Plug 7: Kirtland and Ojo Alamo: Perf holes as
close to TOC under Kirtland as possible. Mix
and pump sufficient volume to bring TOC to
2230', inside and outside. SI casing with
pressure.

Plug 6: Pictured Cliffs and Fruitland: Spot
balanced plug from 2918-2623'

Plug 5: Chacra: Spot balanced plug from
3774-3674'.

Plug 4: Mesa Verde: Perf holes at 4563'. Mix
and pump sufficient volume to bring TOC to
4463', inside and outside. SI casing with
pressure.

Plug 3: Mancos: Perf holes at 5312'. Mix and
pump sufficient volume to bring TOC to 5212',
inside and outside. SI casing with pressure.

TOC 5893'

Plug 2: Gallup: Spot balanced plug from 6281-
6181'.

Plug 1: Dakota and Graneros perms: Spot
balanced plug from 7287' to 7053'. Run CBL.

**UNITED STATES DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT
FARMINGTON DISTRICT OFFICE
6251 COLLEGE BLVD.
FARMINGTON, NEW MEXICO 87402**

AFMSS 2 Sundry ID 2681648

Attachment to notice of Intention to Abandon

Well: Jicarilla Apache F 10

CONDITIONS OF APPROVAL

1. Plugging operations authorized are subject to the attached "General Requirements for Permanent Abandonment of Wells on Federal and Indian Lease."
2. Farmington Office is to be notified at least 24 hours before the plugging operations commence at (505) 564-7750.

You are also required to place cement excesses per 4.2 and 4.4 of the attached General Requirements.

Office Hours: 7:45 a.m. to 4:30 p.m.

K. Rennick 7/19/2022

**GENERAL REQUIREMENTS FOR
PERMANENT ABANDONMENT OF WELLS ON FEDERAL AND INDIAN LEASES
FARMINGTON FIELD OFFICE**

1.0 The approved plugging plans may contain variances from the following minimum general requirements.

1.1 Modification of the approved plugging procedure is allowed only with the prior approval of the Authorized Officer, Farmington Field Office.

1.2 Requirements may be added to address specific well conditions.

2.0 Materials used must be accurately measured. (densometer/scales)

3.0 A tank or lined pit must be used for containment of any fluids from the wellbore during plugging operations and all pits are to be fenced with woven wire. These pits will be fenced on three sides and once the rig leaves location, the fourth side will be fenced.

3.1 Pits are not to be used for disposal of any hydrocarbons. If hydrocarbons are present in the pit, the fluids must be removed prior to filling in.

4.0 All cement plugs are to be placed through a work string. Cement may be bull-headed down the casing with prior approval. Cement caps on top of bridge plugs or cement retainers may be placed by dump bailer.

4.1 The cement shall be as specified in the approved plugging plan.

4.2 All cement plugs placed inside casing shall have sufficient volume to fill a minimum of 100' of the casing, or annular void(s) between casings, plus an excess volume sufficient to provide for 50 linear feet of fill above the plug.

4.3 Surface plugs may be no less than 50' in length.

4.4 All cement plugs placed to fill annular void(s) between casing and the formation shall be of sufficient volume to fill a minimum of 100' of the annular space plus 100% excess, calculated using the bit size, or 100' of annular capacity, determined from a caliper log, plus an excess volume sufficient to provide for 50 linear feet of fill above the plug.

4.5 All cement plugs placed to fill an open hole shall be of sufficient volume to fill a minimum of 100' of hole, as calculated from a caliper log, plus an excess volume sufficient to provide for 50 linear feet of fill above the plug. In the absence of a caliper log, an excess of 100% shall be required.

4.6 A cement bond log or other accepted cement evaluation tool is required to be run if one had not been previously ran or cement did not circulate to surface during the original casing cementing job or subsequent cementing jobs.

5.0 All cement plugs spotted across, or above, any exposed zone(s), when; the wellbore is not full of fluid or the fluid level will not remain static, and in the case of lost circulation or partial returns during cement placement, shall be tested by tagging with the work string.

- 5.1 The top of any cement plug verified by tagging must be at or above the depth specified in the approved plan, without regard to any excess.
- 5.2 Testing will not be required for any cement plug that is mechanically contained by use of a bridge plug and/or cement retainer, if casing integrity has been established.
- 5.3 Any cement plug which is the only isolating medium, for a fresh water interval or a zone containing a prospectively valuable deposit of minerals, shall be tested by tagging.
- 5.4 If perforations are required below the surface casing shoe, a 30 minute minimum wait time will be required to determine if gas and/or water flows are present. If flow is present, the well will be shut-in for a minimum of one hour and the pressure recorded. Short or long term venting may be necessary to evacuate trapped gas. **If only a water flow occurs with no associated gas, shut well in and record the pressures. Contact the Engineer as it may be necessary to change the cement weight and additives.**

6.0 Before setting any cement plugs the hole needs to be rolled. All wells are to be controlled by means of a fluid that is to be of a weight and consistency necessary to stabilize the wellbore. This fluid shall be left in place as filler between all plugs.

- 6.1 Drilling mud may be used as the wellbore fluid in open hole plugging operations.
- 6.2 The wellbore fluid used in cased holes shall be of sufficient weight to balance known pore pressures in all exposed formations.

7.0 A blowout preventer and related equipment (BOPE) shall be installed and tested prior to working in a wellbore with any exposed zone(s); (1) that are over pressured, (2) where the pressures are unknown, or (3) known to contain H₂S.

8.0 Within 30 days after plugging work is completed, file a Sundry Notice, Subsequent Report of Abandonment (Form 3160-5), five copies, with the Field Manager, Bureau of Land Management, 6251 College Blvd., Suite A, Farmington, NM 87402. The report should show the manner in which the plugging work was carried out, the extent, by depth(s), of cement plugs placed, and the size and location, by depth(s), of casing left in the well. Show date well was plugged.

9.0 All permanently abandoned wells are to be marked with a permanent monument as specified in 43 CFR 3162.6(d). Unless otherwise approved.

10.0 If this well is located in a Specially Designated Area (SDA), compliance with the appropriate seasonal closure requirements will be necessary.

All of the above are minimum requirements. Failure to comply with the above conditions of approval may result in an assessment for noncompliance and/or a Shut-in Order being issued pursuant to 43 CFR 3163.1. You are further advised that any instructions, orders or decisions issued by the Bureau of Land Management are subject to administrative review pursuant to 43 CFR 3165.3 and appeal pursuant to 43 CFR 3165.4 and 43 CFR 4.700.

(October 2012 Revision)

BLM FLUID MINERALS P&A Geologic Report

Date Completed: 07/19/2022

Well No. Jicarilla Apache F 10 (API# 30-039-82339)		Location:	NENW			
Lease No. JIC149		Sec. 16	T25N			R5W
Operator DJR Operating, LLC		County	Rio Arriba		State	New Mexico
Total Depth 7428'	PBTD 7316'	Formation Dakota and Graneros				
Elevation (GL) 6703'		Elevation (KB) 6715'				

Geologic Formations	Est. Top	Est. Bottom	Log Top	Log Bottom	Remarks
San Jose Fm					Surface/freshwater sands
Nacimiento Fm			990		Possible freshwater sands
Ojo Alamo Ss			2280		Aquifer (possible freshwater)
Kirtland Shale			2479		
Fruitland Fm			2673		Coal/Gas/Possible water
Pictured Cliffs Ss			2868		Gas
Lewis Shale					
Chacra			3724		Gas
Cliff House			4513		Water/Possible gas
Menefee Fm					Coal/Ss/Water/Possible O&G
Point Lookout Ss					Probable water/Possible O&G
Mancos			5262		Water/Possible gas
Gallup			6231		O&G/Water
Greenhorn					
Graneros Shale					
Dakota Ss			7237		O&G/Water

Remarks:

P & A

Reference Well:

- Dakota and Graneros perforations 7103 – 7295'

Prepared by: Kenneth Rennick

District I
1625 N. French Dr., Hobbs, NM 88240
Phone:(575) 393-6161 Fax:(575) 393-0720
District II
811 S. First St., Artesia, NM 88210
Phone:(575) 748-1283 Fax:(575) 748-9720
District III
1000 Rio Brazos Rd., Aztec, NM 87410
Phone:(505) 334-6178 Fax:(505) 334-6170
District IV
1220 S. St Francis Dr., Santa Fe, NM 87505
Phone:(505) 476-3470 Fax:(505) 476-3462

State of New Mexico
Energy, Minerals and Natural Resources
Oil Conservation Division
1220 S. St Francis Dr.
Santa Fe, NM 87505

CONDITIONS

Action 126813

CONDITIONS

Operator: DJR OPERATING, LLC 1 Road 3263 Aztec, NM 87410	OGRID: 371838
	Action Number: 126813
	Action Type: [C-103] NOI Plug & Abandon (C-103F)

CONDITIONS

Created By	Condition	Condition Date
kpickford	CBL required	7/20/2022
kpickford	Notify NMOCD 24 Hours Prior to beginning operations	7/20/2022
kpickford	Adhere to BLM approved plugs and COAs. See GEO Report	7/20/2022