

District I

1625 N. French Dr., Hobbs, NM 88240
Phone:(575) 393-6161 Fax:(575) 393-0720

District II

811 S. First St., Artesia, NM 88210
Phone:(575) 748-1283 Fax:(575) 748-9720

District III

1000 Rio Brazos Rd., Aztec, NM 87410
Phone:(505) 334-6178 Fax:(505) 334-6170

District IV

1220 S. St Francis Dr., Santa Fe, NM 87505
Phone:(505) 476-3470 Fax:(505) 476-3462

State of New Mexico
Energy, Minerals and Natural Resources
Oil Conservation Division
1220 S. St Francis Dr.
Santa Fe, NM 87505

Form C-101
August 1, 2011

Permit 323866

APPLICATION FOR PERMIT TO DRILL, RE-ENTER, DEEPEN, PLUGBACK, OR ADD A ZONE

1. Operator Name and Address ADVANCE ENERGY PARTNERS HAT MESA, LLC 11490 Westheimer Rd., Ste 950 Houston, TX 77077		2. OGRID Number 372417
		3. API Number 30-025-50558
4. Property Code 333273	5. Property Name BECKNELL 21 33 17 STATE COM	6. Well No. 113H

7. Surface Location

UL - Lot G	Section 17	Township 21S	Range 33E	Lot Idn G	Feet From 2439	N/S Line N	Feet From 2073	E/W Line E	County Lea
---------------	---------------	-----------------	--------------	--------------	-------------------	---------------	-------------------	---------------	---------------

8. Proposed Bottom Hole Location

UL - Lot J	Section 5	Township 21S	Range 33E	Lot Idn J	Feet From 2588	N/S Line S	Feet From 2304	E/W Line E	County Lea
---------------	--------------	-----------------	--------------	--------------	-------------------	---------------	-------------------	---------------	---------------

9. Pool Information

WC-025 G-10 S213328O;WOLFCAMP	98033
-------------------------------	-------

Additional Well Information

11. Work Type New Well	12. Well Type OIL	13. Cable/Rotary	14. Lease Type State	15. Ground Level Elevation 3781
16. Multiple N	17. Proposed Depth 22465	18. Formation Wolfcamp	19. Contractor	20. Spud Date 4/28/2023
Depth to Ground water		Distance from nearest fresh water well		Distance to nearest surface water

☒ We will be using a closed-loop system in lieu of lined pits

21. Proposed Casing and Cement Program

Type	Hole Size	Casing Size	Casing Weight/ft	Setting Depth	Sacks of Cement	Estimated TOC
Surf	17.5	13.375	54.5	1855	1422	0
Int1	12.25	10.75	40.5	5504	775	0
Int2	9.875	7.625	29.7	11194	1312	0
Prod	6.75	5.5	20	22465	719	0

Casing/Cement Program: Additional Comments

--

22. Proposed Blowout Prevention Program

Type	Working Pressure	Test Pressure	Manufacturer
Double Ram	5000	5000	TBD

23. I hereby certify that the information given above is true and complete to the best of my knowledge and belief.
I further certify I have complied with 19.15.14.9 (A) NMAC ☒ and/or 19.15.14.9 (B) NMAC ☒ if applicable.

Signature:

Printed Name: Electronically filed by Eileen M Kosakowski

Title:

Email Address: ekosakowski@advanceenergypartners.com

Date: 8/24/2022

Phone: 832-672-4604

OIL CONSERVATION DIVISION

Approved By: Paul F Kautz

Title: Geologist

Approved Date: 9/14/2022

Expiration Date: 9/14/2024

Conditions of Approval Attached

District I
1625 N. French Dr., Hobbs, NM 88240
Phone: (575) 393-6161 Fax: (575) 393-0720
District II
811 S. First St., Artesia, NM 88210
Phone: (575) 748-1283 Fax: (575) 748-9720
District III
1000 Rio Brazos Road, Aztec, NM 87410
Phone: (505) 334-6178 Fax: (505) 334-6170
District IV
1220 S. St. Francis Dr., Santa Fe, NM 87505
Phone: (505) 476-3460 Fax: (505) 476-3462

State of New Mexico
Energy, Minerals & Natural Resources Department
OIL CONSERVATION DIVISION
1220 South St. Francis Dr.
Santa Fe, NM 87505

Form C-102
Revised August 1, 2011
Submit one copy to appropriate
District Office

☐ AMENDED REPORT

WELL LOCATION AND ACREAGE DEDICATION PLAT

¹ API Number 30-025- 50558	² Pool Code 98033	³ Pool Name WC-025 G-10 S2133280;WOLFCAMP
⁴ Property Code 333273	⁵ Property Name Becknell 21-33-17 State Com	⁶ Well Number #113H
⁷ OGRID No. 372417	⁸ Operator Name ADVANCE ENERGY PARTNERS HAT MESA LLC	⁹ Elevation 3,781.35'

¹⁰ Surface Location


UL or lot no.	Section	Township	Range	Lot Idn	Feet from the	North/South line	Feet from the	East/West line	County
G	17	21-S	33-E	--	2,439'	NORTH	2,073'	EAST	LEA

¹¹ Bottom Hole Location If Different From Surface

UL or lot no.	Section	Township	Range	Lot Idn	Feet from the	North/South line	Feet from the	East/West line	County
J	5	21-S	33-E	--	2,588'	SOUTH	2,304'	EAST	LEA

¹² Dedicated Acres 320	¹³ Joint or Infill	¹⁴ Consolidation Code C	¹⁵ Order No.
--------------------------------------	-------------------------------	---------------------------------------	-------------------------

No allowable will be assigned to this completion until all interests have been consolidated or a non-standard unit has been approved by the division.

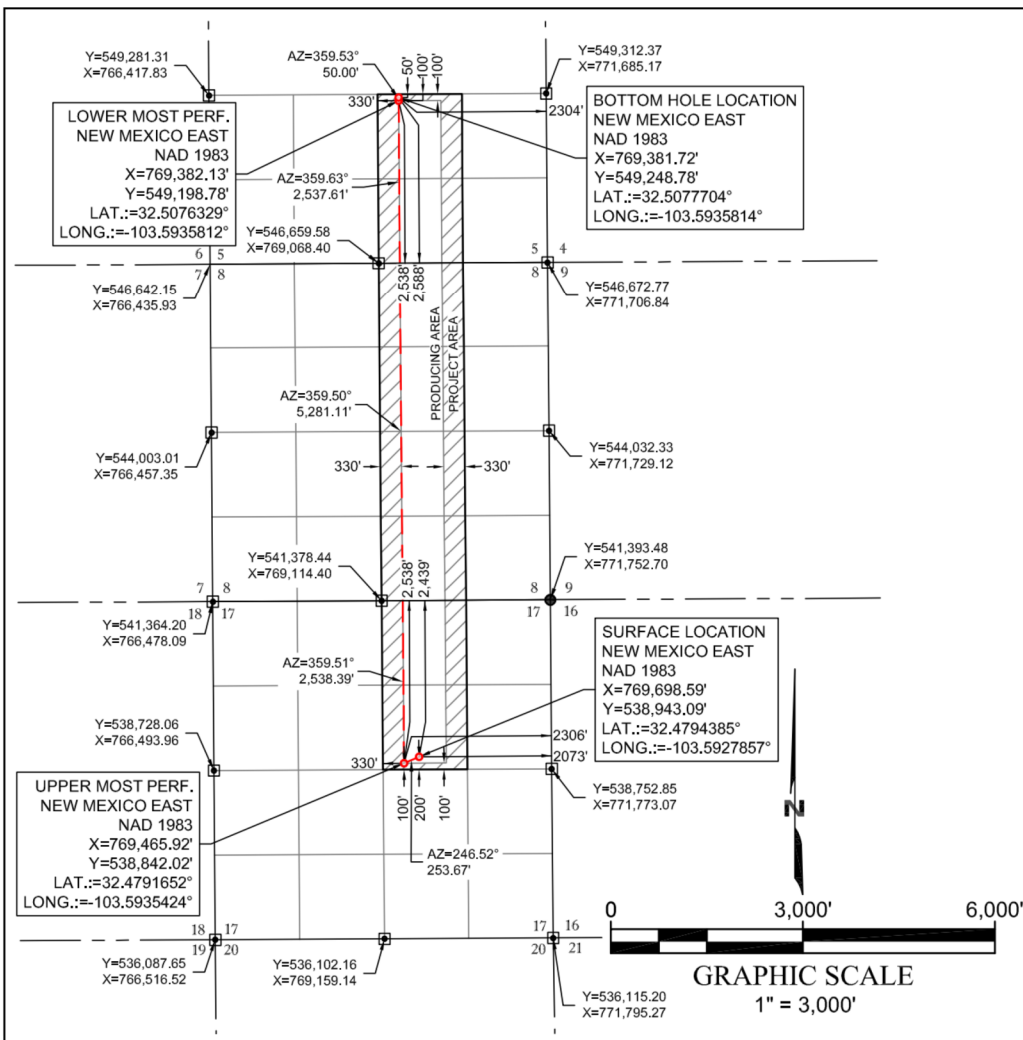

¹⁷ OPERATOR CERTIFICATION

I hereby certify that the information contained herein is true and complete to the best of my knowledge and belief, and that this organization either owns a working interest or unleased mineral interest in the land including the proposed bottom hole location or has a right to drill this well at this location pursuant to a contract with an owner of such a mineral or working interest, or to a voluntary pooling agreement or a compulsory pooling order heretofore entered by the division.

Signature: *Floyd Hammond* Date: 8/23/2022

Floyd Hammond
Printed Name

fhammond@ameredev.com
E-mail Address

¹⁸ SURVEYOR CERTIFICATION

I hereby certify that the well location shown on this plat was plotted from field notes of actual surveys made by me or under my supervision, and that the same is true and correct to the best of my belief.

08/18/2022
Date of Survey

Signature and Seal of Professional Surveyor

24873
Certificate Number



District I

1625 N. French Dr., Hobbs, NM 88240
 Phone:(575) 393-6161 Fax:(575) 393-0720

District II

811 S. First St., Artesia, NM 88210
 Phone:(575) 748-1283 Fax:(575) 748-9720

District III

1000 Rio Brazos Rd., Aztec, NM 87410
 Phone:(505) 334-6178 Fax:(505) 334-6170

District IV

1220 S. St Francis Dr., Santa Fe, NM 87505
 Phone:(505) 476-3470 Fax:(505) 476-3462

State of New Mexico
Energy, Minerals and Natural Resources
Oil Conservation Division
1220 S. St Francis Dr.
Santa Fe, NM 87505

Form APD Conditions

Permit 323866

PERMIT CONDITIONS OF APPROVAL

Operator Name and Address: ADVANCE ENERGY PARTNERS HAT MESA, LLC [372417] 11490 Westheimer Rd., Ste 950 Houston, TX 77077	API Number: 30-025-50558
	Well: BECKNELL 21 33 17 STATE COM #113H

OCD Reviewer	Condition
pkautz	Notify OCD 24 hours prior to casing & cement
pkautz	Will require a File As Drilled C-102 and a Directional Survey with the C-104
pkautz	Once the well is spud, to prevent ground water contamination through whole or partial conduits from the surface, the operator shall drill without interruption through the fresh water zone or zones and shall immediately set in cement the water protection string
pkautz	Oil base muds are not to be used until fresh water zones are cased and cemented providing isolation from the oil or diesel. This includes synthetic oils. Oil based mud, drilling fluids and solids must be contained in a steel closed loop system
pkautz	CEMENT MUST COME TO THE SURFACE ON ALL STRINGS
pkautz	The Operator is to notify NMOCD by sundry (Form C-103) within ten (10) days of the well being spud

State of New Mexico
Energy, Minerals and Natural Resources Department

Michelle Lujan Grisham
Governor

Sarah Cottrell Propst
Cabinet Secretary Designate

Todd E. Leahy, JD, PhD
Deputy Secretary

Adrienne Sandoval, Division Director
Oil Conservation Division



September 12, 2022,

BUREAU OF LAND MANAGEMENT
ATT: James S. Rutley
620 E Greene Street
Carlsbad, NM 88220

STATE LAND OFFICE
ATT: Paige Czoski
PO BOX 1148
Santa Fe, NM 87505

RE: APPLICATION FOR PERMIT TO DRILL IN POTASH AREA

OPERATOR: Advance Energy Partners Hat Mesa, LLC

LEASE NAME: Becknell 21 33 17 State Com # 113H

PROPOSED LOCATION: U/L G Sec 17 T21S R33E 2439FNL 2073 FEL

Lat. 32.4794385 Long. -103.5927857 NAD83

PROPOSED DEPTH: 22464' MD 11741' TVD

Gentleman:

The application for permit to drill identified above has been filed with this office of the New Mexico Oil Conservation Division. Pursuant to the provisions of Oil Conservation Division Order R – 111 - P, please advise this office whether the location is within an established Life-of-Mine-Reserve that are filed with and approved by your office. If not, please advise whether it is within the buffer zone established by the order.

Thank you for your assistance. Please Return as soon as possible.

Very truly yours,

OIL CONSERVATION DIVISION

P. Kautz
Paul Kautz

Hobbs Office Geologist, District I

RESONSE:

The above referenced location is in LMR (2022 year) -----Yes _____ No X

The above referenced location is within the Buffer Zone-----Yes _____ No X

Signed *Paige Czoski*

Printed Signature Paige Czoski

Representing NM SLO

State of New Mexico
Energy, Minerals and Natural Resources Department

Michelle Lujan Grisham
Governor

Sarah Cottrell Propst
Cabinet Secretary Designate

Todd E. Leahy, JD, PhD
Deputy Secretary

Adrienne Sandoval, Division Director
Oil Conservation Division



September 12, 2022,

BUREAU OF LAND MANAGEMENT
ATT: James S. Rutley
620 E Greene Street
Carlsbad, NM 88220

STATE LAND OFFICE
ATT: Paige Czoski
PO BOX 1148
Santa Fe, NM 87505

RE: APPLICATION FOR PERMIT TO DRILL IN POTASH AREA

OPERATOR: Advance Energy Partners Hat Mesa, LLC

LEASE NAME: Becknell 21 33 17 State Com # 113H

PROPOSED LOCATION: U/L G Sec 17 T21S R33E 2439FNL 2073 FEL

Lat. 32.4794385 Long. -103.5927857 NAD83

PROPOSED DEPTH: 22464' MD 11741' TVD

Gentleman:

The application for permit to drill identified above has been filed with this office of the New Mexico Oil Conservation Division. Pursuant to the provisions of Oil Conservation Division Order R – 111 - P, please advise this office whether the location is within an established Life-of-Mine-Reserve that are filed with and approved by your office. If not, please advise whether it is within the buffer zone established by the order.

Thank you for your assistance. Please Return as soon as possible.

Very truly yours,

OIL CONSERVATION DIVISION

P Kautz
Paul Kautz

Hobbs Office Geologist, District I

RESONSE:

The above referenced location is in LMR (2022 year) -----Yes _____ No ☒

The above referenced location is within the Buffer Zone -----Yes _____ No ☒

Signed _____

Printed Signature JAMES RUTLEY

Representing BLM



2901 Via Fortuna, Suite 600, Austin, Texas 78746 • Phone 832-672-4700 • Fax 832-672-4609

September 9, 2022

Mr. Paul Kautz, Hobbs District Geologist
Energy Minerals Natural Resources Dept.
Oil Conservation Division
1625 N. French Dr.
Hobbs, New Mexico 88240

Re: Advance Energy Partners Hat Mesa, LLC (OGRID No. 372417)
Proposed Well APDs- Becknell Wells
State Land in Section 17, T21S-R33E
Lea County, New Mexico

Dear Mr. Kautz,

This letter is to confirm that there are no active potash leases within a 1-mile radius of the SHLs of the Becknell 21-33-17 State Com wells in Section 17, Township 21 South, Range 33 East, Lea County, New Mexico.

Becknell 21-33-17 State Com Wells:

Becknell 21-33-17 State Com #71H

- The surface location is located 2,437 feet from the north line and 700 feet from the west line (Unit E) of Section 17
- The bottom hole location is located 2,589 feet from the south line and 330 feet from the west line (Unit L) of Section 5.

Becknell 21-33-17 State Com #72H

- The surface location is located 2,437 feet from the north line and 1,700 feet from the west line (Unit F) of Section 17.
- The bottom hole location is located 2,588 feet from the south line and 1,973 feet from the west line (Unit K) of Section 5.

Becknell 21-33-17 State Com #73H

- The surface location is located 2,439 feet from the north line and 2,033 feet from the east line (Unit G) of Section 17.
- The bottom hole location is located 2,588 feet from the south line and 1,430 feet from the east line (Unit J) of Section 5.

Becknell 21-33-17 State Com #91H

- The surface location is located 2,437 feet from the north line and 760 feet from the west line (Unit E) of Section 17

- The bottom hole location is located 2,589 feet from the south line and 330 feet from the west line (Unit L) of Section 5.

Becknell 21-33-17 State Com #92H

- The surface location is located 2,437 feet from the north line and 1,640 feet from the west line (Unit F) of Section 17.
- The bottom hole location is located 2,588 feet from the south line and 2,090 feet from the west line (Unit K) of Section 5.

Becknell 21-33-17 State Com #93H

- The surface location is located 2,440 feet from the north line and 810 feet from the east line (Unit H) of Section 17.
- The bottom hole location is located 2,588 feet from the south line and 1,430 feet from the east line (Unit J) of Section 5.

Becknell 21-33-17 State Com #111H

- The surface location is located 2,437 feet from the north line and 1,620 feet from the west line (Unit F) of Section 17
- The bottom hole location is located 2,588 feet from the south line and 1,210 feet from the west line (Unit L) of Section 5.

Becknell 21-33-17 State Com #113H

- The surface location is located 2,439 feet from the north line and 2,073 feet from the east line (Unit G) of Section 17
- The bottom hole location is located 2,588 feet from the south line and 2,304 feet from the east line (Unit J) of Section 5.

Becknell 21-33-17 State Com #114H

- The surface location is located 2,440 feet from the north line and 790 feet from the east line (Unit H) of Section 17
- The bottom hole location is located 2,589 feet from the south line and 550 feet from the east line (Unit I) of Section 5.

Becknell 21-33-17 State Com #811H

- The surface location is located 2,437 feet from the north line and 800 feet from the west line (Unit E) of Section 17.
- The bottom hole location is located 2,588 feet from the south line and 1,210 feet from the west line (Unit L) of Section 5.

Becknell 21-33-17 State Com #813H

- The surface location is located 2,439 feet from the north line and 2,133 feet from the east line (Unit G) of Section 17.
- The bottom hole location is located 2,588 feet from the south line and 2,304 feet from the east line (Unit J) of Section 5.

Becknell 21-33-17 State Com #814H

- The surface location is located 2,440 feet from the north line and 730 feet from the east line (Unit H) of Section 17
- The bottom hole location is located 2,589 feet from the south line and 550 feet from the east line (Unit I) of Section 5.

Becknell 21-33-17 State Com #821H

- The surface location is located 2,437 feet from the north line and 720 feet from the west line (Unit E) of Section 17.
- The bottom hole location is located 2,589 feet from the south line and 330 feet from the west line (Unit L) of Section 5.

Becknell 21-33-17 State Com #822H

- The surface location is located 2,437 feet from the north line and 1,680 feet from the west line (Unit F) of Section 17.
- The bottom hole location is located 2,588 feet from the south line and 2,090 feet from the west line (Unit K) of Section 5.

Becknell 21-33-17 State Com #823H

- The surface location is located 2,439 feet from the north line and 2,053 feet from the east line (Unit G) of Section 17.
- The bottom hole location is located 2,588 feet from the south line and 1,430 feet from the east line (Unit J) of Section 5.

Becknell 21-33-17 State Com #831H

- The surface location is located 2,437 feet from the north line and 780 feet from the west line (Unit E) of Section 17
- The bottom hole location is located 2,588 feet from the south line and 1,210 feet from the west line (Unit L) of Section 5.

Becknell 21-33-17 State Com #833H

- The surface location is located 2,439 feet from the north line and 2,113 feet from the east line (Unit G) of Section 17.
- The bottom hole location is located 2,588 feet from the south line and 2,304 feet from the east line (Unit J) of Section 5.

Becknell 21-33-17 State Com #834H

- The surface location is located 2,440 feet from the north line and 750 feet from the east line (Unit H) of Section 17
- The bottom hole location is located 2,589 feet from the south line and 550 feet from the east line (Unit I) of Section 5.

Becknell 21-33-17 State Com #911H

- The surface location is located 2,437 feet from the north line and 740 feet from the west line (Unit E) of Section 17

- The bottom hole location is located 2,589 feet from the south line and 430 feet from the west line (Unit L) of Section 5.

Becknell 21-33-17 State Com #912H

- The surface location is located 2,437 feet from the north line and 1,660 feet from the west line (Unit F) of Section 17.
- The bottom hole location is located 2,588 feet from the south line and 2,190 feet from the west line (Unit K) of Section 5.

Becknell 21-33-17 State Com #913H

- The surface location is located 2,440 feet from the north line and 830 feet from the east line (Unit H) of Section 17.
- The bottom hole location is located 2,588 feet from the south line and 1,330 feet from the east line (Unit J) of Section 5.

Becknell 21-33-17 State Com #921H

- The surface location is located 2,437 feet from the north line and 1,600 feet from the west line (Unit F) of Section 17.
- The bottom hole location is located 2,588 feet from the south line and 1,310 feet from the west line (Unit L) of Section 5.

Becknell 21-33-17 State Com #923H

- The surface location is located 2,439 feet from the north line and 2,093 feet from the east line (Unit G) of Section 17
- The bottom hole location is located 2,588 feet from the south line and 2,204 feet from the east line (Unit J) of Section 5.

Boone 21-33-16 State Com #924H

- The surface location is located 2,440 feet from the north line and 770 feet from the east line (Unit H) of Section 17
- The bottom hole location is located 2,589 feet from the south line and 450 feet from the east line (Unit I) of Section 5.

If you have any questions about this letter, please contact me by phone at 737-444-2997 or email at LLaufer@ameredev.com.

Sincerely,



Lizzy Laufer

Landman

Advance Energy Partners Hat Mesa, LLC

Email: LLaufer@ameredev.com



American Resource Development LLC.

Ameredev Operating

Hat Mesa

Becknell State Com - B Pad

Becknell 21-33-17 113H

OWB

Plan: Permit Plan 1 - 359.50

Standard Planning Report - Geographic

22 August, 2022



American Resource Development LLC

Planning Report - Geographic

Database:	AUS-COMPASS - EDM_15 - 32bit	Local Co-ordinate Reference:	Well Becknell 21-33-17 113H
Company:	Ameredev Operating	TVD Reference:	GL 3781.35 + 27 KB @ 3808.3usft
Project:	Hat Mesa	MD Reference:	GL 3781.35 + 27 KB @ 3808.3usft
Site:	Becknell State Com - B Pad	North Reference:	Grid
Well:	Becknell 21-33-17 113H	Survey Calculation Method:	Minimum Curvature
Wellbore:	OWB		
Design:	Permit Plan 1 - 359.50		

Project	Hat Mesa, Lea County, NM		
Map System:	US State Plane 1983	System Datum:	Mean Sea Level
Geo Datum:	North American Datum 1983		
Map Zone:	New Mexico Eastern Zone		

Site	Becknell State Com - B Pad				
Site Position:		Northing:	538,943.36 usft	Latitude:	32.479439
From:	Lat/Long	Easting:	769,738.54 usft	Longitude:	-103.592656
Position Uncertainty:	0.0 usft	Slot Radius:	13-3/16 "		

Well	Becknell 21-33-17 113H					
Well Position	+N/-S	0.0 usft	Northing:	538,943.08 usft	Latitude:	32.479439
	+E/-W	0.0 usft	Easting:	769,698.58 usft	Longitude:	-103.592786
Position Uncertainty		0.0 usft	Wellhead Elevation:	usft	Ground Level:	3,781.3 usft
Grid Convergence:		0.40 °				

Wellbore	OWB				
Magnetics	Model Name	Sample Date	Declination (°)	Dip Angle (°)	Field Strength (nT)
	IGRF2020	8/22/2022	6.44	60.09	47,516.63664299

Design	Permit Plan 1 - 359.50			
Audit Notes:				
Version:	Phase:	PLAN	Tie On Depth:	0.0
Vertical Section:	Depth From (TVD) (usft)	+N/-S (usft)	+E/-W (usft)	Direction (°)
	0.0	0.0	0.0	359.50

Plan Survey Tool Program	Date	8/22/2022		
Depth From (usft)	Depth To (usft)	Survey (Wellbore)	Tool Name	Remarks
1	0.0	22,464.8 Permit Plan 1 - 359.50 (OWB)	MWD	
			OWSG MWD - Standard	



American Resource Development LLC

Planning Report - Geographic

Database:	AUS-COMPASS - EDM_15 - 32bit	Local Co-ordinate Reference:	Well Becknell 21-33-17 113H
Company:	Ameredev Operating	TVD Reference:	GL 3781.35 + 27 KB @ 3808.3usft
Project:	Hat Mesa	MD Reference:	GL 3781.35 + 27 KB @ 3808.3usft
Site:	Becknell State Com - B Pad	North Reference:	Grid
Well:	Becknell 21-33-17 113H	Survey Calculation Method:	Minimum Curvature
Wellbore:	OWB		
Design:	Permit Plan 1 - 359.50		

Plan Sections										
Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Dogleg Rate (°/100usft)	Build Rate (°/100usft)	Turn Rate (°/100usft)	TFO (°)	Target
0.0	0.00	0.00	0.0	0.0	0.0	0.00	0.00	0.00	0.00	
2,000.0	0.00	0.00	2,000.0	0.0	0.0	0.00	0.00	0.00	0.00	
2,272.2	4.08	200.81	2,272.0	-9.1	-3.4	1.50	1.50	0.00	200.81	
11,013.9	4.08	200.81	10,991.5	-590.9	-224.6	0.00	0.00	0.00	0.00	
11,286.2	0.00	0.00	11,263.5	-600.0	-228.0	1.50	-1.50	0.00	180.00	
12,035.4	89.91	359.47	11,741.0	-123.3	-232.5	12.00	12.00	-0.07	359.47	
12,057.7	89.91	359.47	11,741.0	-101.0	-232.7	0.00	0.00	0.00	0.00	FTP (BECK113H)
12,063.5	90.00	359.54	11,741.0	-95.2	-232.7	2.00	1.58	1.22	37.75	
22,414.7	90.00	359.54	11,741.0	10,255.7	-316.5	0.00	0.00	0.00	0.00	LTP (BECK113H)
22,464.8	90.00	359.54	11,741.0	10,305.7	-316.9	0.00	0.00	0.00	0.00	BHL (BECK113H)



American Resource Development LLC.

Planning Report - Geographic

Database:	AUS-COMPASS - EDM_15 - 32bit	Local Co-ordinate Reference:	Well Becknell 21-33-17 113H
Company:	Ameredev Operating	TVD Reference:	GL 3781.35 + 27 KB @ 3808.3usft
Project:	Hat Mesa	MD Reference:	GL 3781.35 + 27 KB @ 3808.3usft
Site:	Becknell State Com - B Pad	North Reference:	Grid
Well:	Becknell 21-33-17 113H	Survey Calculation Method:	Minimum Curvature
Wellbore:	OWB		
Design:	Permit Plan 1 - 359.50		

Planned Survey									
Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Map Northing (usft)	Map Easting (usft)	Latitude	Longitude
0.0	0.00	0.00	0.0	0.0	0.0	538,943.08	769,698.58	32.479439	-103.592786
100.0	0.00	0.00	100.0	0.0	0.0	538,943.08	769,698.58	32.479439	-103.592786
200.0	0.00	0.00	200.0	0.0	0.0	538,943.08	769,698.58	32.479439	-103.592786
300.0	0.00	0.00	300.0	0.0	0.0	538,943.08	769,698.58	32.479439	-103.592786
400.0	0.00	0.00	400.0	0.0	0.0	538,943.08	769,698.58	32.479439	-103.592786
500.0	0.00	0.00	500.0	0.0	0.0	538,943.08	769,698.58	32.479439	-103.592786
600.0	0.00	0.00	600.0	0.0	0.0	538,943.08	769,698.58	32.479439	-103.592786
700.0	0.00	0.00	700.0	0.0	0.0	538,943.08	769,698.58	32.479439	-103.592786
800.0	0.00	0.00	800.0	0.0	0.0	538,943.08	769,698.58	32.479439	-103.592786
900.0	0.00	0.00	900.0	0.0	0.0	538,943.08	769,698.58	32.479439	-103.592786
1,000.0	0.00	0.00	1,000.0	0.0	0.0	538,943.08	769,698.58	32.479439	-103.592786
1,100.0	0.00	0.00	1,100.0	0.0	0.0	538,943.08	769,698.58	32.479439	-103.592786
1,200.0	0.00	0.00	1,200.0	0.0	0.0	538,943.08	769,698.58	32.479439	-103.592786
1,300.0	0.00	0.00	1,300.0	0.0	0.0	538,943.08	769,698.58	32.479439	-103.592786
1,400.0	0.00	0.00	1,400.0	0.0	0.0	538,943.08	769,698.58	32.479439	-103.592786
1,500.0	0.00	0.00	1,500.0	0.0	0.0	538,943.08	769,698.58	32.479439	-103.592786
1,600.0	0.00	0.00	1,600.0	0.0	0.0	538,943.08	769,698.58	32.479439	-103.592786
1,700.0	0.00	0.00	1,700.0	0.0	0.0	538,943.08	769,698.58	32.479439	-103.592786
1,730.0	0.00	0.00	1,730.0	0.0	0.0	538,943.08	769,698.58	32.479439	-103.592786
Rustler									
1,800.0	0.00	0.00	1,800.0	0.0	0.0	538,943.08	769,698.58	32.479439	-103.592786
1,900.0	0.00	0.00	1,900.0	0.0	0.0	538,943.08	769,698.58	32.479439	-103.592786
2,000.0	0.00	0.00	2,000.0	0.0	0.0	538,943.08	769,698.58	32.479439	-103.592786
Start Build 1.50									
2,100.0	1.50	200.81	2,100.0	-1.2	-0.5	538,941.86	769,698.11	32.479435	-103.592787
2,127.0	1.91	200.81	2,127.0	-2.0	-0.8	538,941.11	769,697.83	32.479433	-103.592788
Salado									
2,200.0	3.00	200.81	2,199.9	-4.9	-1.9	538,938.19	769,696.72	32.479425	-103.592792
2,272.2	4.08	200.81	2,272.0	-9.1	-3.4	538,934.02	769,695.13	32.479414	-103.592797
Start 8741.7 hold at 2272.2 MD									
2,300.0	4.08	200.81	2,299.7	-10.9	-4.1	538,932.17	769,694.43	32.479409	-103.592800
2,400.0	4.08	200.81	2,399.4	-17.6	-6.7	538,925.52	769,691.90	32.479390	-103.592808
2,500.0	4.08	200.81	2,499.2	-24.2	-9.2	538,918.86	769,689.37	32.479372	-103.592816
2,600.0	4.08	200.81	2,598.9	-30.9	-11.7	538,912.20	769,686.84	32.479354	-103.592825
2,700.0	4.08	200.81	2,698.7	-37.5	-14.3	538,905.55	769,684.31	32.479336	-103.592833
2,800.0	4.08	200.81	2,798.4	-44.2	-16.8	538,898.89	769,681.78	32.479317	-103.592841
2,900.0	4.08	200.81	2,898.2	-50.9	-19.3	538,892.23	769,679.25	32.479299	-103.592850
3,000.0	4.08	200.81	2,997.9	-57.5	-21.9	538,885.58	769,676.72	32.479281	-103.592858
3,100.0	4.08	200.81	3,097.7	-64.2	-24.4	538,878.92	769,674.20	32.479263	-103.592866
3,200.0	4.08	200.81	3,197.4	-70.8	-26.9	538,872.26	769,671.67	32.479244	-103.592875
3,300.0	4.08	200.81	3,297.2	-77.5	-29.4	538,865.61	769,669.14	32.479226	-103.592883
3,400.0	4.08	200.81	3,396.9	-84.1	-32.0	538,858.95	769,666.61	32.479208	-103.592892
3,500.0	4.08	200.81	3,496.7	-90.8	-34.5	538,852.30	769,664.08	32.479190	-103.592900
3,600.0	4.08	200.81	3,596.4	-97.4	-37.0	538,845.64	769,661.55	32.479171	-103.592908
3,627.7	4.08	200.81	3,624.0	-99.3	-37.7	538,843.80	769,660.85	32.479166	-103.592911
Tansill									
3,700.0	4.08	200.81	3,696.1	-104.1	-39.6	538,838.98	769,659.02	32.479153	-103.592917
3,800.0	4.08	200.81	3,795.9	-110.8	-42.1	538,832.33	769,656.49	32.479135	-103.592925
3,900.0	4.08	200.81	3,895.6	-117.4	-44.6	538,825.67	769,653.96	32.479117	-103.592933
4,000.0	4.08	200.81	3,995.4	-124.1	-47.1	538,819.01	769,651.43	32.479098	-103.592942
4,100.0	4.08	200.81	4,095.1	-130.7	-49.7	538,812.36	769,648.90	32.479080	-103.592950
4,108.9	4.08	200.81	4,104.0	-131.3	-49.9	538,811.77	769,648.68	32.479079	-103.592951
Capitan									
4,200.0	4.08	200.81	4,194.9	-137.4	-52.2	538,805.70	769,646.37	32.479062	-103.592958



American Resource Development LLC.

Planning Report - Geographic

Database:	AUS-COMPASS - EDM_15 - 32bit	Local Co-ordinate Reference:	Well Becknell 21-33-17 113H
Company:	Ameredev Operating	TVD Reference:	GL 3781.35 + 27 KB @ 3808.3usft
Project:	Hat Mesa	MD Reference:	GL 3781.35 + 27 KB @ 3808.3usft
Site:	Becknell State Com - B Pad	North Reference:	Grid
Well:	Becknell 21-33-17 113H	Survey Calculation Method:	Minimum Curvature
Wellbore:	OWB		
Design:	Permit Plan 1 - 359.50		

Planned Survey										
Measured			Vertical			Map		Map		
Depth (usft)	Inclination (°)	Azimuth (°)	Depth (usft)	+N/-S (usft)	+E/-W (usft)	Northing (usft)	Easting (usft)	Latitude	Longitude	
4,300.0	4.08	200.81	4,294.6	-144.0	-54.7	538,799.05	769,643.84	32.479044	-103.592967	
4,400.0	4.08	200.81	4,394.4	-150.7	-57.3	538,792.39	769,641.31	32.479025	-103.592975	
4,500.0	4.08	200.81	4,494.1	-157.4	-59.8	538,785.73	769,638.78	32.479007	-103.592983	
4,600.0	4.08	200.81	4,593.9	-164.0	-62.3	538,779.08	769,636.25	32.478989	-103.592992	
4,700.0	4.08	200.81	4,693.6	-170.7	-64.9	538,772.42	769,633.73	32.478971	-103.593000	
4,800.0	4.08	200.81	4,793.4	-177.3	-67.4	538,765.76	769,631.20	32.478952	-103.593008	
4,900.0	4.08	200.81	4,893.1	-184.0	-69.9	538,759.11	769,628.67	32.478934	-103.593017	
5,000.0	4.08	200.81	4,992.8	-190.6	-72.4	538,752.45	769,626.14	32.478916	-103.593025	
5,100.0	4.08	200.81	5,092.6	-197.3	-75.0	538,745.80	769,623.61	32.478898	-103.593034	
5,200.0	4.08	200.81	5,192.3	-203.9	-77.5	538,739.14	769,621.08	32.478880	-103.593042	
5,300.0	4.08	200.81	5,292.1	-210.6	-80.0	538,732.48	769,618.55	32.478861	-103.593050	
5,400.0	4.08	200.81	5,391.8	-217.3	-82.6	538,725.83	769,616.02	32.478843	-103.593059	
5,462.3	4.08	200.81	5,454.0	-221.4	-84.1	538,721.68	769,614.44	32.478832	-103.593064	
Bell Canyon										
5,500.0	4.08	200.81	5,491.6	-223.9	-85.1	538,719.17	769,613.49	32.478825	-103.593067	
5,600.0	4.08	200.81	5,591.3	-230.6	-87.6	538,712.51	769,610.96	32.478807	-103.593075	
5,700.0	4.08	200.81	5,691.1	-237.2	-90.1	538,705.86	769,608.43	32.478788	-103.593084	
5,800.0	4.08	200.81	5,790.8	-243.9	-92.7	538,699.20	769,605.90	32.478770	-103.593092	
5,900.0	4.08	200.81	5,890.6	-250.5	-95.2	538,692.55	769,603.37	32.478752	-103.593100	
6,000.0	4.08	200.81	5,990.3	-257.2	-97.7	538,685.89	769,600.84	32.478734	-103.593109	
6,100.0	4.08	200.81	6,090.1	-263.9	-100.3	538,679.23	769,598.31	32.478715	-103.593117	
6,200.0	4.08	200.81	6,189.8	-270.5	-102.8	538,672.58	769,595.78	32.478697	-103.593125	
6,300.0	4.08	200.81	6,289.5	-277.2	-105.3	538,665.92	769,593.26	32.478679	-103.593134	
6,400.0	4.08	200.81	6,389.3	-283.8	-107.9	538,659.26	769,590.73	32.478661	-103.593142	
6,500.0	4.08	200.81	6,489.0	-290.5	-110.4	538,652.61	769,588.20	32.478642	-103.593150	
6,600.0	4.08	200.81	6,588.8	-297.1	-112.9	538,645.95	769,585.67	32.478624	-103.593159	
6,700.0	4.08	200.81	6,688.5	-303.8	-115.4	538,639.30	769,583.14	32.478606	-103.593167	
6,800.0	4.08	200.81	6,788.3	-310.4	-118.0	538,632.64	769,580.61	32.478588	-103.593175	
6,900.0	4.08	200.81	6,888.0	-317.1	-120.5	538,625.98	769,578.08	32.478569	-103.593184	
7,000.0	4.08	200.81	6,987.8	-323.8	-123.0	538,619.33	769,575.55	32.478551	-103.593192	
7,100.0	4.08	200.81	7,087.5	-330.4	-125.6	538,612.67	769,573.02	32.478533	-103.593201	
7,200.0	4.08	200.81	7,187.3	-337.1	-128.1	538,606.01	769,570.49	32.478515	-103.593209	
7,250.9	4.08	200.81	7,238.0	-340.5	-129.4	538,602.63	769,569.20	32.478505	-103.593213	
Brushy Canyon										
7,300.0	4.08	200.81	7,287.0	-343.7	-130.6	538,599.36	769,567.96	32.478496	-103.593217	
7,400.0	4.08	200.81	7,386.8	-350.4	-133.1	538,592.70	769,565.43	32.478478	-103.593226	
7,500.0	4.08	200.81	7,486.5	-357.0	-135.7	538,586.04	769,562.90	32.478460	-103.593234	
7,600.0	4.08	200.81	7,586.2	-363.7	-138.2	538,579.39	769,560.37	32.478442	-103.593242	
7,700.0	4.08	200.81	7,686.0	-370.4	-140.7	538,572.73	769,557.84	32.478423	-103.593251	
7,800.0	4.08	200.81	7,785.7	-377.0	-143.3	538,566.08	769,555.31	32.478405	-103.593259	
7,900.0	4.08	200.81	7,885.5	-383.7	-145.8	538,559.42	769,552.79	32.478387	-103.593267	
8,000.0	4.08	200.81	7,985.2	-390.3	-148.3	538,552.76	769,550.26	32.478369	-103.593276	
8,100.0	4.08	200.81	8,085.0	-397.0	-150.9	538,546.11	769,547.73	32.478350	-103.593284	
8,200.0	4.08	200.81	8,184.7	-403.6	-153.4	538,539.45	769,545.20	32.478332	-103.593292	
8,300.0	4.08	200.81	8,284.5	-410.3	-155.9	538,532.79	769,542.67	32.478314	-103.593301	
8,400.0	4.08	200.81	8,384.2	-416.9	-158.4	538,526.14	769,540.14	32.478296	-103.593309	
8,500.0	4.08	200.81	8,484.0	-423.6	-161.0	538,519.48	769,537.61	32.478277	-103.593317	
8,600.0	4.08	200.81	8,583.7	-430.3	-163.5	538,512.83	769,535.08	32.478259	-103.593326	
8,700.0	4.08	200.81	8,683.5	-436.9	-166.0	538,506.17	769,532.55	32.478241	-103.593334	
8,800.0	4.08	200.81	8,783.2	-443.6	-168.6	538,499.51	769,530.02	32.478223	-103.593343	
8,870.0	4.08	200.81	8,853.0	-448.2	-170.3	538,494.86	769,528.25	32.478210	-103.593348	
Bone Spring Lime										
8,900.0	4.08	200.81	8,882.9	-450.2	-171.1	538,492.86	769,527.49	32.478204	-103.593351	
9,000.0	4.08	200.81	8,982.7	-456.9	-173.6	538,486.20	769,524.96	32.478186	-103.593359	



American Resource Development LLC

Planning Report - Geographic

Database:	AUS-COMPASS - EDM_15 - 32bit	Local Co-ordinate Reference:	Well Becknell 21-33-17 113H
Company:	Ameredev Operating	TVD Reference:	GL 3781.35 + 27 KB @ 3808.3usft
Project:	Hat Mesa	MD Reference:	GL 3781.35 + 27 KB @ 3808.3usft
Site:	Becknell State Com - B Pad	North Reference:	Grid
Well:	Becknell 21-33-17 113H	Survey Calculation Method:	Minimum Curvature
Wellbore:	OWB		
Design:	Permit Plan 1 - 359.50		

Planned Survey										
Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Map Northing (usft)	Map Easting (usft)	Latitude	Longitude	
9,100.0	4.08	200.81	9,082.4	-463.5	-176.1	538,479.54	769,522.43	32.478168	-103.593368	
9,200.0	4.08	200.81	9,182.2	-470.2	-178.7	538,472.89	769,519.90	32.478150	-103.593376	
9,300.0	4.08	200.81	9,281.9	-476.9	-181.2	538,466.23	769,517.37	32.478131	-103.593384	
9,400.0	4.08	200.81	9,381.7	-483.5	-183.7	538,459.58	769,514.84	32.478113	-103.593393	
9,500.0	4.08	200.81	9,481.4	-490.2	-186.3	538,452.92	769,512.31	32.478095	-103.593401	
9,600.0	4.08	200.81	9,581.2	-496.8	-188.8	538,446.26	769,509.79	32.478077	-103.593409	
9,700.0	4.08	200.81	9,680.9	-503.5	-191.3	538,439.61	769,507.26	32.478058	-103.593418	
9,800.0	4.08	200.81	9,780.7	-510.1	-193.9	538,432.95	769,504.73	32.478040	-103.593426	
9,900.0	4.08	200.81	9,880.4	-516.8	-196.4	538,426.29	769,502.20	32.478022	-103.593434	
9,920.6	4.08	200.81	9,901.0	-518.2	-196.9	538,424.92	769,501.68	32.478018	-103.593436	
First Bone Spring										
10,000.0	4.08	200.81	9,980.2	-523.4	-198.9	538,419.64	769,499.67	32.478004	-103.593443	
10,100.0	4.08	200.81	10,079.9	-530.1	-201.4	538,412.98	769,497.14	32.477985	-103.593451	
10,200.0	4.08	200.81	10,179.6	-536.8	-204.0	538,406.33	769,494.61	32.477967	-103.593459	
10,300.0	4.08	200.81	10,279.4	-543.4	-206.5	538,399.67	769,492.08	32.477949	-103.593468	
10,400.0	4.08	200.81	10,379.1	-550.1	-209.0	538,393.01	769,489.55	32.477931	-103.593476	
10,500.0	4.08	200.81	10,478.9	-556.7	-211.6	538,386.36	769,487.02	32.477912	-103.593484	
10,507.1	4.08	200.81	10,486.0	-557.2	-211.7	538,385.88	769,486.84	32.477911	-103.593485	
Second Bone Spring										
10,600.0	4.08	200.81	10,578.6	-563.4	-214.1	538,379.70	769,484.49	32.477894	-103.593493	
10,700.0	4.08	200.81	10,678.4	-570.0	-216.6	538,373.04	769,481.96	32.477876	-103.593501	
10,800.0	4.08	200.81	10,778.1	-576.7	-219.1	538,366.39	769,479.43	32.477858	-103.593510	
10,900.0	4.08	200.81	10,877.9	-583.4	-221.7	538,359.73	769,476.90	32.477839	-103.593518	
11,000.0	4.08	200.81	10,977.6	-590.0	-224.2	538,353.08	769,474.37	32.477821	-103.593526	
11,013.9	4.08	200.81	10,991.5	-590.9	-224.6	538,352.15	769,474.02	32.477819	-103.593527	
Start Drop -1.50										
11,100.0	2.79	200.81	11,077.4	-595.8	-226.4	538,347.32	769,472.19	32.477805	-103.593533	
11,200.0	1.29	200.81	11,177.4	-599.1	-227.7	538,343.99	769,470.92	32.477796	-103.593538	
11,286.2	0.00	0.00	11,263.5	-600.0	-228.0	538,343.08	769,470.58	32.477794	-103.593539	
Start DLS 12.00 TFO 359.47										
11,300.0	1.66	359.47	11,277.3	-599.8	-228.0	538,343.29	769,470.58	32.477794	-103.593539	
11,400.0	13.66	359.47	11,376.3	-586.5	-228.1	538,356.59	769,470.45	32.477831	-103.593539	
11,500.0	25.66	359.47	11,470.3	-552.9	-228.4	538,390.18	769,470.14	32.477923	-103.593539	
11,526.7	28.87	359.47	11,494.0	-540.7	-228.6	538,402.40	769,470.02	32.477957	-103.593539	
Third Bone Spring										
11,600.0	37.66	359.47	11,555.2	-500.5	-228.9	538,442.57	769,469.65	32.478067	-103.593540	
11,700.0	49.66	359.47	11,627.4	-431.6	-229.6	538,511.48	769,469.01	32.478257	-103.593540	
11,800.0	61.66	359.47	11,683.7	-349.2	-230.3	538,593.90	769,468.24	32.478483	-103.593541	
11,878.0	71.02	359.47	11,715.0	-277.9	-231.0	538,665.23	769,467.57	32.478679	-103.593541	
Wolf Camp A										
11,900.0	73.66	359.47	11,721.7	-256.9	-231.2	538,686.22	769,467.37	32.478737	-103.593541	
12,000.0	85.66	359.47	11,739.6	-158.7	-232.1	538,784.41	769,466.46	32.479007	-103.593542	
12,035.4	89.91	359.47	11,741.0	-123.3	-232.5	538,819.76	769,466.13	32.479104	-103.593542	
Start 22.3 hold at 12035.4 MD										
12,057.7	89.91	359.47	11,741.0	-101.0	-232.7	538,842.04	769,465.92	32.479165	-103.593543	
Start DLS 2.00 TFO 37.75 - FTP (BECK113H)										
12,063.5	90.00	359.54	11,741.0	-95.2	-232.7	538,847.86	769,465.87	32.479181	-103.593543	
Start 10351.3 hold at 12063.5 MD										
12,100.0	90.00	359.54	11,741.0	-58.7	-233.0	538,884.37	769,465.57	32.479282	-103.593543	
12,200.0	90.00	359.54	11,741.0	41.3	-233.8	538,984.37	769,464.76	32.479557	-103.593543	
12,300.0	90.00	359.54	11,741.0	141.3	-234.6	539,084.37	769,463.96	32.479831	-103.593544	
12,400.0	90.00	359.54	11,741.0	241.3	-235.4	539,184.37	769,463.15	32.480106	-103.593544	
12,500.0	90.00	359.54	11,741.0	341.3	-236.2	539,284.36	769,462.34	32.480381	-103.593544	



American Resource Development LLC

Planning Report - Geographic

Database:	AUS-COMPASS - EDM_15 - 32bit	Local Co-ordinate Reference:	Well Becknell 21-33-17 113H
Company:	Ameredev Operating	TVD Reference:	GL 3781.35 + 27 KB @ 3808.3usft
Project:	Hat Mesa	MD Reference:	GL 3781.35 + 27 KB @ 3808.3usft
Site:	Becknell State Com - B Pad	North Reference:	Grid
Well:	Becknell 21-33-17 113H	Survey Calculation Method:	Minimum Curvature
Wellbore:	OWB		
Design:	Permit Plan 1 - 359.50		

Planned Survey									
Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Map Northing (usft)	Map Easting (usft)	Latitude	Longitude
12,600.0	90.00	359.54	11,741.0	441.3	-237.0	539,384.36	769,461.53	32.480656	-103.593545
12,700.0	90.00	359.54	11,741.0	541.3	-237.9	539,484.36	769,460.72	32.480931	-103.593545
12,800.0	90.00	359.54	11,741.0	641.3	-238.7	539,584.35	769,459.91	32.481206	-103.593545
12,900.0	90.00	359.54	11,741.0	741.3	-239.5	539,684.35	769,459.10	32.481481	-103.593546
13,000.0	90.00	359.54	11,741.0	841.3	-240.3	539,784.35	769,458.29	32.481755	-103.593546
13,100.0	90.00	359.54	11,741.0	941.3	-241.1	539,884.34	769,457.48	32.482030	-103.593547
13,200.0	90.00	359.54	11,741.0	1,041.3	-241.9	539,984.34	769,456.67	32.482305	-103.593547
13,300.0	90.00	359.54	11,741.0	1,141.3	-242.7	540,084.34	769,455.86	32.482580	-103.593547
13,400.0	90.00	359.54	11,741.0	1,241.2	-243.5	540,184.33	769,455.06	32.482855	-103.593548
13,500.0	90.00	359.54	11,741.0	1,341.2	-244.3	540,284.33	769,454.25	32.483130	-103.593548
13,600.0	90.00	359.54	11,741.0	1,441.2	-245.1	540,384.33	769,453.44	32.483405	-103.593548
13,700.0	90.00	359.54	11,741.0	1,541.2	-245.9	540,484.32	769,452.63	32.483679	-103.593549
13,800.0	90.00	359.54	11,741.0	1,641.2	-246.8	540,584.32	769,451.82	32.483954	-103.593549
13,900.0	90.00	359.54	11,741.0	1,741.2	-247.6	540,684.32	769,451.01	32.484229	-103.593550
14,000.0	90.00	359.54	11,741.0	1,841.2	-248.4	540,784.31	769,450.20	32.484504	-103.593550
14,100.0	90.00	359.54	11,741.0	1,941.2	-249.2	540,884.31	769,449.39	32.484779	-103.593550
14,200.0	90.00	359.54	11,741.0	2,041.2	-250.0	540,984.31	769,448.58	32.485054	-103.593551
14,300.0	90.00	359.54	11,741.0	2,141.2	-250.8	541,084.30	769,447.77	32.485329	-103.593551
14,400.0	90.00	359.54	11,741.0	2,241.2	-251.6	541,184.30	769,446.96	32.485604	-103.593551
14,500.0	90.00	359.54	11,741.0	2,341.2	-252.4	541,284.30	769,446.15	32.485878	-103.593552
14,600.0	90.00	359.54	11,741.0	2,441.2	-253.2	541,384.29	769,445.35	32.486153	-103.593552
14,700.0	90.00	359.54	11,741.0	2,541.2	-254.0	541,484.29	769,444.54	32.486428	-103.593553
14,800.0	90.00	359.54	11,741.0	2,641.2	-254.8	541,584.29	769,443.73	32.486703	-103.593553
14,900.0	90.00	359.54	11,741.0	2,741.2	-255.7	541,684.28	769,442.92	32.486978	-103.593553
15,000.0	90.00	359.54	11,741.0	2,841.2	-256.5	541,784.28	769,442.11	32.487253	-103.593554
15,100.0	90.00	359.54	11,741.0	2,941.2	-257.3	541,884.28	769,441.30	32.487528	-103.593554
15,200.0	90.00	359.54	11,741.0	3,041.2	-258.1	541,984.27	769,440.49	32.487802	-103.593554
15,300.0	90.00	359.54	11,741.0	3,141.2	-258.9	542,084.27	769,439.68	32.488077	-103.593555
15,400.0	90.00	359.54	11,741.0	3,241.2	-259.7	542,184.27	769,438.87	32.488352	-103.593555
15,500.0	90.00	359.54	11,741.0	3,341.2	-260.5	542,284.26	769,438.06	32.488627	-103.593556
15,600.0	90.00	359.54	11,741.0	3,441.2	-261.3	542,384.26	769,437.25	32.488902	-103.593556
15,700.0	90.00	359.54	11,741.0	3,541.2	-262.1	542,484.26	769,436.45	32.489177	-103.593556
15,800.0	90.00	359.54	11,741.0	3,641.2	-262.9	542,584.25	769,435.64	32.489452	-103.593557
15,900.0	90.00	359.54	11,741.0	3,741.2	-263.8	542,684.25	769,434.83	32.489726	-103.593557
16,000.0	90.00	359.54	11,741.0	3,841.2	-264.6	542,784.25	769,434.02	32.490001	-103.593557
16,100.0	90.00	359.54	11,741.0	3,941.2	-265.4	542,884.24	769,433.21	32.490276	-103.593558
16,200.0	90.00	359.54	11,741.0	4,041.2	-266.2	542,984.24	769,432.40	32.490551	-103.593558
16,300.0	90.00	359.54	11,741.0	4,141.2	-267.0	543,084.24	769,431.59	32.490826	-103.593559
16,400.0	90.00	359.54	11,741.0	4,241.1	-267.8	543,184.23	769,430.78	32.491101	-103.593559
16,500.0	90.00	359.54	11,741.0	4,341.1	-268.6	543,284.23	769,429.97	32.491376	-103.593559
16,600.0	90.00	359.54	11,741.0	4,441.1	-269.4	543,384.23	769,429.16	32.491650	-103.593560
16,700.0	90.00	359.54	11,741.0	4,541.1	-270.2	543,484.22	769,428.35	32.491925	-103.593560
16,800.0	90.00	359.54	11,741.0	4,641.1	-271.0	543,584.22	769,427.55	32.492200	-103.593560
16,900.0	90.00	359.54	11,741.0	4,741.1	-271.8	543,684.22	769,426.74	32.492475	-103.593561
17,000.0	90.00	359.54	11,741.0	4,841.1	-272.7	543,784.21	769,425.93	32.492750	-103.593561
17,100.0	90.00	359.54	11,741.0	4,941.1	-273.5	543,884.21	769,425.12	32.493025	-103.593562
17,200.0	90.00	359.54	11,741.0	5,041.1	-274.3	543,984.21	769,424.31	32.493300	-103.593562
17,300.0	90.00	359.54	11,741.0	5,141.1	-275.1	544,084.20	769,423.50	32.493575	-103.593562
17,400.0	90.00	359.54	11,741.0	5,241.1	-275.9	544,184.20	769,422.69	32.493849	-103.593563
17,500.0	90.00	359.54	11,741.0	5,341.1	-276.7	544,284.20	769,421.88	32.494124	-103.593563
17,600.0	90.00	359.54	11,741.0	5,441.1	-277.5	544,384.20	769,421.07	32.494399	-103.593563
17,700.0	90.00	359.54	11,741.0	5,541.1	-278.3	544,484.19	769,420.26	32.494674	-103.593564
17,800.0	90.00	359.54	11,741.0	5,641.1	-279.1	544,584.19	769,419.45	32.494949	-103.593564
17,900.0	90.00	359.54	11,741.0	5,741.1	-279.9	544,684.19	769,418.65	32.495224	-103.593565
18,000.0	90.00	359.54	11,741.0	5,841.1	-280.7	544,784.18	769,417.84	32.495499	-103.593565



American Resource Development LLC

Planning Report - Geographic

Database:	AUS-COMPASS - EDM_15 - 32bit	Local Co-ordinate Reference:	Well Becknell 21-33-17 113H
Company:	Ameredev Operating	TVD Reference:	GL 3781.35 + 27 KB @ 3808.3usft
Project:	Hat Mesa	MD Reference:	GL 3781.35 + 27 KB @ 3808.3usft
Site:	Becknell State Com - B Pad	North Reference:	Grid
Well:	Becknell 21-33-17 113H	Survey Calculation Method:	Minimum Curvature
Wellbore:	OWB		
Design:	Permit Plan 1 - 359.50		

Planned Survey										
Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Map Northing (usft)	Map Easting (usft)	Latitude	Longitude	
18,100.0	90.00	359.54	11,741.0	5,941.1	-281.6	544,884.18	769,417.03	32.495773	-103.593565	
18,200.0	90.00	359.54	11,741.0	6,041.1	-282.4	544,984.18	769,416.22	32.496048	-103.593566	
18,300.0	90.00	359.54	11,741.0	6,141.1	-283.2	545,084.17	769,415.41	32.496323	-103.593566	
18,400.0	90.00	359.54	11,741.0	6,241.1	-284.0	545,184.17	769,414.60	32.496598	-103.593566	
18,500.0	90.00	359.54	11,741.0	6,341.1	-284.8	545,284.17	769,413.79	32.496873	-103.593567	
18,600.0	90.00	359.54	11,741.0	6,441.1	-285.6	545,384.16	769,412.98	32.497148	-103.593567	
18,700.0	90.00	359.54	11,741.0	6,541.1	-286.4	545,484.16	769,412.17	32.497423	-103.593568	
18,800.0	90.00	359.54	11,741.0	6,641.1	-287.2	545,584.16	769,411.36	32.497697	-103.593568	
18,900.0	90.00	359.54	11,741.0	6,741.1	-288.0	545,684.15	769,410.55	32.497972	-103.593568	
19,000.0	90.00	359.54	11,741.0	6,841.1	-288.8	545,784.15	769,409.75	32.498247	-103.593569	
19,100.0	90.00	359.54	11,741.0	6,941.1	-289.6	545,884.15	769,408.94	32.498522	-103.593569	
19,200.0	90.00	359.54	11,741.0	7,041.1	-290.5	545,984.14	769,408.13	32.498797	-103.593569	
19,300.0	90.00	359.54	11,741.0	7,141.1	-291.3	546,084.14	769,407.32	32.499072	-103.593570	
19,400.0	90.00	359.54	11,741.0	7,241.1	-292.1	546,184.14	769,406.51	32.499347	-103.593570	
19,500.0	90.00	359.54	11,741.0	7,341.0	-292.9	546,284.13	769,405.70	32.499621	-103.593571	
19,600.0	90.00	359.54	11,741.0	7,441.0	-293.7	546,384.13	769,404.89	32.499896	-103.593571	
19,700.0	90.00	359.54	11,741.0	7,541.0	-294.5	546,484.13	769,404.08	32.500171	-103.593571	
19,800.0	90.00	359.54	11,741.0	7,641.0	-295.3	546,584.12	769,403.27	32.500446	-103.593572	
19,900.0	90.00	359.54	11,741.0	7,741.0	-296.1	546,684.12	769,402.46	32.500721	-103.593572	
20,000.0	90.00	359.54	11,741.0	7,841.0	-296.9	546,784.12	769,401.65	32.500996	-103.593572	
20,100.0	90.00	359.54	11,741.0	7,941.0	-297.7	546,884.11	769,400.85	32.501271	-103.593573	
20,200.0	90.00	359.54	11,741.0	8,041.0	-298.5	546,984.11	769,400.04	32.501546	-103.593573	
20,300.0	90.00	359.54	11,741.0	8,141.0	-299.4	547,084.11	769,399.23	32.501820	-103.593574	
20,400.0	90.00	359.54	11,741.0	8,241.0	-300.2	547,184.10	769,398.42	32.502095	-103.593574	
20,500.0	90.00	359.54	11,741.0	8,341.0	-301.0	547,284.10	769,397.61	32.502370	-103.593574	
20,600.0	90.00	359.54	11,741.0	8,441.0	-301.8	547,384.10	769,396.80	32.502645	-103.593575	
20,700.0	90.00	359.54	11,741.0	8,541.0	-302.6	547,484.09	769,395.99	32.502920	-103.593575	
20,800.0	90.00	359.54	11,741.0	8,641.0	-303.4	547,584.09	769,395.18	32.503195	-103.593575	
20,900.0	90.00	359.54	11,741.0	8,741.0	-304.2	547,684.09	769,394.37	32.503470	-103.593576	
21,000.0	90.00	359.54	11,741.0	8,841.0	-305.0	547,784.08	769,393.56	32.503744	-103.593576	
21,100.0	90.00	359.54	11,741.0	8,941.0	-305.8	547,884.08	769,392.75	32.504019	-103.593577	
21,200.0	90.00	359.54	11,741.0	9,041.0	-306.6	547,984.08	769,391.95	32.504294	-103.593577	
21,300.0	90.00	359.54	11,741.0	9,141.0	-307.4	548,084.07	769,391.14	32.504569	-103.593577	
21,400.0	90.00	359.54	11,741.0	9,241.0	-308.3	548,184.07	769,390.33	32.504844	-103.593578	
21,500.0	90.00	359.54	11,741.0	9,341.0	-309.1	548,284.07	769,389.52	32.505119	-103.593578	
21,600.0	90.00	359.54	11,741.0	9,441.0	-309.9	548,384.06	769,388.71	32.505394	-103.593578	
21,700.0	90.00	359.54	11,741.0	9,541.0	-310.7	548,484.06	769,387.90	32.505668	-103.593579	
21,800.0	90.00	359.54	11,741.0	9,641.0	-311.5	548,584.06	769,387.09	32.505943	-103.593579	
21,900.0	90.00	359.54	11,741.0	9,741.0	-312.3	548,684.05	769,386.28	32.506218	-103.593580	
22,000.0	90.00	359.54	11,741.0	9,841.0	-313.1	548,784.05	769,385.47	32.506493	-103.593580	
22,100.0	90.00	359.54	11,741.0	9,941.0	-313.9	548,884.05	769,384.66	32.506768	-103.593580	
22,200.0	90.00	359.54	11,741.0	10,041.0	-314.7	548,984.04	769,383.85	32.507043	-103.593581	
22,300.0	90.00	359.54	11,741.0	10,141.0	-315.5	549,084.04	769,383.05	32.507318	-103.593581	
22,400.0	90.00	359.54	11,741.0	10,241.0	-316.3	549,184.04	769,382.24	32.507592	-103.593581	
22,414.7	90.00	359.54	11,741.0	10,255.7	-316.5	549,198.77	769,382.12	32.507633	-103.593581	
Start 50.0 hold at 22414.7 MD - LTP (BECK113H)										
22,464.8	90.00	359.54	11,741.0	10,305.7	-316.9	549,248.80	769,381.71	32.507770	-103.593582	
TD at 22464.8 - BHL (BECK113H)										



American Resource Development LLC

Planning Report - Geographic

Database:	AUS-COMPASS - EDM_15 - 32bit	Local Co-ordinate Reference:	Well Becknell 21-33-17 113H
Company:	Ameredev Operating	TVD Reference:	GL 3781.35 + 27 KB @ 3808.3usft
Project:	Hat Mesa	MD Reference:	GL 3781.35 + 27 KB @ 3808.3usft
Site:	Becknell State Com - B Pad	North Reference:	Grid
Well:	Becknell 21-33-17 113H	Survey Calculation Method:	Minimum Curvature
Wellbore:	OWB		
Design:	Permit Plan 1 - 359.50		

Design Targets									
Target Name									
- hit/miss target	Dip Angle	Dip Dir.	TVD	+N/-S	+E/-W	Northing	Easting	Latitude	Longitude
- Shape	(°)	(°)	(usft)	(usft)	(usft)	(usft)	(usft)		
FTP (BECK113H)	0.00	0.00	11,741.0	-101.0	-232.7	538,842.04	769,465.92	32.479165	-103.593543
- plan hits target center									
- Point									
BHL (BECK113H)	0.00	0.00	11,741.0	10,305.7	-316.9	549,248.80	769,381.71	32.507770	-103.593582
- plan hits target center									
- Point									
LTP (BECK113H)	0.00	0.00	11,741.0	10,255.7	-316.5	549,198.77	769,382.12	32.507633	-103.593581
- plan hits target center									
- Point									

Formations						
Measured Depth	Vertical Depth	Name	Lithology	Dip	Dip Direction	
(usft)	(usft)			(°)	(°)	
1,730.0	1,730.0	Rustler				
2,127.0	2,127.0	Salado				
3,627.7	3,624.0	Tansill				
4,108.9	4,104.0	Capitan				
5,462.3	5,454.0	Bell Canyon				
7,250.9	7,238.0	Brushy Canyon				
8,870.0	8,853.0	Bone Spring Lime				
9,920.6	9,901.0	First Bone Spring				
10,507.1	10,486.0	Second Bone Spring				
11,526.7	11,494.0	Third Bone Spring				
11,878.0	11,715.0	Wolf Camp A				

Plan Annotations					
Measured Depth	Vertical Depth	Local Coordinates			
(usft)	(usft)	+N/-S	+E/-W	Comment	
(usft)	(usft)	(usft)	(usft)		
2,000.0	2,000.0	0.0	0.0	Start Build 1.50	
2,272.2	2,272.0	-9.1	-3.4	Start 8741.7 hold at 2272.2 MD	
11,013.9	10,991.5	-590.9	-224.6	Start Drop -1.50	
11,286.2	11,263.5	-600.0	-228.0	Start DLS 12.00 TFO 359.47	
12,035.4	11,741.0	-123.3	-232.5	Start 22.3 hold at 12035.4 MD	
12,057.7	11,741.0	-101.0	-232.7	Start DLS 2.00 TFO 37.75	
12,063.5	11,741.0	-95.2	-232.7	Start 10351.3 hold at 12063.5 MD	
22,414.7	11,741.0	10,255.7	-316.5	Start 50.0 hold at 22414.7 MD	
22,464.8	11,741.0	10,305.7	-316.9	TD at 22464.8	



2901 Via Fortuna, Suite 600, Austin, Texas 78746 • Phone 832-672-4700 • Fax 832-672-4609

September 9, 2022

Mr. Paul Kautz, Hobbs District Geologist
Energy Minerals Natural Resources Dept.
Oil Conservation Division
1625 N. French Dr.
Hobbs, New Mexico 88240

Re: Advance Energy Partners Hat Mesa, LLC (OGRID No. 372417)
Proposed Well APDs- Becknell Wells
State Land in Section 17, T21S-R33E
Lea County, New Mexico

Dear Mr. Kautz,

This letter is to confirm that there are no active potash leases within a 1-mile radius of the SHLs of the Becknell 21-33-17 State Com wells in Section 17, Township 21 South, Range 33 East, Lea County, New Mexico.

Becknell 21-33-17 State Com Wells:

Becknell 21-33-17 State Com #71H

- The surface location is located 2,437 feet from the north line and 700 feet from the west line (Unit E) of Section 17
- The bottom hole location is located 2,589 feet from the south line and 330 feet from the west line (Unit L) of Section 5.

Becknell 21-33-17 State Com #72H

- The surface location is located 2,437 feet from the north line and 1,700 feet from the west line (Unit F) of Section 17.
- The bottom hole location is located 2,588 feet from the south line and 1,973 feet from the west line (Unit K) of Section 5.

Becknell 21-33-17 State Com #73H

- The surface location is located 2,439 feet from the north line and 2,033 feet from the east line (Unit G) of Section 17.
- The bottom hole location is located 2,588 feet from the south line and 1,430 feet from the east line (Unit J) of Section 5.

Becknell 21-33-17 State Com #91H

- The surface location is located 2,437 feet from the north line and 760 feet from the west line (Unit E) of Section 17

- The bottom hole location is located 2,589 feet from the south line and 330 feet from the west line (Unit L) of Section 5.

Becknell 21-33-17 State Com #92H

- The surface location is located 2,437 feet from the north line and 1,640 feet from the west line (Unit F) of Section 17.
- The bottom hole location is located 2,588 feet from the south line and 2,090 feet from the west line (Unit K) of Section 5.

Becknell 21-33-17 State Com #93H

- The surface location is located 2,440 feet from the north line and 810 feet from the east line (Unit H) of Section 17.
- The bottom hole location is located 2,588 feet from the south line and 1,430 feet from the east line (Unit J) of Section 5.

Becknell 21-33-17 State Com #111H

- The surface location is located 2,437 feet from the north line and 1,620 feet from the west line (Unit F) of Section 17
- The bottom hole location is located 2,588 feet from the south line and 1,210 feet from the west line (Unit L) of Section 5.

Becknell 21-33-17 State Com #113H

- The surface location is located 2,439 feet from the north line and 2,073 feet from the east line (Unit G) of Section 17
- The bottom hole location is located 2,588 feet from the south line and 2,304 feet from the east line (Unit J) of Section 5.

Becknell 21-33-17 State Com #114H

- The surface location is located 2,440 feet from the north line and 790 feet from the east line (Unit H) of Section 17
- The bottom hole location is located 2,589 feet from the south line and 550 feet from the east line (Unit I) of Section 5.

Becknell 21-33-17 State Com #811H

- The surface location is located 2,437 feet from the north line and 800 feet from the west line (Unit E) of Section 17.
- The bottom hole location is located 2,588 feet from the south line and 1,210 feet from the west line (Unit L) of Section 5.

Becknell 21-33-17 State Com #813H

- The surface location is located 2,439 feet from the north line and 2,133 feet from the east line (Unit G) of Section 17.
- The bottom hole location is located 2,588 feet from the south line and 2,304 feet from the east line (Unit J) of Section 5.

Becknell 21-33-17 State Com #814H

- The surface location is located 2,440 feet from the north line and 730 feet from the east line (Unit H) of Section 17
- The bottom hole location is located 2,589 feet from the south line and 550 feet from the east line (Unit I) of Section 5.

Becknell 21-33-17 State Com #821H

- The surface location is located 2,437 feet from the north line and 720 feet from the west line (Unit E) of Section 17.
- The bottom hole location is located 2,589 feet from the south line and 330 feet from the west line (Unit L) of Section 5.

Becknell 21-33-17 State Com #822H

- The surface location is located 2,437 feet from the north line and 1,680 feet from the west line (Unit F) of Section 17.
- The bottom hole location is located 2,588 feet from the south line and 2,090 feet from the west line (Unit K) of Section 5.

Becknell 21-33-17 State Com #823H

- The surface location is located 2,439 feet from the north line and 2,053 feet from the east line (Unit G) of Section 17.
- The bottom hole location is located 2,588 feet from the south line and 1,430 feet from the east line (Unit J) of Section 5.

Becknell 21-33-17 State Com #831H

- The surface location is located 2,437 feet from the north line and 780 feet from the west line (Unit E) of Section 17
- The bottom hole location is located 2,588 feet from the south line and 1,210 feet from the west line (Unit L) of Section 5.

Becknell 21-33-17 State Com #833H

- The surface location is located 2,439 feet from the north line and 2,113 feet from the east line (Unit G) of Section 17.
- The bottom hole location is located 2,588 feet from the south line and 2,304 feet from the east line (Unit J) of Section 5.

Becknell 21-33-17 State Com #834H

- The surface location is located 2,440 feet from the north line and 750 feet from the east line (Unit H) of Section 17
- The bottom hole location is located 2,589 feet from the south line and 550 feet from the east line (Unit I) of Section 5.

Becknell 21-33-17 State Com #911H

- The surface location is located 2,437 feet from the north line and 740 feet from the west line (Unit E) of Section 17

- The bottom hole location is located 2,589 feet from the south line and 430 feet from the west line (Unit L) of Section 5.

Becknell 21-33-17 State Com #912H

- The surface location is located 2,437 feet from the north line and 1,660 feet from the west line (Unit F) of Section 17.
- The bottom hole location is located 2,588 feet from the south line and 2,190 feet from the west line (Unit K) of Section 5.

Becknell 21-33-17 State Com #913H

- The surface location is located 2,440 feet from the north line and 830 feet from the east line (Unit H) of Section 17.
- The bottom hole location is located 2,588 feet from the south line and 1,330 feet from the east line (Unit J) of Section 5.

Becknell 21-33-17 State Com #921H

- The surface location is located 2,437 feet from the north line and 1,600 feet from the west line (Unit F) of Section 17.
- The bottom hole location is located 2,588 feet from the south line and 1,310 feet from the west line (Unit L) of Section 5.

Becknell 21-33-17 State Com #923H

- The surface location is located 2,439 feet from the north line and 2,093 feet from the east line (Unit G) of Section 17
- The bottom hole location is located 2,588 feet from the south line and 2,204 feet from the east line (Unit J) of Section 5.

Boone 21-33-16 State Com #924H

- The surface location is located 2,440 feet from the north line and 770 feet from the east line (Unit H) of Section 17
- The bottom hole location is located 2,589 feet from the south line and 450 feet from the east line (Unit I) of Section 5.

If you have any questions about this letter, please contact me by phone at 737-444-2997 or email at LLaufer@ameredev.com.

Sincerely,



Lizzy Laufer

Landman

Advance Energy Partners Hat Mesa, LLC

Email: LLaufer@ameredev.com

State of New Mexico
Energy, Minerals and Natural Resources Department

Submit Electronically
Via E-permitting

Oil Conservation Division
1220 South St. Francis Dr.
Santa Fe, NM 87505

NATURAL GAS MANAGEMENT PLAN

This Natural Gas Management Plan must be submitted with each Application for Permit to Drill (APD) for a new or recompleted well.

Section 1 – Plan Description

Effective May 25, 2021

I. Operator: Advance Energy Partners Hat Mesa, LLC **OGRID:** 372417 **Date:** _____

II. Type: ☒ Original ☐ Amendment due to ☐ 19.15.27.9.D(6)(a) NMAC ☐ 19.15.27.9.D(6)(b) NMAC ☐ Other.

If Other, please describe: _____

III. Well(s): Provide the following information for each new or recompleted well or set of wells proposed to be drilled or proposed to be recompleted from a single well pad or connected to a central delivery point.

Well Name	API	ULSTR	Footages	Anticipated Oil BBL/D	Anticipated Gas MCF/D	Anticipated Produced Water BBL/D
BECKNELL 21-33-17 State Com 073H	30-025-	G-17-21S-33E	2439' FNL & 2033' FEL	1000	1600	3300
BECKNELL 21-33-17 State Com 113H	30-025-	G-17-21S-33E	2439' FNL & 2073' FEL	1000	1600	3300
BECKNELL 21-33-17 State Com 813H	30-025-	G-17-21S-33E	2439' FNL & 2133' FEL	1000	1600	3300
BECKNELL 21-33-17 State Com 823H	30-025-	G-17-21S-33E	2439' FNL & 2053' FEL	1000	1600	3300
BECKNELL 21-33-17 State Com 833H	30-025-	G-17-21S-33E	2439' FNL & 2113' FEL	1000	1600	3300
BECKNELL 21-33-17 State Com 923H	30-025-	G-17-21S-33E	2439' FNL & 2093' FEL	1000	1600	3300

IV. Central Delivery Point Name: _____ [See 19.15.27.9(D)(1) NMAC]

V. Anticipated Schedule: Provide the following information for each new or recompleted well or set of wells proposed to be drilled or proposed to be recompleted from a single well pad or connected to a central delivery point.

Well Name	API	Spud Date	TD Reached Date	Completion Commencement Date	Initial Flow Back Date	First Production Date
BECKNELL 21-33-17 State Com 073H	30-025-	3/17/2023	4/6/2023	7/30/2023	9/19/2023	9/22/2023
BECKNELL 21-33-17 State Com 113H	30-025-	4/30/2023	5/20/2023	7/30/2023	9/19/2023	9/22/2023
BECKNELL 21-33-17 State Com 813H	30-025-	7/5/2023	7/25/2023	7/30/2023	9/19/2023	9/22/2023
BECKNELL 21-33-17 State Com 823H	30-025-	4/8/2023	4/28/2023	7/30/2023	9/19/2023	9/22/2023
BECKNELL 21-33-17 State Com 833H	30-025-	6/13/2023	7/3/2023	7/30/2023	9/19/2023	9/22/2023
BECKNELL 21-33-17 State Com 923H	30-025-	5/22/2023	6/11/2023	7/30/2023	9/19/2023	9/22/2023

VI. Separation Equipment: ☒ Attach a complete description of how Operator will size separation equipment to optimize gas capture.

VII. Operational Practices: ☒ Attach a complete description of the actions Operator will take to comply with the requirements of Subsection A through F of 19.15.27.8 NMAC.

VIII. Best Management Practices: ☒ Attach a complete description of Operator's best management practices to minimize venting during active and planned maintenance.

Section 2 – Enhanced Plan

EFFECTIVE APRIL 1, 2022

Beginning April 1, 2022, an operator that is not in compliance with its statewide natural gas capture requirement for the applicable reporting area must complete this section.

☒ Operator certifies that it is not required to complete this section because Operator is in compliance with its statewide natural gas capture requirement for the applicable reporting area.

IX. Anticipated Natural Gas Production:

Well	API	Anticipated Average Natural Gas Rate MCF/D	Anticipated Volume of Natural Gas for the First Year MCF

X. Natural Gas Gathering System (NGGS):

Operator	System	ULSTR of Tie-in	Anticipated Gathering Start Date	Available Maximum Daily Capacity of System Segment Tie-in

XI. Map. ☐ Attach an accurate and legible map depicting the location of the well(s), the anticipated pipeline route(s) connecting the production operations to the existing or planned interconnect of the natural gas gathering system(s), and the maximum daily capacity of the segment or portion of the natural gas gathering system(s) to which the well(s) will be connected.

XII. Line Capacity. The natural gas gathering system ☐ will ☐ will not have capacity to gather 100% of the anticipated natural gas production volume from the well prior to the date of first production.

XIII. Line Pressure. Operator ☐ does ☐ does not anticipate that its existing well(s) connected to the same segment, or portion, of the natural gas gathering system(s) described above will continue to meet anticipated increases in line pressure caused by the new well(s).

☐ Attach Operator's plan to manage production in response to the increased line pressure.

XIV. Confidentiality: ☐ Operator asserts confidentiality pursuant to Section 71-2-8 NMSA 1978 for the information provided in Section 2 as provided in Paragraph (2) of Subsection D of 19.15.27.9 NMAC, and attaches a full description of the specific information for which confidentiality is asserted and the basis for such assertion.

Section 3 - Certifications

Effective May 25, 2021

Operator certifies that, after reasonable inquiry and based on the available information at the time of submittal:

☒ Operator will be able to connect the well(s) to a natural gas gathering system in the general area with sufficient capacity to transport one hundred percent of the anticipated volume of natural gas produced from the well(s) commencing on the date of first production, taking into account the current and anticipated volumes of produced natural gas from other wells connected to the pipeline gathering system; or

☐ Operator will not be able to connect to a natural gas gathering system in the general area with sufficient capacity to transport one hundred percent of the anticipated volume of natural gas produced from the well(s) commencing on the date of first production, taking into account the current and anticipated volumes of produced natural gas from other wells connected to the pipeline gathering system.

If Operator checks this box, Operator will select one of the following:

Well Shut-In. ☐ Operator will shut-in and not produce the well until it submits the certification required by Paragraph (4) of Subsection D of 19.15.27.9 NMAC; or

Venting and Flaring Plan. ☐ Operator has attached a venting and flaring plan that evaluates and selects one or more of the potential alternative beneficial uses for the natural gas until a natural gas gathering system is available, including:

- (a) power generation on lease;
- (b) power generation for grid;
- (c) compression on lease;
- (d) liquids removal on lease;
- (e) reinjection for underground storage;
- (f) reinjection for temporary storage;
- (g) reinjection for enhanced oil recovery;
- (h) fuel cell production; and
- (i) other alternative beneficial uses approved by the division.

Section 4 - Notices

1. If, at any time after Operator submits this Natural Gas Management Plan and before the well is spud:

(a) Operator becomes aware that the natural gas gathering system it planned to connect the well(s) to has become unavailable or will not have capacity to transport one hundred percent of the production from the well(s), no later than 20 days after becoming aware of such information, Operator shall submit for OCD's approval a new or revised venting and flaring plan containing the information specified in Paragraph (5) of Subsection D of 19.15.27.9 NMAC; or

(b) Operator becomes aware that it has, cumulatively for the year, become out of compliance with its baseline natural gas capture rate or natural gas capture requirement, no later than 20 days after becoming aware of such information, Operator shall submit for OCD's approval a new or revised Natural Gas Management Plan for each well it plans to spud during the next 90 days containing the information specified in Paragraph (2) of Subsection D of 19.15.27.9 NMAC, and shall file an update for each Natural Gas Management Plan until Operator is back in compliance with its baseline natural gas capture rate or natural gas capture requirement.

2. OCD may deny or conditionally approve an APD if Operator does not make a certification, fails to submit an adequate venting and flaring plan which includes alternative beneficial uses for the anticipated volume of natural gas produced, or if OCD determines that Operator will not have adequate natural gas takeaway capacity at the time a well will be spud.

I certify that, after reasonable inquiry, the statements in and attached to this Natural Gas Management Plan are true and correct to the best of my knowledge and acknowledge that a false statement may be subject to civil and criminal penalties under the Oil and Gas Act.

Signature: <i>Dayeed Khan</i>
Printed Name: Dayeed Khan
Title: Engineer
E-mail Address: dkhan@ameredev.com
Date: 08/23/2022
Phone: 737-300-4735
OIL CONSERVATION DIVISION (Only applicable when submitted as a standalone form)
Approved By:
Title:
Approval Date:
Conditions of Approval:

Natural Gas Management Plan

VI. Separation Equipment: Attach a complete description of how Operator will size separation equipment to optimize gas capture.

- Separation equipment is sized to allow for retention time and velocity to adequately separate oil, gas, and water at anticipated peak rates.
- All central tank battery equipment is designed to efficiently capture the remaining gas from the liquid phase.
- Valves and meters are designed to service without flow interruption or venting of gas.

VII. Operational Practices: Attach a complete description of the actions Operator will take to comply with the requirements of Subsection A through F 19.15.27.8 NMAC.

19.15.27.8 (A)

Advanced Energy Partners field operations are designed with the goal of minimizing flaring and preventing venting of natural gas. If capturing the gas is not possible then the gas is combusted/flared using properly sized flares or combustors in accordance with state air permit rules.

19.15.27.8 (B) Venting and Flaring during drilling operations

- A properly-sized flare stack will be located at a minimum 100' from the nearest surface hole location on the pad.
- All natural gas produced during drilling operations will be flared. Venting will only occur if there is an equipment malfunction and/or to avoid risk of an immediate and substantial adverse impact on safety, public health, or the environment.

19.15.27.8 (C) Venting and Flaring during completions or recompletions operations.

- During all phases of flowback, wells will flow through a sand separator, or other appropriate flowback separation equipment, and the well stream will be directed to a central tank battery (CTB) through properly sized flowlines
- The CTB will have properly sized separation equipment for maximum anticipated flowrates
- Multiple stages of separation will be used to separate gas from liquids. All gas will be routed to a sales outlet. Fluids will be routed to tanks equipped with a closed loop system that will recover any residual gas from the tanks and route such gas to a sales outlet.

19.15.27.8 (D) Venting and Flaring during production operations.

- During production, the well stream will be routed to the CTB where multiple stages of separation will separate gas from liquids. All gas will be routed to a sales outlet. Fluids will be routed to tanks with a closed

loop system that will recover any residual gas from the tanks and route such gas to a sales outlet, minimizing tank emissions.

- Flares are equipped with auto-ignition systems and continuous pilot operations.
- Automatic gauging equipment is installed on all tanks.

19.15.27.8 (E) Performance Standards

- Production equipment will be designed to handle maximum anticipated rates and pressure.
- Automatic gauging equipment is installed on all tanks to minimize venting
- All flared gas will be combusted in a flare stack that is properly sized and designed to ensure proper combustion.
- Flares are equipped with continuous pilots and auto-ignitors along with remote monitoring of the pilot status
- Weekly AVOs and monthly LDAR inspections will be performed on all wells and facilities that produce more than 60 Mcfd.
- Gas/H₂S detectors will be installed throughout the facilities and wellheads to detect leaks and enable timely repairs.

19.15.27.8 (F) Measurement or estimation of vented and flared natural gas

- All high pressure flared gas is measured by equipment conforming to API 14.10.
- No meter bypasses are installed.
- When metering is not practical due to low pressure/low rate, the vented or flared volume will be estimated through flare flow curves with the assistance of air emissions consultants, as necessary.

VIII. Best Management Practices: Attach a complete description of Operator's best management practices to minimize venting during active and planned maintenance.

- Advanced Energy Partners will use best management practices to vent as minimally as possible during well intervention operations and downhole well maintenance
- All natural gas is routed into the gas gathering system and directed to one of Advanced Energy Partners multiple gas sales outlets.
- All venting events will be recorded and all start-up, shutdown, maintenance logs will be kept for control equipment
- All control equipment will be maintained to provide highest run-time possible
- All procedures are drafted to keep venting and flaring to the absolute minimum