

Office
District I - (575) 393-6161
1625 N. French Dr., Hobbs, NM 88240
District II - (575) 748-1283
811 S. First St., Artesia, NM 88210
District III - (505) 334-6178
1000 Rio Brazos Rd., Aztec, NM 87410
District IV - (505) 476-3460
1220 S. St. Francis Dr., Santa Fe, NM 87505

State of New Mexico
Energy, Minerals and Natural Resources

Form C-103
Revised July 18, 2013

OIL CONSERVATION DIVISION
1220 South St. Francis Dr.
Santa Fe, NM 87505

WELL API NO. 30-005-60114
5. Indicate Type of Lease STATE [ ] FEE [X]
6. State Oil & Gas Lease No.
7. Lease Name or Unit Agreement Name White
8. Well Number 001
9. OGRID Number 372658
10. Pool name or Wildcat Racetrack; San Andres
11. Elevation (Show whether DR, RKB, RT, GR, etc.) 3780 GL

SUNDRY NOTICES AND REPORTS ON WELLS
(DO NOT USE THIS FORM FOR PROPOSALS TO DRILL OR TO DEEPEN OR PLUG BACK TO A DIFFERENT RESERVOIR. USE "APPLICATION FOR PERMIT" (FORM C-101) FOR SUCH PROPOSALS.)
1. Type of Well: Oil Well [X] Gas Well [ ] Other [ ]
2. Name of Operator Yates Industries, LLC
3. Address of Operator 403 W. San Francisco Street, Santa Fe, NM 87501
4. Well Location Unit Letter I : 2500 feet from the S line and 700 feet from the E line
Section 13 Township 10S Range 27E NMPM County Chaves

12. Check Appropriate Box to Indicate Nature of Notice, Report or Other Data

NOTICE OF INTENTION TO:
PERFORM REMEDIAL WORK [ ] PLUG AND ABANDON [ ]
TEMPORARILY ABANDON [ ] CHANGE PLANS [ ]
PULL OR ALTER CASING [ ] MULTIPLE COMPL [ ]
DOWNHOLE COMMINGLE [ ]
CLOSED-LOOP SYSTEM [ ]
OTHER: [ ]
SUBSEQUENT REPORT OF:
REMEDIAL WORK [ ] ALTERING CASING [ ]
COMMENCE DRILLING OPNS. [ ] P AND A [X]
CASING/CEMENT JOB [ ]
OTHER: [ ]

13. Describe proposed or completed operations. (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work). SEE RULE 19.15.7.14 NMAC. For Multiple Completions: Attach wellbore diagram of proposed completion or recompletion.

Yates Industries plugged this well as follows:

- 8/10/2022 MI 3G Well Service plugging equipment
8/11/2022 RU pulling unit. POH w/ tubing and RIH w/ CIBP and set at 2087'
8/12/2022 Run CBL log and found top of cement @ 218'. Perforate squeeze holes at 200'. Establish good circulation.
8/15/2022 RIH and tag CIBP @ 2087' and load hole with plugging mud
8/17/2022 Pump 70 sx class C plug @ 2087': plug 1 1443 - 2087'. Pull up and pump 80 sx class C @ 410': plug 2 Surface to 410' on inside of 5 1/2" casing and from 200' to surface behind 5 1/2" casing.
8/18/2022 Checked cement, it had fallen 6" inside 5 1/2" casing. RDMO pulling unit.
8/19/2022 Cut off wellhead 3' below ground level. Cement remained at surface behind 5 1/2" casing.
9/18/2022 Weld on plate and install dry hole marker on well and fill cellar.
See exhibit attached. The surface will be cleaned to NMOCD standards.

Approved for plugging of well bore only. Liability under bond is retained pending Location cleanup & receipt of C-103Q (Subsequent Report of Well Plugging) which may be found at OCD Web Page, OCD Permitting @ www.emnrd.state.nm.us

Spud Date: [ ] Rig Release Date: [ ]

I hereby certify that the information above is true and complete to the best of my knowledge and belief.

SIGNATURE [Signature] TITLE Consultant DATE 9/20/2022

Type or print name Phelps White E-mail address: pwiv@zianet.com PHONE: 575 626 7660

For State Use Only

APPROVED BY: [Signature] TITLE Staff Manager DATE 10/5/22
Conditions of Approval (if any):



# WELLBORE DIAGRAM

**White #1**

Section 13, T10S, R27E: 2540' FNL & 1220 FEL  
API# 30-005-60114

Updated 9/20/2022

**Plugs 8/2022**

**Perf: 200'**

**80 sx Class C @ 410'**  
**Surface to 410'**

**70 sx Class C**  
**1443-2087'**

**CIBP @ 2087'**


4053 (tag) to 4399'

Squeeze Perfs 4282'

25 sx Class C @ 5043  
4795 to 5043'

25 sx Class C @ 5799'  
5551' to 5799'

FISH IN HOLE  
3.5 jts 2 7/8"  
clean body cut  
Top 6462 bot 6571

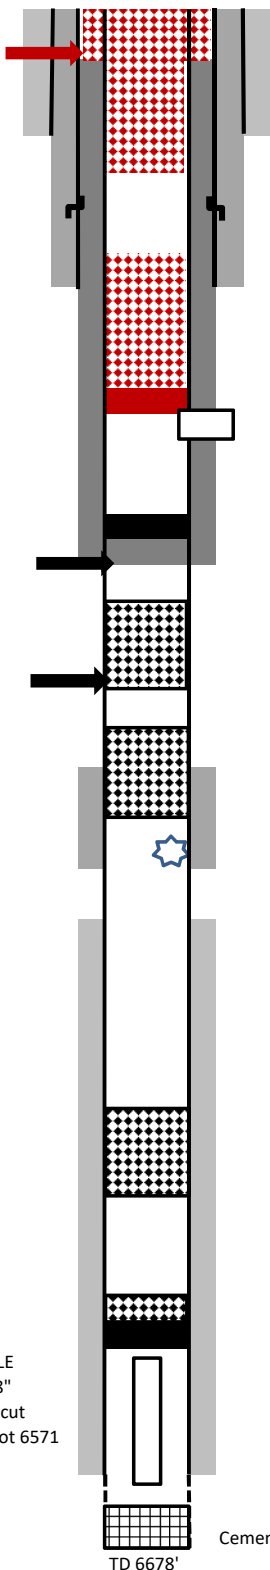

5 1/2" TOC 218' by CBL

12 3/4" 34# @ 360'  
450 sx to surface

Casing Patch 1203', cmt 300 sx

8 5/8" 24 & 32# @ 1593'  
600 sx

Perfs: 2148-84', 2195-2205, 2216-22, 2232-40,  
2247-51, 2264-72, 2282-92', 2 spf

PBTD 2398', 5/23/22  
Squeeze job 5/21/22 500 sx, TOC Unk but close to surface.  
Cement Retainer @ 2400'  
Squeeze Perfs 2500'

5400' Hole in casing: squeeze 100 sx.  
Casing tested to 500 psi OK

Formation Tops	
Yts	430
Queen	1035
San Andres	1565
Glorietta	2702
Tubb	4232
Abo	4997
Wolfcamp	5780
Penn	6240
Miss	6520
Devonian	6632

35' cement dumped on top tagged 6418'

5 1/2" 15.5# J-55@ 6633  
200 sx TOC 3620'

Open Hole; 6633' to 6642' (9')  
Cement 6642-6678'

TD 6678'

**District I**  
 1625 N. French Dr., Hobbs, NM 88240  
 Phone:(575) 393-6161 Fax:(575) 393-0720

**District II**  
 811 S. First St., Artesia, NM 88210  
 Phone:(575) 748-1283 Fax:(575) 748-9720

**District III**  
 1000 Rio Brazos Rd., Aztec, NM 87410  
 Phone:(505) 334-6178 Fax:(505) 334-6170

**District IV**  
 1220 S. St Francis Dr., Santa Fe, NM 87505  
 Phone:(505) 476-3470 Fax:(505) 476-3462

**State of New Mexico**  
**Energy, Minerals and Natural Resources**  
**Oil Conservation Division**  
**1220 S. St Francis Dr.**  
**Santa Fe, NM 87505**

CONDITIONS

Action 144965

**CONDITIONS**

Operator: YATES INDUSTRIES LLC 403 W San Francisco Street Santa Fe, NM 87501	OGRID: 372658
	Action Number: 144965
	Action Type: [C-103] Sub. Plugging (C-103P)

**CONDITIONS**

Created By	Condition	Condition Date
gcordero	None	10/5/2022