



U.S. Department of the Interior
BUREAU OF LAND MANAGEMENT

Sundry Print Report

12/27/2022

Well Name: POKER LAKE UNIT**Well Location:** T25S / R31E / SEC
4 / SESW /**County or Parish/State:**
EDDY / NM**Well Number:** 303H**Type of Well:** OIL WELL**Allottee or Tribe Name:****Lease Number:** NMNM030457**Unit or CA Name:** POKERLAKE
UNIT 303H**Unit or CA Number:**
NMNM140282**US Well Number:** 3001537646**Well Status:** Abandoned**Operator:** XTO PERMIAN
OPERATING LLC

Accepted for record – NMOCD gc 1/4/2023

Subsequent Report

Sundry ID: 2684639**Type of Submission:** Subsequent Report**Type of Action:** Plug and Abandonment**Date Sundry Submitted:** 07/31/2022**Time Sundry Submitted:** 02:15**Date Operation Actually Began:** 07/11/2022

Actual Procedure: 07/11/22: test BOP - tested good 07/12/22: TTOC @ 7380', cmt pump starter broke
07/13/22: Perf @ 5321', est inj rate pressure up no success. 50' below perf spot 40 sx Class C cmt.
07/14/22: Tag TOC 5123'. Perf @ 4390. EIR unable to establish inj rate. Spot 75 sx class C cmt @ 4393',
WOC. 07/15/22: TTOC @ 3939', Perf @ 995' attempted to EIR unsuccessful. Cmt to Surf w/ 170 sx class C
cmt, top off well with remaining cmt. PA Complete.

SR Attachments

Actual Procedure

PLU_303H_subsequent_WBD_20220729091721.pdf



Schematic - Wellbore - Vertical


Well Name: **POKER LAKE UNIT 303H**

API/UWI 3001537646	SAP Cost Center ID 1139141001	Permit Number	State/Province New Mexico	County Eddy
Surface Location T25S-R31E-S04	Spud Date 3/4/2012 08:00	Original KB Elevation (ft) 3,435.00	Ground Elevation (ft) 3,413.00	KB-Ground Distance (ft) 22.00

12/29/2021; Tubing Hanger; 7 1/16 in; 23.7 ftKB

12/29/2021; Tubing; 2 7/8 in; 6,587.8 ftKB

CIBP @ 7440, TOC @ 7401

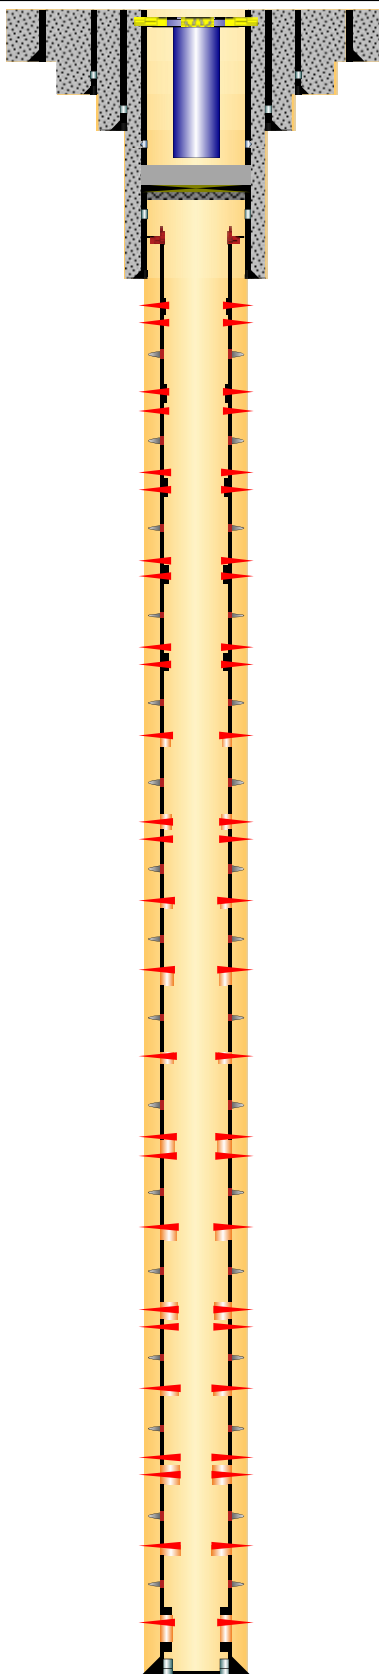

Conductor; 24 in; 105.0 ftKB

Casing; Conductor; 20 in; 94.00 lb/ft; K-55; 22.0-105.0 ftKB

Surface; 17 1/2 in; 872.0 ftKB

Casing; Surface; 13 3/8 in; 48.00 lb/ft; H-40; 22.0-872.0 ftKB

Intermediate; 12 1/4 in; 4,319.0 ftKB

Casing; Intermediate 1; 9 5/8 in; 40.00 lb/ft; J-55, K-55; 22.0-4,319.0 ftKB

DVT; 5,271.1

Intermediate; 8 3/4 in; 8,386.0 ftKB

Cement; 7,401.0-7,440.0 ftKB

Bridge Plug - Permanent; 7,440.0-7,441.0 ftKB

TOL; 8,295.0

Casing; Intermediate 2; 7 in; 26.00 lb/ft; N-80; 22.0-8,386.0 ftKB

Production; 6 1/8 in; 13,815.0 ftKB

Casing; Production; 4 1/2 in; 11.60 lb/ft; HCP-110; 8,295.0-13,815.0 ftKB

PBTD; 13,815.0 ftKB; 4/2/2012

TD - Original Hole; 13,815.0 ftKB

District I
1625 N. French Dr., Hobbs, NM 88240
Phone:(575) 393-6161 Fax:(575) 393-0720

District II
811 S. First St., Artesia, NM 88210
Phone:(575) 748-1283 Fax:(575) 748-9720

District III
1000 Rio Brazos Rd., Aztec, NM 87410
Phone:(505) 334-6178 Fax:(505) 334-6170

District IV
1220 S. St Francis Dr., Santa Fe, NM 87505
Phone:(505) 476-3470 Fax:(505) 476-3462

State of New Mexico
Energy, Minerals and Natural Resources
Oil Conservation Division
1220 S. St Francis Dr.
Santa Fe, NM 87505

CONDITIONS

Action 170205

CONDITIONS

Operator: XTO PERMIAN OPERATING LLC. 6401 HOLIDAY HILL ROAD MIDLAND, TX 79707	OGRID: 373075
	Action Number: 170205
	Action Type: [C-103] Sub. Plugging (C-103P)

CONDITIONS

Created By	Condition	Condition Date
gcordero	None	1/4/2023