

District I

1625 N. French Dr., Hobbs, NM 88240
Phone:(575) 393-6161 Fax:(575) 393-0720

District II

811 S. First St., Artesia, NM 88210
Phone:(575) 748-1283 Fax:(575) 748-9720

District III

1000 Rio Brazos Rd., Aztec, NM 87410
Phone:(505) 334-6178 Fax:(505) 334-6170

District IV

1220 S. St Francis Dr., Santa Fe, NM 87505
Phone:(505) 476-3470 Fax:(505) 476-3462

State of New Mexico
Energy, Minerals and Natural Resources
Oil Conservation Division
1220 S. St Francis Dr.
Santa Fe, NM 87505

Form C-101
August 1, 2011

Permit 333909

APPLICATION FOR PERMIT TO DRILL, RE-ENTER, DEEPEN, PLUGBACK, OR ADD A ZONE

1. Operator Name and Address DEVON ENERGY PRODUCTION COMPANY, LP 333 West Sheridan Ave. Oklahoma City, OK 73102		2. OGRID Number 6137
		3. API Number 30-015-53373
4. Property Code 333760	5. Property Name MIMOSA 18-16 STATE COM	6. Well No. 622H

7. Surface Location

UL - Lot D	Section 18	Township 20S	Range 30E	Lot Idn 1	Feet From 1195	N/S Line N	Feet From 1066	E/W Line W	County Eddy
---------------	---------------	-----------------	--------------	--------------	-------------------	---------------	-------------------	---------------	----------------

8. Proposed Bottom Hole Location

UL - Lot A	Section 16	Township 20S	Range 30E	Lot Idn A	Feet From 1750	N/S Line N	Feet From 20	E/W Line E	County Eddy
---------------	---------------	-----------------	--------------	--------------	-------------------	---------------	-----------------	---------------	----------------

9. Pool Information

WC-015 G-07 S203032G;WOLFCAMP	97963
-------------------------------	-------

Additional Well Information

11. Work Type New Well	12. Well Type OIL	13. Cable/Rotary	14. Lease Type State	15. Ground Level Elevation 3306
16. Multiple N	17. Proposed Depth 25370	18. Formation Wolfcamp	19. Contractor	20. Spud Date 8/20/2023
Depth to Ground water		Distance from nearest fresh water well		Distance to nearest surface water

☒ We will be using a closed-loop system in lieu of lined pits

21. Proposed Casing and Cement Program

Type	Hole Size	Casing Size	Casing Weight/ft	Setting Depth	Sacks of Cement	Estimated TOC
Surf	17.5	13.375	48	329	277	0
Int1	12.25	10.75	45.5	1705	192	0
Int2	9.875	8.625	32	3754	194	0
Prod	7.875	5.5	17	25370	2243	7308

Casing/Cement Program: Additional Comments

--

22. Proposed Blowout Prevention Program

Type	Working Pressure	Test Pressure	Manufacturer
Annular	5000	5000	
Blind	5000	5000	
Double Ram	5000	5000	
Annular	5000	5000	
Blind	5000	5000	
Double Ram	5000	5000	
Annular	5000	5000	
Blind	5000	5000	
Double Ram	5000	5000	

23. I hereby certify that the information given above is true and complete to the best of my knowledge and belief.
I further certify I have complied with 19.15.14.9 (A) NMAC ☒ and/or 19.15.14.9 (B) NMAC ☒ if applicable.

OIL CONSERVATION DIVISION

Signature:			
Printed Name:	Electronically filed by Jeff Walla	Approved By:	Katherine Pickford
Title:	Supervisor Land	Title:	Geoscientist
Email Address:	Jeff.Walla@dmn.com	Approved Date:	2/7/2023
Date:	2/7/2023	Phone:	575-748-9925
		Expiration Date:	2/7/2025
		Conditions of Approval Attached	

District I
1625 N. French Dr., Hobbs, NM 88240
Phone: (505) 393-6161 Fax: (505) 393-0720
District II
811 S. First St., Artesia, NM 88210
Phone: (505) 748-1283 Fax: (505) 748-9720
District III
1000 Rio Brazos Road, Aztec, NM 87410
Phone: (505) 334-6178 Fax: (505) 334-6170
District IV
1220 S. St. Francis Dr., Santa Fe, NM 87505
Phone: (505) 476-3460 Fax: (505) 476-3462

State of New Mexico
Energy, Minerals & Natural Resources Department
OIL CONSERVATION DIVISION
1220 South St. Francis Dr.
Santa Fe, NM 87505

Form C-102

Revised August 1, 2011

Submit one copy to
appropriate District Office☐ AMENDED REPORT**WELL LOCATION AND ACREAGE DEDICATION PLAT**

¹ API Number 30-015-53373	² Pool Code 92963- 97963	³ Pool Name WC-015 G-07 S203032G;WOLFCAMP
⁴ Property Code 333760	⁵ Property Name MIMOSA 18-16 STATE COM	
⁷ OGRID No. 6137	⁸ Operator Name DEVON ENERGY PRODUCTION COMPANY, L.P.	⁶ Well Number 622H
		⁹ Elevation 3306.3'

¹⁰ Surface Location

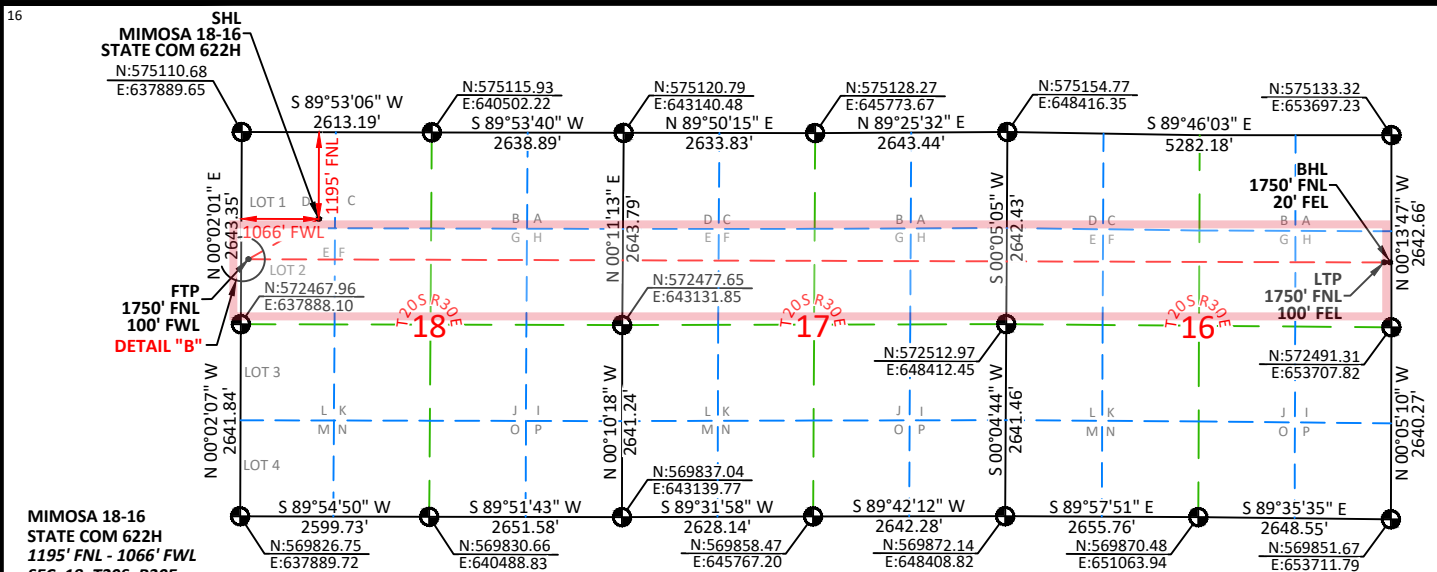
UL or lot no. D	Section 18	Township 20-S	Range 30-E	Lot Idn 1	Feet from the 1195	North/South line NORTH	Feet from the 1066	East/West line WEST	County EDDY
---------------------------	----------------------	-------------------------	----------------------	---------------------	------------------------------	----------------------------------	------------------------------	-------------------------------	-----------------------

¹¹ Bottom Hole Location If Different From Surface

UL or lot no. H	Section 16	Township 20-S	Range 30-E	Lot Idn	Feet from the 1750	North/South line NORTH	Feet from the 20	East/West line EAST	County EDDY
---------------------------	----------------------	-------------------------	----------------------	---------	------------------------------	----------------------------------	----------------------------	-------------------------------	-----------------------

¹² Dedicated Acres 479.22	¹³ Joint or Infill	¹⁴ Consolidation Code	¹⁵ Order No.
--	-------------------------------	----------------------------------	-------------------------

No allowable will be assigned to this completion until all interests have been consolidated
or a non-standard unit has been approved by the division.

¹⁷ OPERATOR CERTIFICATION

I hereby certify that the information contained herein is true and complete to the best of my knowledge and belief, and that this organization either owns a working interest or unleased mineral interest in the land including the proposed bottom hole location or has a right to drill this well at this location pursuant to a contract with an owner of such a mineral or working interest, or to a voluntary pooling agreement or a compulsory pooling order heretofore entered by the division.

Arianna Evans 2/7/23
Signature Date
Arianna Evans
Printed Name
arianna.evans@dvn.com
E-mail Address

NOTES:

1. BEARINGS SHOWN ARE GRID BASED ON THE NEW MEXICO STATE PLANE EAST ZONE COORDINATE SYSTEM (3001), NAD 83 (2011), BASED FROM GPS OBSERVATIONS, OCCUPYING A WHS CONTROL POINT (5/8" REBAR), LOCATED AT AT N:556917.441 E:633268.606 ORTHO:3349.52. DETERMINED BY AN OPUS SOLUTION ON SEPTEMBER 5TH, 2019.
2. DISTANCES DEPICTED HEREON ARE REPORTED AS GROUND DISTANCE IN US SURVEY FEET USING A COMBINED SCALE FACTOR OF 1.000237768
3. ELEVATIONS ARE EXISTING GROUND ELEVATIONS UNLESS NOTED.


¹⁸ SURVEYOR CERTIFICATION

I hereby certify that the well location shown on this plat was plotted from field notes of actual surveys made by me or under my supervision, and that the same is true and correct to the best of my belief.

01/02/2023

Date of Survey

Signature and Seal of Professional Surveyor:



Certificate No. 23261	Albert Dehoyos
Drawn by: JEB	Checked by: ARD Date: 01/13/2023

Intent ☒ As Drilled ☐

API #		
Operator Name: DEVON ENERGY PRODUCTION COMPANY, L.P.	Property Name: MIMOSA 18-16 STATE COM	Well Number 622H

Kick Off Point (KOP)

UL	Section	Township	Range	Lot	Feet	From N/S	Feet	From E/W	County
	18	20-S	30-E		1749	FNL	61	FWL	EDDY
Latitude 32.5757					Longitude -104.0198				NAD 83

First Take Point (FTP)

UL	Section	Township	Range	Lot	Feet	From N/S	Feet	From E/W	County
E	18	20-S	30-E		1750	NORTH	100	WEST	EDDY
Latitude 32.5758331°					Longitude -104.0195675°				NAD 83

Last Take Point (LTP)

UL	Section	Township	Range	Lot	Feet	From N/S	Feet	From E/W	County
H	16	20-S	30-E		1750	NORTH	100	EAST	EDDY
Latitude 32.5757569°					Longitude -103.9688737°				NAD 83

Is this well the defining well for the Horizontal Spacing Unit? ☒ YES

Is this well an infill well? ☐ NO

If infill is yes provide API if available, Operator name and well number for Defining well for Horizontal Spacing Unit.

API #		
Operator Name:	Property Name:	Well Number

KZ 06/29/2018

District I

1625 N. French Dr., Hobbs, NM 88240
 Phone:(575) 393-6161 Fax:(575) 393-0720

District II

811 S. First St., Artesia, NM 88210
 Phone:(575) 748-1283 Fax:(575) 748-9720

District III

1000 Rio Brazos Rd., Aztec, NM 87410
 Phone:(505) 334-6178 Fax:(505) 334-6170

District IV

1220 S. St Francis Dr., Santa Fe, NM 87505
 Phone:(505) 476-3470 Fax:(505) 476-3462

State of New Mexico
Energy, Minerals and Natural Resources
Oil Conservation Division
1220 S. St Francis Dr.
Santa Fe, NM 87505

Form APD Conditions

Permit 333909

PERMIT CONDITIONS OF APPROVAL

Operator Name and Address: DEVON ENERGY PRODUCTION COMPANY, LP [6137] 333 West Sheridan Ave. Oklahoma City, OK 73102	API Number: 30-015-53373
	Well: MIMOSA 18-16 STATE COM #622H

OCD Reviewer	Condition
kpickford	Notify OCD 24 hours prior to casing & cement
kpickford	Will require a File As Drilled C-102 and a Directional Survey with the C-104
kpickford	The Operator is to notify NMOCD by sundry (Form C-103) within ten (10) days of the well being spud
kpickford	Once the well is spud, to prevent ground water contamination through whole or partial conduits from the surface, the operator shall drill without interruption through the fresh water zone or zones and shall immediately set in cement the water protection string
kpickford	Cement is required to circulate on both surface and intermediate1 strings of casing
kpickford	Oil base muds are not to be used until fresh water zones are cased and cemented providing isolation from the oil or diesel. This includes synthetic oils. Oil based mud, drilling fluids and solids must be contained in a steel closed loop system

State of New Mexico
Energy, Minerals and Natural Resources Department

Submit Electronically
Via E-permitting

Oil Conservation Division
1220 South St. Francis Dr.
Santa Fe, NM 87505

NATURAL GAS MANAGEMENT PLAN

This Natural Gas Management Plan must be submitted with each Application for Permit to Drill (APD) for a new or recompleted well.

Section 1 – Plan Description

Effective May 25, 2021

I. Operator: Devon Energy Production Company, L.P. **OGRID:** 6137 **Date:** 02 / 6 / 2023

II. Type: ☒ Original ☐ Amendment due to ☐ 19.15.27.9.D(6)(a) NMAC ☐ 19.15.27.9.D(6)(b) NMAC ☐ Other.

If Other, please describe: _____

III. Well(s): Provide the following information for each new or recompleted well or set of wells proposed to be drilled or proposed to be recompleted from a single well pad or connected to a central delivery point.

Well Name	API	ULSTR	Footages	Anticipated Oil BBL/D	Anticipated Gas MCF/D	Anticipated Produced Water BBL/D
See Attached						

IV. Central Delivery Point Name: SEE ATTACHMENTS [See 19.15.27.9(D)(1) NMAC]

V. Anticipated Schedule: Provide the following information for each new or recompleted well or set of wells proposed to be drilled or proposed to be recompleted from a single well pad or connected to a central delivery point.

Well Name	API	Spud Date	TD Reached Date	Completion Commencement Date	Initial Flow Back Date	First Production Date
See Attached						

VI. Separation Equipment: ☒ Attach a complete description of how Operator will size separation equipment to optimize gas capture.

VII. Operational Practices: ☒ Attach a complete description of the actions Operator will take to comply with the requirements of Subsection A through F of 19.15.27.8 NMAC.

VIII. Best Management Practices: ☒ Attach a complete description of Operator's best management practices to minimize venting during active and planned maintenance.

Section 2 – Enhanced Plan

EFFECTIVE APRIL 1, 2022

Beginning April 1, 2022, an operator that is not in compliance with its statewide natural gas capture requirement for the applicable reporting area must complete this section.

☒ Operator certifies that it is not required to complete this section because Operator is in compliance with its statewide natural gas capture requirement for the applicable reporting area.

IX. Anticipated Natural Gas Production:

Well	API	Anticipated Average Natural Gas Rate MCF/D	Anticipated Volume of Natural Gas for the First Year MCF

X. Natural Gas Gathering System (NGGS):

Operator	System	ULSTR of Tie-in	Anticipated Gathering Start Date	Available Maximum Daily Capacity of System Segment Tie-in

XI. Map. ☐ Attach an accurate and legible map depicting the location of the well(s), the anticipated pipeline route(s) connecting the production operations to the existing or planned interconnect of the natural gas gathering system(s), and the maximum daily capacity of the segment or portion of the natural gas gathering system(s) to which the well(s) will be connected.

XII. Line Capacity. The natural gas gathering system ☐ will ☐ will not have capacity to gather 100% of the anticipated natural gas production volume from the well prior to the date of first production.

XIII. Line Pressure. Operator ☐ does ☐ does not anticipate that its existing well(s) connected to the same segment, or portion, of the natural gas gathering system(s) described above will continue to meet anticipated increases in line pressure caused by the new well(s).

☐ Attach Operator's plan to manage production in response to the increased line pressure.

XIV. Confidentiality: ☐ Operator asserts confidentiality pursuant to Section 71-2-8 NMSA 1978 for the information provided in Section 2 as provided in Paragraph (2) of Subsection D of 19.15.27.9 NMAC, and attaches a full description of the specific information for which confidentiality is asserted and the basis for such assertion.

Section 3 - Certifications

Effective May 25, 2021

Operator certifies that, after reasonable inquiry and based on the available information at the time of submittal:

☒ Operator will be able to connect the well(s) to a natural gas gathering system in the general area with sufficient capacity to transport one hundred percent of the anticipated volume of natural gas produced from the well(s) commencing on the date of first production, taking into account the current and anticipated volumes of produced natural gas from other wells connected to the pipeline gathering system; or

☐ Operator will not be able to connect to a natural gas gathering system in the general area with sufficient capacity to transport one hundred percent of the anticipated volume of natural gas produced from the well(s) commencing on the date of first production, taking into account the current and anticipated volumes of produced natural gas from other wells connected to the pipeline gathering system.

If Operator checks this box, Operator will select one of the following:

Well Shut-In. ☐ Operator will shut-in and not produce the well until it submits the certification required by Paragraph (4) of Subsection D of 19.15.27.9 NMAC; or

Venting and Flaring Plan. ☐ Operator has attached a venting and flaring plan that evaluates and selects one or more of the potential alternative beneficial uses for the natural gas until a natural gas gathering system is available, including:

- (a) power generation on lease;
- (b) power generation for grid;
- (c) compression on lease;
- (d) liquids removal on lease;
- (e) reinjection for underground storage;
- (f) reinjection for temporary storage;
- (g) reinjection for enhanced oil recovery;
- (h) fuel cell production; and
- (i) other alternative beneficial uses approved by the division.

Section 4 - Notices

1. If, at any time after Operator submits this Natural Gas Management Plan and before the well is spud:

(a) Operator becomes aware that the natural gas gathering system it planned to connect the well(s) to has become unavailable or will not have capacity to transport one hundred percent of the production from the well(s), no later than 20 days after becoming aware of such information, Operator shall submit for OCD's approval a new or revised venting and flaring plan containing the information specified in Paragraph (5) of Subsection D of 19.15.27.9 NMAC; or

(b) Operator becomes aware that it has, cumulatively for the year, become out of compliance with its baseline natural gas capture rate or natural gas capture requirement, no later than 20 days after becoming aware of such information, Operator shall submit for OCD's approval a new or revised Natural Gas Management Plan for each well it plans to spud during the next 90 days containing the information specified in Paragraph (2) of Subsection D of 19.15.27.9 NMAC, and shall file an update for each Natural Gas Management Plan until Operator is back in compliance with its baseline natural gas capture rate or natural gas capture requirement.

2. OCD may deny or conditionally approve an APD if Operator does not make a certification, fails to submit an adequate venting and flaring plan which includes alternative beneficial uses for the anticipated volume of natural gas produced, or if OCD determines that Operator will not have adequate natural gas takeaway capacity at the time a well will be spud.

I certify that, after reasonable inquiry, the statements in and attached to this Natural Gas Management Plan are true and correct to the best of my knowledge and acknowledge that a false statement may be subject to civil and criminal penalties under the Oil and Gas Act.

Signature:



Printed Name: Jeff Walla

Title: Surface Land and Regulatory Manager

E-mail Address:

Date:

Phone:

OIL CONSERVATION DIVISION
(Only applicable when submitted as a standalone form)

Approved By:

Title:

Approval Date:

Conditions of Approval:

Well Name	API	ULSTR	N/S Footage	Call	E/W Footage	Call	Anticipated Oil BBL/D	Anticipated Gas MCF/D	Anticipated Produced Water BBL/D
MIMOSA 18-16 STATE COM 621H		18-20S-30E	1165	FNL	1066	FWL	(+/-)1245bopd	(+/-)2995mcf	(+/-)3115bwpd
MIMOSA 18-16 STATE COM 622H		18-20S-30E	1195	FNL	1066	FWL	(+/-)1245bopd	(+/-)2995mcf	(+/-)3115bwpd

Well Name	API	Spud Date*	TD Reached Date*	Completion Commencement Date*	Initial Flow Back Date*	First Production Date*
MIMOSA 18-16 STATE COM 621H		7/22/2023	8/21/2023	12/19/2023	12/19/2023	12/19/2023
MIMOSA 18-16 STATE COM 622H		8/20/2023	9/19/2023	1/17/2024	1/17/2024	1/17/2024

*Approximate Dates Subject to Change



VI. Separation Equipment

Devon Energy Production Company, L.P. utilizes a "stage separation" process in which oil and gas separation is carried out through a series of separators operating at successively reduced pressures. Hydrocarbon liquids are produced into a high-pressure inlet separator, then carried through one or more lower pressure separation vessels before entering the storage tanks. The purpose of this separation process is to attain maximum recovery of liquid hydrocarbons from the fluids and allow maximum capture of produced gas into the sales pipeline. Devon utilizes a series of Low-Pressure Compression units to capture gas off the staged separation and send it to the sales pipeline. This process minimizes the amount of flash gas that enters the end-stage storage tanks that is subsequently vented or flared.



VII. Operational Practices

Devon Energy Production Company, L. P. will employ best management practices and control technologies to maximize the recovery and minimize waste of natural gas through venting and flaring.

- During drilling operations, Devon will utilize flares and/or combustors to capture and control natural gas, where technically feasible. If flaring is deemed technically in-feasible, Devon will employ best management practices to minimize or reduce venting to the extent possible.
- During completions operations, Devon will utilize Green Completion methods to capture gas produced during well completions that is otherwise vented or flared. If capture is technically in-feasible, flares and/or combustors will be used to capture and control flow back fluids entering into frac tanks during initial flowback. Upon indication of first measurable hydrocarbon volumes, Devon will turn operations to onsite separation vessels and flow to the gathering pipeline.
- During production operations, Devon will take every practical effort to minimize waste of natural gas through venting and flaring by:
 - Designing and constructing facilities in a manner consistent to achieve maximum capture and control of hydrocarbon liquids & produced gas
 - Utilizing a closed-loop capture system to collect and route produced gas to sales line via low pressure compression, or to a flare/combustor
 - Flaring in lieu of venting, where technically feasible
 - Utilizing auto-ignitors or continuous pilots, with thermocouples connected to Scada, to quickly detect and resolve issues related to malfunctioning flares/combustors
 - Employ the use of automatic tank gauging to minimize storage tank venting during loading events
 - Installing air-driven or electric-driven pneumatics & combustion engines, where technically feasible to minimize venting to the atmosphere
 - Confirm equipment is properly maintained and repaired through a preventative maintenance and repair program to ensure equipment meets all manufacturer specifications
 - Conduct and document AVO inspections on the frequency set forth in Part 27 to detect and repair any onsite leaks as quickly and efficiently as is feasible



VIII. Best Management Practices during Maintenance

Devon Energy Production Company, L.P. will utilize best management practices to minimize venting during active and planned maintenance activities. Devon is operating under guidance that production facilities permitted under NOI permits have no provisions to allow high pressure flaring and high pressure flaring is only allowed in disruption scenarios so long as the duration is less than eight hours. When technically feasible, flaring during maintenance activities will be utilized in lieu of venting to the atmosphere. Devon will work with third-party operators during scheduled maintenance of downstream pipeline or processing plants to address those events ahead of time to minimize venting. Actions considered include identifying alternative capture approaches or planning to temporarily reduce production or shut in the well to address these circumstances.

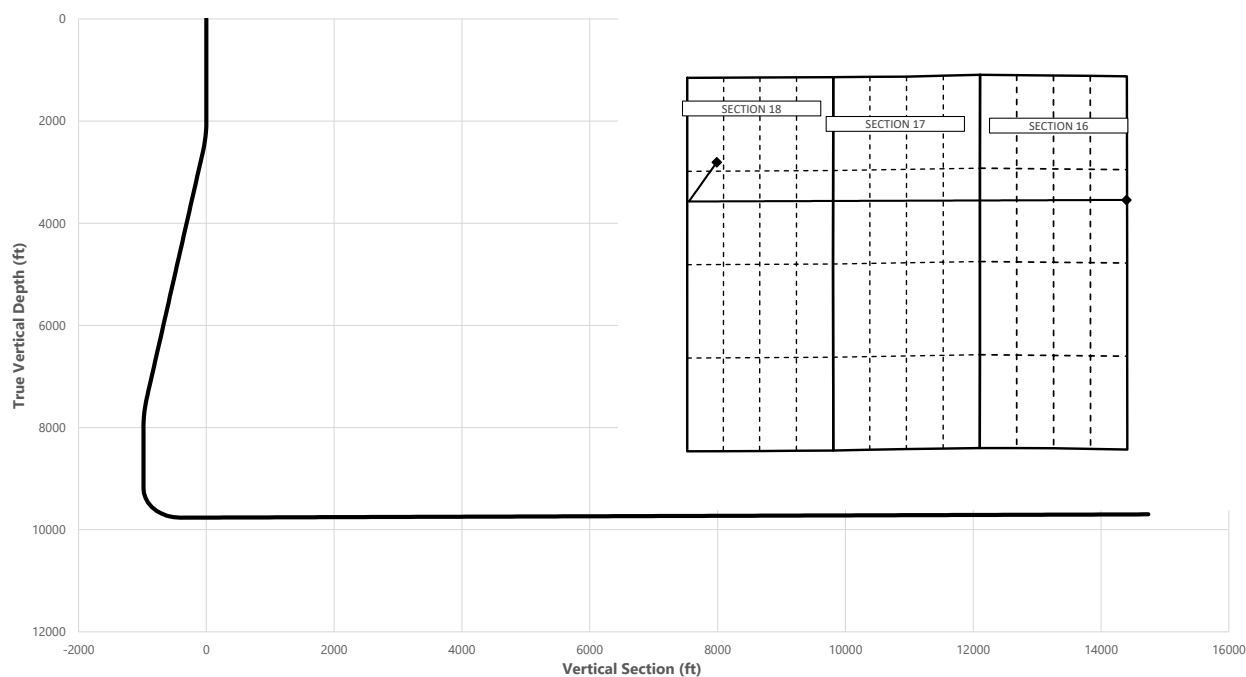
MIMOSA 18-16 STATE COM 622H



Well: MIMOSA 18-16 STATE COM 622H
County: Eddy
Wellbore: Permit Plan
Design: Permit Plan #1

Geodetic System: US State Plane 1983
Datum: North American Datum 1927
Ellipsoid: Clarke 1866
Zone: 3001 - NM East (NAD83)

MD (ft)	INC (°)	AZI (°)	TVD (ft)	NS (ft)	EW (ft)	VS (ft)	DLS (°/100ft)	Comment
0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	SHL
2000.00	0.00	241.00	2000.00	0.00	0.00	0.00	0.00	Start Tangent
2600.00	12.00	241.00	2595.62	-30.35	-54.75	-53.62	2.00	Hold Tangent
7523.43	12.00	241.00	7411.46	-526.62	-950.05	-930.31	0.00	Drop to Vertical
8123.43	0.00	241.00	8007.08	-556.97	-1004.80	-983.92	2.00	Hold Vertical
9308.39	0.00	89.92	9192.05	-556.97	-1004.80	-983.92	0.00	KOP
10210.85	90.25	89.92	9765.00	-556.17	-429.39	-408.91	10.00	Landing Point
25370.39	90.25	89.92	9700.00	-535.00	14730.00	14739.71	0.00	BHL

**Key Depths**

	MD (ft)	TVD (ft)
Rustler	304.00	304.00
Salt	412.00	412.00
Base of Salt	1680.00	1680.00
Delaware	3733.14	3704.00
Cherry Canyon	4706.41	4656.00
Brushy Canyon	5159.30	5099.00
1st Bone Spring Lime	6359.53	6273.00
Bone Spring 1st	7519.89	7408.00
Bone Spring 2nd	8304.34	8188.00
3rd Bone Spring Lime	8625.34	8509.00
Bone Spring 3rd	9292.34	9176.00
Wolfcamp / Point of Penetration	9824.28	9641.00
exit	25290.39	9700.36

SHL
KOP
Point of Penetration
Exit
BHL

MD (ft)	TVD (ft)	Lat (°)	Long (°)	Section Footages
0.00	0.00	32.5773	-104.0165	1195' FNL, 1066' FWL of Sec 18 in T20S, R30E
9308.39	9192.05	32.5757	-104.0198	1749' FNL, 61' FWL of Sec 18 in T20S, R30E
9824.28	9641.00	32.5758	-104.0196	1750' FNL, 100' FWL of Sec 18 in T20S, R30E
25290.39	9700.36	32.5758	-103.9689	1750' FNL, 100' FEL of Sec 16 in T20S, R30E
25370.39	9700.00	32.5757	-103.9687	1750' FNL, 20' FEL of Sec 16 in T20S, R30E

MIMOSA 18-16 STATE COM 622H



Well: MIMOSA 18-16 STATE COM 622H
 County: Eddy
 Wellbore: Permit Plan
 Design: Permit Plan #1

Geodetic System: US State Plane 1983
 Datum: North American Datum 1927
 Ellipsoid: Clarke 1866
 Zone: 3001 - NM East (NAD83)

MD (ft)	INC (°)	AZI (°)	TVD (ft)	NS (ft)	EW (ft)	VS (ft)	DLS (°/100ft)	Comment
0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	SHL
100.00	0.00	241.00	100.00	0.00	0.00	0.00	0.00	
200.00	0.00	241.00	200.00	0.00	0.00	0.00	0.00	
300.00	0.00	241.00	300.00	0.00	0.00	0.00	0.00	
304.00	0.00	241.00	304.00	0.00	0.00	0.00	0.00	Rustler
400.00	0.00	241.00	400.00	0.00	0.00	0.00	0.00	
412.00	0.00	241.00	412.00	0.00	0.00	0.00	0.00	Salt
500.00	0.00	241.00	500.00	0.00	0.00	0.00	0.00	
600.00	0.00	241.00	600.00	0.00	0.00	0.00	0.00	
700.00	0.00	241.00	700.00	0.00	0.00	0.00	0.00	
800.00	0.00	241.00	800.00	0.00	0.00	0.00	0.00	
900.00	0.00	241.00	900.00	0.00	0.00	0.00	0.00	
1000.00	0.00	241.00	1000.00	0.00	0.00	0.00	0.00	
1100.00	0.00	241.00	1100.00	0.00	0.00	0.00	0.00	
1200.00	0.00	241.00	1200.00	0.00	0.00	0.00	0.00	
1300.00	0.00	241.00	1300.00	0.00	0.00	0.00	0.00	
1400.00	0.00	241.00	1400.00	0.00	0.00	0.00	0.00	
1500.00	0.00	241.00	1500.00	0.00	0.00	0.00	0.00	
1600.00	0.00	241.00	1600.00	0.00	0.00	0.00	0.00	
1680.00	0.00	241.00	1680.00	0.00	0.00	0.00	0.00	Base of Salt
1700.00	0.00	241.00	1700.00	0.00	0.00	0.00	0.00	
1800.00	0.00	241.00	1800.00	0.00	0.00	0.00	0.00	
1900.00	0.00	241.00	1900.00	0.00	0.00	0.00	0.00	
2000.00	0.00	241.00	2000.00	0.00	0.00	0.00	0.00	Start Tangent
2100.00	2.00	241.00	2099.98	-0.85	-1.53	-1.49	2.00	
2200.00	4.00	241.00	2199.84	-3.38	-6.10	-5.98	2.00	
2300.00	6.00	241.00	2299.45	-7.61	-13.73	-13.44	2.00	
2400.00	8.00	241.00	2398.70	-13.52	-24.38	-23.88	2.00	
2500.00	10.00	241.00	2497.47	-21.10	-38.07	-37.27	2.00	
2600.00	12.00	241.00	2595.62	-30.35	-54.75	-53.62	2.00	Hold Tangent
2700.00	12.00	241.00	2693.44	-40.43	-72.94	-71.42	0.00	
2800.00	12.00	241.00	2791.25	-50.51	-91.12	-89.23	0.00	
2900.00	12.00	241.00	2889.07	-60.59	-109.31	-107.03	0.00	
3000.00	12.00	241.00	2986.88	-70.67	-127.49	-124.84	0.00	
3100.00	12.00	241.00	3084.70	-80.75	-145.67	-142.65	0.00	
3200.00	12.00	241.00	3182.51	-90.83	-163.86	-160.45	0.00	
3300.00	12.00	241.00	3280.33	-100.91	-182.04	-178.26	0.00	
3400.00	12.00	241.00	3378.14	-110.99	-200.23	-196.07	0.00	
3500.00	12.00	241.00	3475.96	-121.07	-218.41	-213.87	0.00	
3600.00	12.00	241.00	3573.77	-131.15	-236.60	-231.68	0.00	
3700.00	12.00	241.00	3671.59	-141.23	-254.78	-249.49	0.00	
3733.14	12.00	241.00	3704.00	-144.57	-260.81	-255.39	0.00	Delaware
3800.00	12.00	241.00	3769.40	-151.31	-272.97	-267.29	0.00	
3900.00	12.00	241.00	3867.22	-161.39	-291.15	-285.10	0.00	
4000.00	12.00	241.00	3965.03	-171.47	-309.33	-302.91	0.00	
4100.00	12.00	241.00	4062.84	-181.55	-327.52	-320.71	0.00	
4200.00	12.00	241.00	4160.66	-191.63	-345.70	-338.52	0.00	
4300.00	12.00	241.00	4258.47	-201.71	-363.89	-356.33	0.00	
4400.00	12.00	241.00	4356.29	-211.79	-382.07	-374.13	0.00	
4500.00	12.00	241.00	4454.10	-221.87	-400.26	-391.94	0.00	
4600.00	12.00	241.00	4551.92	-231.95	-418.44	-409.74	0.00	
4700.00	12.00	241.00	4649.73	-242.03	-436.62	-427.55	0.00	
4706.41	12.00	241.00	4656.00	-242.67	-437.79	-428.69	0.00	Cherry Canyon
4800.00	12.00	241.00	4747.55	-252.11	-454.81	-445.36	0.00	
4900.00	12.00	241.00	4845.36	-262.19	-472.99	-463.16	0.00	
5000.00	12.00	241.00	4943.18	-272.27	-491.18	-480.97	0.00	
5100.00	12.00	241.00	5040.99	-282.35	-509.36	-498.78	0.00	
5159.30	12.00	241.00	5099.00	-288.32	-520.15	-509.34	0.00	Brushy Canyon
5200.00	12.00	241.00	5138.81	-292.43	-527.55	-516.58	0.00	
5300.00	12.00	241.00	5236.62	-302.51	-545.73	-534.39	0.00	
5400.00	12.00	241.00	5334.44	-312.59	-563.91	-552.20	0.00	
5500.00	12.00	241.00	5432.25	-322.66	-582.10	-570.00	0.00	
5600.00	12.00	241.00	5530.07	-332.74	-600.28	-587.81	0.00	
5700.00	12.00	241.00	5627.88	-342.82	-618.47	-605.62	0.00	
5800.00	12.00	241.00	5725.70	-352.90	-636.65	-623.42	0.00	
5900.00	12.00	241.00	5823.51	-362.98	-654.84	-641.23	0.00	
6000.00	12.00	241.00	5921.33	-373.06	-673.02	-659.03	0.00	
6100.00	12.00	241.00	6019.14	-383.14	-691.20	-676.84	0.00	
6200.00	12.00	241.00	6116.95	-393.22	-709.39	-694.65	0.00	
6300.00	12.00	241.00	6214.77	-403.30	-727.57	-712.45	0.00	

MIMOSA 18-16 STATE COM 622H



Well: MIMOSA 18-16 STATE COM 622H
County: Eddy
Wellbore: Permit Plan
Design: Permit Plan #1

Geodetic System: US State Plane 1983
Datum: North American Datum 1927
Ellipsoid: Clarke 1866
Zone: 3001 - NM East (NAD83)

MD (ft)	INC (°)	AZI (°)	TVD (ft)	NS (ft)	EW (ft)	VS (ft)	DLS (°/100ft)	Comment
6359.53	12.00	241.00	6273.00	-409.30	-738.40	-723.05	0.00	1st Bone Spring Lime
6400.00	12.00	241.00	6312.58	-413.38	-745.76	-730.26	0.00	
6500.00	12.00	241.00	6410.40	-423.46	-763.94	-748.07	0.00	
6600.00	12.00	241.00	6508.21	-433.54	-782.13	-765.87	0.00	
6700.00	12.00	241.00	6606.03	-443.62	-800.31	-783.68	0.00	
6800.00	12.00	241.00	6703.84	-453.70	-818.49	-801.49	0.00	
6900.00	12.00	241.00	6801.66	-463.78	-836.68	-819.29	0.00	
7000.00	12.00	241.00	6899.47	-473.86	-854.86	-837.10	0.00	
7100.00	12.00	241.00	6997.29	-483.94	-873.05	-854.91	0.00	
7200.00	12.00	241.00	7095.10	-494.02	-891.23	-872.71	0.00	
7300.00	12.00	241.00	7192.92	-504.10	-909.42	-890.52	0.00	
7400.00	12.00	241.00	7290.73	-514.18	-927.60	-908.32	0.00	
7500.00	12.00	241.00	7388.55	-524.26	-945.78	-926.13	0.00	
7519.89	12.00	241.00	7408.00	-526.27	-949.40	-929.67	0.00	Bone Spring 1st
7523.43	12.00	241.00	7411.46	-526.62	-950.05	-930.31	0.00	Drop to Vertical
7600.00	10.47	241.00	7486.56	-533.85	-963.09	-943.08	2.00	
7700.00	8.47	241.00	7585.20	-541.83	-977.48	-957.17	2.00	
7800.00	6.47	241.00	7684.34	-548.13	-988.85	-968.30	2.00	
7900.00	4.47	241.00	7783.88	-552.75	-997.18	-976.46	2.00	
8000.00	2.47	241.00	7883.70	-555.68	-1002.48	-981.64	2.00	
8100.00	0.47	241.00	7983.66	-556.92	-1004.72	-983.84	2.00	
8123.43	0.00	241.00	8007.08	-556.97	-1004.80	-983.92	2.00	Hold Vertical
8200.00	0.00	89.92	8083.66	-556.97	-1004.80	-983.92	0.00	
8300.00	0.00	89.92	8183.66	-556.97	-1004.80	-983.92	0.00	
8304.34	0.00	89.92	8188.00	-556.97	-1004.80	-983.92	0.00	Bone Spring 2nd
8400.00	0.00	89.92	8283.66	-556.97	-1004.80	-983.92	0.00	
8500.00	0.00	89.92	8383.66	-556.97	-1004.80	-983.92	0.00	
8600.00	0.00	89.92	8483.66	-556.97	-1004.80	-983.92	0.00	
8625.34	0.00	89.92	8509.00	-556.97	-1004.80	-983.92	0.00	3rd Bone Spring Lime
8700.00	0.00	89.92	8583.66	-556.97	-1004.80	-983.92	0.00	
8800.00	0.00	89.92	8683.66	-556.97	-1004.80	-983.92	0.00	
8900.00	0.00	89.92	8783.66	-556.97	-1004.80	-983.92	0.00	
9000.00	0.00	89.92	8883.66	-556.97	-1004.80	-983.92	0.00	
9100.00	0.00	89.92	8983.66	-556.97	-1004.80	-983.92	0.00	
9200.00	0.00	89.92	9083.66	-556.97	-1004.80	-983.92	0.00	
9292.34	0.00	89.92	9176.00	-556.97	-1004.80	-983.92	0.00	Bone Spring 3rd
9300.00	0.00	89.92	9183.66	-556.97	-1004.80	-983.92	0.00	
9308.39	0.00	89.92	9192.05	-556.97	-1004.80	-983.92	0.00	KOP
9400.00	9.16	89.92	9283.27	-556.96	-997.49	-976.62	10.00	
9500.00	19.16	89.92	9380.11	-556.93	-973.06	-952.20	10.00	
9600.00	29.16	89.92	9471.23	-556.87	-932.18	-911.35	10.00	
9700.00	39.16	89.92	9553.87	-556.79	-876.10	-855.31	10.00	
9800.00	49.16	89.92	9625.52	-556.69	-806.52	-785.78	10.00	
9824.28	51.59	89.92	9641.00	-556.67	-787.82	-767.10	10.00	Wolfcamp / Point of Penetration
9900.00	59.16	89.92	9684.00	-556.58	-725.56	-704.88	10.00	
10000.00	69.16	89.92	9727.52	-556.45	-635.67	-615.05	10.00	
10100.00	79.16	89.92	9754.78	-556.32	-539.59	-519.04	10.00	
10200.00	89.16	89.92	9764.94	-556.18	-440.23	-419.75	10.00	
10210.85	90.25	89.92	9765.00	-556.17	-429.39	-408.91	10.00	Landing Point
10300.00	90.25	89.92	9764.62	-556.04	-340.23	-319.83	0.00	
10400.00	90.25	89.92	9764.19	-555.90	-240.23	-219.90	0.00	
10500.00	90.25	89.92	9763.76	-555.76	-140.24	-119.97	0.00	
10600.00	90.25	89.92	9763.33	-555.62	-40.24	-20.04	0.00	
10700.00	90.25	89.92	9762.90	-555.48	59.76	79.88	0.00	
10800.00	90.25	89.92	9762.47	-555.34	159.76	179.81	0.00	
10900.00	90.25	89.92	9762.05	-555.20	259.76	279.74	0.00	
11000.00	90.25	89.92	9761.62	-555.06	359.76	379.67	0.00	
11100.00	90.25	89.92	9761.19	-554.92	459.76	479.60	0.00	
11200.00	90.25	89.92	9760.76	-554.78	559.76	579.52	0.00	
11300.00	90.25	89.92	9760.33	-554.64	659.76	679.45	0.00	
11400.00	90.25	89.92	9759.90	-554.50	759.76	779.38	0.00	
11500.00	90.25	89.92	9759.47	-554.36	859.75	879.31	0.00	
11600.00	90.25	89.92	9759.05	-554.23	959.75	979.24	0.00	
11700.00	90.25	89.92	9758.62	-554.09	1059.75	1079.17	0.00	
11800.00	90.25	89.92	9758.19	-553.95	1159.75	1179.09	0.00	
11900.00	90.25	89.92	9757.76	-553.81	1259.75	1279.02	0.00	
12000.00	90.25	89.92	9757.33	-553.67	1359.75	1378.95	0.00	
12100.00	90.25	89.92	9756.90	-553.53	1459.75	1478.88	0.00	
12200.00	90.25	89.92	9756.47	-553.39	1559.75	1578.81	0.00	
12300.00	90.25	89.92	9756.05	-553.25	1659.75	1678.73	0.00	

MIMOSA 18-16 STATE COM 622H



Well: MIMOSA 18-16 STATE COM 622H
County: Eddy
Wellbore: Permit Plan
Design: Permit Plan #1

Geodetic System: US State Plane 1983
Datum: North American Datum 1927
Ellipsoid: Clarke 1866
Zone: 3001 - NM East (NAD83)

MD (ft)	INC (")	AZI (°)	TVD (ft)	NS (ft)	EW (ft)	VS (ft)	DLS (°/100ft)	Comment
12400.00	90.25	89.92	9755.62	-553.11	1759.74	1778.66	0.00	
12500.00	90.25	89.92	9755.19	-552.97	1859.74	1878.59	0.00	
12600.00	90.25	89.92	9754.76	-552.83	1959.74	1978.52	0.00	
12700.00	90.25	89.92	9754.33	-552.69	2059.74	2078.45	0.00	
12800.00	90.25	89.92	9753.90	-552.55	2159.74	2178.37	0.00	
12900.00	90.25	89.92	9753.47	-552.41	2259.74	2278.30	0.00	
13000.00	90.25	89.92	9753.04	-552.27	2359.74	2378.23	0.00	
13100.00	90.25	89.92	9752.62	-552.13	2459.74	2478.16	0.00	
13200.00	90.25	89.92	9752.19	-551.99	2559.74	2578.09	0.00	
13300.00	90.25	89.92	9751.76	-551.85	2659.74	2678.01	0.00	
13400.00	90.25	89.92	9751.33	-551.71	2759.73	2777.94	0.00	
13500.00	90.25	89.92	9750.90	-551.57	2859.73	2877.87	0.00	
13600.00	90.25	89.92	9750.47	-551.43	2959.73	2977.80	0.00	
13700.00	90.25	89.92	9750.04	-551.29	3059.73	3077.73	0.00	
13800.00	90.25	89.92	9749.62	-551.15	3159.73	3177.65	0.00	
13900.00	90.25	89.92	9749.19	-551.01	3259.73	3277.58	0.00	
14000.00	90.25	89.92	9748.76	-550.87	3359.73	3377.51	0.00	
14100.00	90.25	89.92	9748.33	-550.73	3459.73	3477.44	0.00	
14200.00	90.25	89.92	9747.90	-550.59	3559.73	3577.37	0.00	
14300.00	90.25	89.92	9747.47	-550.45	3659.73	3677.29	0.00	
14400.00	90.25	89.92	9747.04	-550.31	3759.72	3777.22	0.00	
14500.00	90.25	89.92	9746.62	-550.17	3859.72	3877.15	0.00	
14600.00	90.25	89.92	9746.19	-550.03	3959.72	3977.08	0.00	
14700.00	90.25	89.92	9745.76	-549.89	4059.72	4077.01	0.00	
14800.00	90.25	89.92	9745.33	-549.75	4159.72	4176.93	0.00	
14900.00	90.25	89.92	9744.90	-549.61	4259.72	4276.86	0.00	
15000.00	90.25	89.92	9744.47	-549.47	4359.72	4376.79	0.00	
15100.00	90.25	89.92	9744.04	-549.33	4459.72	4476.72	0.00	
15200.00	90.25	89.92	9743.61	-549.19	4559.72	4576.65	0.00	
15300.00	90.25	89.92	9743.19	-549.05	4659.72	4676.57	0.00	
15400.00	90.25	89.92	9742.76	-548.91	4759.71	4776.50	0.00	
15500.00	90.25	89.92	9742.33	-548.77	4859.71	4876.43	0.00	
15600.00	90.25	89.92	9741.90	-548.63	4959.71	4976.36	0.00	
15700.00	90.25	89.92	9741.47	-548.50	5059.71	5076.29	0.00	
15800.00	90.25	89.92	9741.04	-548.36	5159.71	5176.21	0.00	
15900.00	90.25	89.92	9740.61	-548.22	5259.71	5276.14	0.00	
16000.00	90.25	89.92	9740.19	-548.08	5359.71	5376.07	0.00	
16100.00	90.25	89.92	9739.76	-547.94	5459.71	5476.00	0.00	
16200.00	90.25	89.92	9739.33	-547.80	5559.71	5575.93	0.00	
16300.00	90.25	89.92	9738.90	-547.66	5659.71	5675.85	0.00	
16400.00	90.25	89.92	9738.47	-547.52	5759.70	5775.78	0.00	
16500.00	90.25	89.92	9738.04	-547.38	5859.70	5875.71	0.00	
16600.00	90.25	89.92	9737.61	-547.24	5959.70	5975.64	0.00	
16700.00	90.25	89.92	9737.19	-547.10	6059.70	6075.57	0.00	
16800.00	90.25	89.92	9736.76	-546.96	6159.70	6175.49	0.00	
16900.00	90.25	89.92	9736.33	-546.82	6259.70	6275.42	0.00	
17000.00	90.25	89.92	9735.90	-546.68	6359.70	6375.35	0.00	
17100.00	90.25	89.92	9735.47	-546.54	6459.70	6475.28	0.00	
17200.00	90.25	89.92	9735.04	-546.40	6559.70	6575.21	0.00	
17300.00	90.25	89.92	9734.61	-546.26	6659.70	6675.13	0.00	
17400.00	90.25	89.92	9734.18	-546.12	6759.69	6775.06	0.00	
17500.00	90.25	89.92	9733.76	-545.98	6859.69	6874.99	0.00	
17600.00	90.25	89.92	9733.33	-545.84	6959.69	6974.92	0.00	
17700.00	90.25	89.92	9732.90	-545.70	7059.69	7074.85	0.00	
17800.00	90.25	89.92	9732.47	-545.56	7159.69	7174.77	0.00	
17900.00	90.25	89.92	9732.04	-545.42	7259.69	7274.70	0.00	
18000.00	90.25	89.92	9731.61	-545.28	7359.69	7374.63	0.00	
18100.00	90.25	89.92	9731.18	-545.14	7459.69	7474.56	0.00	
18200.00	90.25	89.92	9730.76	-545.00	7559.69	7574.49	0.00	
18300.00	90.25	89.92	9730.33	-544.86	7659.68	7674.41	0.00	
18400.00	90.25	89.92	9729.90	-544.72	7759.68	7774.34	0.00	
18500.00	90.25	89.92	9729.47	-544.58	7859.68	7874.27	0.00	
18600.00	90.25	89.92	9729.04	-544.44	7959.68	7974.20	0.00	
18700.00	90.25	89.92	9728.61	-544.30	8059.68	8074.13	0.00	
18800.00	90.25	89.92	9728.18	-544.16	8159.68	8174.05	0.00	
18900.00	90.25	89.92	9727.76	-544.02	8259.68	8273.98	0.00	
19000.00	90.25	89.92	9727.33	-543.88	8359.68	8373.91	0.00	
19100.00	90.25	89.92	9726.90	-543.74	8459.68	8473.84	0.00	
19200.00	90.25	89.92	9726.47	-543.60	8559.68	8573.77	0.00	
19300.00	90.25	89.92	9726.04	-543.46	8659.67	8673.69	0.00	

MIMOSA 18-16 STATE COM 622H



Well: MIMOSA 18-16 STATE COM 622H
County: Eddy
Wellbore: Permit Plan
Design: Permit Plan #1

Geodetic System: US State Plane 1983
Datum: North American Datum 1927
Ellipsoid: Clarke 1866
Zone: 3001 - NM East (NAD83)

MD (ft)	INC (°)	AZI (°)	TVD (ft)	NS (ft)	EW (ft)	VS (ft)	DLS (°/100ft)	Comment
19400.00	90.25	89.92	9725.61	-543.32	8759.67	8773.62	0.00	
19500.00	90.25	89.92	9725.18	-543.18	8859.67	8873.55	0.00	
19600.00	90.25	89.92	9724.75	-543.04	8959.67	8973.48	0.00	
19700.00	90.25	89.92	9724.33	-542.90	9059.67	9073.41	0.00	
19800.00	90.25	89.92	9723.90	-542.77	9159.67	9173.33	0.00	
19900.00	90.25	89.92	9723.47	-542.63	9259.67	9273.26	0.00	
20000.00	90.25	89.92	9723.04	-542.49	9359.67	9373.19	0.00	
20100.00	90.25	89.92	9722.61	-542.35	9459.67	9473.12	0.00	
20200.00	90.25	89.92	9722.18	-542.21	9559.67	9573.05	0.00	
20300.00	90.25	89.92	9721.75	-542.07	9659.66	9672.97	0.00	
20400.00	90.25	89.92	9721.33	-541.93	9759.66	9772.90	0.00	
20500.00	90.25	89.92	9720.90	-541.79	9859.66	9872.83	0.00	
20600.00	90.25	89.92	9720.47	-541.65	9959.66	9972.76	0.00	
20700.00	90.25	89.92	9720.04	-541.51	10059.66	10072.69	0.00	
20800.00	90.25	89.92	9719.61	-541.37	10159.66	10172.61	0.00	
20900.00	90.25	89.92	9719.18	-541.23	10259.66	10272.54	0.00	
21000.00	90.25	89.92	9718.75	-541.09	10359.66	10372.47	0.00	
21100.00	90.25	89.92	9718.33	-540.95	10459.66	10472.40	0.00	
21200.00	90.25	89.92	9717.90	-540.81	10559.66	10572.33	0.00	
21300.00	90.25	89.92	9717.47	-540.67	10659.65	10672.25	0.00	
21400.00	90.25	89.92	9717.04	-540.53	10759.65	10772.18	0.00	
21500.00	90.25	89.92	9716.61	-540.39	10859.65	10872.11	0.00	
21600.00	90.25	89.92	9716.18	-540.25	10959.65	10972.04	0.00	
21700.00	90.25	89.92	9715.75	-540.11	11059.65	11071.97	0.00	
21800.00	90.25	89.92	9715.32	-539.97	11159.65	11171.89	0.00	
21900.00	90.25	89.92	9714.90	-539.83	11259.65	11271.82	0.00	
22000.00	90.25	89.92	9714.47	-539.69	11359.65	11371.75	0.00	
22100.00	90.25	89.92	9714.04	-539.55	11459.65	11471.68	0.00	
22200.00	90.25	89.92	9713.61	-539.41	11559.65	11571.61	0.00	
22300.00	90.25	89.92	9713.18	-539.27	11659.64	11671.53	0.00	
22400.00	90.25	89.92	9712.75	-539.13	11759.64	11771.46	0.00	
22500.00	90.25	89.92	9712.32	-538.99	11859.64	11871.39	0.00	
22600.00	90.25	89.92	9711.90	-538.85	11959.64	11971.32	0.00	
22700.00	90.25	89.92	9711.47	-538.71	12059.64	12071.25	0.00	
22800.00	90.25	89.92	9711.04	-538.57	12159.64	12171.18	0.00	
22900.00	90.25	89.92	9710.61	-538.43	12259.64	12271.10	0.00	
23000.00	90.25	89.92	9710.18	-538.29	12359.64	12371.03	0.00	
23100.00	90.25	89.92	9709.75	-538.15	12459.64	12470.96	0.00	
23200.00	90.25	89.92	9709.32	-538.01	12559.64	12570.89	0.00	
23300.00	90.25	89.92	9708.90	-537.87	12659.63	12670.82	0.00	
23400.00	90.25	89.92	9708.47	-537.73	12759.63	12770.74	0.00	
23500.00	90.25	89.92	9708.04	-537.59	12859.63	12870.67	0.00	
23600.00	90.25	89.92	9707.61	-537.45	12959.63	12970.60	0.00	
23700.00	90.25	89.92	9707.18	-537.31	13059.63	13070.53	0.00	
23800.00	90.25	89.92	9706.75	-537.17	13159.63	13170.46	0.00	
23900.00	90.25	89.92	9706.32	-537.04	13259.63	13270.38	0.00	
24000.00	90.25	89.92	9705.89	-536.90	13359.63	13370.31	0.00	
24100.00	90.25	89.92	9705.47	-536.76	13459.63	13470.24	0.00	
24200.00	90.25	89.92	9705.04	-536.62	13559.62	13570.17	0.00	
24300.00	90.25	89.92	9704.61	-536.48	13659.62	13670.10	0.00	
24400.00	90.25	89.92	9704.18	-536.34	13759.62	13770.02	0.00	
24500.00	90.25	89.92	9703.75	-536.20	13859.62	13869.95	0.00	
24600.00	90.25	89.92	9703.32	-536.06	13959.62	13969.88	0.00	
24700.00	90.25	89.92	9702.89	-535.92	14059.62	14069.81	0.00	
24800.00	90.25	89.92	9702.47	-535.78	14159.62	14169.74	0.00	
24900.00	90.25	89.92	9702.04	-535.64	14259.62	14269.66	0.00	
25000.00	90.25	89.92	9701.61	-535.50	14359.62	14369.59	0.00	
25100.00	90.25	89.92	9701.18	-535.36	14459.62	14469.52	0.00	
25200.00	90.25	89.92	9700.75	-535.22	14559.61	14569.45	0.00	
25290.39	90.25	89.92	9700.36	-535.09	14650.00	14659.77	0.00	exit
25300.00	90.25	89.92	9700.32	-535.08	14659.61	14669.38	0.00	
25370.39	90.25	89.92	9700.00	-535.00	14730.00	14739.71	0.00	BHL

MIMOSA 18-16 STATE COM 622H

Well: MIMOSA 18-16 STATE COM 622H
County: Eddy
Wellbore: Permit Plan
Design: Permit Plan #1

Geodetic System: US State Plane 1983
Datum: North American Datum 1927
Ellipsoid: Clarke 1866
Zone: 3001 - NM East (NAD83)

MD	INC	AZI	TVD	NS	EW	VS	DLS	Comment
(ft)	(°)	(°)	(ft)	(ft)	(ft)	(ft)	(°/100ft)	

MIMOSA 18-16 STATE COM 622H

1. Geologic Formations

TVD of target	9700	Pilot hole depth	N/A
MD at TD:	25370	Deepest expected fresh water	

Basin

Formation	Depth (TVD) from KB	Water/Mineral Bearing/Target Zone?	Hazards*
Rustler	304		
Salt	412		
Base of Salt	1680		
Capitan Reef Top	2157		
Delaware	3704		
Cherry Canyon	4656		
Brushy Canyon	5099		
1st Bone Spring Lime	6273		
Bone Spring 1st	7408		
Bone Spring 2nd	8188		
3rd Bone Spring Lime	8509		
Bone Spring 3rd	9176		
Wolfcamp	9641		

*H2S, water flows, loss of circulation, abnormal pressures, etc.

MIMOSA 18-16 STATE COM 622H

2. Casing Program (Primary Design)

Hole Size	Csg. Size	Wt (PPF)	Grade	Conn	Top (MD)	Bottom (MD)	Top (TVD)	Bottom (TVD)
17 1/2	13 3/8	48.0	H40	STC	0.0	329 MD	0	329 TVD
12 1/4	10 3/4	45.5	HCL80	BTC SCC	0.0	1705 MD	0	1705 TVD
9 7/8	8 5/8	32	P110	Sprint FJ	0	3754 MD	0	3754 TVD
7 7/8	5 1/2	17.0	P110	DWC/C IS+	0	25370 MD	0	9700 TVD

- All casing strings will be tested in accordance with Onshore Oil and Gas Order #2 IILB.1.h Must have table for contingency casing.
- The Rustler top will be validated via drilling parameters (i.e. reduction in ROP), and the surface casing setting depth will be revised accordingly. In addition, surface casing will be set a minimum of 25' above the top of the salt.

MIMOSA 18-16 STATE COM 622H

3. Cementing Program (Primary Design)

Casing	# Sks	TOC	Wt. (lb/gal)	Yld (ft3/sack)	Slurry Description
Surface	277	0	13.2	1.44	Lead: Class C Cement + additives
Int	91	0	9	3.27	Lead: Class C Cement + additives
	101	1205	13.2	1.44	Tail: Class H / C + additives
Int 1	127	0	9	3.27	Lead: Class C Cement + additives
	67	3254	13.2	1.44	Tail: Class H / C + additives
Production	117	7308	9	3.27	Lead: Class H /C + additives
	2126	9308	13.2	1.44	Tail: Class H / C + additives

Assuming no returns are established while drilling, Devon requests to pump a two stage cement job on the intermediate casing string with the first stage being pumped conventionally with the calculated top of cement at the Capitan and the second stage performed as a bradenhead squeeze with planned cement from the Capitan to surface. Devon will report to the BLM the volume of fluid (limited to 1 bbls) used to flush intermediate casing valves following backside cementing procedures. The final cement top will be verified by Echo-meter. Devon will include the Echo-meter verified fluid top and the volume of displacement fluid above the cement slurry in the annulus in all post-drill sundries on wells utilizing this cement program.

Casing String	% Excess
Surface	50%
Intermediate and Intermediate 1	30%
Intermediate 1 (Two Stage)	25%
Prod	10%

MIMOSA 18-16 STATE COM 622H

4. Pressure Control Equipment (Four String Design)

BOP installed and tested before drilling which hole?		Size?	Min. Required WP	Type		✓	Tested to:
Int		13-5/8"	5M	Annular		X	50% of rated working pressure
				Blind Ram		X	5M
				Pipe Ram			
				Double Ram		X	
				Other*			
Int 1		13-5/8"	5M	Annular (5M)		X	100% of rated working pressure
				Blind Ram		X	5M
				Pipe Ram			
				Double Ram		X	
				Other*			
Production		13-5/8"	5M	Annular (5M)		X	100% of rated working pressure
				Blind Ram		X	5M
				Pipe Ram			
				Double Ram		X	
				Other*			
N	A variance is requested for the use of a diverter on the surface casing. See attached for schematic.						
N	A variance is requested to run a 5 M annular on a 10M system						

MIMOSA 18-16 STATE COM 622H

5. Mud Program (Four String Design)

Section	Type	Weight (ppg)
Surface	WBM	8.5-9
Intermediate	DBE / Cut Brine	10-10.5
Intermediate 1	WBM	8.5-9
Production	OBM	10-10.5

Sufficient mud materials to maintain mud properties and meet minimum lost circulation and weight increase requirements will be kept on location at all times.

What will be used to monitor the loss or gain of fluid?	PVT/Pason/Visual Monitoring
---	-----------------------------

6. Logging and Testing Procedures

Logging, Coring and Testing	
X	Will run GR/CNL from TD to surface (horizontal well - vertical portion of hole). Stated logs run will be in the Completion Report and submitted to the BLM.
	No logs are planned based on well control or offset log information.
	Drill stem test? If yes, explain.
	Coring? If yes, explain.

Additional logs planned		Interval
	Resistivity	Int. shoe to KOP
	Density	Int. shoe to KOP
X	CBL	Production casing
X	Mud log	Intermediate shoe to TD
	PEX	

7. Drilling Conditions

Condition	Specify what type and where?
BH pressure at deepest TVD	5296
Abnormal temperature	No

Mitigation measure for abnormal conditions. Describe. Lost circulation material/sweeps/mud scavengers.

Hydrogen Sulfide (H₂S) monitors will be installed prior to drilling out the surface shoe. If H₂S is detected in concentrations greater than 100 ppm, the operator will comply with the provisions of Onshore Oil and Gas Order #6. If Hydrogen Sulfide is encountered measured values and formations will be provided to the BLM.

N	H ₂ S is present
Y	H ₂ S plan attached.

MIMOSA 18-16 STATE COM 622H

8. Other facets of operation

Is this a walking operation? Potentially

- 1 If operator elects, drilling rig will batch drill the surface holes and run/cement surface casing; walking the rig to next wells on the pad.
- 2 The drilling rig will then batch drill the intermediate sections and run/cement intermediate casing; the wellbore will be isolated with a blind flange and pressure gauge installed for monitoring the well before walking to the next well.
- 3 The drilling rig will then batch drill the production hole sections on the wells with OBM, run/cement production casing, and install TA caps or tubing heads for completions.

NOTE: During batch operations the drilling rig will be moved from well to well however, it will not be removed from the pad until all wells have production casing run/cemented.

Will be pre-setting casing? Potentially

- 1 Spudder rig will move in and batch drill surface hole.
 - a. Rig will utilize fresh water based mud to drill surface hole to TD. Solids control will be handled entirely on a closed loop basis.,
- 2 After drilling the surface hole section, the spudder rig will run casing and cement following all of the applicable rules and regulations (OnShore Order 2, all COAs and NMOCD regulations).
- 3 The wellhead will be installed and tested once the surface casing is cut off and the WOC time has been reached.
- 4 A blind flange with the same pressure rating as the wellhead will be installed to seal the wellbore. Pressure will be monitored with a pressure gauge installed on the wellhead.
- 5 Spudder rig operations is expected to take 4-5 days per well on a multi-well pad.
- 6 The NMOCD will be contacted and notified 24 hours prior to commencing spudder rig operations.
- 7 Drilling operations will be performed with drilling rig. At that time an approved BOP stack will be nipped up and tested on the wellhead before drilling operations commences on each well.
 - a. The NMOCD will be contacted / notified 24 hours before the drilling rig moves back on to the pad with the pre-set surface casing.

Attachments

X Directional Plan

 Other, describe

District I
1625 N. French Dr., Hobbs, NM 88240
Phone: (575) 393-6161 Fax: (575) 393-0720
District II
811 S. First St., Artesia, NM 88210
Phone: (575) 748-1283 Fax: (575) 748-9720
District III
1000 Rio Brazos Road, Aztec, NM 87410
Phone: (505) 334-6178 Fax: (505) 334-6170
District IV
1220 S. St. Francis Dr., Santa Fe, NM 87505
Phone: (505) 476-3460 Fax: (505) 476-3462

State of New Mexico
Energy, Minerals & Natural Resources Department
OIL CONSERVATION DIVISION
1220 South St. Francis Dr.
Santa Fe, NM 87505

Form C-102

Revised August 1, 2011

Submit one copy to
appropriate District Office

☐ AMENDED REPORT

WELL LOCATION AND ACREAGE DEDICATION PLAT

¹ API Number	² Pool Code 92963	³ Pool Name WC-015 G-07 S203032G;WOLFCAMP
⁴ Property Code	⁵ Property Name MIMOSA 18-16 STATE COM	⁶ Well Number 622H
⁷ OGRID No. 6137	⁸ Operator Name DEVON ENERGY PRODUCTION COMPANY, L.P.	⁹ Elevation 3306.3'

¹⁰ Surface Location

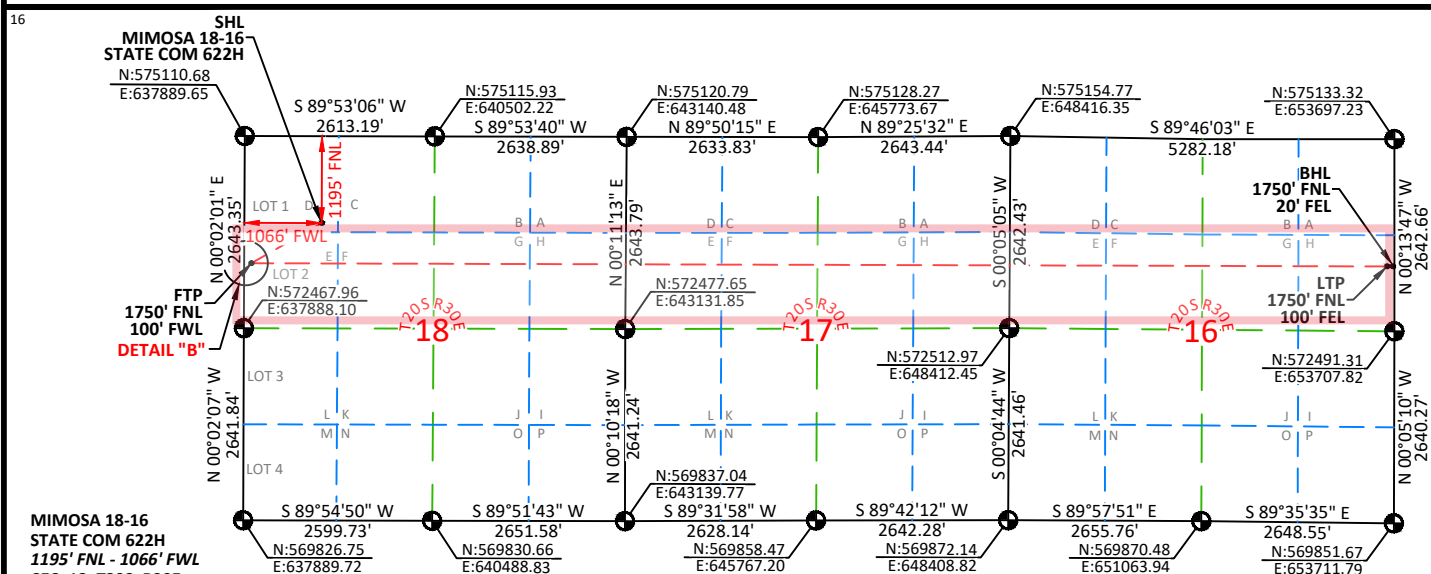
UL or lot no. D	Section 18	Township 20-S	Range 30-E	Lot Idn 1	Feet from the 1195	North/South line NORTH	Feet from the 1066	East/West line WEST	County EDDY
---------------------------	----------------------	-------------------------	----------------------	---------------------	------------------------------	----------------------------------	------------------------------	-------------------------------	-----------------------

¹¹ Bottom Hole Location If Different From Surface

UL or lot no. H	Section 16	Township 20-S	Range 30-E	Lot Idn	Feet from the 1750	North/South line NORTH	Feet from the 20	East/West line EAST	County EDDY
---------------------------	----------------------	-------------------------	----------------------	---------	------------------------------	----------------------------------	----------------------------	-------------------------------	-----------------------

¹² Dedicated Acres 479.22	¹³ Joint or Infill	¹⁴ Consolidation Code	¹⁵ Order No.
--	-------------------------------	----------------------------------	-------------------------

No allowable will be assigned to this completion until all interests have been consolidated
or a non-standard unit has been approved by the division.

¹⁷ OPERATOR CERTIFICATION

I hereby certify that the information contained herein is true and complete to the best of my knowledge and belief, and that this organization either owns a working interest or unleased mineral interest in the land including the proposed bottom hole location or has a right to drill this well at this location pursuant to a contract with an owner of such a mineral or working interest, or to a voluntary pooling agreement or a compulsory pooling order heretofore entered by the division.

Arianna Evans 2/7/23
Signature Date
Arianna Evans
Printed Name
arianna.evans@dvn.com
E-mail Address

NOTES:

1. BEARINGS SHOWN ARE GRID BASED ON THE NEW MEXICO STATE PLANE EAST ZONE COORDINATE SYSTEM (3001), NAD 83 (2011), BASED FROM GPS OBSERVATIONS, OCCUPYING A WHS CONTROL POINT (5/8" REBAR), LOCATED AT AT N:556917.441 E:633268.606 ORTHO:3349.52. DETERMINED BY AN OPUS SOLUTION ON SEPTEMBER 5TH, 2019.
2. DISTANCES DEPICTED HEREON ARE REPORTED AS GROUND DISTANCE IN US SURVEY FEET USING A COMBINED SCALE FACTOR OF 1.000237768
3. ELEVATIONS ARE EXISTING GROUND ELEVATIONS UNLESS NOTED.


¹⁸ SURVEYOR CERTIFICATION

I hereby certify that the well location shown on this plat was plotted from field notes of actual surveys made by me or under my supervision, and that the same is true and correct to the best of my belief.

01/02/2023

Date of Survey

Signature and Seal of Professional Surveyor:



Certificate No. 23261	Albert Dehoyos
Drawn by: JEB	Checked by: ARD Date: 01/13/2023

Intent ☒ As Drilled ☐

API #		
Operator Name: DEVON ENERGY PRODUCTION COMPANY, L.P.	Property Name: MIMOSA 18-16 STATE COM	Well Number 622H

Kick Off Point (KOP)

UL	Section	Township	Range	Lot	Feet	From N/S	Feet	From E/W	County
	18	20-S	30-E		1749	FNL	61	FWL	EDDY
Latitude 32.5757					Longitude -104.0198				NAD 83

First Take Point (FTP)

UL	Section	Township	Range	Lot	Feet	From N/S	Feet	From E/W	County
E	18	20-S	30-E		1750	NORTH	100	WEST	EDDY
Latitude 32.5758331°					Longitude -104.0195675°				NAD 83

Last Take Point (LTP)

UL	Section	Township	Range	Lot	Feet	From N/S	Feet	From E/W	County
H	16	20-S	30-E		1750	NORTH	100	EAST	EDDY
Latitude 32.5757569°					Longitude -103.9688737°				NAD 83

Is this well the defining well for the Horizontal Spacing Unit? ☒ YES

Is this well an infill well? ☐ NO

If infill is yes provide API if available, Operator name and well number for Defining well for Horizontal Spacing Unit.

API #		
Operator Name:	Property Name:	Well Number

KZ 06/29/2018