

U.S. Department of the Interior
BUREAU OF LAND MANAGEMENT

Well Name: FEDERAL B COM	Well Location: T30N / R11W / SEC 31 / NENW / 36.773859 / -108.035259	County or Parish/State: SAN JUAN / NM
Well Number: 90	Type of Well: OTHER	Allottee or Tribe Name:
Lease Number: NMNM0175788	Unit or CA Name: FRCL - W/2	Unit or CA Number: NMNM110404
US Well Number: 300453125800S1	Well Status: Producing Gas Well	Operator: DUGAN PRODUCTION CORPORATION

Notice of Intent

Sundry ID: 2726281

Type of Submission: Notice of Intent

Type of Action: Plug and Abandonment

Date Sundry Submitted: 04/18/2023

Time Sundry Submitted: 01:08

Date proposed operation will begin: 05/12/2023

Procedure Description: Dugan Production plans to plug and abandon the well per the following procedure: 1) Run 5½" casing scraper to 1980'. RIH & Set 5½" CIBP @ 1942'. Fruitland Coal perforations @ 1992'-2010'. Load hole. Pressure test casing to 600 psi for 30 mins. 2) Spot inside Plug I above CIBP @ 1942' w/45 sks (51.8 cu ft) Class G neat cement to 1608' with 50' excess added.(5 gal/sk, 15.8 #/gal, 1.15 cu ft/sk). Plug I, inside 5½" casing, 1608'-1942', Fruitland, 45 sks, 51.8 cu ft. 3) Spot inside Plug II from 788' w/30 sks (34.5 cu ft) Class G neat cement to 583' with 50' of excess added. Plug II, inside 5½" casing, 583'-788', Ojo Alamo-Kirtland, 30 sks, 34.5 cu ft. 4) Spot inside Plug III from 330' w/45 sks Class G neat cement (51.8 cu ft) to surface w/50' excess added. Plug III, inside 5½" casing, 0-330', Surface, 45 sks, 51.8 cu ft. 5) Cut wellhead off. Fill casing w/cement in case needed. Install dry hole marker. 6) Clean location. Rig down and move.

Surface Disturbance

Is any additional surface disturbance proposed?: No

NOI Attachments

Procedure Description

Federal_B_Com_90_PA_planned_procedure_20230418130257.pdf

Federal_B_Com_90_PA_formation_tops_20230418130240.pdf

Federal_B_Com_90_PA_planned_wellbore_schematic_20230418130224.pdf

Federal_B_Com_90_PA_current_wellbore_schematic_20230418130209.pdf

Accepted for record – NMOCD
 JRH ——— 05/02/2023 ———

Well Name: FEDERAL B COM

Well Location: T30N / R11W / SEC 31 / NENW / 36.773859 / -108.035259

County or Parish/State: SAN JUAN / NM

Well Number: 90

Type of Well: OTHER

Allottee or Tribe Name:

Lease Number: NMNM0175788

Unit or CA Name: FRCL - W/2

Unit or CA Number: NMNM110404

US Well Number: 300453125800S1

Well Status: Producing Gas Well

Operator: DUGAN PRODUCTION CORPORATION

Conditions of Approval

Additional

General_Requirement_PxA_20230421162959.pdf

2726281_NOIA_B_Com_90_3004531258_KR_04212023_20230421162932.pdf

30N11W31_Fed_B_Com_90_Geo_KGR_20230421162907.pdf

Operator

I certify that the foregoing is true and correct. Title 18 U.S.C. Section 1001 and Title 43 U.S.C. Section 1212, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction. Electronic submission of Sundry Notices through this system satisfies regulations requiring a

Operator Electronic Signature: TYRA FEIL

Signed on: APR 18, 2023 01:01 PM

Name: DUGAN PRODUCTION CORPORATION

Title: Authorized Representative

Street Address: PO Box 420

City: Farmington State: NM

Phone: (505) 325-1821

Email address: tyrafeil@duganproduction.com

Field

Representative Name: ALIPH REENA

Street Address: PO BOX 420

City: FARMINGTON State: NM Zip: 87499-0420

Phone: (505)325-1821

Email address: Aliph.Reena@duganproduction.com

BLM Point of Contact

BLM POC Name: KENNETH G RENNICK

BLM POC Title: Petroleum Engineer

BLM POC Phone: 5055647742

BLM POC Email Address: krennick@blm.gov

Disposition: Approved

Disposition Date: 04/21/2023

Signature: Kenneth Rennick

Planned P & A Procedure

Federal B Com #90

30-045-31258

Basin Fruitland

800' FNL & 1600' FWL

S31 T30N R11W

San Juan County, NM


Lat:36.7738533 Long:-108.0352936

Dugan Production plan to plug and abandon the well per the following procedure:

- Run 5½" casing scraper to 1980'. RIH & Set 5½" CIBP @ 1942'. Fruitland Coal perforations @ 1992'-2010'. Load hole. Pressure test casing to 600 psi for 30 mins.
- Spot inside Plug I above CIBP @ 1942' w/45 sks (51.8 cu ft) Class G neat cement to 1608' with 50' excess added.(5 gal/sk, 15.8 #/gal, 1.15 cu ft/sk). Plug I, inside 5½" casing, 1608'-1942', Fruitland, 45 sks, 51.8 cu ft.
- Spot inside Plug II from 788' w/30 sks (34.5 cu ft) Class G neat cement to 583' with 50' of excess added. Plug II, inside 5½" casing, 583'-788', Ojo Alamo-Kirtland, 30 sks, 34.5 cu ft
- Spot inside Plug III from 330' w/45 sks Class G neat cement (51.8 cu ft) to surface w/50' excess added. Plug III, inside 5½" casing, 0-330', Surface, 45 sks, 51.8 cu ft.
- Cut wellhead off. Fill casing w/cement in case needed. Install dry hole marker.
- Clean location. Rig down and move.

Current wellbore Schematic

Federal B Com # 90
30-045-31258
Basin Fruitland
800' FNL & 1600' FWL
S31 T30N R11W
San Juan County, NM
Lat:36.7738533 Long:-108.0352936

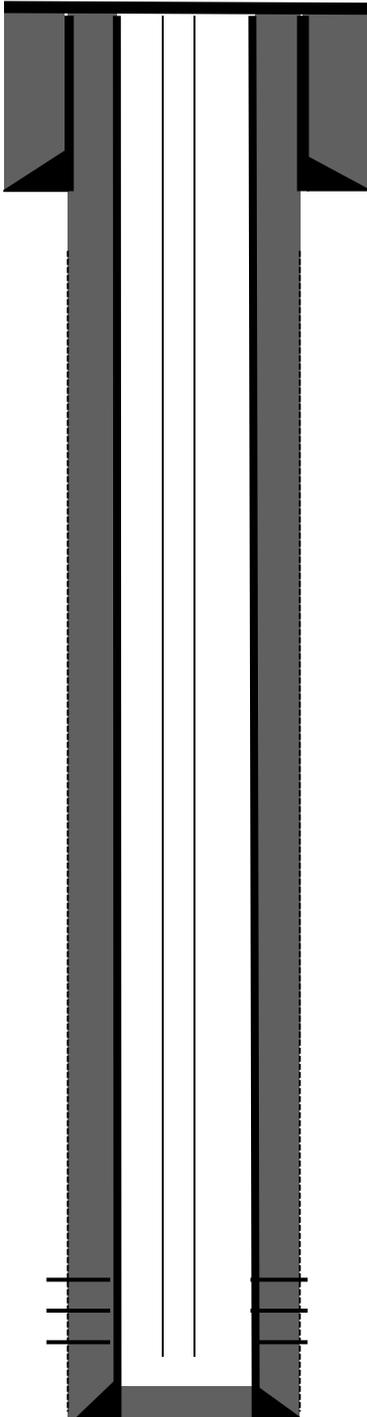

8-5/8" 24# casing @ 280'. Cemented with 180 sks Class B cement w/2% CaCl₂. Hole size: 12 1/4". Circulate 15 bbls cement to surface.

**5 1/2" 15.5# casing @ 2200'. Hole size: 7-1/8"
2-7/8", 6.5#, EOT @ 1999'**


Cement production casing w/ 195 sks 2% lodense followed by 157 sks Class B. 585 cu.ft total cement. Circulated 13 bbls cement to surface.

Fruitland Coal Perforated @ 1992' - 2010'

PBTD @ 2132', TD 2200'

Planned P & A wellbore Schematic

Federal B Com # 90
30-045-31258
Basin Fruitland
800' FNL & 1600' FWL
S31 T30N R11W
San Juan County, NM
Lat:36.7738533 Long:-108.0352936

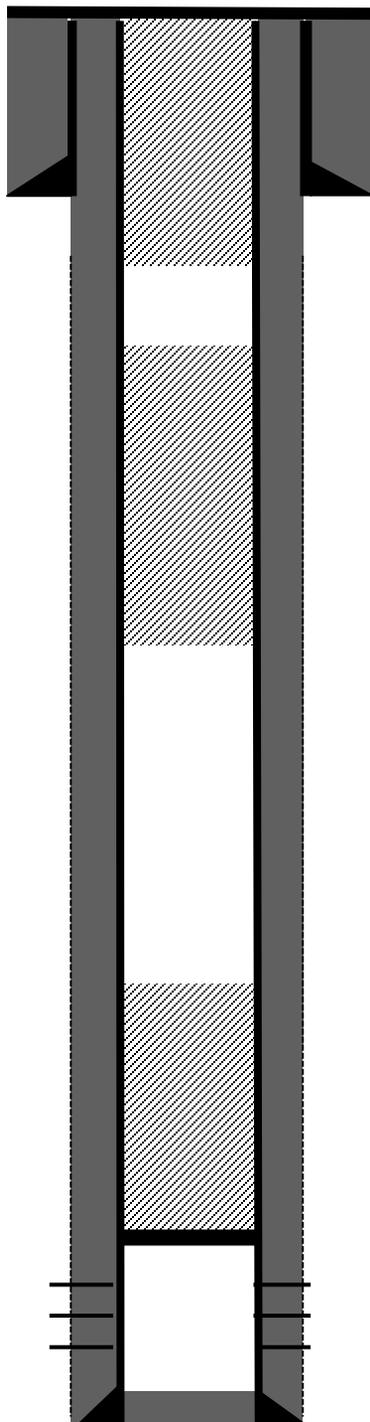

8-5/8" 24# casing @ 280'. Cemented with 180 sks Class B cement w/2% CaCl₂. Hole size: 12 1/4". Circulate 15 bbls cement to surface.

Spot inside plug III from 330' w/ 45 sks Class G Cement (51.8 cu.ft) to surface. Plug III, Surface, 0'-330'

Spot inside plug II from 788' w/ 30 sks Class G Cement (34.5 cu.ft) to 583'. Plug II, Ojo Alamo-Kirtland, 583'-788'

5 1/2" 15.5# casing @ 2200'. Hole size: 7-1/8"

Cement production casing w/ 195 sks 2% lodense followed by 157 sks Class B. 585 cu.ft total cement. Circulated 13 bbls cement to surface.

Set 5 1/2" CIBP @ 1942'. Spot Inside Plug I with 45 sks (51.8 cu.ft) @ 1608'-1942' Class G cement. Plug I, Fruitland, 1608'-1942'

Fruitland Coal Perforated @ 1992' - 2010'

PBTD @ 2132', TD 2200'

Federal B Com # 90
30-045-31258
Basin Fruitland
800' FNL & 1600' FWL
S31 T30N R11W
San Juan County, NM
Lat:36.7738533 Long:-108.0352936

Formation Tops

- Ojo Alamo - 633
- Kirtland - 738
- Fruitland - 1658

**UNITED STATES DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT
FARMINGTON DISTRICT OFFICE
6251 COLLEGE BLVD.
FARMINGTON, NEW MEXICO 87402**

AFMSS 2 Sundry ID 2726281

Attachment to notice of Intention to Abandon

Well: Federal B Com 90

CONDITIONS OF APPROVAL

1. Plugging operations must be completed by December 31, 2023.
2. Plugging operations authorized are subject to the attached "General Requirements for Permanent Abandonment of Wells on Federal and Indian Lease."
3. Farmington Office is to be notified at least 24 hours before the plugging operations commence at (505) 564-7750.

You are also required to place cement excesses per 4.2 and 4.4 of the attached General Requirements.

Office Hours: 7:45 a.m. to 4:30 p.m.

K. Rennick 04/21/2023

**GENERAL REQUIREMENTS FOR
PERMANENT ABANDONMENT OF WELLS ON FEDERAL AND INDIAN LEASES
FARMINGTON FIELD OFFICE**

- 1.0 The approved plugging plans may contain variances from the following minimum general requirements.
- 1.1 Modification of the approved plugging procedure is allowed only with the prior approval of the Authorized Officer, Farmington Field Office.
- 1.2 Requirements may be added to address specific well conditions.
- 2.0 Materials used must be accurately measured. (densometer/scales)
- 3.0 A tank or lined pit must be used for containment of any fluids from the wellbore during plugging operations and all pits are to be fenced with woven wire. These pits will be fenced on three sides and once the rig leaves location, the fourth side will be fenced.
- 3.1 Pits are not to be used for disposal of any hydrocarbons. If hydrocarbons are present in the pit, the fluids must be removed prior to filling in.
- 4.0 All cement plugs are to be placed through a work string. Cement may be bull-headed down the casing with prior approval. Cement caps on top of bridge plugs or cement retainers may be placed by dump bailer.
- 4.1 The cement shall be as specified in the approved plugging plan.
- 4.2 All cement plugs placed inside casing shall have sufficient volume to fill a minimum of 100' of the casing, or annular void(s) between casings, plus an excess volume sufficient to provide for 50 linear feet of fill above the plug.
- 4.3 Surface plugs may be no less than 50' in length.
- 4.4 All cement plugs placed to fill annular void(s) between casing and the formation shall be of sufficient volume to fill a minimum of 100' of the annular space plus 100% excess, calculated using the bit size, or 100' of annular capacity, determined from a caliper log, plus an excess volume sufficient to provide for 50 linear feet of fill above the plug.
- 4.5 All cement plugs placed to fill an open hole shall be of sufficient volume to fill a minimum of 100' of hole, as calculated from a caliper log, plus an excess volume sufficient to provide for 50 linear feet of fill above the plug. In the absence of a caliper log, an excess of 100% shall be required.
- 4.6 **A cement bond log or other accepted cement evaluation tool is required to be run if one had not been previously ran or cement did not circulate to surface during the original casing cementing job or subsequent cementing jobs.**

5.0 All cement plugs spotted across, or above, any exposed zone(s), when; the wellbore is not full of fluid or the fluid level will not remain static, and in the case of lost circulation or partial returns during cement placement, shall be tested by tagging with the work string.

- 5.1 The top of any cement plug verified by tagging must be at or above the depth specified in the approved plan, without regard to any excess.
- 5.2 Testing will not be required for any cement plug that is mechanically contained by use of a bridge plug and/or cement retainer, if casing integrity has been established.
- 5.3 Any cement plug which is the only isolating medium, for a fresh water interval or a zone containing a prospectively valuable deposit of minerals, shall be tested by tagging.
- 5.4 If perforations are required below the surface casing shoe, a 30 minute minimum wait time will be required to determine if gas and/or water flows are present. If flow is present, the well will be shut-in for a minimum of one hour and the pressure recorded. Short or long term venting may be necessary to evacuate trapped gas. **If only a water flow occurs with no associated gas, shut well in and record the pressures. Contact the Engineer as it may be necessary to change the cement weight and additives.**

6.0 Before setting any cement plugs the hole needs to be rolled. All wells are to be controlled by means of a fluid that is to be of a weight and consistency necessary to stabilize the wellbore. This fluid shall be left in place as filler between all plugs.

- 6.1 Drilling mud may be used as the wellbore fluid in open hole plugging operations.
- 6.2 The wellbore fluid used in cased holes shall be of sufficient weight to balance known pore pressures in all exposed formations.

7.0 A blowout preventer and related equipment (BOPE) shall be installed and tested prior to working in a wellbore with any exposed zone(s); (1) that are over pressured, (2) where the pressures are unknown, or (3) known to contain H₂S.

8.0 Within 30 days after plugging work is completed, file a Sundry Notice, Subsequent Report of Abandonment (Form 3160-5), through the Automated Fluid Minerals Support System (AFMSS) with the Field Manager, Bureau of Land Management, 6251 College Blvd., Suite A, Farmington, NM 87402. The report should show the manner in which the plugging work was carried out, the extent, by depth(s), of cement plugs placed, and the size and location, by depth(s), of casing left in the well. Show date well was plugged.

9.0 All permanently abandoned wells are to be marked with a permanent monument as specified in 43 CFR 3162.6(d). Unless otherwise approved.

10.0 If this well is located in a Specially Designated Area (SDA), compliance with the appropriate seasonal closure requirements will be necessary.

All of the above are minimum requirements. Failure to comply with the above conditions of approval may result in an assessment for noncompliance and/or a Shut-in Order being issued pursuant to 43 CFR 3163.1. You are further advised that any instructions, orders or decisions issued by the Bureau of Land Management are subject to administrative review pursuant to 43 CFR 3165.3 and appeal pursuant to 43 CFR 3165.4 and 43 CFR 4.700.

**BLM FLUID MINERALS
P&A Geologic Report**

Date Completed: 04/21/2023

Well No. Federal B Com 90 (API 30-045-31258)	Location	NENW			
Lease No. NMNM0175788	Sec. 31	T30N			R11W
Operator Dugan Production Corporation	County	San Juan	State		New Mexico
Total Depth 2200'	PBTD 2132'	Formation	Basin Fruitland Coal		
Elevation (GL) 5812'					

Geologic Formations	Est. Top	Est. Bottom	Log Top	Log Bottom	Remarks
San Jose Fm					Surface/freshwater sands
Nacimiento Fm					Possible freshwater sands
Ojo Alamo Ss	633				Aquifer (possible freshwater)
Kirtland Shale	783				
Fruitland Fm			1658		Coal/Gas/Possible water
Pictured Cliffs Ss					Gas
Lewis Shale					
Chacra					Gas
Cliff House Ss					Water/Possible gas
Menefee Fm					Coal/Ss/Water/Possible O&G
Point Lookout Ss					Probable water/Possible O&G
Mancos Shale					
Gallup					O&G/Water
Greenhorn					
Graneros Shale					
Dakota Ss					O&G/Water

Remarks:
P & A

Reference Well:

- Raster logs limited, agreed with the estimated formation tops determined by operator for Ojo Alamo and Kirtland.

Prepared by: Kenneth Rennick

District I
 1625 N. French Dr., Hobbs, NM 88240
 Phone:(575) 393-6161 Fax:(575) 393-0720

District II
 811 S. First St., Artesia, NM 88210
 Phone:(575) 748-1283 Fax:(575) 748-9720

District III
 1000 Rio Brazos Rd., Aztec, NM 87410
 Phone:(505) 334-6178 Fax:(505) 334-6170

District IV
 1220 S. St Francis Dr., Santa Fe, NM 87505
 Phone:(505) 476-3470 Fax:(505) 476-3462

State of New Mexico
Energy, Minerals and Natural Resources
Oil Conservation Division
1220 S. St Francis Dr.
Santa Fe, NM 87505

CONDITIONS

Action 209837

CONDITIONS

Operator: DUGAN PRODUCTION CORP PO Box 420 Farmington, NM 87499	OGRID: 6515
	Action Number: 209837
	Action Type: [C-103] NOI Plug & Abandon (C-103F)

CONDITIONS

Created By	Condition	Condition Date
john.harrison	Please Perf & Sqz Plug III at surface csg shoe	5/2/2023