<u>District I</u> 1625 N. French Dr., Hobbs, NM 88240 Phone:(575) 393-6161 Fax:(575) 393-0720

District II 811 S. First St., Artesia, NM 88210 Phone:(575) 748-1283 Fax:(575) 748-9720

District III 1000 Rio Brazos Rd., Aztec, NM 87410 Phone:(505) 334-6178 Fax:(505) 334-6170

**District IV** 

1220 S. St Francis Dr., Santa Fe, NM 87505 Phone:(505) 476-3470 Fax:(505) 476-3462

### **State of New Mexico Energy, Minerals and Natural Resources Oil Conservation Division** 1220 S. St Francis Dr. Santa Fe, NM 87505

Form C-101 August 1, 2011

Permit 353189

ADDITION FOR DEDMIT TO DOLL DE ENTED DEEDEN DILICRACK OR ADDIT ZONE

AFFLIO	A HON F ON F ENVIR TO DIVILE, INC-ENTEN, DELFEN, FLOGBACK, ON ADD	AZONL
Operator Name and Address		2. OGRID Number
Avant Operating, LLC	330396	
1515 Wynkoop Street		3. API Number
Denver, CO 80202		30-025-52207
4. Property Code	5. Property Name	6. Well No.
334829	EXPLORER 15 STATE COM	301H

7 Surface Location

ſ	UL - Lot	Section	Township	Range	Lot Idn	Feet From	N/S Line	Feet From	E/W Line	County
	В	15	18S	34E	В	431	N	1359	E	Lea

8. Proposed Bottom Hole Location

UL - Lot	Section	Township	Range	Lot Idn	Feet From	N/S Line	Feet From	E/W Line	County
0	22	18S	34E	0	100	S	2310	E	Lea

9. Pool Information

AIRSTRIP;BONE SPRING	960
AIRSTRIP:BONE SPRING, NORTH	962

**Additional Well Information** 

11. Work Type	12. Well Type	13. Cable/Rotary	14. Lease Type	15. Ground Level Elevation
New Well	OIL		State	4018
16. Multiple	17. Proposed Depth	18. Formation	19. Contractor	20. Spud Date
Υ	18750	1st Bone Spring Sand		5/30/2024
Depth to Ground water		Distance from nearest fresh water well		Distance to nearest surface water

☑ We will be using a closed-loop system in lieu of lined pits

21. Proposed Casing and Cement Program

Type	Hole Size	Casing Size	Casing Weight/ft	Setting Depth	Sacks of Cement	Estimated TOC
Surf	17.5	13.375	54.5	1805	1045	1440
Int1	12.25	9.625	40	3400	890	2720
Prod	8.75	5.5	20	18750	3470	8062

### Casing/Cement Program: Additional Comments

22. Proposed Blowout Prevention Program

zz. i roposca Biomoaci rogiam							
Type	Working Pressure	Test Pressure	Manufacturer				
Pipe	10000	5000	Cameron				

23. I hereby certify that the information given above is true and complete to the best of my knowledge and belief.  I further certify I have complied with 19.15.14.9 (A) NMAC ☑ and/or 19.15.14.9 (B) NMAC ☑, if applicable.  Signature:			OIL CONSERVATION	ON DIVISION	
Printed Name: Electronically filed by Sarah Ferreyros		Approved By:	Paul F Kautz		
Title:	Director of Regulatory		Title:	Geologist	
Email Address:	Email Address: sarah@avantnr.com		Approved Date:	11/14/2023	Expiration Date: 11/14/2025
Date:	11/13/2023 Phone: 720-854-9020		Conditions of Approval Attached		

1625 N. French Dr., Hobbs, NM 88240 Phone: (575) 393-6161 Fax: (575) 393-0720 District II 811 S. First St., Artesia, NM 88210 District III

1000 Rio Brazos Road, Aztec, NM 87410 Phone: (505) 334-6178 Fax: (505) 334-6170

Phone: (505) 476-3460 Fax: (505) 476-3462

District IV

State of New Mexico Energy, Minerals & Natural Resources Department OIL CONSERVATION DIVISION 1220 South St. Francis Dr. Santa Fe, NM 87505

Form C-102 Revised August 1, 2011 Submit one copy to appropriate District Office


☐ AMENDED REPORT

### WELL LOCATION AND ACREAGE DEDICATION PLAT

API Number			Pool Code						
			960			AIRSTRIP;BONE SPRING			
Property (	Property Code			EXPL	Property Name ORER 15 STAT	poperty Name Well Number R 15 STATE COM #301H			
OGRID N	lo.	Operator Name Elevation					ion		
330396		AVANT OPERATING, LLC 4018'					8'		
					Surface Locati	on			
UL or lot no.	Section	Township	Range	Lot Idn	Feet from the	North/South line	Feet from the	East/West line	County

Range Feet from the Township 15 18 S 34 E **NORTH** 1359 **EAST** LEA В 431 Bottom Hole Location If Different From Surface East/West line UL or lot no Township 22 18 S 34 E 100 SOUTH 0 2310 **EAST** LEA Joint or Infill Dedicated Acres Order No 320.00

No allowable will be assigned to this completion until all interests have been consolidated or a non-standard unit has been approved by the division.

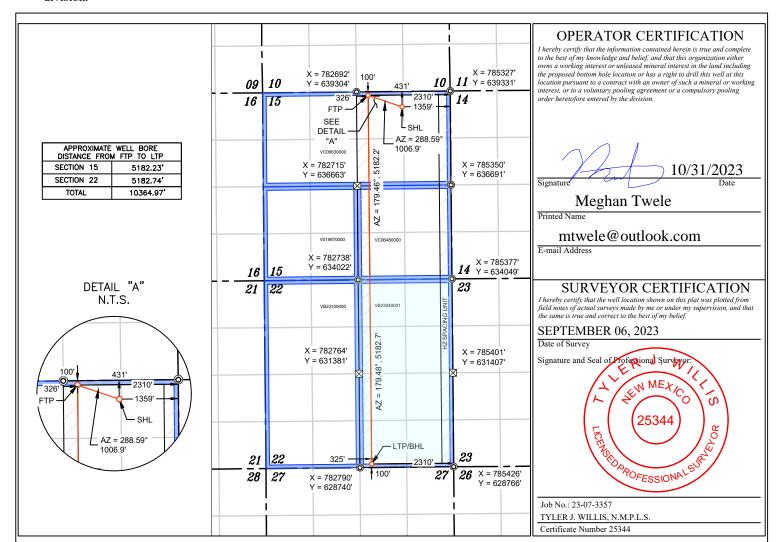


NAD	83 (FTP) 100' FNL & 2310' FEL
LAT	ITUDE = 32.754751°
LON	GITUDE = -103.547191°
NAD	27 (FTP)
LAT	ITUDE = 32.754628°
LON	GITUDE = -103.546694°
STA	TE PLANE NAD 83 (N.M. EAST)
N: 63	39207.52' E: 783018.19'
STA	TE PLANE NAD 27 (N.M. EAST)
N: 63	80142 85' E+ 741830 05'

NAL	83 (LTP/BHL) 100' FSL & 2310' FEL
LA	TITUDE = 32.726263°
LO	NGITUDE = -103.547127°
NA	D 27 (LTP/BHL)
LA	TITUDE = 32.726140°
LO	NGITUDE = -103.546631°
STA	TE PLANE NAD 83 (N.M. EAST)
N: 6	28843.00' E: 783114.75'
STA	TE PLANE NAD 27 (N.M. EAST)
N: 6	28778.64' E: 741935.32'



### **NOTES**

- 1. ALL COORDINATES, BEARINGS, AND DISTANCES CONTAINED HEREIN ARE GRID, BASED UPON THE NEW MEXICO STATE PLANE COORDINATES SYSTEM, NORTH AMERICAN DATUM 83, NEW MEXICO EAST (3001), NAVD 88.
- 2. THIS DOCUMENT IS BASED UPON AN ON THE GROUND SURVEY PERFORMED DURING SEPTEMBER, 2023. CERTIFICATION OF THIS DOCUMENT IS ONLY TO THE LOCATION OF THIS EASEMENT IN RELATION TO RECORDED MONUMENT OF DEEDS PROVIDED BY THE CLIENT.
- 3. ELEVATIONS MSL, DERIVED FROM G.N.S.S. OBSERVATION AND DERIVED FROM SAID ON-THE-GROUND SURVEY.



1625 N. French Dr., Hobbs, NM 88240 Phone: (575) 393-6161 Fax: (575) 393-0720

District II 811 S. First St., Artesia, NM 88210 District III 1000 Rio Brazos Road, Aztec, NM 87410 Phone: (505) 334-6178 Fax: (505) 334-6170 District IV

Phone: (505) 476-3460 Fax: (505) 476-3462

### State of New Mexico Energy, Minerals & Natural Resources Department OIL CONSERVATION DIVISION 1220 South St. Francis Dr.

Santa Fe, NM 87505

Form C-102 Revised August 1, 2011 Submit one copy to appropriate District Office


☐ AMENDED REPORT

### WELL LOCATION AND ACREAGE DEDICATION PLAT

	AP	I Number			Pool Code				Pool Name			
				962 AIRSTRIP; BONE SPF						RING, NORTH		
	Property C	ode								Well Nu	mber	
					EXPL	ORER 15	STATE	COM		#301	IH	
Ī	OGRID N	0.				Operato	r Name			Elevat	ion	
	330396				AVA	NT OPEF	RATING	, LLC		401	8'	
		Property Code Property Name EXPLORER 15 STATE COM OGRID No. Operator Name AVANT OPERATING, LLC Surface Location  AIRSTRIP; BONE SPRING, NORTH Well Number #301H #301H  Elevation 4018'										
ſ	UL or lot no.	Section	Township	Range	Lot Idn	Feet fron	n the	North/South line	Feet from the	East/West line	County	


15 18 S 34 E **NORTH** 1359 **EAST** LEA В 431 Bottom Hole Location If Different From Surface East/West line UL or lot no Township 22 18 S 34 E SOUTH 0 100 2310 **EAST** LEA Joint or Infill Dedicated Acres Order No 320.00

No allowable will be assigned to this completion until all interests have been consolidated or a non-standard unit has been approved by the division.

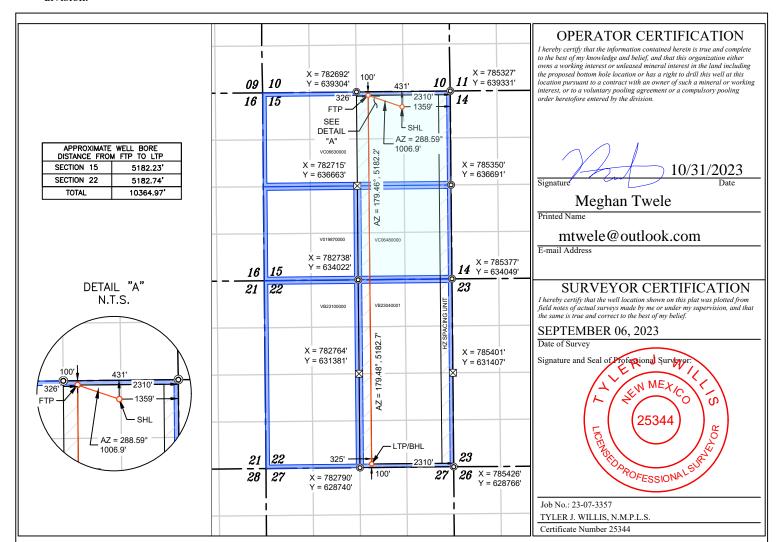

ľ	NAD 83 (FTP) 100' FNL & 2310' FEL
	LATITUDE = 32.754751°
	LONGITUDE = -103.547191°
	NAD 27 (FTP)
	LATITUDE = 32.754628°
	LONGITUDE = -103.546694°
Г	STATE PLANE NAD 83 (N.M. EAST)
Г	N: 639207.52' E: 783018.19'
7	STATE PLANE NAD 27 (N.M. EAST)
г	NI. (20142 05) E. 741020 05)

NAD	83 (LTP/BHL) 100' FSL & 2310' FEL
LA	ITUDE = 32.726263°
LO	GITUDE = -103.547127°
NA	27 (LTP/BHL)
LA	ITUDE = 32.726140°
LO	GITUDE = -103.546631°
STA	TE PLANE NAD 83 (N.M. EAST)
N: 6	28843.00' E: 783114.75'
STA	TE PLANE NAD 27 (N.M. EAST)
N: 6	28778.64' E: 741935.32'



### **NOTES**

- 1. ALL COORDINATES, BEARINGS, AND DISTANCES CONTAINED HEREIN ARE GRID, BASED UPON THE NEW MEXICO STATE PLANE COORDINATES SYSTEM, NORTH AMERICAN DATUM 83, NEW MEXICO EAST (3001), NAVD 88.
- 2. THIS DOCUMENT IS BASED UPON AN ON THE GROUND SURVEY PERFORMED DURING SEPTEMBER, 2023. CERTIFICATION OF THIS DOCUMENT IS ONLY TO THE LOCATION OF THIS EASEMENT IN RELATION TO RECORDED MONUMENT OF DEEDS PROVIDED BY THE CLIENT.
- 3. ELEVATIONS MSL, DERIVED FROM G.N.S.S. OBSERVATION AND DERIVED FROM SAID ON-THE-GROUND SURVEY.



<u>District I</u> 1625 N. French Dr., Hobbs, NM 88240 Phone:(575) 393-6161 Fax:(575) 393-0720 District II

811 S. First St., Artesia, NM 88210 Phone:(575) 748-1283 Fax:(575) 748-9720 District III

1000 Rio Brazos Rd., Aztec, NM 87410 Phone:(505) 334-6178 Fax:(505) 334-6170

1220 S. St Francis Dr., Santa Fe, NM 87505 Phone:(505) 476-3470 Fax:(505) 476-3462

### **State of New Mexico Energy, Minerals and Natural Resources Oil Conservation Division** 1220 S. St Francis Dr. **Santa Fe, NM 87505**

Form APD Conditions

Permit 353189

#### PERMIT CONDITIONS OF APPROVAL

Operator Name and Address:	API Number:
Avant Operating, LLC [330396]	30-025-52207
1515 Wynkoop Street	Well:
Denver, CO 80202	EXPLORER 15 STATE COM #301H

OCD Reviewer	Condition
pkautz	Notify OCD 24 hours prior to casing & cement
pkautz	Will require a File As Drilled C-102 and a Directional Survey with the C-104
pkautz	Once the well is spud, to prevent ground water contamination through whole or partial conduits from the surface, the operator shall drill without interruption through the fresh water zone or zones and shall immediately set in cement the water protection string
pkautz	Oil base muds are not to be used until fresh water zones are cased and cemented providing isolation from the oil or diesel. This includes synthetic oils. Oil based mud, drilling fluids and solids must be contained in a steel closed loop system
pkautz	Cement is required to circulate on both surface and intermediate1 strings of casing
pkautz	If cement does not circulate on any string , a CBL is required for that string of casing.
pkautz	The Operator is to notify NMOCD by sundry (Form C-103) within ten (10) days of the well being spud

Explorer 15 State Com 303H

State of New Mexico Energy, Minerals and Natural Resources Department

Submit Electronically Via E-permitting

Oil Conservation Division 1220 South St. Francis Dr. Santa Fe, NM 87505

### NATURAL GAS MANAGEMENT PLAN

This Natural Gas Management Plan must be submitted with each Application for Permit to Drill (APD) for a new or recompleted well.

### Section 1 – Plan Description Effective May 25, 2021

I. Operator: Avant Operating, LLC OGRID: 330396 Date: 11/08/2023
II. Type: ⊠ Original □ Amendment due to □ 19.15.27.9.D(6)(a) NMAC □ 19.15.27.9.D(6)(b) NMAC □ Other,
If Other, please describe:
III. Well(s): Provide the following information for each new or recompleted well or set of wells proposed to be drilled or proposed t
be recompleted from a single well pad or connected to a central delivery point.

Well Name	API	ULSTR	Footages	Anticipated Oil BBL/D	Anticipated Gas MCF/D	Anticipated Produced Water BBL/D
Explorer 15 State Com 006H		B-15-T18S-R34E	271FNL/1357FEL	1000 BBL/D	1800 MCF/D	8000 BBL/D
Explorer 15 State Com 007H		B-15-T18S-R34E	271FNL/1337FEL	1000 BBL/D	1800 MCF/D	8000 BBL/D
Explorer 15 State Com 008H		A-15-T18S-R34E	271FNL/1317FEL	1000 BBL/D	1800 MCF/D	8000 BBL/D
Explorer 15 State Com 301H		B-15-T18S-R34E	431FNL/1359FEL	1000 BBL/D	1800 MCF/D	8000 BBL/D
Explorer 15 State Com 302H		B-15-T18S-R34E	431FNL/1339FEL	1000 BBL/D	1800 MCF/D	8000 BBL/D

1000 BBL/D

1800 MCF/D

8000 BBL/D

IV. Central Delivery Point Name: Explorer CTB 1 [See 19.15.27.9(D)(1) NMAC]

B-15-T18S-R34E 431FNL/1319FEL

**V.** Anticipated Schedule: Provide the following information for each new or recompleted well or set of wells proposed to be drilled or proposed to be recompleted from a single well pad or connected to a central delivery point.

Well Name	API	Spud Date	TD Reached	Completion	Initial Flow	First Production
			Date	Commencement Date	Back Date	Date
Explorer 15 State Com 006H		05/01/2025	08/15/2025	08/22/2025	09/30/2025	09/30/2025
Explorer 15 State Com 007H		05/01/2025	08/15/2025	08/22/2025	09/30/2025	09/30/2025
Explorer 15 State Com 008H		05/01/2025	08/15/2025	08/22/2025	09/30/2025	09/30/2025
Explorer 15 State Com 301H		05/01/2025	08/15/2025	08/22/2025	09/30/2025	09/30/2025
Explorer 15 State Com 302H		05/01/2025	08/15/2025	08/22/2025	09/30/2025	09/30/2025
Explorer 15 State Com 303H		05/01/2025	08/15/2025	08/22/2025	09/30/2025	09/30/2025

VI. Separation Equipment: 

Attach a complete description of how Operator will size separation equipment to optimize gas capture.

VII. Operational Practices: 

Attach a complete description of the actions Operator will take to comply with the requirements of Subsection A through F of 19.15.27.8 NMAC.

VIII. Best Management Practices: 

Attach a complete description of Operator's best management practices to minimize venting during active and planned maintenance.

# Section 3 - Certifications Effective May 25, 2021

Operator certifies that, after reasonable inquiry and based on the available information at the time of submittal: ☐ Operator will be able to connect the well(s) to a natural gas gathering system in the general area with sufficient capacity to transport one hundred percent of the anticipated volume of natural gas produced from the well(s) commencing on the date of first production, taking into account the current and anticipated volumes of produced natural gas from other wells connected to the pipeline gathering system; or Operator will not be able to connect to a natural gas gathering system in the general area with sufficient capacity to transport one hundred percent of the anticipated volume of natural gas produced from the well(s) commencing on the date of first production, taking into account the current and anticipated volumes of produced natural gas from other wells connected to the pipeline gathering system. If Operator checks this box, Operator will select one of the following: Well Shut-In. 

Operator will shut-in and not produce the well until it submits the certification required by Paragraph (4) of Subsection D of 19.15.27.9 NMAC; or Venting and Flaring Plan. 

Operator has attached a venting and flaring plan that evaluates and selects one or more of the potential alternative beneficial uses for the natural gas until a natural gas gathering system is available, including: power generation on lease; (a) (b) power generation for grid; (c) compression on lease; (d) liquids removal on lease; (e) reinjection for underground storage: reinjection for temporary storage;

- **(f)**
- reinjection for enhanced oil recovery; (g)
- (h) fuel cell production; and
- (i) other alternative beneficial uses approved by the division.

### **Section 4 - Notices**

- 1. If, at any time after Operator submits this Natural Gas Management Plan and before the well is spud:
- Operator becomes aware that the natural gas gathering system it planned to connect the well(s) to has become unavailable or will not have capacity to transport one hundred percent of the production from the well(s), no later than 20 days after becoming aware of such information, Operator shall submit for OCD's approval a new or revised venting and flaring plan containing the information specified in Paragraph (5) of Subsection D of 19.15.27.9 NMAC; or
- Operator becomes aware that it has, cumulatively for the year, become out of compliance with its baseline natural gas capture rate or natural gas capture requirement, no later than 20 days after becoming aware of such information, Operator shall submit for OCD's approval a new or revised Natural Gas Management Plan for each well it plans to spud during the next 90 days containing the information specified in Paragraph (2) of Subsection D of 19.15.27.9 NMAC, and shall file an update for each Natural Gas Management Plan until Operator is back in compliance with its baseline natural gas capture rate or natural gas capture requirement.
- 2. OCD may deny or conditionally approve an APD if Operator does not make a certification, fails to submit an adequate venting and flaring plan which includes alternative beneficial uses for the anticipated volume of natural gas produced, or if OCD determines that Operator will not have adequate natural gas takeaway capacity at the time a well will be spud.

and Gas Act. Signature: Printed Name: John Harper Title: VP of Geosciences E-mail Address: John@avantnr.com Date: 11/08/23 Phone: 678-988-6644 **OIL CONSERVATION DIVISION** (Only applicable when submitted as a standalone form) Approved By: Title: Approval Date: Conditions of Approval:

I certify that, after reasonable inquiry, the statements in and attached to this Natural Gas Management Plan are true and correct to the best of my knowledge and acknowledge that a false statement may be subject to civil and criminal penalties under the Oil

### Avant Operating, LLC Natural Gas Management Plan

- VI. Separation equipment will be sized by construction engineering staff based on stated manufacturer daily throughput capacities and anticipated daily production rates to ensure adequate capacity. Closed vent system piping, compression needs, and VRUs will be sized utilizing ProMax modelling software to ensure adequate capacity for anticipated production volumes and conditions.
- VII. Avant Operating, LLC (Avant) will take the following actions to comply with the regulations listed in 19.15.27.8:
  - A. Avant will maximize the recovery of natural gas by minimizing the waste, as defined by 19.15.2 NMAC, of natural gas through venting and flaring. Avant will ensure that well(s) will be connected to a natural gas gathering system with sufficient capacity to transport natural gas.
  - B. All drilling operations will be equipped with a rig flare located at least 100' from the nearest surface hole. Rig flare will be utilized to combust any natural gas that is brought to surface during normal drilling operations. In the case of emergency venting or flaring the volumes will be estimated and reported appropriately.
  - C. During completion operations any natural gas brought to surface will be flared. Immediately following the finish of completion operations, all well flowback will be directed to permanent separation equipment. Produced natural gas from separation equipment will be sent to sales. It is not anticipated that gas will not meet pipeline standards. However, if natural gas does not meet gathering pipeline quality specifications, Avant will flare the natural gas for 60 days or until the natural gas meets the pipeline quality specifications. Avant will ensure that the flare is sized properly and is equipped with automatic igniter or continuous pilot. The gas sample will be analyzed twice per week and the gas will be routed into a gathering system as soon as pipeline specifications are met.
  - D. Avant will comply with the performance standards requirements and provisions listed in 19.15.27.8 (l) through (8). All equipment will be designed and sized to handle maximum anticipated pressures and throughputs to minimize the waste. Production storage tanks constructed after May 25, 2021, will be equipped with automatic gauging system. Flares constructed after May 25, 2021, will be equipped with automatic igniter or continuous pilot. Flares will be located at least 100' from the well and storage tanks unless otherwise approved by the division. Avant will conduct AVO inspections as described in 19.15.27.8 E (5) (a) with frequencies specified in 19.15.27.8 E (5) (b) and (c). All emergencies will be resolved as quickly and safely as feasible to minimize waste.
  - E. The volume of natural gas that is vented or flared as the result of malfunction or emergency during drilling and completions operations will be estimated. The volume of natural gas that is vented, flared, or beneficially used during production operations, will be measured, or estimated. Avant will install equipment to measure



# **Avant Operating, LLC**

Lea Co., NM (NAD 83) Explorer 15 State Com Pad 2 Explorer 15 State Com 301H

OH

Plan: Plan 0.1

## **Standard Planning Report**

30 October, 2023







Database: EDM 5000.16 Single User Db Company: Avant Operating, LLC Project: Lea Co., NM (NAD 83)
Site: Explorer 15 State Com Pad 2

 Well:
 Explorer 15 State Com 301H

 Wellbore:
 OH

 Design:
 Plan 0.1

Local Co-ordinate Reference:
TVD Reference:
MD Reference:

Survey Calculation Method:

North Reference:

Well Explorer 15 State Com 301H WELL @ 4044.5usft (4044.5) WELL @ 4044.5usft (4044.5)

Minimum Curvature

Project Lea Co., NM (NAD 83)

Map System:US State Plane 1983Geo Datum:North American Datum 1983Map Zone:New Mexico Eastern Zone

System Datum: Mean Sea Level

Site Explorer 15 State Com Pad 2

 Site Position:
 Northing:
 638,966.75 usft
 Latitude:
 32.7540850°N

 From:
 Lat/Long
 Easting:
 783,247.96 usft
 Longitude:
 103.5464490°W

Position Uncertainty: 0.0 usft Slot Radius: 13-3/16 "

Well Explorer 15 State Com 301H **Well Position** +N/-S 0.0 usft Northing: 638,886.64 usft Latitude: 32.7538500°N +E/-W 0.0 usft Easting: 783,972.61 usft Longitude: 103.5440940°W **Position Uncertainty** 0.0 usft Wellhead Elevation: usft **Ground Level:** 4,018.0 usft

Grid Convergence: 0.43 °

ОН Wellbore **Model Name** Declination Field Strength Magnetics Sample Date Dip Angle (°) (°) (nT) IGRF2000 49,744.95961836 12/31/2004 8.59 60.94

Design Plan 0.1 **Audit Notes:** Phase: PROTOTYPE Tie On Depth: 0.0 Version: Vertical Section: Depth From (TVD) +N/-S +E/-W Direction (usft) (usft) (usft) (°) 184.88 0.0 0.0 0.0

 Plan Survey Tool Program
 Date
 10/30/2023

 Depth From (usft)
 Depth To (usft)
 Survey (Wellbore)
 Tool Name
 Remarks

 1
 0.0
 18,750.5
 Plan 0.1 (OH)
 B001Mb\_MWD+HRGM

OWSG MWD + HRGM





Database: EDM 5000.16 Single User Db Company: Avant Operating, LLC Project: Lea Co., NM (NAD 83)
Site: Explorer 15 State Com Pad 2

Site:Explorer 15 State Com Pad 2Well:Explorer 15 State Com 301H

Wellbore: OH
Design: Plan 0.1

Local Co-ordinate Reference: TVD Reference: MD Reference: North Reference: Survey Calculation Method:

Plan Sections										
Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Dogleg Rate (°/100usft)	Build Rate (°/100usft)	Turn Rate (°/100usft)	TFO (°)	Target
0.0	0.00	0.00	0.0	0.0	0.0	0.00	0.00	0.00	0.00	
2,200.0	0.00	0.00	2,200.0	0.0	0.0	0.00	0.00	0.00	0.00	
2,745.0	10.90	292.35	2,741.7	19.7	-47.8	2.00	2.00	0.00	292.35	
7,344.6	10.90	292.35	7,258.3	350.3	-852.2	0.00	0.00	0.00	0.00	
7,889.5	0.00	0.00	7,800.0	370.0	-900.0	2.00	-2.00	0.00	180.00	
8,062.1	0.00	0.00	7,972.5	370.0	-900.0	0.00	0.00	0.00	0.00	
8,812.1	90.00	184.55	8,450.0	-106.0	-937.9	12.00	12.00	0.00	184.55	
8,813.5	90.00	184.55	8,450.0	-107.4	-938.0	0.00	0.00	0.00	0.00	
9,067.4	90.00	179.47	8,450.0	-361.0	-946.9	2.00	0.00	-2.00	-90.00	
18,750.5	90.00	179.47	8,450.0	-10,043.8	-858.0	0.00	0.00	0.00	0.00	Explorer 15 State Cor



EDM 5000.16 Single User Db Database: Company: Avant Operating, LLC Project: Lea Co., NM (NAD 83) Explorer 15 State Com Pad 2 Site:

Explorer 15 State Com 301H

ОН Wellbore: Design: Plan 0.1

Well:

Local Co-ordinate Reference: TVD Reference: MD Reference: North Reference:

WELL @ 4044.5usft (4044.5) WELL @ 4044.5usft (4044.5) Grid **Survey Calculation Method:** Minimum Curvature

Well Explorer 15 State Com 301H

anned Survey									
Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Vertical Section (usft)	Dogleg Rate (°/100usft)	Build Rate (°/100usft)	Turn Rate (°/100usft)
0.0	0.00	0.00	0.0	0.0	0.0	0.0	0.00	0.00	0.00
100.0	0.00	0.00	100.0	0.0	0.0	0.0	0.00	0.00	0.00
200.0	0.00	0.00	200.0	0.0	0.0	0.0	0.00	0.00	0.00
300.0	0.00	0.00	300.0	0.0	0.0	0.0	0.00	0.00	0.00
400.0	0.00	0.00	400.0	0.0	0.0	0.0	0.00	0.00	0.00
500.0	0.00	0.00	500.0	0.0	0.0	0.0	0.00	0.00	0.00
600.0	0.00	0.00	600.0	0.0	0.0	0.0	0.00	0.00	0.00
700.0	0.00	0.00	700.0	0.0	0.0	0.0	0.00	0.00	0.00
800.0	0.00	0.00	800.0	0.0	0.0	0.0	0.00	0.00	0.00
900.0	0.00	0.00	900.0	0.0	0.0	0.0	0.00	0.00	0.00
1 000 0	0.00	0.00		0.0	0.0	0.0	0.00	0.00	0.00
1,000.0			1,000.0						
1,100.0	0.00	0.00	1,100.0	0.0	0.0	0.0	0.00	0.00	0.00
1,200.0 1,300.0	0.00	0.00 0.00	1,200.0 1,300.0	0.0	0.0	0.0	0.00	0.00 0.00	0.00
1,300.0 1,400.0	0.00			0.0	0.0	0.0	0.00	0.00	0.00
	0.00	0.00	1,400.0	0.0	0.0	0.0	0.00		0.00
1,500.0	0.00	0.00	1,500.0	0.0	0.0	0.0	0.00	0.00	0.00
1,600.0	0.00	0.00	1,600.0	0.0	0.0	0.0	0.00	0.00	0.00
1,700.0	0.00	0.00	1,700.0	0.0	0.0	0.0	0.00	0.00	0.00
1,780.0	0.00	0.00	1,780.0	0.0	0.0	0.0	0.00	0.00	0.00
RUSTLER									
1,800.0	0.00	0.00	1,800.0	0.0	0.0	0.0	0.00	0.00	0.00
1,890.0	0.00	0.00	1,890.0	0.0	0.0	0.0	0.00	0.00	0.00
SALT									
1,900.0	0.00	0.00	1,900.0	0.0	0.0	0.0	0.00	0.00	0.00
2,000.0	0.00	0.00	2,000.0	0.0	0.0	0.0	0.00	0.00	0.00
2,100.0	0.00	0.00	2,100.0	0.0	0.0	0.0	0.00	0.00	0.00
2,200.0	0.00	0.00	2,200.0	0.0	0.0	0.0	0.00	0.00	0.00
KOP - Start	Build 2.00								
2,300.0	2.00	292.35	2,300.0	0.7	-1.6	-0.5	2.00	2.00	0.00
2,400.0	4.00	292.35	2,399.8	2.7	-6.5	-2.1	2.00	2.00	0.00
2,500.0	6.00	292.35	2,499.5	6.0	-14.5	-4.7	2.00	2.00	0.00
2,600.0	8.00	292.35	2,598.7	10.6	-25.8	-8.4	2.00	2.00	0.00
2,700.0	10.00	292.35	2,697.5	16.5	-40.3	-13.1	2.00	2.00	0.00
2,745.0	10.90	292.35	2,741.7	19.7	-47.8	-15.5	2.00	2.00	0.00
	hold at 2745.0 N		2 705 7	00.0	F7 4	40.0	0.00	0.00	0.00
2,800.0 2,900.0	10.90 10.90	292.35 292.35	2,795.7 2,893.9	23.6 30.8	-57.4 -74.9	-18.6 -24.3	0.00 0.00	0.00 0.00	0.00 0.00
3,000.0	10.90	292.35	2,992.1	38.0	-74.9 -92.4	-30.0	0.00	0.00	0.00
3,100.0	10.90	292.35	3.090.3	45.2	-109.9	-35.7	0.00	0.00	0.00
			-,						
3,200.0	10.90	292.35	3,188.5	52.4	-127.4	-41.3	0.00	0.00	0.00
3,300.0	10.90	292.35	3,286.7	59.6	-144.9	-47.0	0.00	0.00	0.00
3,400.0	10.90	292.35	3,384.9	66.7	-162.4	-52.7	0.00	0.00	0.00
3,500.0	10.90	292.35	3,483.1	73.9	-179.8	-58.4	0.00	0.00	0.00
3,600.0	10.90	292.35	3,581.3	81.1	-197.3	-64.0	0.00	0.00	0.00
3,675.1	10.90	292.35	3,655.0	86.5	-210.5	-68.3	0.00	0.00	0.00
SEVEN RIVE	RS								
3,700.0	10.90	292.35	3,679.5	88.3	-214.8	-69.7	0.00	0.00	0.00
3,800.0	10.90	292.35	3,777.7	95.5	-232.3	-75.4	0.00	0.00	0.00
3,900.0	10.90	292.35	3,875.9	102.7	-249.8	-81.1	0.00	0.00	0.00
4,000.0	10.90	292.35	3,974.1	109.9	-267.3	-86.7	0.00	0.00	0.00
4,100.0	10.90	292.35	4,072.3	117.1	-284.8	-92.4	0.00	0.00	0.00
4,100.0 4,200.0	10.90	292.35 292.35	4,072.3 4,170.5	117.1 124.3	-284.8 -302.3	-92.4 -98.1	0.00	0.00	0.00
4,300.0	10.90	292.35	4,170.5	131.5	-302.3 -319.8	-103.8	0.00	0.00	0.00
4,400.0	10.90	292.35	4,366.9	138.6	-337.2	-103.6	0.00	0.00	0.00

# NATURAL RESOURCES

### **Planning Report**



Database: EDM 5000.16 Single User Db Company: Avant Operating, LLC Project: Lea Co., NM (NAD 83)
Site: Explorer 15 State Com Pad 2

Explorer 15 State Com 301H

Wellbore: OH
Design: Plan 0.1

Well:

Local Co-ordinate Reference:
TVD Reference:
MD Reference:
North Reference:
Survey Calculation Method:

	FIAIT U. I								
l Survey									
Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Vertical Section (usft)	Dogleg Rate (°/100usft)	Build Rate (°/100usft)	Turn Rate (°/100usft)
4,423.6	10.90	292.35	4,390.0	140.3	-341.4	-110.8	0.00	0.00	0.00
QUEEN									
4,500.0		292.35	4,465.1	145.8	-354.7	-115.1	0.00	0.00	0.00
4,600.0		292.35	4,563.3	153.0	-372.2	-120.8	0.00	0.00	0.00
4,700.0 4,800.0		292.35 292.35	4,661.5 4,759.6	160.2 167.4	-389.7 -407.2	-126.5 -132.1	0.00 0.00	0.00 0.00	0.00 0.00
4,900.0		292.35	4,857.8	174.6	-407.2 -424.7	-132.1	0.00	0.00	0.00
5,000.0 5,041.7		292.35 292.35	4,956.0 4,997.0	181.8 184.8	-442.2 -449.5	-143.5 -145.9	0.00 0.00	0.00 0.00	0.00 0.00
CAPITAN F		202.00	1,007.0	101.0	110.0	110.0	0.00	0.00	0.00
5,100.0		292.35	5,054.2	189.0	-459.7	-149.2	0.00	0.00	0.00
5,200.0		292.35	5,152.4	196.2	-477.1	-154.8	0.00	0.00	0.00
5,300.0	10.90	292.35	5,250.6	203.4	-494.6	-160.5	0.00	0.00	0.00
5,400.0		292.35	5,348.8	210.5	-512.1	-166.2	0.00	0.00	0.00
5,500.0		292.35	5,447.0	217.7	-529.6	-171.9	0.00	0.00	0.00
5,600.0		292.35	5,545.2	224.9	-547.1	-177.5	0.00	0.00	0.00
5,700.0 5,708.7		292.35 292.35	5,643.4 5,652.0	232.1 232.7	-564.6 -566.1	-183.2 -183.7	0.00 0.00	0.00 0.00	0.00
CHERRY C		292.00	3,032.0	202.1	-300.1	-100.7	0.00	0.00	0.00
5,800.0	10.90	292.35	5,741.6	239.3	-582.1	-188.9	0.00	0.00	0.00
5,869.6		292.35	5,810.0	244.3	-594.3	-192.8	0.00	0.00	0.00
BRUSHY C			-,						
5,900.0	10.90	292.35	5,839.8	246.5	-599.6	-194.6	0.00	0.00	0.00
6,000.0	10.90	292.35	5,938.0	253.7	-617.1	-200.2	0.00	0.00	0.00
6,100.0	10.90	292.35	6,036.2	260.9	-634.5	-205.9	0.00	0.00	0.00
6,200.0		292.35	6,134.4	268.1	-652.0	-211.6	0.00	0.00	0.00
6,300.0		292.35	6,232.6	275.2	-669.5	-217.3	0.00	0.00	0.00
6,400.0		292.35	6,330.8	282.4	-687.0	-222.9	0.00	0.00	0.00
6,500.0		292.35	6,429.0	289.6	-704.5	-228.6	0.00	0.00	0.00
6,600.0		292.35	6,527.2	296.8	-722.0	-234.3	0.00	0.00	0.00
6,664.0		292.35	6,590.0	301.4	-733.2	-237.9	0.00	0.00	0.00
Top of BS0 6.700.0		292.35	6,625.4	304.0	-739.5	-240.0	0.00	0.00	0.00
6.800.0		292.35	6,723.6	311.2	-759.5 -757.0	-240.0 -245.6	0.00	0.00	0.00
6,900.0		292.35	6,821.8	318.4	-774.5	-251.3	0.00	0.00	0.00
7,000.0		292.35	6,920.0	325.6	-791.9	-257.0	0.00	0.00	0.00
7,100.0		292.35	7,018.2	332.8	-809.4	-262.7	0.00	0.00	0.00
7,200.0		292.35	7,116.4	340.0	-826.9	-268.3	0.00	0.00	0.00
7,300.0		292.35	7,214.5	347.1	-844.4	-274.0	0.00	0.00	0.00
7,344.6		292.35	7,258.3	350.3	-852.2	-276.5	0.00	0.00	0.00
7,400.0		292.35	7,312.8	354.1	-861.4	-279.5	2.00	-2.00	0.00
7,500.0 7,600.0		292.35	7,411.7	359.9	-875.5	-284.1	2.00	-2.00 -2.00	0.00
7,600.0		292.35 292.35	7,511.0 7,610.6	364.4 367.6	-886.5 -894.2	-287.7 -290.2	2.00 2.00	-2.00 -2.00	0.00 0.00
7,700.0		292.35	7,710.5	369.5	-898.7	-290.2 -291.6	2.00	-2.00 -2.00	0.00
7,889.5		0.00	7,800.0	370.0	-900.0	-292.1	2.00	-2.00	75.56
Start 172.5	hold at 7889.5 MI	)							
7,900.0	0.00	0.00	7,810.5	370.0	-900.0	-292.1	0.00	0.00	0.00
8,000.0		0.00	7,910.5	370.0	-900.0	-292.1	0.00	0.00	0.00
8,062.1		0.00	7,972.5	370.0	-900.0	-292.1	0.00	0.00	0.00
	tart Build 12.00								
8,100.0	4.55	184.55	8,010.4	368.5	-900.1	-290.6	12.00	12.00	0.00





Database: EDM 5000.16 Single User Db Company: Avant Operating, LLC Project: Lea Co., NM (NAD 83)
Site: Explorer 15 State Com Pad 2

Explorer 15 State Com 301H

Wellbore: OH
Design: Plan 0.1

Well:

Local Co-ordinate Reference:
TVD Reference:
MD Reference:
North Reference:
Survey Calculation Method:

gn:	Plan 0.1								
nned Survey									
Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Vertical Section (usft)	Dogleg Rate (°/100usft)	Build Rate (°/100usft)	Turn Rate (°/100usft)
8,200.0	16.55	184.55	8,108.6	350.3	-901.6	-272.3	12.00	12.00	0.00
8,300.0		184.55	8,200.7	312.1	-904.6	-234.0	12.00	12.00	0.00
8,400.0 8,470.6		184.55 184.55	8,282.9 8,333.0	255.7 206.2	-909.1 -913.0	-177.4 -127.7	12.00 12.00	12.00 12.00	0.00 0.00
Explorer 1	5 State Com 301H	FTP							
8,500.0 8,600.0		184.55 184.55	8,351.6 8,403.7	183.4 98.6	-914.8 -921.6	-104.9 -19.8	12.00 12.00	12.00 12.00	0.00 0.00
8,628.1		184.55	8,415.0	72.9	-923.6	6.0	12.00	12.00	0.00
Top of FBS		.000	5,110.0	. 2.0	020.0	0.0	.2.00	.2.00	0.00
8,700.0		184.55	8,436.9	4.7	-929.1	74.4	12.00	12.00	0.00
8,800.0		184.55	8,449.8	-93.9	-936.9	173.3	12.00	12.00	0.00
8,812.1	90.00	184.55	8,450.0	-106.0	-937.9	185.4	12.00	12.00	0.00
LP - Start 1	1.4 hold at 8812.1	MD							
8,813.5		184.55	8,450.0	-107.4	-938.0	186.8	0.00	0.00	0.00
	2.00 TFO -90.00								
8,900.0		182.82	8,450.0	-193.7	-943.6	273.3	2.00	0.00	-2.00
9,000.0		180.82	8,450.0	-293.6	-946.7	373.2	2.00	0.00	-2.00
9,067.4		179.47	8,450.0	-361.0	-946.9	440.3	2.00	0.00	-2.00
	2 hold at 9067.4 N		0.450.0	000.0	040.0	470.6	2.25	2.25	2.22
9,100.0 9,200.0		179.47 179.47	8,450.0 8,450.0	-393.6 -493.6	-946.6 -945.7	472.8 572.3	0.00 0.00	0.00 0.00	0.00 0.00
9,300.0		179.47	8,450.0		-944.8	671.9		0.00	0.00
9,300.0 9,400.0		179.47	8,450.0	-593.6 -693.6	-944.6 -943.9	771.4	0.00 0.00	0.00	0.00
9,500.0		179.47	8,450.0	-793.6	-942.9	871.0	0.00	0.00	0.00
9,600.0		179.47	8,450.0	-893.6	-942.0	970.6	0.00	0.00	0.00
9,700.0		179.47	8,450.0	-993.6	-941.1	1,070.1	0.00	0.00	0.00
9,800.0	90.00	179.47	8,450.0	-1,093.6	-940.2	1,169.7	0.00	0.00	0.00
9,900.0	90.00	179.47	8,450.0	-1,193.6	-939.3	1,269.2	0.00	0.00	0.00
10,000.0	90.00	179.47	8,450.0	-1,293.6	-938.3	1,368.8	0.00	0.00	0.00
10,100.0		179.47	8,450.0	-1,393.6	-937.4	1,468.3	0.00	0.00	0.00
10,200.0	90.00	179.47	8,450.0	-1,493.6	-936.5	1,567.9	0.00	0.00	0.00
10,300.0	90.00	179.47	8,450.0	-1,593.6	-935.6	1,667.4	0.00	0.00	0.00
10,400.0		179.47	8,450.0	-1,693.6	-934.7	1,767.0	0.00	0.00	0.00
10,500.0		179.47	8,450.0	-1,793.6	-933.8	1,866.5	0.00	0.00	0.00
10,600.0		179.47	8,450.0	-1,893.6	-932.8	1,966.1	0.00	0.00	0.00
10,700.0	90.00	179.47	8,450.0	-1,993.6	-931.9	2,065.7	0.00	0.00	0.00
10,800.0		179.47	8,450.0	-2,093.6	-931.0	2,165.2	0.00	0.00	0.00
10,900.0		179.47	8,450.0	-2,193.6	-930.1	2,264.8	0.00	0.00	0.00
11,000.0		179.47	8,450.0	-2,293.6	-929.2	2,364.3	0.00	0.00	0.00
11,100.0		179.47	8,450.0	-2,393.6	-928.2	2,463.9	0.00	0.00	0.00
11,200.0		179.47	8,450.0	-2,493.6	-927.3	2,563.4	0.00	0.00	0.00
11,300.0		179.47	8,450.0	-2,593.5	-926.4	2,663.0	0.00	0.00	0.00
11,400.0		179.47	8,450.0	-2,693.5	-925.5	2,762.5	0.00	0.00	0.00
11,500.0		179.47 170.47	8,450.0	-2,793.5 2,803.5	-924.6	2,862.1 2,961.6	0.00	0.00	0.00
11,600.0 11,700.0		179.47 179.47	8,450.0 8,450.0	-2,893.5 -2,993.5	-923.6 -922.7	3,061.2	0.00 0.00	0.00 0.00	0.00 0.00
11,800.0		179.47	8,450.0	-3.093.5	-921.8	3.160.8	0.00	0.00	0.00
11,900.0		179.47	8,450.0	-3,193.5	-920.9	3,260.3	0.00	0.00	0.00
12,000.0		179.47	8,450.0	-3,293.5	-920.0	3,359.9	0.00	0.00	0.00
12,100.0		179.47	8,450.0	-3,393.5	-919.1	3,459.4	0.00	0.00	0.00
12,200.0		179.47	8,450.0	-3,493.5	-918.1	3,559.0	0.00	0.00	0.00
12,300.0	90.00	179.47	8,450.0	-3,593.5	-917.2	3,658.5	0.00	0.00	0.00
12,400.0		179.47	8,450.0	-3,693.5	-916.3	3,758.1	0.00	0.00	0.00





Database: EDM 5000.16 Single User Db Company: Avant Operating, LLC
Project: Lea Co., NM (NAD 83)
Site: Explorer 15 State Com Pad 2
Well: Explorer 15 State Com 301H

Well: Explorer
Wellbore: OH
Design: Plan 0.1

Local Co-ordinate Reference: TVD Reference: MD Reference: North Reference: Survey Calculation Method:

lanned Survey									
Measured			Vertical			Vertical	Dogleg	Build	Turn
Depth	Inclination	Azimuth	Depth	+N/-S	+E/-W	Section	Rate	Rate	Rate
(usft)			(usft)			(usft)	(°/100usft)	(°/100usft)	(°/100usft)
(usit)	(°)	(°)	(usit)	(usft)	(usft)	(usit)	( / loousit)	( / loousit)	( / loousit)
12,500.0	90.00	179.47	8,450.0	-3,793.5	-915.4	3,857.6	0.00	0.00	0.00
12,600.0	90.00	179.47	8,450.0	-3,893.5	-914.5	3,957.2	0.00	0.00	0.00
12,700.0	90.00	179.47	8,450.0	-3,993.5	-913.5	4,056.8	0.00	0.00	0.00
12,700.0	90.00	179.47	0,430.0	-3,993.5	-913.3	4,030.6	0.00	0.00	0.00
12,800.0	90.00	179.47	8,450.0	-4,093.5	-912.6	4,156.3	0.00	0.00	0.00
12,900.0	90.00	179.47	8,450.0	-4,193.5	-911.7	4,255.9	0.00	0.00	0.00
13,000.0	90.00	179.47	8,450.0	-4,293.5	-910.8	4,355.4	0.00	0.00	0.00
13,100.0	90.00	179.47	8,450.0	-4,393.5	-909.9	4,455.0	0.00	0.00	0.00
13,200.0	90.00	179.47	8,450.0	-4,493.5	-909.0	4,554.5	0.00	0.00	0.00
13,300.0	90.00	179.47	8,450.0	-4,593.5	-908.0	4,654.1	0.00	0.00	0.00
13,400.0	90.00	179.47	8,450.0	-4,693.5	-907.1	4,753.6	0.00	0.00	0.00
13,500.0	90.00	179.47	8,450.0	-4,793.5	-906.2	4,853.2	0.00	0.00	0.00
13,600.0	90.00	179.47	8,450.0	-4,893.5	-905.3	4,952.7	0.00	0.00	0.00
13,700.0	90.00	179.47	8,450.0	-4,993.4	-904.4	5,052.3	0.00	0.00	0.00
40,000.0	00.00	170 17	0.450.0	E 000 4	000.4	E 454 C	0.00	0.00	0.00
13,800.0	90.00	179.47	8,450.0	-5,093.4	-903.4	5,151.9	0.00	0.00	0.00
13,900.0	90.00	179.47	8,450.0	-5,193.4	-902.5	5,251.4	0.00	0.00	0.00
14,000.0	90.00	179.47	8,450.0	-5,293.4	-901.6	5,351.0	0.00	0.00	0.00
14,100.0	90.00	179.47	8,450.0	-5,393.4	-900.7	5,450.5	0.00	0.00	0.00
	90.00	179.47			-899.8	5,550.1		0.00	
14,200.0	90.00	1/9.4/	8,450.0	-5,493.4	-099.0	J,33U. I	0.00	0.00	0.00
14,300.0	90.00	179.47	8,450.0	-5,593.4	-898.8	5.649.6	0.00	0.00	0.00
	90.00	179.47				5,749.2	0.00		
14,400.0			8,450.0	-5,693.4	-897.9			0.00	0.00
14,500.0	90.00	179.47	8,450.0	-5,793.4	-897.0	5,848.7	0.00	0.00	0.00
14,600.0	90.00	179.47	8,450.0	-5,893.4	-896.1	5,948.3	0.00	0.00	0.00
14,700.0	90.00	179.47	8,450.0	-5,993.4	-895.2	6,047.8	0.00	0.00	0.00
1 1,7 00.0	00.00	170.11	0, 100.0	0,000.1	000.2	0,011.0	0.00	0.00	0.00
14,800.0	90.00	179.47	8,450.0	-6,093.4	-894.3	6,147.4	0.00	0.00	0.00
14,900.0	90.00	179.47	8,450.0	-6,193.4	-893.3	6,247.0	0.00	0.00	0.00
15,000.0	90.00	179.47	8,450.0	-6,293.4	-892.4	6,346.5	0.00	0.00	0.00
15,100.0	90.00	179.47	8,450.0	-6,393.4	-891.5	6,446.1	0.00	0.00	0.00
15,200.0	90.00	179.47	8,450.0	-6,493.4	-890.6	6,545.6	0.00	0.00	0.00
45.000.0	00.00	470.47	0.450.0	0.500.4	200 7	0.045.0	0.00	0.00	0.00
15,300.0	90.00	179.47	8,450.0	-6,593.4	-889.7	6,645.2	0.00	0.00	0.00
15,400.0	90.00	179.47	8,450.0	-6,693.4	-888.7	6,744.7	0.00	0.00	0.00
15,500.0	90.00	179.47	8,450.0	-6,793.4	-887.8	6,844.3	0.00	0.00	0.00
15,600.0	90.00	179.47	8,450.0	-6,893.4	-886.9	6,943.8	0.00	0.00	0.00
		179.47							
15,700.0	90.00	1/9.4/	8,450.0	-6,993.4	-886.0	7,043.4	0.00	0.00	0.00
15,800.0	90.00	179.47	8,450.0	-7,093.4	-885.1	7,142.9	0.00	0.00	0.00
15,900.0	90.00	179.47	8,450.0	-7,193.4	-884.2	7,242.5	0.00	0.00	0.00
16,000.0	90.00	179.47	8,450.0	-7,293.3	-883.2	7,342.1	0.00	0.00	0.00
16,100.0	90.00	179.47	8,450.0	-7,393.3	-882.3	7,441.6	0.00	0.00	0.00
16,200.0	90.00	179.47	8,450.0	-7,493.3	-881.4	7,541.2	0.00	0.00	0.00
16,300.0	90.00	179.47	8,450.0	-7,593.3	-880.5	7,640.7	0.00	0.00	0.00
16,400.0	90.00	179.47	8,450.0	-7,693.3	-879.6	7,740.3	0.00	0.00	0.00
16,500.0	90.00	179.47	8,450.0	-7,793.3	-878.6	7,839.8	0.00	0.00	0.00
16,600.0	90.00	179.47	8,450.0	-7,893.3	-877.7	7,939.4	0.00	0.00	0.00
16,700.0	90.00	179.47	8,450.0	-7,993.3	-876.8	8,038.9	0.00	0.00	0.00
40.000.0	00.00	470 47	0.450.0	0.000.0	075.0	0.400.5	0.00	0.00	0.00
16,800.0	90.00	179.47	8,450.0	-8,093.3	-875.9	8,138.5	0.00	0.00	0.00
16,900.0	90.00	179.47	8,450.0	-8,193.3	-875.0	8,238.1	0.00	0.00	0.00
17,000.0	90.00	179.47	8,450.0	-8,293.3	-874.0	8,337.6	0.00	0.00	0.00
17,100.0	90.00	179.47	8,450.0	-8,393.3	-873.1	8,437.2	0.00	0.00	0.00
17,200.0	90.00	179.47	8,450.0	-8,493.3	-872.2	8,536.7	0.00	0.00	0.00
17,300.0	90.00	179.47	8,450.0	-8,593.3	-871.3	8,636.3	0.00	0.00	0.00
17,400.0	90.00	179.47	8,450.0	-8,693.3	-870.4	8,735.8	0.00	0.00	0.00
17,500.0	90.00	179.47	8,450.0	-8,793.3	-869.5	8,835.4	0.00	0.00	0.00
17,600.0	90.00	179.47	8,450.0	-8,893.3	-868.5	8,934.9	0.00	0.00	0.00
17,700.0	90.00	179.47	8,450.0	-8,993.3	-867.6	9,034.5	0.00	0.00	0.00
17,700.0	50.00	113.41	0,400.0	-0,333.3	-001.0	3,004.0	0.00	0.00	0.00
17,800.0	90.00	179.47	8,450.0	-9,093.3	-866.7	9,134.0	0.00	0.00	0.00

# NATURAL RESOURCES

### **Planning Report**



Database: EDM 5000.16 Single User Db Company: Avant Operating, LLC
Project: Lea Co., NM (NAD 83)
Site: Explorer 15 State Com Pad 2
Well: Explorer 15 State Com 301H

Wellbore: OH
Design: Plan 0.1

Local Co-ordinate Reference: TVD Reference: MD Reference:

Survey Calculation Method:

North Reference:

Well Explorer 15 State Com 301H WELL @ 4044.5usft (4044.5) WELL @ 4044.5usft (4044.5)

Minimum Curvature

Planned Survey												
Measured Depth (usft)	Inclination Azimuth D		Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Vertical Section (usft)	Dogleg Rate (°/100usft)	Build Rate (°/100usft)	Turn Rate (°/100usft)			
17,900.0	90.00	179.47	8,450.0	-9,193.3	-865.8	9,233.6	0.00	0.00	0.00			
18,000.0	90.00	179.47	8,450.0	-9,293.3	-864.9	9,333.2	0.00	0.00	0.00			
18,100.0	90.00	179.47	8,450.0	-9,393.3	-863.9	9,432.7	0.00	0.00	0.00			
18,200.0	90.00	179.47	8,450.0	-9,493.3	-863.0	9,532.3	0.00	0.00	0.00			
18,300.0	90.00	179.47	8,450.0	-9,593.3	-862.1	9,631.8	0.00	0.00	0.00			
18,400.0	90.00	179.47	8,450.0	-9,693.2	-861.2	9,731.4	0.00	0.00	0.00			
18,500.0	90.00	179.47	8,450.0	-9,793.2	-860.3	9,830.9	0.00	0.00	0.00			
18,600.0	90.00	179.47	8,450.0	-9,893.2	-859.3	9,930.5	0.00	0.00	0.00			
18,700.0	90.00	179.47	8,450.0	-9,993.2	-858.4	10,030.0	0.00	0.00	0.00			
18,750.5	90.00	179.47	8,450.0	-10,043.8	-858.0	10,080.4	0.00	0.00	0.00			
TD at 18750.	5 - Explorer 15 S	State Com 301H	LTP/BHL									

Design Targets									
Target Name - hit/miss target - Shape	Dip Angle (°)	Dip Dir. (°)	TVD (usft)	+N/-S (usft)	+E/-W (usft)	Northing (usft)	Easting (usft)	Latitude	Longitude
Explorer 15 State Com 3 - plan hits target cent - Point	0.00 er	0.00	8,450.0	-10,043.8	-858.0	628,842.86	783,114.65	32.7262630°N	103.5471270°W
Explorer 15 State Com 3 - plan misses target of Point	0.00 center by 168	0.00 9usft at 8470	8,450.0 0.6usft MD (	320.7 8333.0 TVD, 2	-954.6 206.2 N, -913.0	639,207.37 D E)	783,018.05	32.7547510°N	103.5471910°W

ormations						
	Measured Depth (usft)	Vertical Depth (usft)	Name	Lithology	Dip (°)	Dip Direction (°)
	1,780.0	1,780.0	RUSTLER			
	1,890.0	1,890.0	SALT			
	3,675.1	3,655.0	SEVEN RIVERS			
	4,423.6	4,390.0	QUEEN			
	5,041.7	4,997.0	CAPITAN REEF			
	5,708.7	5,652.0	CHERRY CANYON			
	5,869.6	5,810.0	BRUSHY CANYON			
	6,664.0	6,590.0	Top of BSGL			
	8,628.1	8,415.0	Top of FBSG SD			





Database: EDM 5000.16 Single User Db Company: Avant Operating, LLC
Project: Lea Co., NM (NAD 83)
Site: Explorer 15 State Com Pad 2
Well: Explorer 15 State Com 301H

Wellbore: OH
Design: Plan 0.1

Local Co-ordinate Reference: TVD Reference: MD Reference: North Reference:

**Survey Calculation Method:** 

Plan Annotations				
Measured Depth (usft)	Vertical Depth (usft)	Local Coor +N/-S (usft)	dinates +E/-W (usft)	Comment
2,200.0	2,200.0	0.0	0.0	KOP - Start Build 2.00
2.745.0	,	19.7	-47.8	Start 4599.6 hold at 2745.0 MD
7,344.6	7,258.3	350.3	-852.2	Start Drop -2.00
7,889.5	7,800.0	370.0	-900.0	Start 172.5 hold at 7889.5 MD
8,062.1	7,972.5	370.0	-900.0	KOP #2 - Start Build 12.00
8,812.1	8,450.0	-106.0	-937.9	LP - Start 1.4 hold at 8812.1 MD
8,813.5	8,450.0	-107.4	-938.0	Start DLS 2.00 TFO -90.00
9,067.4	8,450.0	-361.0	-946.9	Start 9683.2 hold at 9067.4 MD
18,750.5	8,450.0	-10,043.8	-858.0	TD at 18750.5

Inten <sup>-</sup>	t	As Dril	led									
API#												
Ope	rator Nai	me:			Property N		Well Number					
Kick C	Off Point	(KOP)										
UL	Section	Township	Range	Lot	Feet	From N	1/S	Feet	Fro	om E/W	County	
Latitu	ıde				Longitu	ıde					NAD	
UL	Section	t (FTP)	Range	Lot	t Feet From N/S Feet From E/W County						County	
Latitu	ıde				Longitu	ıde					NAD	
Last T UL Latitu												
					Longitu					NAD		
s this	well the	defining v	vell for th	ie Hori	zontal Տլ	pacing Unit?			]			
s this	well an	infill well?										
	l is yes p ng Unit.	lease provi	de API if	availal	ole, Ope	rator Name	and v	vell nu	umber fo	r Defini	ng well fo	or Horizontal
API#												
Ope	rator Nai	ne:	ı			Property N	lame					Well Number

KZ 06/29/2018