

U.S. Department of the Interior
BUREAU OF LAND MANAGEMENT

02/06/2024

Well Name: PEERY FEDERAL

Well Location: T15S / R30E / SEC 29 /
NESE / 32.986062 / -103.939814County or Parish/State:
CHAVES / NM

Well Number: 7H

Type of Well: OIL WELL

Allottee or Tribe Name:

Lease Number: NMNM119274

Unit or CA Name:

Unit or CA Number:

US Well Number: 300052907500S1

Well Status: Producing Oil Well

Operator: MACK ENERGY
CORPORATION

Accepted for record -NMOCD gc2/8/2024

Notice of Intent

Sundry ID: 2767138

Type of Submission: Notice of Intent

Type of Action: Plug and Abandonment

Date Sundry Submitted: 12/21/2023

Time Sundry Submitted: 11:22

Date proposed operation will begin: 01/03/2024

Procedure Description: 1. Set 4 1/2" CIBP @ 9004'. Circ hole w/ MLF. Pressure test csg. Spot 25 sx class H cmt @ 9004-8704'. WOC & Tag (5 1/2" shoe) 2. Spot 25 sx cmt @ 7985-7700'. WOC & Tag (Top of 4 1/2" liner) 3. Spot 25 sx cmt @ 6585-6420'. (Abo) 4. Spot 25 sx cmt @ 4570-4420'. (Glorieta) 5. Spot 60 sx cmt @ @ 1540-1000'. (Yates) 6. Perf & Sqz 140 sx cmt @ 670' to surface. 7. Cut off well head, verify cmt at surface, weld on Dry Hole Marker.

Surface Disturbance

Is any additional surface disturbance proposed?: No

NOI Attachments

Procedure Description

Peery_Federal_7___Proposed_NOI_20231221112127.pdf

Peery_Federal_7___Proposed_WBD_20231221112127.pdf

Peery_Federal_7___Current_WBD_20231221112127.pdf

Well Number: 7H

Type of Well: OIL WELL

Allottee or Tribe Name:

Lease Number: NMNM119274

Unit or CA Name:

Unit or CA Number:

US Well Number: 300052907500S1

Well Status: Producing Oil Well

Operator: MACK ENERGY
CORPORATION**Conditions of Approval****Specialist Review**

Conditions_of_Approval_20240130114531.pdf

General_Conditions_of_Approval_20240130114531.pdf

Operator

I certify that the foregoing is true and correct. Title 18 U.S.C. Section 1001 and Title 43 U.S.C. Section 1212, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction. Electronic submission of Sundry Notices through this system satisfies regulations requiring a

Operator Electronic Signature: DELILAH FLORES

Signed on: DEC 21, 2023 11:21 AM

Name: MACK ENERGY CORPORATION

Title: Regulatory Technician 1

Street Address: 11344 LOVINGTON HWY

City: ARTESIA

State: NM

Phone: (575) 748-1288

Email address: DELILAH@MEC.COM

Field

Representative Name:

Street Address:

City:

State:

Zip:

Phone:

Email address:

BLM Point of Contact

BLM POC Name: JENNIFER SANCHEZ

BLM POC Title: Petroleum Engineer

BLM POC Phone: 5756270237

BLM POC Email Address: j1sanchez@blm.gov

Disposition Date: 01/30/2024

**Peery Federal 7H
30-005-29075
Mack Energy Corporation
January 30, 2024
Conditions of Approval**

1. Operator shall place CIBP at 9,004' and place 25 sx of Class H cement on top as proposed. WOC and TAG.
2. Operator shall place a Class H cement plug from 7,985'-7,700' to seal the Wolfcamp Formation and top of 4-1/2" liner.
3. Operator shall place a Class C cement plug from 6,585'-6,420' to seal the Abo Glorietta Formation.
4. Operator shall place a Class C cement plug from 4,570'-4,420' to seal the Glorietta Formation.
5. Operator shall place a Class C cement plug from 2,957'-2,827' to seal the San Andres Formation.
6. Operator shall place a Class C cement plug from 2,679'-2,553' to seal the Grayburg Formation
7. Operator shall place a Class C cement plug from 2,288'-2,166' to seal the Queen Formation
8. Operator shall place a Class C cement plug from 1,540'-1,000' to seal the Yates Formation.
9. Operator shall perf at 640' and squeeze class C cement to the surface to seal the Salt Formation and the 9-5/8" shoe.
10. Dry hole marker must be below ground.
11. Surface reclamation will need to be completed once the well bore has been plugged. Please contact rflores@blm.gov for additional information.
12. See Attached for general plugging stipulations.

JAM 01302024

BUREAU OF LAND MANAGEMENT
Roswell Field Office
2909 W. Second Street
Roswell, New Mexico 88201
575-627-0272

General Requirements for Plug Backs

Failure to comply with the following Conditions of Approval may result in a Notice of Incidents of Noncompliance (INC) in accordance with 43 CFR 3163.1.

1. Plugging operations shall commence within **ninety (90)** days from this approval.

If you are unable to plug back the well by the 90th day provide this office, prior to the 90th day, with the reason for not meeting the deadline and a date when we can expect the well to be plugged back. Failure to do so will result in enforcement action.

2. **Notification:** Contact the appropriate BLM office at least 24 hours prior to the commencing of any plug back operations. Call 575-627-0205.

3. **Blowout Preventers:** A blowout preventer (BOP), as appropriate, shall be installed before commencing any plugging operation. The BOP must be installed and maintained as per API and manufacturer recommendations. The minimum BOP requirement is a 2M system for a well not deeper than 9,090 feet; a 3M system for a well not deeper than 13,636 feet; and a 5M system for a well not deeper than 22,727 feet.

4. **Mud Requirement:** Mud shall be placed between all plugs. Minimum consistency of plugging mud shall be obtained by mixing at the rate of 25 sacks (50 pounds each) of gel per 100 barrels of brine water. Minimum nine (9) pounds per gallon.

5. **Cement Requirement:** Sufficient cement shall be used to bring any required plug to the specified depth and length. Any given cement volumes on the proposed plugging procedure are merely estimates and are not final. Unless specific approval is received, no plug except the surface plug shall be less than 25 sacks of cement. Any plug that requires a tag will have a minimum WOC time of 4 hours.

In lieu of a cement plug across perforations in a cased hole (not for any other plugs), a bridge plug set within 50 feet to 100 feet above the perforations shall be capped with 25 sacks of cement. **Before pumping cement on top of CIBP, tag will be required to verify depth. Based on depth, a tag of the cement may be deemed necessary.**

Unless otherwise specified in the approved procedure, the cement plug shall consist of either **Neat Class "C"**, for up to 7,500 feet of depth or **Neat Class "H"**, for deeper than 7,500 feet plugs.


6. **Subsequent Plug back Reporting:** Within 30 days after plug back work is completed, file one original and three copies of the Subsequent Report, Form 3160-5 to BLM. The report should give in detail the manner in which the plug back work was carried out, the extent (by depths) of cement plugs placed, and the size and location (by depths) of casing left in the well. **Show date work was completed.**

7. **Trash:** All trash, junk and other waste material shall be contained in trash cages or bins to prevent scattering and will be removed and deposited in an approved sanitary landfill. Burial on site is not permitted.

Mack Energy		CURRENT	
Author:	Abby @ BCM		
Well Name	Peery Federal	Well No.	#7
	Little Lucky Lake;		
Field/Pool	Wolfcamp	API #:	30-005-29075
County	Chaves	Location:	Sec 29, T15S, R30E
State	NM		2285 FSL & 330 FEL
Spud Date	2/7/2009	GL:	3974

Description	O.D.	Grade	Weight	Depth	Hole	Cmt Sx	TOC
Surface Csg	9 5/8	J55	36#	485	14 3/4	490	0
Prod Csg	5 1/2	P110	17#	8,954	6 1/8	1,725	0
Prod Csg	4 1/2	P110	11.6#	9,500	6 1/8	Open hole Pkrs	0

Formation Tops	
Rust	500
Tansil	1334
Yates	1484
7 Rvs	1732
	2022
	2104
Queen	2238
Grbg	2629
San Andres	2907
Glorieta	4518
Yeso	4586
Tubb	5708
Lower Yeso	5972
Abo	6494
Wolfcamp	7898

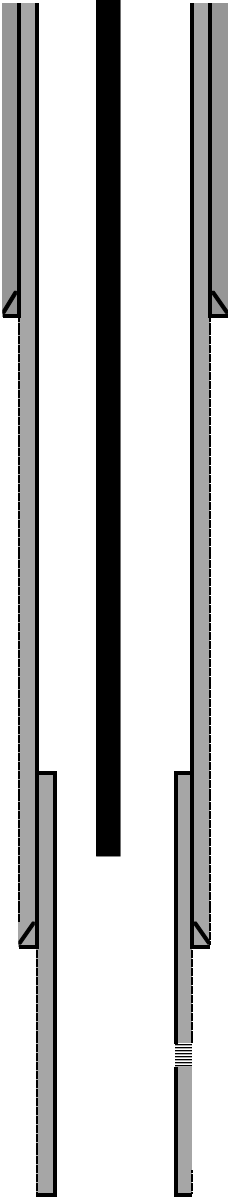

9 5/8 36# CSG @ 485
Hole Size: 14 3/4

Ported collar @ 7935'

2 7/8" tbg @ 8086'

5 1/2 17# CSG @ 8,954
Hole Size: 6 1/8

Perfs @ 9054-9500'


4 1/2 11.6# Liner @ 9,500
Hole Size: 6 1/8

TVD @ 9563'

32.9860687
-103.9398117

Mack Energy		PROPOSED	
Author:	Abby @ BCM	Well No.	#7
Well Name	Peery Federal		
	Little Lucky Lake;		
Field/Pool	Wolfcamp	API #:	30-005-29075
County	Chaves	Location:	Sec 29, T15S, R30E
State	NM		2285 FSL & 330 FEL
Spud Date	2/7/2009	GL:	3974

Description	O.D.	Grade	Weight	Depth	Hole	Cmt Sx	TOC
Surface Csg	9 5/8	J55	36#	485	14 3/4	490	0
Prod Csg	5 1/2	P110	17#	8,954	6 1/8	1,725	0
Prod Csg	4 1/2	P110	11.6#	7935-9500	6 1/8	Open hole Pkrs	0
Formation Tops							
Rust							500
Tansil							1334
Yates							1484
7 Rvs							1732
							2022
							2104
Queen							2238
Grbg							2629
San Andres							2907
Glorieta							4518
Yeso							4586
Tubb							5708
Lower Yeso							5972
Abo							6494
Wolfcamp							7898

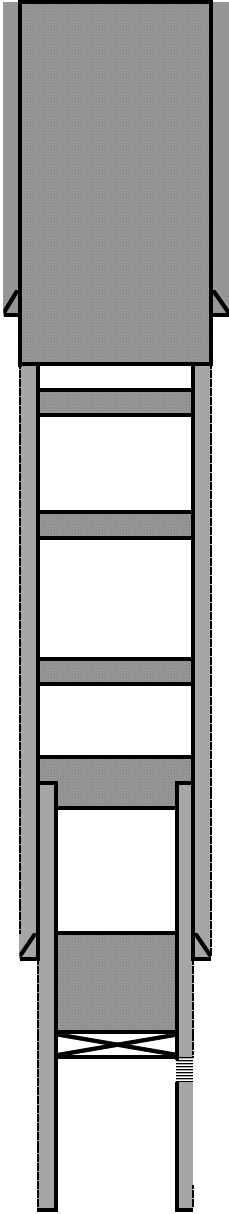

9 5/8 36# CSG @ 485
Hole Size: 14 3/4

6. Perf & Sqz 140 sx cmt @ 670' to surface.

5. Spot 60 sx cmt @ @ 1540-1000'. (Yates)

4. Spot 25 sx cmt @ 4570-4420'. (Glorieta)

3. Spot 25 sx cmt @ 6585-6420'. (Abo)

Ported collar @ 7935'

2. Spot 25 sx cmt @ 7985-7700'. WOC & Tag (Top of 4 1/2" liner)

5 1/2 17# CSG @ 8,954
Hole Size: 6 1/8

1. Set 4 1/2" CIBP @ 9004'. Circ hole w/ MLF. Pressure test csg. Spot 25 sx class H cmt @ 9004-8704'. WOC & Tag (5 1/2" shoe)
Perfs @ 9054-9500'

4 1/2 11.6# Liner @ 7935-9500
Hole Size: 6 1/8

32.9860687
-103.9398117

TVD @ 9563'

District I
1625 N. French Dr., Hobbs, NM 88240
Phone:(575) 393-6161 Fax:(575) 393-0720
District II
811 S. First St., Artesia, NM 88210
Phone:(575) 748-1283 Fax:(575) 748-9720
District III
1000 Rio Brazos Rd., Aztec, NM 87410
Phone:(505) 334-6178 Fax:(505) 334-6170
District IV
1220 S. St Francis Dr., Santa Fe, NM 87505
Phone:(505) 476-3470 Fax:(505) 476-3462

State of New Mexico
Energy, Minerals and Natural Resources
Oil Conservation Division
1220 S. St Francis Dr.
Santa Fe, NM 87505

CONDITIONS

Action 311972

CONDITIONS

Operator: MACK ENERGY CORP P.O. Box 960 Artesia, NM 882110960	OGRID: 13837
	Action Number: 311972
	Action Type: [C-103] NOI Plug & Abandon (C-103F)

CONDITIONS

Created By	Condition	Condition Date
gcordero	None	2/8/2024