

U.S. Department of the Interior BUREAU OF LAND MANAGEMENT

Sundry Print Report 02/05/2024

Well Name: COTTONMOUTH 24

FEDERAL COM

Well Location: T26S / R28E / SEC 24 /

SWSW / 32.0212123 / -104.0472033

County or Parish/State: EDDY /

NM

Well Number: 1H

Type of Well: OIL WELL

Allottee or Tribe Name:

Lease Number: NMNM12559

Unit or CA Name: COTTONMOUTH 24

Unit or CA Number:

FED COM

NMNM134285

US Well Number: 3001538507

Well Status: Producing Oil Well

Operator: COG PRODUCTION

LLC

Accepted for record -NMOCD gc2/8/2024

LONG VO Digitally signed by LONG VO Date: 2024.02.05 16:45:48 -06'00'

Notice of Intent

Sundry ID: 2760335

Type of Submission: Notice of Intent

Type of Action: Plug and Abandonment

Date Sundry Submitted: 11/07/2023

Time Sundry Submitted: 02:01

Date proposed operation will begin: 12/20/2023

Procedure Description: 1. Set 5.5" CIBP @ 5729' cap w/ 20 sxs cmt on top WOC & Tag. 2. Spot 20 sxs @ 4000'-3900'. 3. Spot 35 sxs @ 2690'-2390' WOC & Tag. 4. Spot 20 sxs @ 950'-850' WOC & Tag. 5. Perf & Sqz 65 sxs @ 534'-376' WOC & Tag. 6. Spot 10 sxs from 30'-surface. 7. Cut off well head, verify cmt @ surface weld on Dry Hole Marker.

Surface Disturbance

and

Is any additional surface disturbance proposed?: No

and Special Stipulations Attached

Approval Subject to General Requirements

NOI Attachments

Procedure Description

Cottonmouth_24_Fed_1H_Proposed_WBD_20231107140050.pdf

 $Cottonmouth_24_Fed_1H_Current_WBD_20231107135945.pdf$

Received by OCD: WGN202168 39743 MM UTH 24

Well Number: 1H

Wer/2024-8 49743 MM UTH 24 FEDERAL COM S

Well Location: T26S / R28E / SEC 24 / SWSW / 32.0212123 / -104.0472033

County or Parish/State: EDDY / NM

Type of Well: OIL WELL

Allottee or Tribe Name:

Page 2 of 16

Lease Number: NMNM12559

Unit or CA Name: COTTONMOUTH 24 FED COM

Unit or CA Number:

NMNM134285

US Well Number: 3001538507

Well Status: Producing Oil Well

Operator: COG PRODUCTION

LLC

Operator

I certify that the foregoing is true and correct. Title 18 U.S.C. Section 1001 and Title 43 U.S.C. Section 1212, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction. Electronic submission of Sundry Notices through this system satisfies regulations requiring a

Operator Electronic Signature: RUTH SHOCKENCY Signed on: NOV 07, 2023 02:01 PM

Name: COG PRODUCTION LLC

Title: Regulatory Analyst

Street Address: 600 W. ILLINOIS AVE.

City: MIDLAND State: TX

Phone: (575) 703-8321

Email address: RUTH.SHOCKENCY@CONOCOPHILLIPS.COM

Field

Representative Name:

Street Address:

City: State: Zip:

Phone:

Email address:

PLUG AND ABANDONMENT CONDITIONS OF APPROVAL

OPERATOR'S NAME:	COG Production LLC
LEASE NO.:	NMNM12559
WELL NAME & NO.:	Cottonmouth 24 Federal Com 1H
US Well Number:	3001538507
LOCATION:	Section 24, T.26 S., R.28 E., NMPM
COUNTY:	Eddy County, New Mexico
Sundry ID:	2760335
Karst:	□Low ⊠Medium □High □Critical
Potash:	□Secretary □R111P
Special Area:	□Prairie Chicken □Capitan Reef

- 1) Set 5.5 CIBP @ 5729' cap w/ 25 sxs Class C cmt on top. WOC and Tag at 5477'.
- 2) Spot 32 sxs @ 2690' to 2374'. WOC and Tag.
- 3) Perf and squeeze at 900' and squeeze from 900' to surface. Spot cement from 950' to surface. (94 sxs In/184 sxs Out) Verify at surface.
- 7) ND BOP and cut off wellhead 5' below surface. RDMO PU, transport trucks, and pump truck.
- 8) Set P&A marker.

Approval Subject to General Requirements and Special Stipulations Attached

- No more than 3000 feet between cement plugs in cased hole.
- Wait on Cement and Tag Top of Cement Requirement:
 - 1. Shoe, Top of Salt, Base of Salt, DV tool, Perforate and Squeeze, Open Perforation.
 - 2. Formation plug is optional if a solid base is established and confirmed.

Form 3160-5 (June 2019)

UNITED STATES DEPARTMENT OF THE INTERIOR

FORM APPROVED
OMB No. 1004-0137
Expires: October 31, 202

BUREAU OF LAND MANAGEMENT	
BUKEAU OF LAND MANAGEMENT	
DV NOTICES AND DEDODES ON WELLS	

5. Lease Serial No. NMNM12559

Do not use this	NOTICES AND REP form for proposals Use Form 3160-3 (A	6. If Indian, Allottee or	Tribe Name		
SUBMIT IN	TRIPLICATE - Other inst	tructions on page 2	7. If Unit of CA/Agreen	nent, Name and/or No. FED COM/NMNM134285	
1. Type of Well					
Oil Well Gas			8. Well Name and No.	COTTONMOUTH 24 FEDERAL CO	
2. Name of Operator COG PRODUC	TION LLC		9. API Well No. 30015	38507	
3a. Address 2208 West Main Street	t, Artesia, NM 88210		10. Field and Pool or Exploratory Area Three Rivers/TECOLOTE PEAK		
4. Location of Well (Footage, Sec., T., SEC 24/T26S/R28E/NMP	R.,M., or Survey Description	n)	11. Country or Parish, S EDDY/NM	State	
12. CHI	ECK THE APPROPRIATE	BOX(ES) TO INDICATE NATURE (OF NOTICE, REPORT OR OTH	ER DATA	
TYPE OF SUBMISSION		TYPI	E OF ACTION		
Notice of Intent	Acidize Alter Casing	Deepen Hydraulic Fracturing	Production (Start/Resume) Reclamation	Water Shut-Off Well Integrity	
Subsequent Report	Casing Repair Change Plans	New Construction Plug and Abandon	Recomplete Temporarily Abandon	Other	
Final Abandonment Notice	Convert to Injectio	on Plug Back	Water Disposal		
the Bond under which the work we completion of the involved operation	ally or recomplete horizonta ill be perfonned or provide t ions. If the operation results	ally, give subsurface locations and me the Bond No. on file with BLM/BIA. in a multiple completion or recomple	easured and true vertical depths of Required subsequent reports mus- tion in a new interval, a Form 310	all pertinent markers and zones. Attach	
1. Set 5.5 CIBP @ 5729 cap	w/ 20 sxs cmt on top WO	C & Tag.			
2. Spot 20 sxs @ 4000-3900.					
3. Spot 35 sxs @ 2690-2390	WOC & Tag.	Approval	Subject to General Ro	aquirements	
4. Spot 20 sxs @ 950-850 W	OC & Tag.	Approvai	Subject to deficial in	equilentes	
5. Perf & Sqz 65 sxs @ 534-3	376 WOC & Tag.	and Spec	ial Stipulations Attach	ned	
6. Spot 10 sxs from 30-surfac	e.	and spee	nai Scipalations Attaci	ica	
7. Cut off well head, verify cm	t @ surface weld on Dry	Hole Marker.			

14. I hereby certify that the foregoing is true and correct. Name (<i>Printed/Typed</i>) RUTH SHOCKENCY / Ph: (575) 703-8321	Regulatory Ana	alyst		
(Electronic Submission)	Date	11/07/2	2023	
THE SPACE FOR FEDE	RAL OR STATE	OFICE USE		
Approved by				
	Title		Date	
Conditions of approval, if any, are attached. Approval of this notice does not warrant certify that the applicant holds legal or equitable title to those rights in the subject lear which would entitle the applicant to conduct operations thereon.				
Title 18 U.S.C Section 1001 and Title 43 U.S.C Section 1212, make it a crime for an any false, fictitious or fraudulent statements or representations as to any matter within		d willfully to make to any d	lepartment or agency of the United Sta	tes

(Instructions on page 2)

GENERAL INSTRUCTIONS

This form is designed for submitting proposals to perform certain well operations and reports of such operations when completed as indicated on Federal and Indian lands pursuant to applicable Federal law and regulations. Any necessary special instructions concerning the use of this form and the number of copies to be submitted, particularly with regard to local area or regional procedures and practices, are either shown below, will be issued by or may be obtained from the local Federal office.

SPECIFIC INSTRUCTIONS

Item 4 - Locations on Federal or Indian land should be described in accordance with Federal requirements. Consult the local Federal office for specific instructions.

Item 13: Proposals to abandon a well and subsequent reports of abandonment should include such special information as is required by the local Federal office. In addition, such proposals and reports should include reasons for the abandonment; data on any former or present productive zones or other zones with present significant fluid contents not sealed off by cement or otherwise; depths (top and bottom) and method of placement of cement plugs; mud or other material placed below, between and above plugs; amount, size, method of parting of any casing, liner or tubing pulled and the depth to the top of any tubing left in the hole; method of closing top of well and date well site conditioned for final inspection looking for approval of the abandonment. If the proposal will involve **hydraulic fracturing operations**, you must comply with 43 CFR 3162.3-3, including providing information about the protection of usable water. Operators should provide the best available information about all formations containing water and their depths. This information could include data and interpretation of resistivity logs run on nearby wells. Information may also be obtained from state or tribal regulatory agencies and from local BLM offices.

NOTICES

The privacy Act of 1974 and the regulation in 43 CFR 2.48(d) provide that you be furnished the following information in connection with information required by this application.

AUTHORITY: 30 U.S.C. 181 et seq., 351 et seq., 25 U.S.C. 396; 43 CFR 3160.

PRINCIPAL PURPOSE: The information is used to: (1) Evaluate, when appropriate, approve applications, and report completion of subsequent well operations, on a Federal or Indian lease; and (2) document for administrative use, information for the management, disposal and use of National Resource lands and resources, such as: (a) evaluating the equipment and procedures to be used during a proposed subsequent well operation and reviewing the completed well operations for compliance with the approved plan; (b) requesting and granting approval to perform those actions covered by 43 CFR 3162.3-2, 3162.3-3, and 3162.3-4; (c) reporting the beginning or resumption of production, as required by 43 CFR 3162.4-1(c)and (d) analyzing future applications to drill or modify operations in light of data obtained and methods used.

ROUTINE USES: Information from the record and/or the record will be transferred to appropriate Federal, State, local or foreign agencies, when relevant to civil, criminal or regulatory investigations or prosecutions in connection with congressional inquiries or to consumer reporting agencies to facilitate collection of debts owed the Government.

EFFECT OF NOT PROVIDING THE INFORMATION: Filing of this notice and report and disclosure of the information is mandatory for those subsequent well operations specified in 43 CFR 3162.3-2, 3162.3-4.

The Paperwork Reduction Act of 1995 requires us to inform you that:

The BLM collects this information to evaluate proposed and/or completed subsequent well operations on Federal or Indian oil and gas leases.

Response to this request is mandatory.

The BLM would like you to know that you do not have to respond to this or any other Federal agency-sponsored information collection unless it displays a currently valid OMB control number.

BURDEN HOURS STATEMENT: Public reporting burden for this form is estimated to average 8 hours per response, including the time for reviewing instructions, gathering and maintaining data, and completing and reviewing the form. Direct comments regarding the burden estimate or any other aspect of this form to U.S. Department of the Interior, Bureau of Land Management (1004-0137), Bureau Information Collection Clearance Officer (WO-630), 1849 C St., N.W., Mail Stop 401 LS, Washington, D.C. 20240


Additional Information

Location of Well

 $0. \ SHL: \ SWSW \ / \ 105 \ FSL \ / \ 745 \ FWL \ / \ TWSP: \ 26S \ / \ RANGE: \ 28E \ / \ SECTION: \ 24 \ / \ LAT: \ 0.0 \ / \ LONG: \ 0.0 \ (\ TVD: \ 0 \ feet, \ MD: \ 0 \ feet \)$ BHL: \ \ NWNW \ / \ 340 \ FNL \ / \ 760 \ FWL \ / \ TWSP: \ 26S \ / \ RANGE: \ 28E \ / \ SECTION: \ 24 \ / \ LAT: \ 0.0 \ / \ LONG: \ 0.0 \ (\ TVD: \ 0 \ feet, \ MD: \ 0 \ feet \)

Author:	Leo Gallegos		
Well Name	Cottonmouth 24 Fed	Well No.	1H
Field/Zone	Tecolote Peak BS	API#:	30-015-38507
County	Eddy	Location	105' FSL & 745' FWL
State	NM		Section: 24, T26S, R28E
Spud Date	12/11/2013	GL:	2,961

Description	O.D.	Grade	Weight	Depth	Hole	Cmt Sx	TOC
Surface Csg	13.375	H40	48	484	17 1/2	825	surf
Inter Csg	9.625	J55	36	2,570	12 1/4	875	surf
Prod Csg	5.5	P110	17	11,018	7 7/8	1,750	910' by CBL

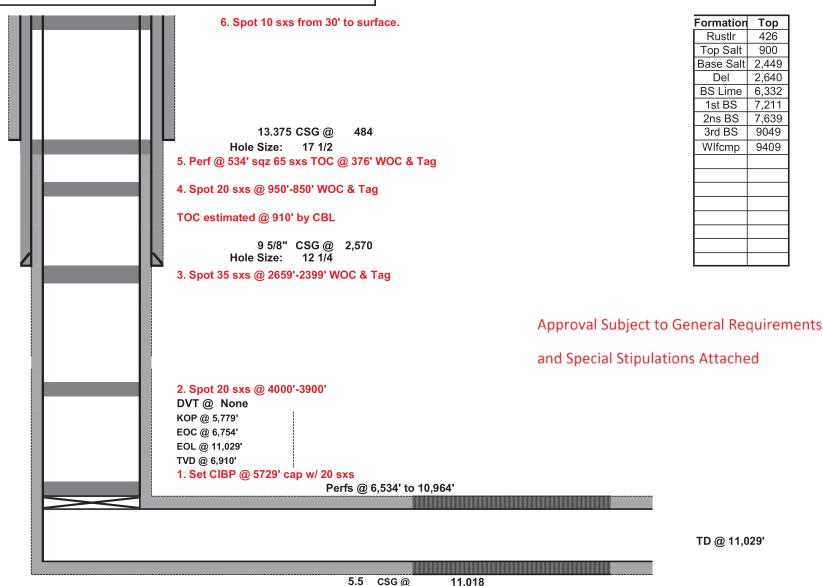


Hole Size:

7.875

Author:	Leo Gallegos		
Well Name	Cottonmouth 24 Fed	Well No.	1H
Field/Zone	Tecolote Peak BS	API#:	30-015-38507
County	Eddy	Location	105' FSL & 745' FWL
State	NM		Section: 24, T26S, R28E
Spud Date	12/11/2013	GL:	2,961

Description	O.D.	Grade	Weight	Depth	Hole	Cmt Sx	TOC
Surface Csg	13.375	H40	48	484	17 1/2	825	surf
Inter Csg	9.625	J55	36	2,570	12 1/4	875	surf
Prod Csg	5.5	P110	17	11,018	7 7/8	1,750	910' by CBL

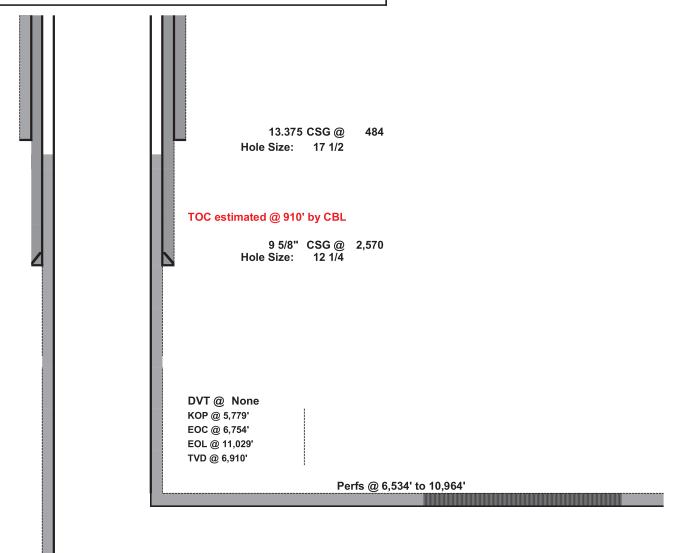

ormation	Тор
Rustlr	426
Top Salt	900
Base Salt	2,449
Del	2,640
BS Lime	6,332
1st BS	7,211
2ns BS	7,639
3rd BS	9049
Wlfcmp	9409

TD @ 11,029'

5.5 CSG @ 11,018 Hole Size: 7.875

BUREAU OF LAND MANAGEMENT Carlsbad Field Office 620 East Greene Street Carlsbad, New Mexico 88220 575-234-5972

Permanent Abandonment of Federal Wells Conditions of Approval

Failure to comply with the following Conditions of Approval may result in a Notice of Incidents of Noncompliance (INC) in accordance with 43 CFR 3163.1.

1. Plugging operations shall commence within <u>ninety (90)</u> days from the approval date of this Notice of Intent to Abandon.

If you are unable to plug the well by the 90th day provide this office, prior to the 90th day, with the reason for not meeting the deadline and a date when we can expect the well to be plugged. Failure to do so will result in enforcement action.

The rig used for the plugging procedure cannot be released and moved off without the prior approval of the authorized officer. Failure to do so may result in enforcement action.

- 2. <u>Notification:</u> Contact the appropriate BLM office at least 24 hours prior to the commencing of any plugging operations. For wells in Chaves and Roosevelt County, call 575-627-0272; Eddy County, call 575-361-2822; Lea County, call 575-689-5981.
- 3. <u>Blowout Preventers</u>: A blowout preventer (BOP), as appropriate, shall be installed before commencing any plugging operation. The BOP must be installed and maintained as per API and manufacturer recommendations. The minimum BOP requirement is a 2M system for a well not deeper than 9,090 feet; a 3M system for a well not deeper than 13,636 feet; and a 5M system for a well not deeper than 22,727 feet.
- 4. <u>Mud Requirement:</u> Mud shall be placed between all plugs. Minimum consistency of plugging mud shall be obtained by mixing at the rate of 25 sacks (50 pounds each) of gel per 100 barrels of **brine** water. Minimum nine (9) pounds per gallon.
- 5. <u>Cement Requirement</u>: Sufficient cement shall be used to bring any required plug to the specified depth and length. Any given cement volumes on the proposed plugging procedure are merely estimates and are not final. Unless specific approval is received, no plug except the surface plug shall be less than 25 sacks of cement. Any plug that requires a tag will have a minimum WOC time of 4 hours. Tagging the plug means running in the hole with a string of tubing or drill pipe and placing sufficient weight on the plug to ensure its integrity. Other methods of tagging the plug may be approved by the BLM authorized officer or BLM field representative.

In lieu of a cement plug across perforations in a cased hole (not for any other plugs), a bridge plug set within 50 feet to 100 feet above the perforations shall be capped with 25 sacks of cement. If a bailer is used to cap this plug, 35 feet of cement shall be sufficient. **Before pumping or bailing cement on top of CIBP, tag will be required to verify depth. Based on depth, a tag of the cement may be deemed necessary.**

Unless otherwise specified in the approved procedure, the cement plug shall consist of either Neat Class "C", for up to 7,500 feet of depth or Neat Class "H", for deeper than 7,500 feet plugs.

6. <u>Dry Hole Marker</u>: All casing shall be cut-off at the base of the cellar or 3 feet below final restored ground level (whichever is deeper). The BLM is to be notified a minimum of 4 hours prior to the wellhead being cut off to verify that cement is to surface in the casing and all annuluses. Wellhead cut off shall commence within ten (10) calendar days of the well being plugged. If the cut off cannot be done by the 10th day, the BLM is to be contacted with justification to receive an extension for completing the cut off.

The well bore shall then be capped with a 4-inch pipe, 10-feet in length, 4 feet above ground and embedded in cement, unless otherwise noted in COA (requirements will be attached). The following information shall be permanently inscribed on the dry hole marker: well name and number, name of the operator, lease serial number, surveyed location (quarter-quarter section, section, township and range or other authorized survey designation acceptable to the authorized officer such as metes and bounds). A weep hole shall be left if a metal plate is welded in place.

- 7. <u>Subsequent Plugging Reporting:</u> Within 30 days after plugging work is completed, file one original and three copies of the Subsequent Report of Abandonment, Form 3160-5 to BLM. The report should give in detail the manner in which the plugging work was carried out, the extent (by depths) of cement plugs placed, and the size and location (by depths) of casing left in the well. **Show date well was plugged.**
- 8. <u>Trash:</u> All trash, junk and other waste material shall be contained in trash cages or bins to prevent scattering and will be removed and deposited in an approved sanitary landfill. Burial on site is not permitted.

Following the submission and approval of the Subsequent Report of Abandonment, surface restoration will be required. See attached reclamation objectives.



United States Department of the Interior

BUREAU OF LAND MANAGEMENT

Carlsbad Field Office 620 E. Greene St. Carlsbad, New Mexico 88220-6292 www.blm.gov/nm



In Reply Refer To: 1310

Reclamation Objectives and Procedures

Reclamation Objective: Oil and gas development is one of many uses of the public lands and resources. While development may have a short- or long-term effect on the land, successful reclamation can ensure the effect is not permanent. During the life of the development, all disturbed areas not needed for active support of production operations should undergo "interim" reclamation in order to minimize the environmental impacts of development on other resources and uses. At final abandonment, well locations, production facilities, and access roads must undergo "final" reclamation so that the character and productivity of the land and water are restored.

The long-term objective of final reclamation is to set the course for eventual ecosystem restoration, including the restoration of the natural vegetation community, hydrology, and wildlife habitats. In most cases this means returning the land to a condition approximating or equal to that which existed prior to the disturbance. The final goal of reclamation is to restore the character of the land and water to its predisturbance condition. The operator is generally not responsible for achieving full ecological restoration of the site. Instead, the operator must achieve the short-term stability, visual, hydrological, and productivity objectives of the surface management agency and take steps necessary to ensure that long-term objectives will be reached through natural processes.

To achieve these objectives, remove any/all contaminants, scrap/trash, equipment, pipelines and powerlines (Contact service companies, allowing plenty of time to have the risers and power lines and poles removed prior to reclamation, don't wait till the last day and try to get them to remove infrastructure). Strip and remove caliche, contour the location to blend with the surrounding landscape, re-distribute the native soils, provide erosion control as needed, rip (across the slope and seed as specified in the original APD COA. This will apply to well pads, facilities, and access roads. Barricade access road at the starting point. If reserve pits have not reclaimed due to salts or other contaminants, submit a plan for approval, as to how you propose to provide adequate restoration of the pit area.

- 1. The Application for Permit to Drill or Reenter (APD, Form 3160-3), Surface Use Plan of Operations must include adequate measures for stabilization and reclamation of disturbed lands. Oil and Gas operators must plan for reclamation, both interim and final, up front in the APD process as per Onshore Oil and Gas Order No. 1.
- 2. For wells and/or access roads not having an approved plan, or an inadequate plan for surface reclamation (either interim or final reclamation), the operator must submit a proposal describing the procedures for reclamation. For interim reclamation, the appropriate time for submittal would be when filing the Well Completion or Recompletion Report and Log (Form 3160-4). For final reclamation, the appropriate time for submittal would be when filing the Notice of Intent, or the Subsequent Report of Abandonment, Sundry Notices and Reports on Wells (Form 3160-5). Interim reclamation is to be completed within 6 months of well completion, and final reclamation is to be completed within 6 months of well abandonment.
- 3. The operator must file a Subsequent Report Plug and Abandonment (Form 3160-5) following the plugging of a well.
- 4. Previous instruction had you waiting for a BLM specialist to inspect the location and provide you with reclamation requirements. If you have an approved Surface Use Plan of Operation and/or an approved Sundry Notice, you are free to proceed with reclamation as per approved APD. If you

have issues or concerns, contact a BLM specialist to assist you. It would be in your interest to have a BLM specialist look at the location and access road prior to the removal of reclamation equipment to ensure that it meets BLM objectives. Upon conclusion submit a Form 3160-5, Subsequent Report of Reclamation. This will prompt a specialist to inspect the location to verify work was completed as per approved plans.

- 5. The approved Subsequent Report of Reclamation will be your notice that the native soils, contour and seedbed have been reestablished. If the BLM objectives have not been met the operator will be notified and corrective actions may be required.
- 6. It is the responsibility of the operator to monitor these locations and/or access roads until such time as the operator feels that the BLM objective has been met. If after two growing seasons the location and/or access roads are not showing the potential for successful revegetation, additional actions may be needed. When you feel the BLM objectives have been met submit a Final Abandonment Notice (FAN), Form 3160-5, stating that all reclamation requirements have been achieved and the location and/or access road is ready for a final abandonment inspection.
- 7. At this time the BLM specialist will inspect the location and/or access road. If the native soils and contour have been restored, and the revegetation is successful, the FAN will be approved, releasing the operator of any further liability of the location and/or access road. If the location and/or access road have not achieved the objective, you will be notified as to additional work needed or additional time being needed to achieve the objective.

If there are any questions, please feel free to contact any of the following specialists:

Jim Amos Supervisory Petroleum Engineering Tech/Environmental Protection Specialist 575-234-5909 (Office), 575-361-2648 (Cell)

Arthur Arias Environmental Protection Specialist 575-234-6230

Crisha Morgan Environmental Protection Specialist 575-234-5987

Jose Martinez-Colon Environmental Protection Specialist 575-234-5951

Mark Mattozzi Environmental Protection Specialist 575-234-5713

Robert Duenas Environmental Protection Specialist 575-234-2229

Doris Lauger Martinez Environmental Protection Specialist 575-234-5926

Jaden Johnston Environmental Protection Asst. (Intern) 575-234-6252

0.00 429.16	Bottom	Length	Tag	Sacks	Cement Class	Notes
	100.00					
	100.00					
		100.00 104.84	Tag/Verify Tag/Verify			
						Perforate at 900' and squeeze from 900' to surface. Spot cement from 950' to surface. (94 sxs In/184 sxs Out)
		109.00	Tag/Verify	278.00	С	Verify at surface
		124.49	Tag/Verify			
2563.60	2690.00		present and/or Mechanic al Integrity Test), If Perf & Sqz then Tag, Leak Test all CIBP if no Open Perforatio		С	Spot cement from 2690' to 2374'. WOC and Tag.
			If solid base no need to Tag (CIBP present and/or Mechanic al Integrity Test), If Perf & Sqz then Tag, Leak Test all CIBP if no Open Perforatio	07.00		Set CIBP at 5729'. Spot 25 sacks on top. WOC and Tag at 5477'.
	2374.51 2494.30 2563.60	841.00 950.00 2374.51 2499.00 2494.30 2620.00 2563.60 2690.00	2374.51	2374.51 2499.00 124.49 Tag/Verify 2494.30 2620.00 125.70 Tag/Verify If solid base no need to Tag (CIBP present and/or Mechanic al Integrity Test), If Perf & Sqz then Tag, Leak Test all CIBP if no Open Perforatio ns If solid base no need to Tag (CIBP present and/or Mechanic al Integrity Test), If Perf & Sqz then Tag, Leak Test all CIBP if no Open Perforatio ns	2374.51 2499.00 124.49 Tag/Verify 2494.30 2620.00 125.70 Tag/Verify If solid base no need to Tag (CIBP present and/or Mechanic al Integrity Test), If Perf & Sqz then Tag, Leak Test all CIBP if no Open Perforatio ns 32.00 If solid base no need to Tag (CIBP present and/or Mechanic al Integrity Test), If Perf & Sqz then Tag, Leak Test all CIBP present and/or Mechanic al Integrity Test), If Perf & Sqz then Tag, Leak Test all CIBP if no Open Perforatio	2374.51 2499.00 124.49 Tag/Verify 2494.30 2620.00 125.70 Tag/Verify

	1				
				If solid	
				base no	
				need to	
				Tag (CIBP	
				present	
				and/or	
				Mechanic	
				al Integrity	
				Test), If	
				Perf &	
				Sqz then	
				Tag, Leak Test all	
				CIBP if no	
				Open	
				Perforatio	
Banaanringa @ 6222	6218.68	6382.00	163.32		
Bonesprings @ 6332 Perforations Plug (If No CIBP)	6484.00	11014.00	103.32	Tag/Verify	
Perforations Plug (if No CIBP)	6484.00	11014.00	4530.00	rag/verily	
				If solid	
				base no	
				need to	
				Tag (CIBP	
				present	
				and/or	
				Mechanic	
				al Integrity	
				Test), If	
				Perf &	
				Sqz then	
				Tag, Leak	
				Test all	
				CIBP if no	
				Open	
				Perforatio	
Wolfcamp @ 9409	9264.91	9459.00	194.09		
5.5 inch- Shoe Plug	10857.82	11068.00	210.18	Tag/Verify	

No more than 2000' is to be allowed between plugs in open hole, and no more than 3000' between plugs in cased hole. Class H >7500' Class C<7500'

Fluid used to mix the cement in R111P shall be saturated with the salts common to the section penetrated, and in suitable proportions, but not more than 3% calcium chloride by weight of cement will be considered the desired mixture whenever possible.

Medium, Secretary: Top of salt to surface If no salt take the deepest fresh water or Karst Depth

High, Critical: Bottom of Karst to surface or Deepest fresh water, whichever is greater R111P: 50 Feet from Base of Salt to surface.

Class C: 1.32 ft^3/sx Class H: 1.06 ft^3/sx

Onshore Order 2.III.G Drilling Abandonment Requirements: "All formations bearing usable-quality water, oil, gas, or geothermal resources, and/or a prospectively valuable deposit of minerals shall be protected.

Cave Karst/Potash Cement Requirement:	Medium	Top of Salt to surface	
13.375 inch- Shoe Plug @ 9.625 inch- Shoe Plug @ 5.5 inch- Shoe Plug @	484.00 2570.00 11018.00	тос @	910.00
Perforatons Top @	6534.00	Perforations Bottom @	10964.00
		CIBP @	5729.00

District I
1625 N. French Dr., Hobbs, NM 88240
Phone: (575) 393-6161 Fax: (575) 393-0720

District II

811 S. First St., Artesia, NM 88210 Phone:(575) 748-1283 Fax:(575) 748-9720 District III 1000 Rio Brazos Rd., Aztec, NM 87410

Phone:(505) 334-6178 Fax:(505) 334-6170

1220 S. St Francis Dr., Santa Fe, NM 87505 Phone:(505) 476-3470 Fax:(505) 476-3462

State of New Mexico Energy, Minerals and Natural Resources Oil Conservation Division 1220 S. St Francis Dr. **Santa Fe, NM 87505**

CONDITIONS

Action 311670

CONDITIONS

Operator:	OGRID:
COG PRODUCTION, LLC	217955
600 W. Illinois Ave	Action Number:
Midland, TX 79701	311670
	Action Type:
	[C-103] NOI Plug & Abandon (C-103F)

CONDITIONS

Created By		Condition Date
gcordero	None	2/8/2024