

Well Name: COBRA COBRETTI BS FEDERAL COM	Well Location: T25S / R28E / SEC 1 / SWSE / 32.1533788 / -104.0381278	County or Parish/State: EDDY / NM
Well Number: 301H	Type of Well: OIL WELL	Allottee or Tribe Name:
Lease Number: NMNM16104	Unit or CA Name:	Unit or CA Number:
US Well Number: 3001555318	Operator: MARATHON OIL PERMIAN LLC	

Notice of Intent

Sundry ID: 2810087

Type of Submission: Notice of Intent **Type of Action:** APD Change

Date Sundry Submitted: 09/04/2024 **Time Sundry Submitted:** 12:43

Date proposed operation will begin: 09/04/2024

Procedure Description: Marathon Oil Permian LLC respectfully request approval to change the well from a three-mile lateral to a two and a half-mile lateral. We also propose changing the SHL, BHL, and drill plan as described below and on the attached: SHL Change: From 524' FSL 1811' FEL Sec1- T25S-R28E To 276' FSL 1722' FEL Sec1- T25S-R28E FTP Change: From: 100' FSL 2310' FEL Sec1-T25S-R28E To: 100' FSL 1640' FEL Sec1-T25S-R28E LTP/BHL Change: From 100' FNL 2310' FEL Sec25-T24S-R28E To 2540' FSL 1640' FEL Sec25-T24S-R28E Change Approved Location Table: SHL: NMNM016104 KOP/PP1: NMNM016104 EXIT/BHL: State Casing Design Change: Intermediate Set Depth From: 6850' To: 6886' Production Set Depth From: 23061' To: 20400' No other changes to the casing design. Cement Design Changes - Please see attached drill plan. Please see attached drill plan, directional plan, and C-102s (proposed & previously approved) for review and approval.

NOI Attachments

Procedure Description

- C102_Proposed___Cobra_Cobretti_BS_Fed_Com_301H_20240904091528.pdf
- Proposed___Cobra_Cobretti_BS_FED_COM_301H_Drill_Plan_20240904091528.pdf
- Proposed___Cobra_Cobretti_BS_Federal_Com_301H_Directional_Plan_20240904091527.pdf
- C102_Approved___Cobra_Cobretti_BS_Fed_Com_301H_20240904091526.pdf

Well Name: COBRA COBRETTI BS
FEDERAL COM

Well Location: T25S / R28E / SEC 1 /
SWSE / 32.1533788 / -104.0381278

County or Parish/State: EDDY /
NM

Well Number: 301H

Type of Well: OIL WELL

Allottee or Tribe Name:

Lease Number: NMNM16104

Unit or CA Name:

Unit or CA Number:

US Well Number: 3001555318

Operator: MARATHON OIL PERMIAN
LLC

Conditions of Approval

Additional

COBRA_COBRETTI_BS_FEDERAL_COM_301H___COA_20240919183814.pdf

Operator

I certify that the foregoing is true and correct. Title 18 U.S.C. Section 1001 and Title 43 U.S.C. Section 1212, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction. Electronic submission of Sundry Notices through this system satisfies regulations requiring a

Operator Electronic Signature: ADRIAN COVARRUBIAS

Signed on: SEP 04, 2024 12:43 PM

Name: MARATHON OIL PERMIAN LLC

Title: regulatory Compliance Representative

Street Address: 990 TOWN & COUNTRY BLVD

City: HOUSTON

State: TX

Phone: (713) 296-3368

Email address: acovarrubias@marathonoil.com

Field

Representative Name:

Street Address:

City:

State:

Zip:

Phone:

Email address:

BLM Point of Contact

BLM POC Name: CODY LAYTON

BLM POC Title: Assistant Field Manager Lands & Minerals

BLM POC Phone: 5752345959

BLM POC Email Address: clayton@blm.gov

Disposition: Approved

Disposition Date: 10/03/2024

Signature: Cody R. Layton

Form 3160-5 (June 2019)	UNITED STATES DEPARTMENT OF THE INTERIOR BUREAU OF LAND MANAGEMENT	FORM APPROVED OMB No. 1004-0137 Expires: October 31, 2021
SUNDRY NOTICES AND REPORTS ON WELLS <i>Do not use this form for proposals to drill or to re-enter an abandoned well. Use Form 3160-3 (APD) for such proposals.</i>		5. Lease Serial No.
		6. If Indian, Allottee or Tribe Name

SUBMIT IN TRIPLICATE - Other instructions on page 2		7. If Unit of CA/Agreement, Name and/or No.
1. Type of Well ☐ Oil Well ☐ Gas Well ☐ Other		8. Well Name and No.
2. Name of Operator		9. API Well No.
3a. Address	3b. Phone No. (include area code)	10. Field and Pool or Exploratory Area
4. Location of Well (Footage, Sec., T.,R.,M., or Survey Description)		11. Country or Parish, State

12. CHECK THE APPROPRIATE BOX(ES) TO INDICATE NATURE OF NOTICE, REPORT OR OTHER DATA				
TYPE OF SUBMISSION	TYPE OF ACTION			
☐ Notice of Intent	☐ Acidize	☐ Deepen	☐ Production (Start/Resume)	☐ Water Shut-Off
	☐ Alter Casing	☐ Hydraulic Fracturing	☐ Reclamation	☐ Well Integrity
☐ Subsequent Report	☐ Casing Repair	☐ New Construction	☐ Recomplete	☐ Other
	☐ Change Plans	☐ Plug and Abandon	☐ Temporarily Abandon	
☐ Final Abandonment Notice	☐ Convert to Injection	☐ Plug Back	☐ Water Disposal	

13. Describe Proposed or Completed Operation: Clearly state all pertinent details, including estimated starting date of any proposed work and approximate duration thereof. If the proposal is to deepen directionally or recompleate horizontally, give subsurface locations and measured and true vertical depths of all pertinent markers and zones. Attach the Bond under which the work will be perfonned or provide the Bond No. on file with BLM/BIA. Required subsequent reports must be filed within 30 days following completion of the involved operations. If the operation results in a multiple completion or recompletion in a new interval, a Form 3160-4 must be filed once testing has been completed. Final Abandonment Notices must be filed only after all requirements, including reclamation, have been completed and the operator has detennined that the site is ready for final inspection.)

14. I hereby certify that the foregoing is true and correct. Name (Printed/Typed)		
	Title	
Signature	Date	

THE SPACE FOR FEDERAL OR STATE OFFICE USE		
Approved by	Title	Date
Conditions of approval, if any, are attached. Approval of this notice does not warrant or certify that the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon.	Office	

Title 18 U.S.C Section 1001 and Title 43 U.S.C Section 1212, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

(Instructions on page 2)

GENERAL INSTRUCTIONS

This form is designed for submitting proposals to perform certain well operations and reports of such operations when completed as indicated on Federal and Indian lands pursuant to applicable Federal law and regulations. Any necessary special instructions concerning the use of this form and the number of copies to be submitted, particularly with regard to local area or regional procedures and practices, are either shown below, will be issued by or may be obtained from the local Federal office.

SPECIFIC INSTRUCTIONS

Item 4 - Locations on Federal or Indian land should be described in accordance with Federal requirements. Consult the local Federal office for specific instructions.

Item 13: Proposals to abandon a well and subsequent reports of abandonment should include such special information as is required by the local Federal office. In addition, such proposals and reports should include reasons for the abandonment; data on any former or present productive zones or other zones with present significant fluid contents not sealed off by cement or otherwise; depths (top and bottom) and method of placement of cement plugs; mud or other material placed below, between and above plugs; amount, size, method of parting of any casing, liner or tubing pulled and the depth to the top of any tubing left in the hole; method of closing top of well and date well site conditioned for final inspection looking for approval of the abandonment. If the proposal will involve **hydraulic fracturing operations**, you must comply with 43 CFR 3162.3-3, including providing information about the protection of usable water. Operators should provide the best available information about all formations containing water and their depths. This information could include data and interpretation of resistivity logs run on nearby wells. Information may also be obtained from state or tribal regulatory agencies and from local BLM offices.

NOTICES

The privacy Act of 1974 and the regulation in 43 CFR 2.48(d) provide that you be furnished the following information in connection with information required by this application.

AUTHORITY: 30 U.S.C. 181 et seq., 351 et seq., 25 U.S.C. 396; 43 CFR 3160.

PRINCIPAL PURPOSE: The information is used to: (1) Evaluate, when appropriate, approve applications, and report completion of subsequent well operations, on a Federal or Indian lease; and (2) document for administrative use, information for the management, disposal and use of National Resource lands and resources, such as: (a) evaluating the equipment and procedures to be used during a proposed subsequent well operation and reviewing the completed well operations for compliance with the approved plan; (b) requesting and granting approval to perform those actions covered by 43 CFR 3162.3-2, 3162.3-3, and 3162.3-4; (c) reporting the beginning or resumption of production, as required by 43 CFR 3162.4-1(c) and (d) analyzing future applications to drill or modify operations in light of data obtained and methods used.

ROUTINE USES: Information from the record and/or the record will be transferred to appropriate Federal, State, local or foreign agencies, when relevant to civil, criminal or regulatory investigations or prosecutions in connection with congressional inquiries or to consumer reporting agencies to facilitate collection of debts owed the Government.

EFFECT OF NOT PROVIDING THE INFORMATION: Filing of this notice and report and disclosure of the information is mandatory for those subsequent well operations specified in 43 CFR 3162.3-2, 3162.3-3, 3162.3-4.

The Paperwork Reduction Act of 1995 requires us to inform you that:

The BLM collects this information to evaluate proposed and/or completed subsequent well operations on Federal or Indian oil and gas leases.

Response to this request is mandatory.

The BLM would like you to know that you do not have to respond to this or any other Federal agency-sponsored information collection unless it displays a currently valid OMB control number.

BURDEN HOURS STATEMENT: Public reporting burden for this form is estimated to average 8 hours per response, including the time for reviewing instructions, gathering and maintaining data, and completing and reviewing the form. Direct comments regarding the burden estimate or any other aspect of this form to U.S. Department of the Interior, Bureau of Land Management (1004-0137), Bureau Information Collection Clearance Officer (WO-630), 1849 C St., N.W., Mail Stop 401 LS, Washington, D.C. 20240

Additional Information

Additional Remarks

From 100' FNL 2310' FEL Sec25-T24S-R28E

To 2540' FSL 1640' FEL Sec25-T24S-R28E

Change Approved Location Table:

SHL: NMNM016104

KOP/PP1: NMNM016104

EXIT/BHL: State

Casing Design Change:

Intermediate Set Depth

From: 6850'

To: 6886'

Production Set Depth

From: 23061'

To: 20400'

No other changes to the casing design.

Cement Design Changes - Please see attached drill plan.

Please see attached drill plan, directional plan, and C-102s (proposed & previously approved) for review and approval.

Location of Well

0. SHL: SWSE / 524 FSL / 1811 FEL / TWSP: 25S / RANGE: 28E / SECTION: 1 / LAT: 32.1533788 / LONG: -104.0381278 (TVD: 0 feet, MD: 0 feet)

PPP: SWSE / 100 FSL / 2310 FEL / TWSP: 25S / RANGE: 28E / SECTION: 1 / LAT: 32.1522378 / LONG: -104.0397424 (TVD: 7490 feet, MD: 7900 feet)

PPP: SWNE / 2662 FNL / 2348 FEL / TWSP: 24S / RANGE: 28E / SECTION: 25 / LAT: 32.1884753 / LONG: -103.039588 (TVD: 7490 feet, MD: 18360 feet)

BHL: NWNE / 100 FNL / 2310 FEL / TWSP: 24S / RANGE: 28E / SECTION: 25 / LAT: 32.1955182 / LONG: -104.039558 (TVD: 7490 feet, MD: 23061 feet)

PECOS DISTRICT DRILLING CONDITIONS OF APPROVAL

OPERATOR'S NAME:	MARATHON OIL PERMIAN LLC
WELL NAME & NO.:	COBRA COBRETTI BS FEDERAL COM 301H
SURFACE HOLE FOOTAGE:	276'/S & 1722'/E
BOTTOM HOLE FOOTAGE:	2540'/S & 1640'/E
LOCATION:	Section 1, T.25 S., R.28 E.
COUNTY:	Eddy County, New Mexico

ALL PREVIOUS COAs STILL APPLY

COA

H2S	☒ Yes	☐ No	
Potash	☒ None	☐ Secretary	☐ R-111-P
Cave/Karst Potential	☐ Low	☐ Medium	☒ High
Cave/Karst Potential	☐ Critical		
Variance	☐ None	☒ Flex Hose	☐ Other
Wellhead	☐ Conventional	☒ Multibowl	☐ Both
Wellhead Variance	☐ Diverter		
Other	☐ 4 String	☐ Capitan Reef	☐ WIPP
Other	☐ Fluid Filled	☐ Pilot Hole	☐ Open Annulus
Cementing	☐ Contingency Cement Squeeze	☐ EchoMeter	☐ Primary Cement Squeeze
Special Requirements	☐ Water Disposal	☒ COM	☐ Unit
Special Requirements	☐ Batch Sundry		
Special Requirements Variance	☐ Break Testing	☐ Offline Cementing	☒ Casing Clearance

A. HYDROGEN SULFIDE

A Hydrogen Sulfide (H2S) Drilling Plan shall be activated AT SPUD. As a result, the Hydrogen Sulfide area must meet Onshore Order 6 requirements, which includes equipment and personnel/public protection items. If Hydrogen Sulfide is encountered, please provide measured values and formations to the BLM.

B. CASING

Primary Casing Design:

1. The 13-3/8 inch surface casing shall be set at approximately **500** feet (a minimum of 70 feet (Eddy County) into the Rustler Anhydrite, above the salt, and below usable fresh water) and cemented to the surface.

- a. If cement does not circulate to the surface, the appropriate BLM office shall be notified and a temperature survey utilizing an electronic type temperature survey with surface log readout will be used or a cement bond log shall be run to verify the top of the cement. Temperature survey will be run a minimum of six hours after pumping cement and ideally between 8-10 hours after completing the cement job.
 - b. Wait on cement (WOC) time for a primary cement job will be a minimum of **8 hours** or 500 pounds compressive strength, whichever is greater. (This is to include the lead cement)
 - c. Wait on cement (WOC) time for a remedial job will be a minimum of 4 hours after bringing cement to surface or 500 pounds compressive strength, whichever is greater.
 - d. If cement falls back, remedial cementing will be done prior to drilling out that string.
2. The 9-5/8 inch intermediate casing shall be set at approximately **6886 feet. Keep casing minimum half full during run for collapse SF. Cement volumes do not meet CFO 25% excess requirement. Please review.** The minimum required fill of cement behind the 9-5/8 inch intermediate casing is:

Option 1:

- Cement to surface. If cement does not circulate see B.1.a, c-d above. **Wait on cement (WOC) time for a primary cement job is to include the lead cement slurry due to cave/karst or potash.**

Option 2:

The operator has not proposed a DV tool depth. DV tool needs to be below the Salado interval. Operator may adjust depth of DV tool if it remains below the Salado and cement volumes are adjusted accordingly. The DV tool may be cancelled if cement circulates to surface on the first stage.

- a. First stage to DV tool: Cement to circulate. If cement does not circulate off the DV tool, contact the appropriate BLM office before proceeding with second stage cement job.
- b. Second stage above DV tool:
 - Cement to surface. If cement does not circulate, contact the appropriate BLM office. **Wait on cement (WOC) time for a primary cement job is to include the lead cement slurry due to cave/karst or potash.**

- ❖ In High Cave/Karst Areas if cement does not circulate to surface on the first two casing strings, the cement on the 3rd casing string must come to surface.
- 3. The 5-1/2 inch production casing shall be set at approximately **20,400** feet. The minimum required fill of cement behind the 5-1/2 inch production casing is:
 - Cement should tie-back at least **200 feet** into previous casing string. Operator shall provide method of verification.
Wait on cement (WOC) time for a primary cement job is to include the lead cement slurry due to cave/karst or potash.

GENERAL REQUIREMENTS

The BLM is to be notified in advance for a representative to witness:

- a. Spudding well (minimum of 24 hours)
- b. Setting and/or Cementing of all casing strings (minimum of 4 hours)
- c. BOPE tests (minimum of 4 hours)

Contact Eddy County Petroleum Engineering Inspection Staff:

Email or call the Carlsbad Field Office, 620 East Greene St., Carlsbad, NM 88220; BLM_NM_CFO_DrillingNotifications@BLM.GOV; (575) 361-2822

Contact Lea County Petroleum Engineering Inspection Staff:

Call the Hobbs Field Station, 414 West Taylor, Hobbs NM 88240, (575) 689-5981

1. Unless the production casing has been run and cemented or the well has been properly plugged, the drilling rig shall not be removed from over the hole without prior approval.
 - a. In the event the operator has proposed to drill multiple wells utilizing a skid/walking rig. Operator shall secure the wellbore on the current well, after installing and testing the wellhead, by installing a blind flange of like pressure rating to the wellhead and a pressure gauge that can be monitored while drilling is performed on the other well(s).
 - b. When the operator proposes to set surface casing with Spudder Rig
 - i. Notify the BLM when moving in and removing the Spudder Rig.
 - ii. Notify the BLM when moving in the 2nd Rig. Rig to be moved in within 90 days of notification that Spudder Rig has left the location.
 - iii. BOP/BOPE test to be conducted per **43 CFR 3172** as soon as 2nd Rig is rigged up on well.
2. Floor controls are required for 3M or Greater systems. These controls will be on the rig floor, unobstructed, readily accessible to the driller and will be operational at all times during drilling and/or completion activities. Rig floor is defined as the area immediately around the rotary table; the area

immediately above the substructure on which the draw works are located, this does not include the dog house or stairway area.

3. For intervals in which cement to surface is required, cement to surface should be verified with a visual check and density or pH check to differentiate cement from spacer and drilling mud. The results should be documented in the driller's log and daily reports.

A. CASING

1. Changes to the approved APD casing program need prior approval if the items substituted are of lesser grade or different casing size or are Non-API. The Operator can exchange the components of the proposal with that of superior strength (i.e. changing from J-55 to N-80, or from 36# to 40#). Changes to the approved cement program need prior approval if the altered cement plan has less volume or strength or if the changes are substantial (i.e. Multistage tool, ECP, etc.). The initial wellhead installed on the well will remain on the well with spools used as needed.
2. Wait on cement (WOC) for Potash Areas: After cementing but before commencing any tests, the casing string shall stand cemented under pressure until both of the following conditions have been met: 1) cement reaches a minimum compressive strength of 500 psi for all cement blends of both lead and tail cement, 2) until cement has been in place at least 8 hours. WOC time will be recorded in the driller's log. The casing integrity test can be done (prior to the cement setting up) immediately after bumping the plug.
3. Wait on cement (WOC) for Water Basin: After cementing but before commencing any tests, the casing string shall stand cemented under pressure until both of the following conditions have been met: 1) cement reaches a minimum compressive strength of 500 psi at the shoe, 2) until cement has been in place at least 8 hours. WOC time will be recorded in the driller's log. See individual casing strings for details regarding lead cement slurry requirements. The casing integrity test can be done (prior to the cement setting up) immediately after bumping the plug.
4. Provide compressive strengths including hours to reach required 500 pounds compressive strength prior to cementing each casing string. Have well specific cement details onsite prior to pumping the cement for each casing string.
5. No pea gravel permitted for remedial or fall back remedial without prior authorization from the BLM engineer.
6. On that portion of any well approved for a 5M BOPE system or greater, a pressure integrity test of each casing shoe shall be performed. Formation at the shoe shall be tested to a minimum of the mud weight equivalent anticipated to control the formation pressure to the next casing depth or at total depth of the well. This test shall be performed before drilling more than 20 feet of new hole.
7. If hardband drill pipe is rotated inside casing, returns will be monitored for metal. If metal is found in samples, drill pipe will be pulled and rubber protectors which have a larger diameter than the tool joints of the drill pipe will be installed prior to continuing drilling operations.
8. Whenever a casing string is cemented in the R-111-Q potash area, the NMOCD requirements shall be followed.

B. PRESSURE CONTROL

1. All blowout preventer (BOP) and related equipment (BOPE) shall comply with well control requirements as described in **43 CFR 3172**.
2. If a variance is approved for a flexible hose to be installed from the BOP to the choke manifold, the following requirements apply: The flex line must meet the requirements of API 16C. Check condition of flexible line from BOP to choke

manifold, replace if exterior is damaged or if line fails test. Line to be as straight as possible with no hard bends and is to be anchored according to Manufacturer's requirements. The flexible hose can be exchanged with a hose of equal size and equal or greater pressure rating. Anchor requirements, specification sheet and hydrostatic pressure test certification matching the hose in service, to be onsite for review. These documents shall be posted in the company man's trailer and on the rig floor.

3. 5M or higher system requires an HCR valve, remote kill line and annular to match. The remote kill line is to be installed prior to testing the system and tested to stack pressure.

4. If the operator has proposed a multi-bowl wellhead assembly in the APD. The following requirements must be met:

- i. Wellhead shall be installed by manufacturer's representatives, submit documentation with subsequent sundry.
- ii. If the welding is performed by a third party, the manufacturer's representative shall monitor the temperature to verify that it does not exceed the maximum temperature of the seal.
- iii. Manufacturer representative shall install the test plug for the initial BOP test.
- iv. Whenever any seal subject to test pressure is broken, all the tests in 43 CFR 3172.6(b)(9) must be followed.
- v. If the cement does not circulate and one inch operations would have been possible with a standard wellhead, the well head shall be cut off, cementing operations performed and another wellhead installed.

5. The appropriate BLM office shall be notified a minimum of 4 hours in advance for a representative to witness the tests.

- i. In a water basin, for all casing strings utilizing slips, these are to be set as soon as the crew and rig are ready and any fallback cement remediation has been done. The casing cut-off and BOP installation can be initiated four hours after installing the slips, which will be approximately six hours after bumping the plug. For those casing strings not using slips, the minimum wait time before cut-off is eight hours after bumping the plug. BOP/BOPE testing can begin after cut-off or once cement reaches 500 psi compressive strength (including lead cement), whichever is greater. However, if the float does not hold, cut-off cannot be initiated until cement reaches 500 psi compressive strength (including lead when specified).
- ii. In potash areas, for all casing strings utilizing slips, these are to be set as soon as the crew and rig are ready and any fallback cement remediation has been done. For all casing strings, casing cut-off and BOP installation can be initiated at twelve hours after bumping the cement plug. The BOPE test can be initiated after bumping the cement plug with the casing valve open. (only applies to single stage cement jobs, prior to the cement setting up.)
- iii. The tests shall be done by an independent service company utilizing a test plug not a cup or J-packer and can be initiated immediately with the casing valve open. The operator also has the option of utilizing an independent tester to test without a plug (i.e. against the casing) pursuant to **43 CFR 3172** with the pressure not to exceed 70% of the burst rating for the casing. Any test against the casing must meet the WOC time for 8 hours or 500 pounds compressive strength, whichever is greater, prior to initiating the test (see casing segment as lead cement may be critical item).
- iv. The test shall be run on a 5000 psi chart for a 2-3M BOP/BOP, on a 10000 psi chart for a 5M BOP/BOPE and on a 15000 psi chart for a 10M

BOP/BOPE. If a linear chart is used, it shall be a one hour chart. A circular chart shall have a maximum 2 hour clock. If a twelve hour or twenty-four hour chart is used, tester shall make a notation that it is run with a two hour clock.

- v. The results of the test shall be reported to the appropriate BLM office.
- vi. All tests are required to be recorded on a calibrated test chart. A copy of the BOP/BOPE test chart and a copy of independent service company test will be submitted to the appropriate BLM office.
- vii. The BOP/BOPE test shall include a low pressure test from 250 to 300 psi. The test will be held for a minimum of 10 minutes if test is done with a test plug and 30 minutes without a test plug. This test shall be performed prior to the test at full stack pressure.
- viii. BOP/BOPE must be tested by an independent service company within 500 feet of the top of the Wolfcamp formation if the time between the setting of the intermediate casing and reaching this depth exceeds 20 days. This test does not exclude the test prior to drilling out the casing shoe as per **43 CFR 3172**.

C. DRILLING MUD

Mud system monitoring equipment, with derrick floor indicators and visual and audio alarms, shall be operating before drilling into the Wolfcamp formation, and shall be used until production casing is run and cemented.

D. WASTE MATERIAL AND FLUIDS

All waste (i.e. drilling fluids, trash, salts, chemicals, sewage, gray water, etc.) created as a result of drilling operations and completion operations shall be safely contained and disposed of properly at a waste disposal facility. No waste material or fluid shall be disposed of on the well location or surrounding area. Porto-johns and trash containers will be on-location during fracturing operations or any other crew-intensive operations.

KPI 9/19/2024

C-102 Submit Electronically Via OCD Permitting	State of New Mexico Energy, Minerals, & Natural Resources Department OIL CONSERVATION DIVISION	Revised July 9, 2024
		Submittal Type: ☒ Initial Submittal
		☒ Amended Report
		☐ As Drilled

WELL LOCATION INFORMATION

API Number 30-015-55318	Pool Code 64450	Pool Name WILLOW LAKE; BONE SPRING
Property Code 336005	Property Name COBRA COBRETTI BS FEDERAL COM	Well Number 301H
OGRID No. 372098	Operator Name MARATHON OIL PERMIAN LLC	Ground Level Elevation 2916'
Surface Owner: ☐ State ☐ Fee ☐ Tribal ☒ Federal		Mineral Owner: ☒ State ☐ Fee ☐ Tribal ☒ Federal

Surface Location

UL O	Section 01	Township 25S	Range 28E	Lot	Ft. from N/S 276' FSL	Ft. from E/W 1722' FEL	Latitude (NAD83) 32.15269118	Longitude (NAD83) -104.03784163	County EDDY
---------	---------------	-----------------	--------------	-----	--------------------------	---------------------------	---------------------------------	------------------------------------	----------------

Bottom Hole Location

UL J	Section 25	Township 24S	Range 28E	Lot	Ft. from N/S 2540' FSL	Ft. from E/W 1640' FEL	Latitude (NAD83) 32.18813318	Longitude (NAD83) -104.03731089	County EDDY
---------	---------------	-----------------	--------------	-----	---------------------------	---------------------------	---------------------------------	------------------------------------	----------------

Dedicated Acres 800.08	Infill or Defining Well	Defining Well API	Overlapping Spacing Unit (Y/N)	Consolidation Code
Order Numbers:			Well setbacks are under Common Ownership: ☐ Yes ☐ No	

Kick Off Point (KOP)

UL O	Section 01	Township 25S	Range 28E	Lot	Ft. from N/S 100' FSL	Ft. from E/W 1640' FEL	Latitude (NAD83) 32.15220304	Longitude (NAD83) -104.03757758	County EDDY
---------	---------------	-----------------	--------------	-----	--------------------------	---------------------------	---------------------------------	------------------------------------	----------------

First Take Point (FTP)

UL O	Section 01	Township 25S	Range 28E	Lot	Ft. from N/S 100' FSL	Ft. from E/W 1640' FEL	Latitude (NAD83) 32.15220304	Longitude (NAD83) -104.03757758	County EDDY
---------	---------------	-----------------	--------------	-----	--------------------------	---------------------------	---------------------------------	------------------------------------	----------------

Last Take Point (LTP)

UL J	Section 25	Township 24S	Range 28E	Lot	Ft. from N/S 2540' FSL	Ft. from E/W 1640' FEL	Latitude (NAD83) 32.18813318	Longitude (NAD83) -104.03731089	County EDDY
---------	---------------	-----------------	--------------	-----	---------------------------	---------------------------	---------------------------------	------------------------------------	----------------

Unitized Area or Area of Uniform Interest	Spacing Unit Type: ☒ Horizontal ☐ Vertical	Ground Floor Elevation 2916'
---	---	---------------------------------

OPERATOR CERTIFICATIONS

I hereby certify that the information contained herein is true and complete to the best of my knowledge and belief, and, if the well is a vertical or directional well, that this organization either owns a working interest or unleased mineral interest in the land including the proposed bottom hole location or has a right to drill this well at this location pursuant to a contract with an owner of a working interest or unleased mineral interest, or to a voluntary pooling agreement or a compulsory pooling order heretofore entered by the division.

If this well is a horizontal well, I further certify that this organization has received the consent of at least one lessee or owner of a working interest or unleased mineral interest in each tract (in the target pool or formation) in which any part of the well's completed interval will be located or obtained a compulsory pooling order from the division.

Adrian Covarrubias 9/4/2024
Signature Date

Adrian Covarrubias
Printed Name

acovarrubias@marathonoil.com
Email Address

SURVEYOR CERTIFICATIONS

I hereby certify that the well location shown on this plat was plotted from field notes of actual surveys made by me or under my supervision, and that the same is true and correct to the best of my belief.



Signature and Seal of Professional Surveyor

Certificate Number 21653	Date of Survey AUGUST 26, 2024
-----------------------------	-----------------------------------

ACREAGE DEDICATION PLATS


COBRA COBRETTI BS FEDERAL COM 301H

LTP/BHL
FSL 2540' FEL 1640', SECTION 25
NAD 83, SPCS NM EAST
X:632913.24' / Y:432303.41'
LAT:32.18813318 / LON:-104.03731089
NAD 27, SPCS NM EAST
X:591729.30' / Y:432244.87'
LAT:32.18801061 / LON:-104.03682125

PI-1
FSL 0' FEL 1640', SECTION 25
NAD 83, SPCS NM EAST
X:632850.33' / Y:429763.31'
LAT:32.18115120 / LON:-104.03753681
NAD 27, SPCS NM EAST
X:591666.34' / Y:429704.82'
LAT:32.18102854 / LON:-104.03704738

KOP/FTP/PPP-1
FSL 100' FEL 1640', SECTION 01
NAD 83, SPCS NM EAST
X:632866.66' / Y:419232.52'
LAT:32.15220304 / LON:-104.03757758
NAD 27, SPCS NM EAST
X:591682.42' / Y:419174.24'
LAT:32.15208003 / LON:-104.03708909

SHL
FSL 276' FEL 1722', SECTION 01
NAD 83, SPCS NM EAST
X:632784.45' / Y:419409.87'
LAT:32.15269118 / LON:-104.03784163
NAD 27, SPCS NM EAST
X:591600.22' / Y:419351.59'
LAT:32.15256818 / LON:-104.03735311

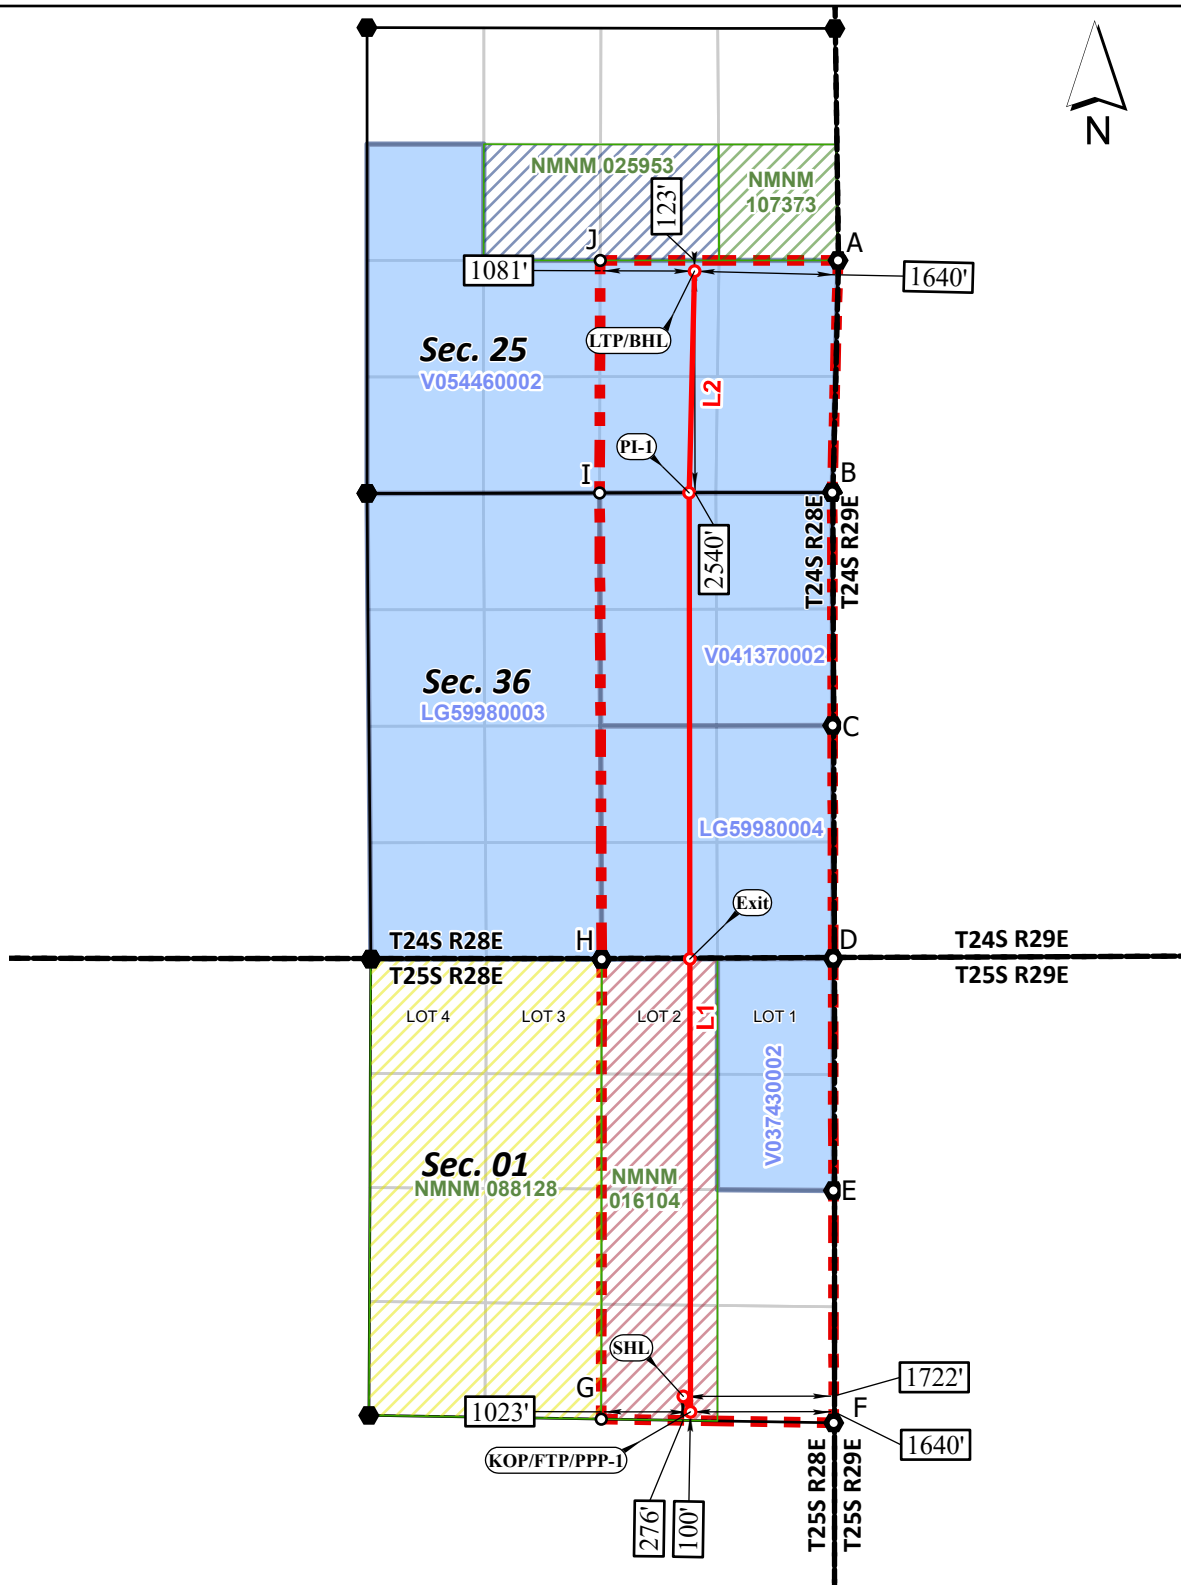

*FTP TO LTP LINE BEARINGS

LINE	BEARING
L1	N 00°05'20" W ~ 10530.80'
L2	N 01°25'07" E ~ 2540.88'

CORNER COORDINATES NAD 83, SPCS NM EAST		CORNER COORDINATES NAD 27, SPCS NM EAST	
A - X:	634556.82' / Y:432426.25'	A - X:	593372.85' / Y:432367.69'
B - X:	634490.33' / Y:429765.92'	B - X:	593306.30' / Y:429707.41'
C - X:	634494.93' / Y:427097.80'	C - X:	593310.84' / Y:427039.34'
D - X:	634500.87' / Y:424428.61'	D - X:	593316.72' / Y:424370.20'
E - X:	634503.74' / Y:421769.03'	E - X:	593319.52' / Y:421710.67'
F - X:	634506.81' / Y:419106.02'	F - X:	593322.53' / Y:419047.72'
G - X:	631843.83' / Y:419149.02'	G - X:	590659.62' / Y:419090.76'
H - X:	631848.34' / Y:424418.82'	H - X:	590664.24' / Y:424360.45'
I - X:	631824.97' / Y:429761.67'	I - X:	590641.00' / Y:429703.20'
J - X:	631832.26' / Y:432425.89'	J - X:	590648.34' / Y:432367.36'



○ Drill Line Events ● Section Corners — Drill Line ↔ Dimension Lines ▨ Federal Leases ■ NMSLO ■ HSU ● HSU Corners
All bearings and coordinates refer to New Mexico State Plane Coordinate System, East Zone, U.S. Survey Feet.

JOB No. MRO_0012_CC
REV 5 NDS 8/26/2024

Distances/areas relative to NAD 83 grid measurements. Combined Scale Factor: 0.99977780 and a Convergence Angle: 0.14126667°

MARATHON OIL PERMIAN, LLC.
DRILLING AND OPERATIONS PLAN



WELL NAME & NUMBER:

COBRA COBRETTI BS FEDERAL COM 301H

LOCATION:

SECTION **1** TOWNSHIP **25S** RANGE **28E**
EDDY COUNTY, **NEW MEXICO**

Section 1:**GEOLOGICAL FORMATIONS**

Name of Surface Formation: Permian
 Elevation: 2916 feet

Estimated Tops of Important Geological Markers:

Formation	TVD (ft)	MD (ft)	Elevation (ft SS)	Lithologies	Mineral Resources	Producing Formation?
Rustler		27	2916	Anhydrite	Brine	No
Salado	573	600	2343	Salt/Anhydrite	Brine	No
Castile	1209	1236	1707	Salt/Anhydrite	Brine	No
Base of Salt (BX)	2560	2587	356	Salt/Anhydrite	Brine	No
Lamar	2692	2719	224	Sandstone/Shale	None	No
Bell Canyon	2720	2747	196	Sandstone	Oil	No
Cherry Canyon	3597	3624	-681	Sandstone	Oil	No
Brushy Canyon	4832	4859	-1916	Sandstone	Oil	No
Bone Spring Lime	6424	6451	-3508	Limestone	None	No
Upper Avalon Shale	6760	6787	-3844	Shale	Oil	Yes
1st Bone Spring Sand	7337	7364	-4421	Sandstone	Oil	Yes
2nd Bone Spring Carbonate	7588	7615	-4672	Limestone/Shale	None	No
2nd Bone Spring Sand	8166	8193	-5250	Sandstone	Oil	Yes
3rd Bone Spring Carbonate	8506	8533	-5590	Limestone	Oil	No
3rd Bone Spring Sand	9273	9300	-6357	Sandstone	Oil	Yes
Wolfcamp	9637	9664	-6721	Sandstone/Shale/Carbonates	Natural Gas / Oil	Yes
Wolfcamp A	9791	9818	-6875	Sandstone/Shale/Carbonates	Natural Gas / Oil	Yes
Wolfcamp B	10092	10119	-7176	Sandstone/Shale/Carbonates	Natural Gas / Oil	No
Wolfcamp C	10332	10359	-7416	Sandstone/Shale/Carbonates	Natural Gas / Oil	Yes
Wolfcamp D	10837	10864	-7921	Sandstone/Shale/Carbonates	Natural Gas / Oil	Yes
Strawn	11878	11905	-8962	Carbonates/Sands/Clays	Natural Gas	Possible

Section 2:**BLOWOUT PREVENTER TESTING PROCEDURE**

Pressure Rating (PSI): 10M
 Rating Depth: 10000
 Equipment: 13 5/8 BOP Annular (5,000 psi WP) and BOP Stack (10,000 psi WP) will be installed and tested before drilling all holes.

Requesting Variance? Yes
 Variance Request: A variance is requested for the use of a flexible choke line from the BOP to Choke Manifold. See attached for specs and hydrostatic test chart.

Testing Procedure: BOP/BOPE will be tested to 250 psi low and a high of 100% WP for the Annular and 5,000psi for the BOP Stacking before drilling the intermediate hole, 10,000psi for the BOP Stacking before drilling the production hole. Testing will be conducted by an independent service company per Onshore Order 2 requirements. The System may be upgraded to a higher pressure but still tested to the working pressure listed in the Equipment Description above. If the system is upgraded all the components installed will be functional and tested.

Pipe rams will be operationally checked each 24 hour period. Blind rams will be operationally checked on each trip out of the hole. These checks will be noted on the daily tour sheets. Other accessories to the BOP equipment will include a Kelly cock, full opening safety valve / inside BOP and choke lines and choke manifold. See attached schematics.

Formation integrity test will be performed per Onshore Order #2. On Exploratory wells or on that portion of any well approved for a 5M BOPE system or greater, a pressure integrity test of each casing shoe shall be performed. Will be tested in accordance with Onshore Oil and Gas Order #2 III.B.1.i. A multibowl wellhead is being used. The BOP will be tested per Onshore Order #2 after installation on the surface casing which will cover testing requirements for a maximum of 30 days. If any seal subject to test pressure is broken the system must be tested. See attached schematic.

Section 3: CASING PROGRAM

String Type	Hole Size	Casing Size	Top Set MD	Bottom Set MD	Top Set TVD	Bottom Set TVD	Top Set MSL	Bottom Set MSL	Weight (lbs/ft)	Grade	Joint Type	Collapse SF	Burst SF	Joint SF Type	Joint SF	Body SF Type	Body SF
Surface	17.5	13.375	0	500	0	527	2916	2389	54.5	J55	BTC	5.22	1.81	BUOY	4.52	BUOY	4.52
Intermediate	12.25	9.625	0	6850	0	6837	2916	-3921	40	P110HC	BTC	1.20	1.42	BUOY	2.44	BUOY	2.44
Production	8.75	5.5	0	20400	0	7510	2916	-4594	23	P110HC	TLW	2.53	1.26	BUOY	2.22	BUOY	2.22
All casing strings will be tested in accordance with Onshore Oil and Gas Order #2 III.B.1.h												Safety Factors will Meet or Exceed					

Casing Condition: New
Casing Standard: API
Tapered String? No

Yes or No	
Is casing new? If used, attach certification as required in Onshore Order #1.	Yes
Does casing meet API specifications? If no, attach casing specification sheet.	Yes
Is premium or uncommon casing planned? If yes attach casing specification sheet.	No
Does the above casing design meet or exceed BLM's minimum standards? If not provide justification (loading assumptions, casing design criteria).	Yes
Will the intermediate pipe be kept at a minimum 1/3 fluid filled to avoid approaching the collapse pressure rating of the casing?	Yes
Is well located within Capitan Reef?	No
If yes, does production casing cement tie back a minimum of 50' above the Reef?	
Is proposed well within the designated four string boundary?	
Is well located in R-111-P and SOPA?	No
If yes, are the first three strings cemented to surface?	
Is the second string set 100' to 600' below the base of salt?	
Is well located in SOPA but not in R-111-P?	No
If yes, are the first 2 strings cemented to surface and third string cement tied back 500' into previous casing?	
Is well located in high Cave/Karst?	No
If yes, are there two strings cemented to surface?	
If yes, is there a contingency casing if lost circulation occurs?	
Is well located in critical Cave/Karst?	No
If yes, are there three strings cemented to surface?	

Section 4: CEMENT PROGRAM

String Type	Lead/Tail	Top MD	Bottom MD	Quantity (sks)	Yield (ft³/sks)	Density (ppg)	Slurry Volume (ft³)	Excess (%)	Cement Type	Additives
Surface	Lead	0	350	166	2.12	12.5	353	25	Class C	Extender, Accelerator, LCM
Surface	Tail	350	500	99	1.32	14.8	130	25	Class C	Accelerator
Intermediate	Lead	0	6350	1155	2.18	12.4	2517	25	Class C	Extender, Accelerator, LCM
Intermediate	Tail	6350	6850	147	1.33	14.8	196	25	Class C	Retarder
Production	Tail	6550	20400	2644	1.68	13	4441	25	Class H	Retarder, Extender, Fluid Loss, Suspension Agent

Stage tool depth(s) will be adjusted based on hole conditions and cement volumes will be adjusted proportionally. Stage tool will be set a minimum of 50 feet below previous casing and a minimum of 200 feet above current shoe. Lab reports with the 500 psi compressive strength time for the cement will be onsite for review.

Pilot Hole? No
Pilot Hole Depth: N/A
KOP Depth: N/A
Plugging Procedure for Pilot Hole: N/A

Plug Top	Plug Bottom	Excess (%)	Quantity (sx)	Density (ppg)	Yield (ft3/sks)	Water gal/sk	Slurry Description and Cement Type

Section 5: CIRCULATING MEDIUM

Mud System Type: Closed
Will an air or gas system be used? No

Describe what will be on location to control well or mitigate other conditions:
The necessary mud products for additional weight and fluid loss control will be on location at all times.

Describe the mud monitoring system utilized:
Losses or gains in the mud system will be monitored visually/manually as well as with an electronic PVT.

Circulating Medium Table:

Top Depth	Bottom Depth	Mud Type	Min. Weight (ppg)	Max Weight (ppg)
0	500	Water Based Mud	8.4	8.8
500	6850	Brine or Oil Based Mud	9.2	10.2
6850	20400	Oil Based Mud	10.5	12.5

Section 6: TESTING, LOGGING, CORING

List of production tests including testing procedures, equipment and safety measures:
GR from TD to surface (horizontal well - vertical portion of hole)

List of open and cased hole logs run in the well:
GR while drilling from Intermediate casing shoe to TD.

Coring operation description for the well:
Run gamma-ray (GR) and corrected neutron log (CNL) or analogous to surface for future development of the area, one per shared well pad not to exceed 200' radial distance.

Section 7: ANTICIPATED PRESSURE

Anticipated Bottom Hole Pressure: 4882 PSI
Anticipated Bottom Hole Temperature: 195 °F
Anticipated Abnormal Pressure? No
Anticipated Abnormal Temperature? No

Potential Hazards:
H2S detection equipment will be in operation after drilling out the surface casing shoe until the production casing has been cemented. Breathing equipment will be on location from drilling out the surface shoe until production casing is cemented. If H2S is encountered the operator will comply with Onshore Order #6. Adequate flare lines will be installed off the mud/gas separator where gas may be flared safely. All personnel will be familiar with all aspects of safe operation of equipment being used to drill this well. See attached H2S Contingency Plan.


Section 8: OTHER INFORMATION

Auxiliary Well Control and Monitoring Equipment:
A Kelly cock will be in the drill string at all times. A full opening drill pipe stabbing valve having the appropriate connections will be on the rig floor unobstructed and readily accessible at all times.
Hydrogen Sulfide detection equipment will be in operation after drilling out the surface casing shoe until the production casing is cemented. Breathing equipment will be on location upon drilling the surface casing shoe until total depth is reached. If Hydrogen Sulfide is encountered, measured amounts and formations will be reported to the BLM.

Anticipated Starting Date and Duration of Operations:
Road and location construction will begin after the BLM has approved the APD. Anticipated spud date will be as soon as possible after BLM approval and as soon as a rig will be available. Move in operations and drilling is expected to take 30 days.



Project: Eddy County, NM (NAD27-NME)
Site: Cobra Cobretti
Well: Cobra Cobretti BS Federal Com 301H
Wellbore: OH
Design: Plan 2 08-27-24
Rig: Cactus 171

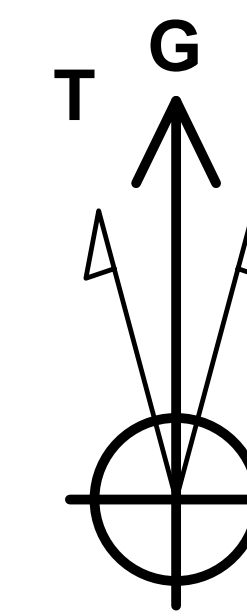

Azimuths to Grid North
True North: -0.16°
Magnetic North: 6.30°

Magnetic Field
Strength: 47318.8nT
Dip Angle: 59.69°
Date: 10/13/2024
Model: MVHD

RKB @ 2939.60usft (Cactus 171)
Ground Level: 2916.00

WELL DETAILS										
							2916.00			
	+N/-S	+E/-W	Northing	Easting	Latitude	Longitude				
	0.00	0.00	419351.59	591600.22	32° 9' 9.245488 N	104° 2' 14.471237 W				

DESIGN TARGET DETAILS										
Name	TVD	+N/-S	+E/-W	Northing	Easting	Latitude	Longitude			
FTP/PPP1v3 - Cobra Cobretti 301H	7490.00	-177.35	82.20	419174.24	591682.42	32° 9' 7.488131 N	104° 2' 13.520743 W			
LTP/BHLv3 - Cobra Cobretti 301H	7490.00	12893.28	129.08	432244.87	591729.30	32° 11' 16.838200 N	104° 2' 12.556490 W			
PI1v2 - Cobra Cobretti 301H	7490.00	10353.23	66.12	429704.82	591666.34	32° 10' 51.702786 N	104° 2' 13.370556 W			

SECTION DETAILS													
Sec	MD	Inc	Azi	TVD	+N/-S	+E/-W	Dleg	TFace	VSec	Target	Annotation		
1	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.000	0.00		KOP, Begin 2.00°/100' Build		
2	2100.00	0.00	0.00	2100.00	0.00	0.00	0.00	0.000	0.00		Hold 14.14° Inc at 226.91° Azm		
3	2405.64	6.11	151.75	2405.06	-14.35	7.71	2.00	151.747	-14.36		Begin 2.00°/100' Drop		
4	4525.57	6.11	151.75	4512.94	-213.20	114.57	0.00	0.000	-213.38		Begin Vertical Hold		
5	4831.21	0.00	0.00	4818.00	-227.55	122.28	2.00	180.000	-227.74		KOP2, Begin 10.00°/100' Build		
6	6930.25	0.00	0.00	6917.04	-227.55	122.28	0.00	0.000	-227.74		LP, Hold 90.00° Inc, Begin 2.00°/100' Turn		
7	7830.25	90.00	356.50	7490.00	344.34	87.30	10.00	356.500	344.20		Hold 359.91° Azm		
8	8000.64	90.00	359.91	7490.00	514.62	81.96	2.00	90.000	514.49		Begin 2.00°/100' Turn		
9	17839.27	90.00	359.91	7490.00	10353.23	66.12	0.00	0.00010353.11		PI1v2 - Cobra Cobretti 301H	Hold 1.44° Azm		
10	17916.03	90.00	1.44	7490.00	10429.99	67.02	2.00	90.00010429.87		LTP/BHLv3 - Cobra Cobretti 301H	TD at 20380.10		
11	20380.10	90.00	1.44	7490.00	12893.28	129.08	0.00	0.00012893.06					

Map System: US State Plane 1927 (Exact solution)
Datum: NAD 1927 (NADCON CONUS)
Ellipsoid: Clarke 1866
Zone Name: New Mexico East 3001







Local Origin: Well Cobra Cobretti BS Federal Com 301H, Grid North

Latitude: 32° 9' 9.245488 N
Longitude: 104° 2' 14.471237 W

Grid East: 591600.22
Grid North: 419351.59
Scale Factor: 1.000

Geomagnetic Model: MVHD
Sample Date: 13-Oct-24
Magnetic Declination: 6.461°
Dip Angle from Horizontal: 59.688°
Magnetic Field Strength: 47318.83438083nT

To convert a Magnetic Direction to a Grid Direction, Add 6.303°
To convert a Magnetic Direction to a True Direction, Add 6.461° East
To convert a True Direction to a Grid Direction, Subtract 0.158°

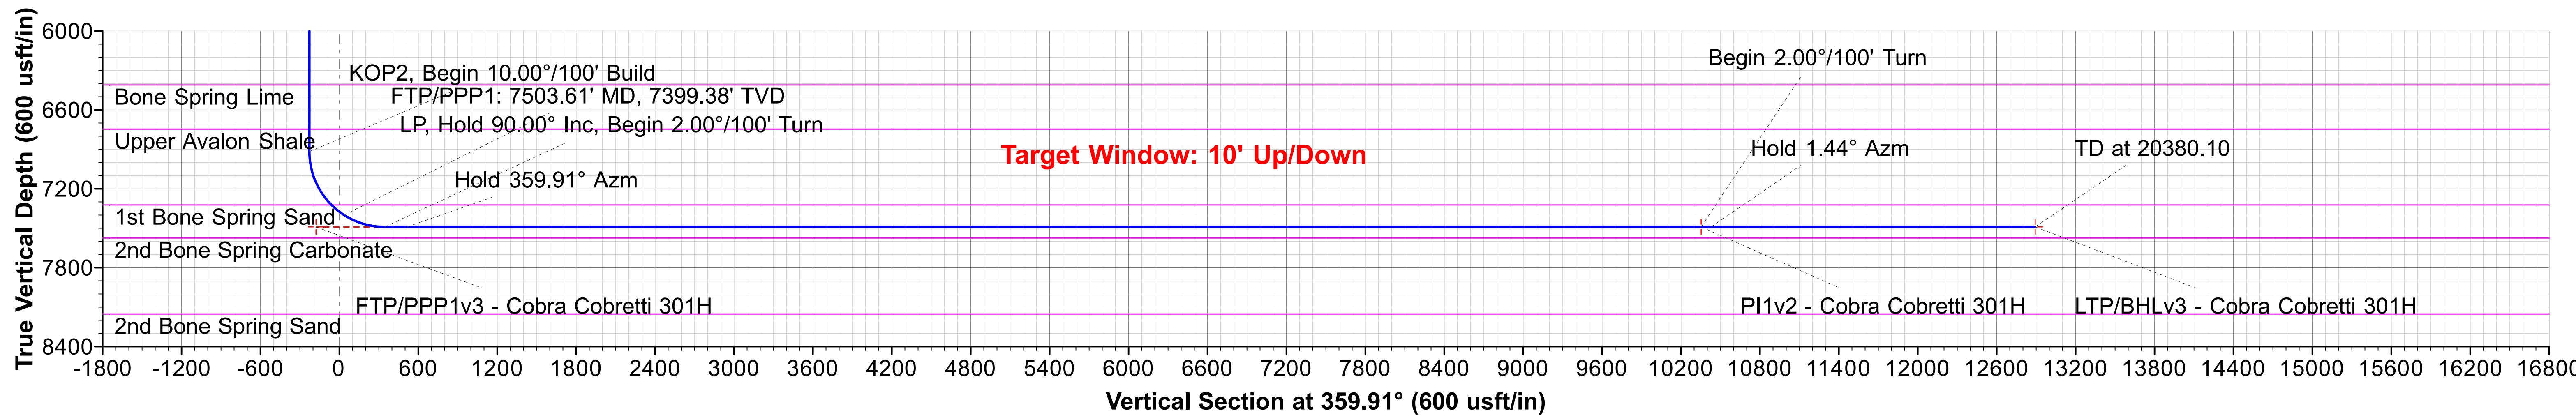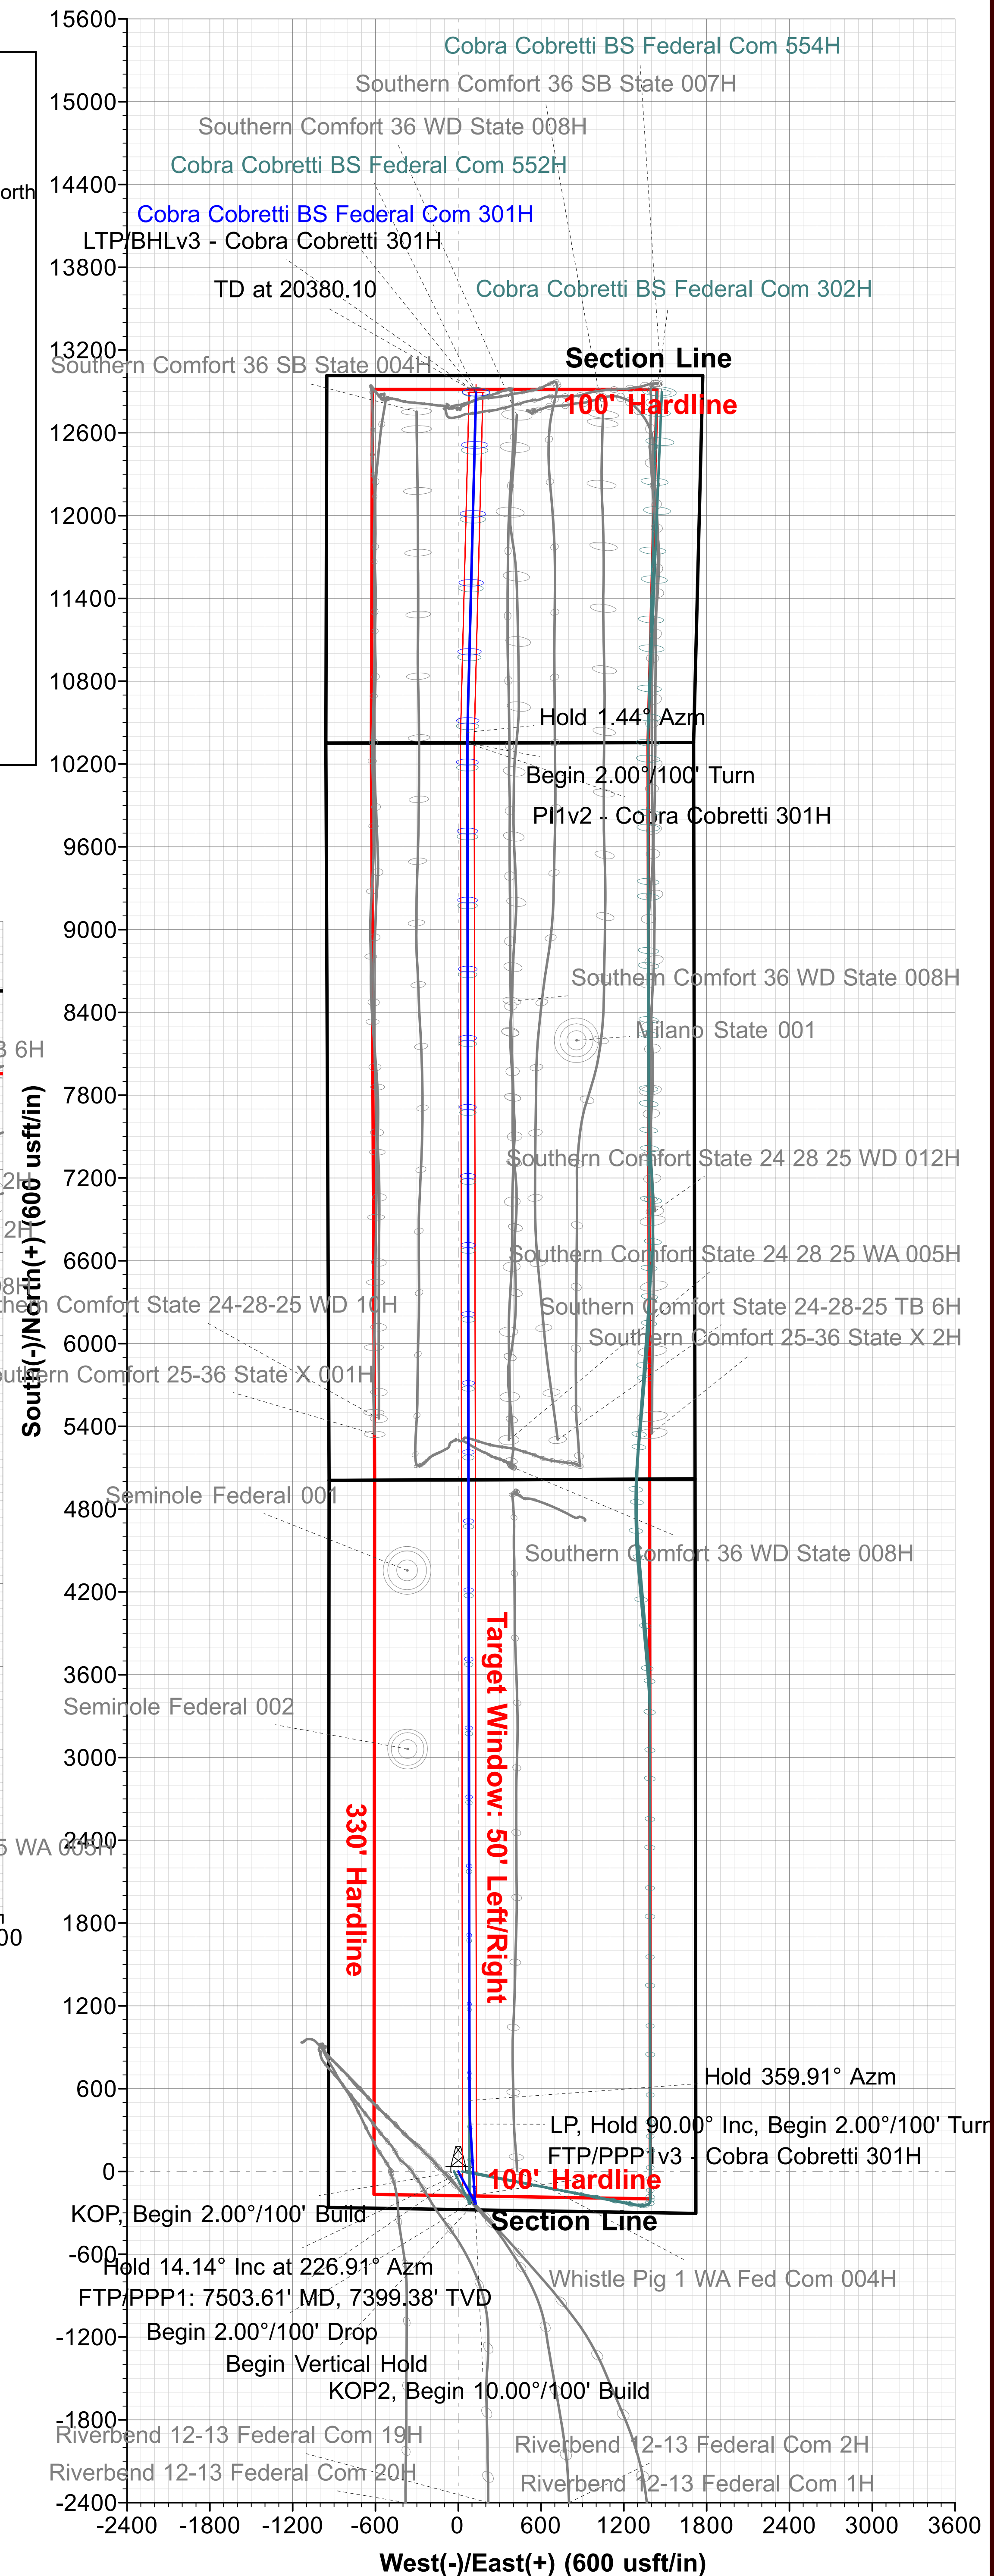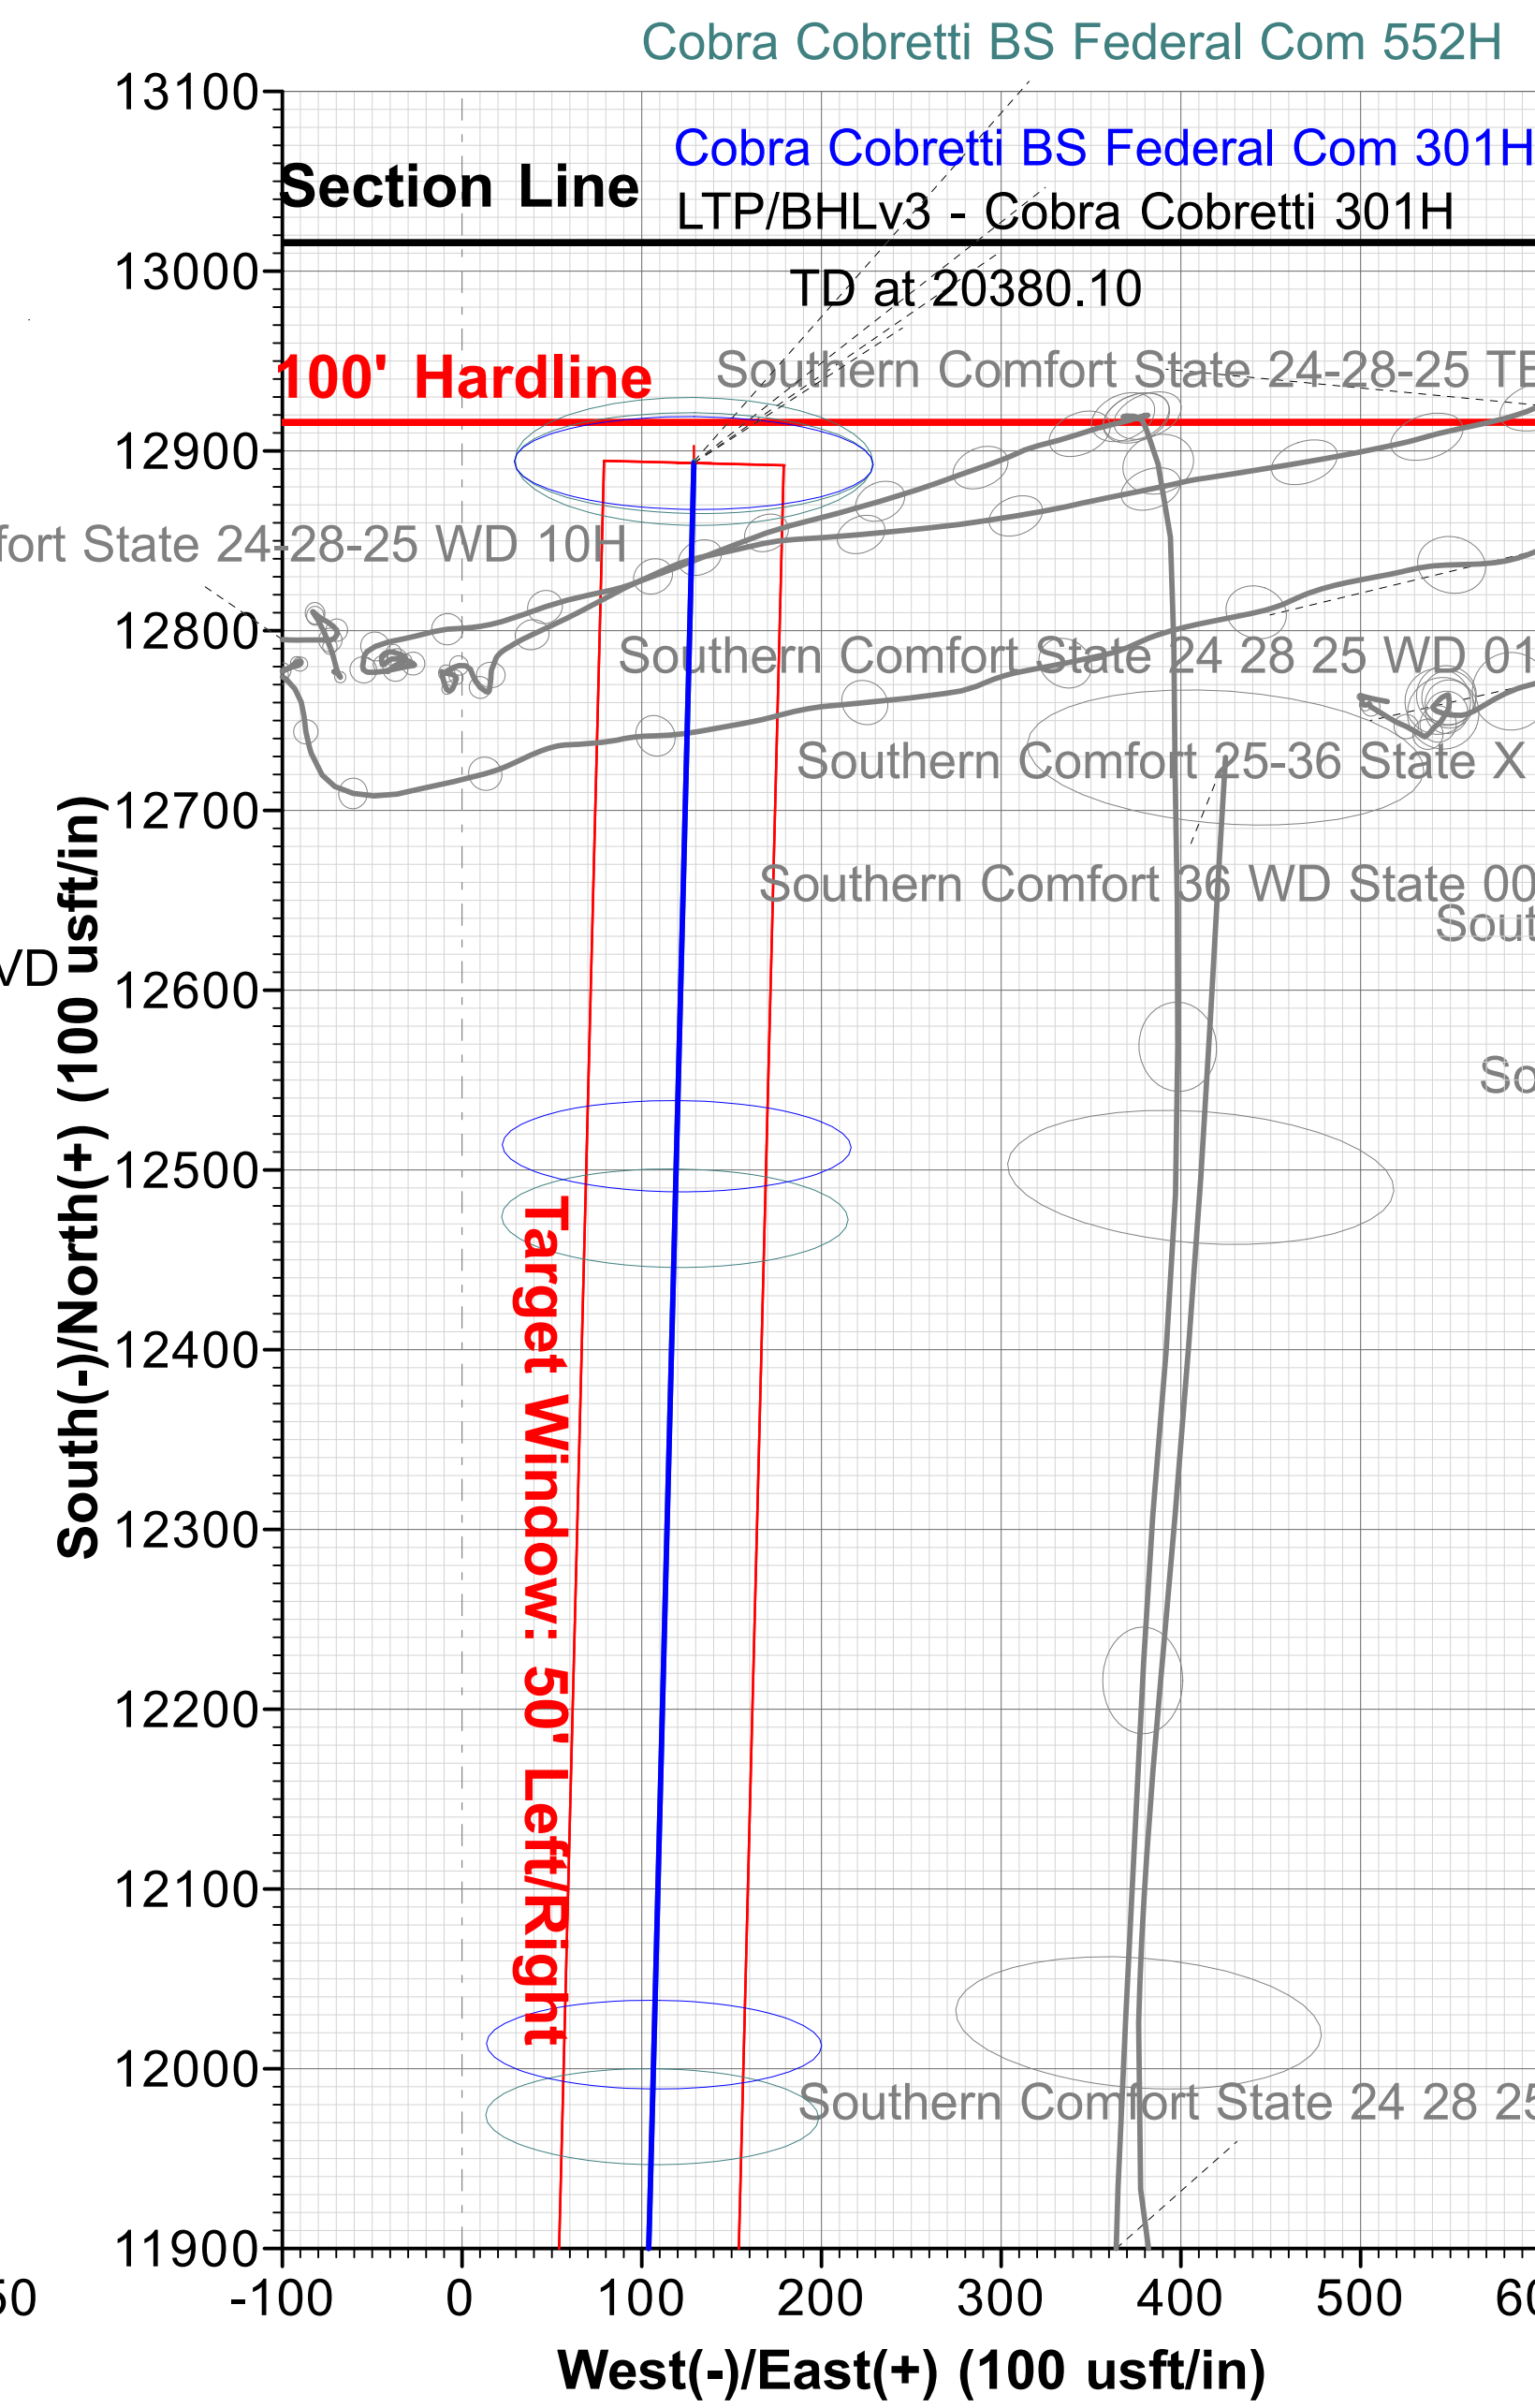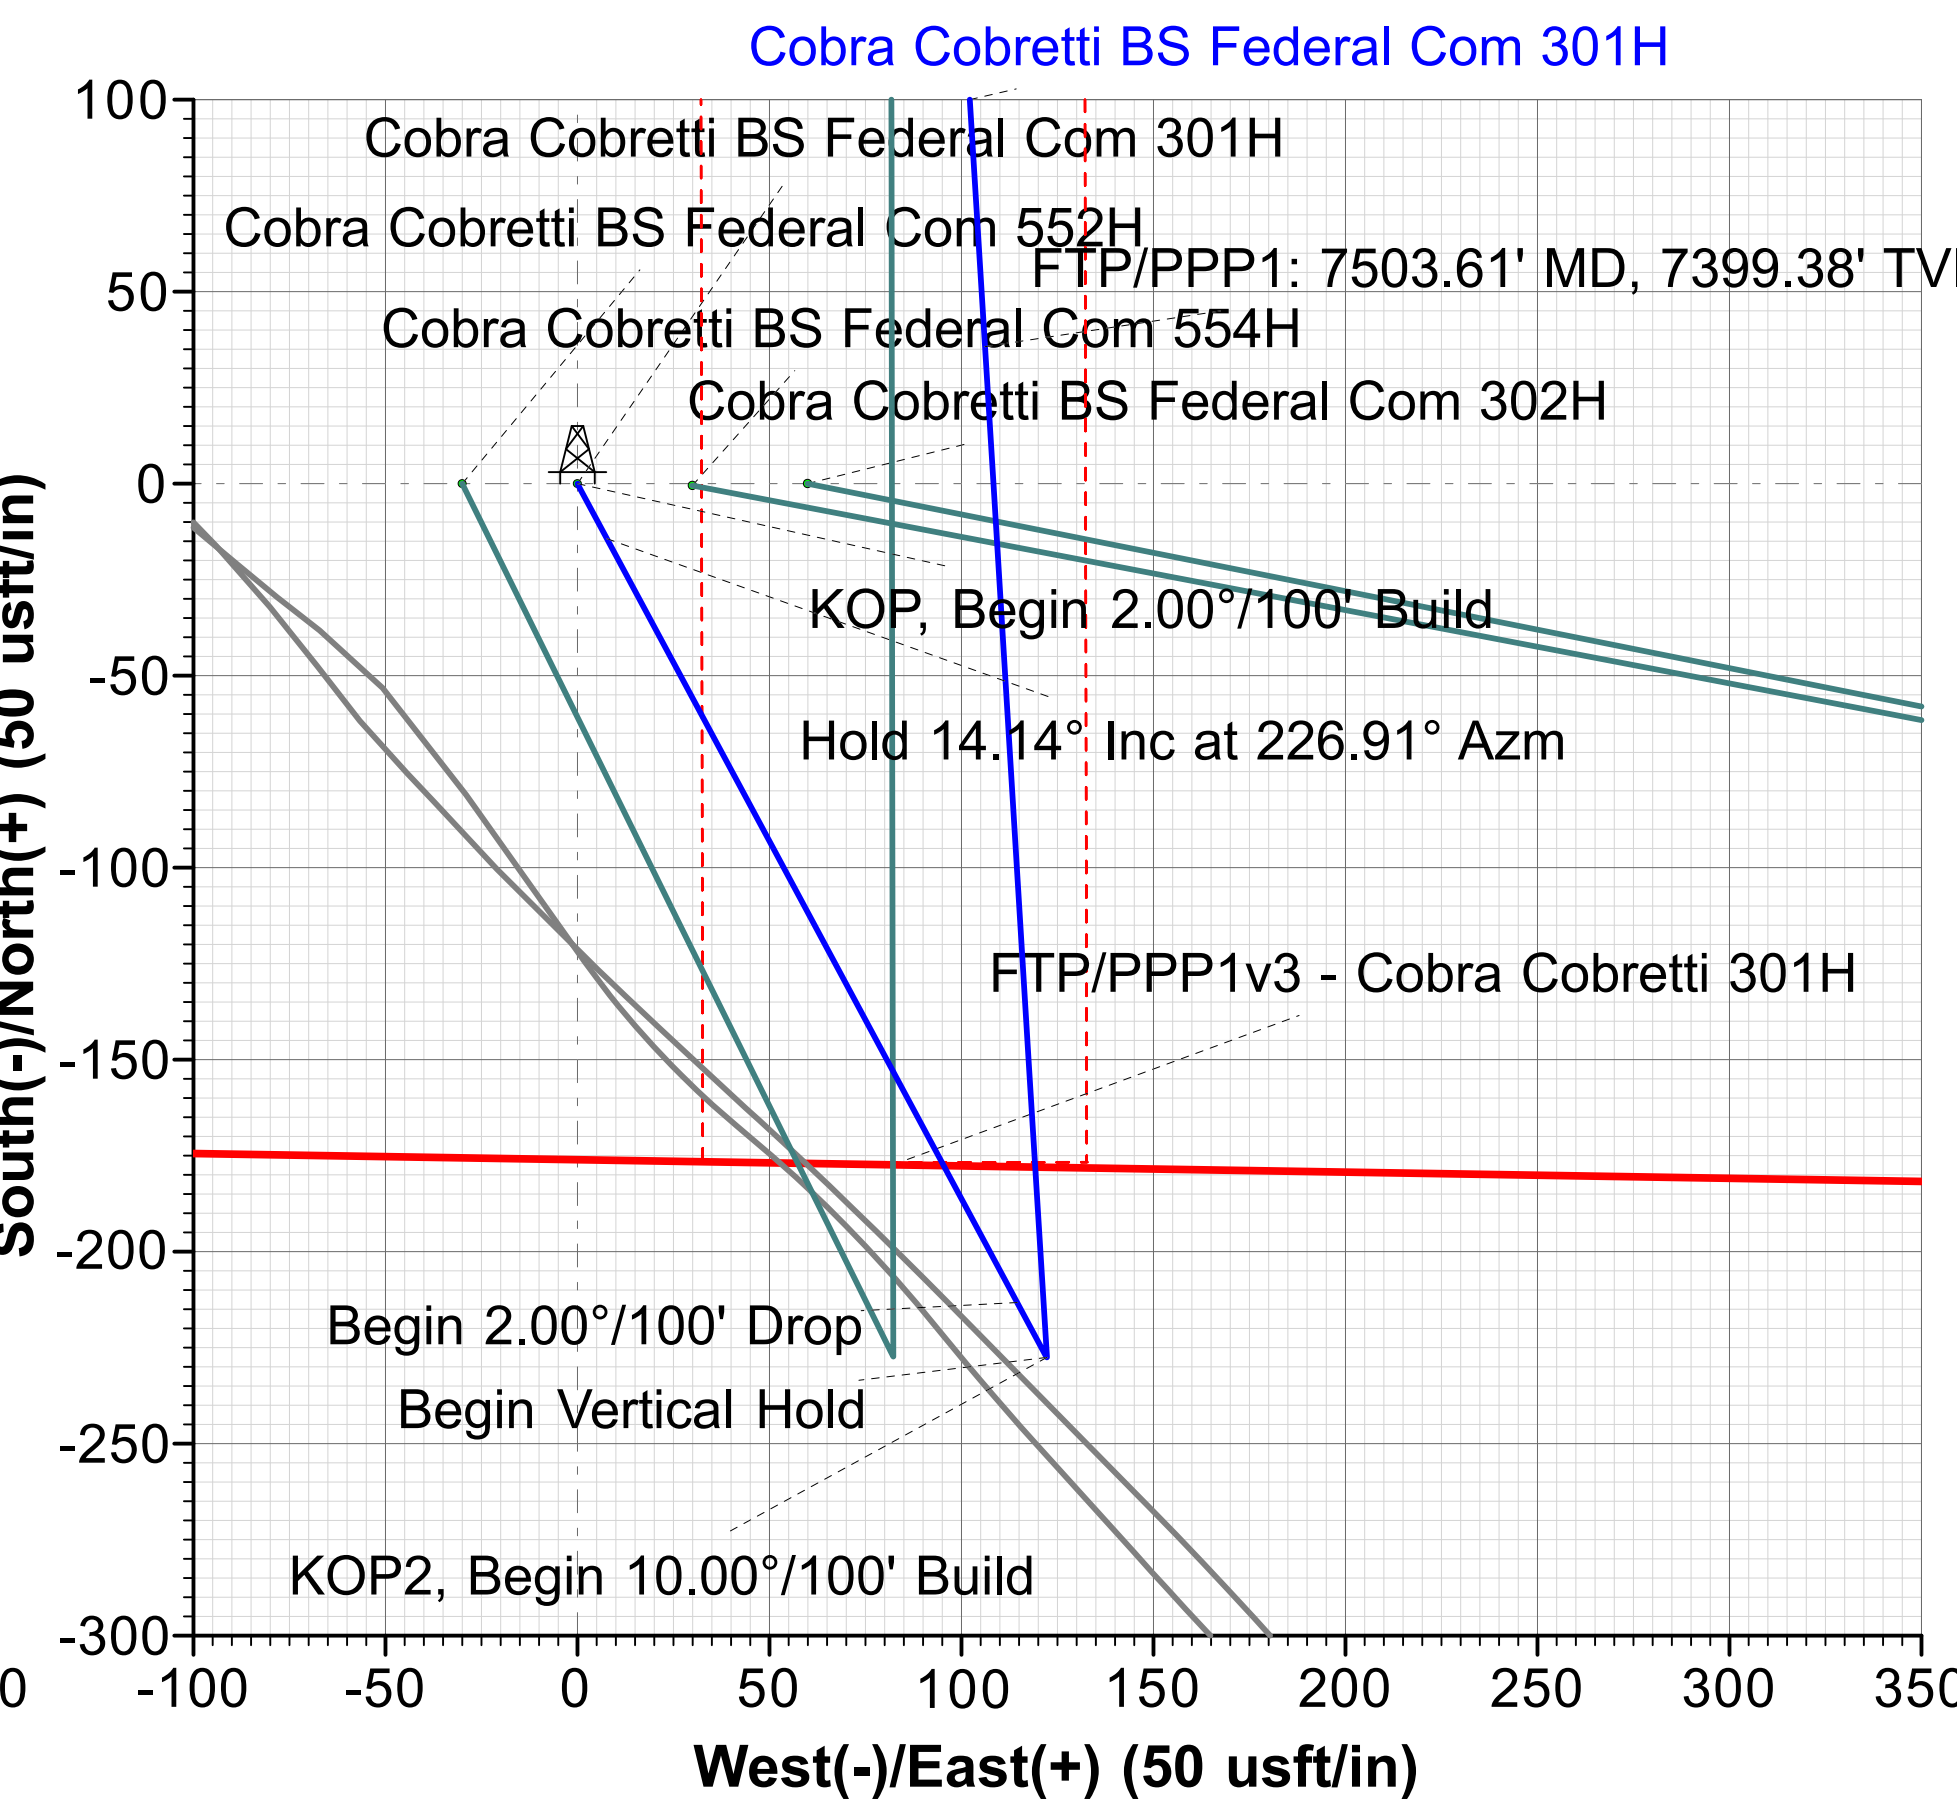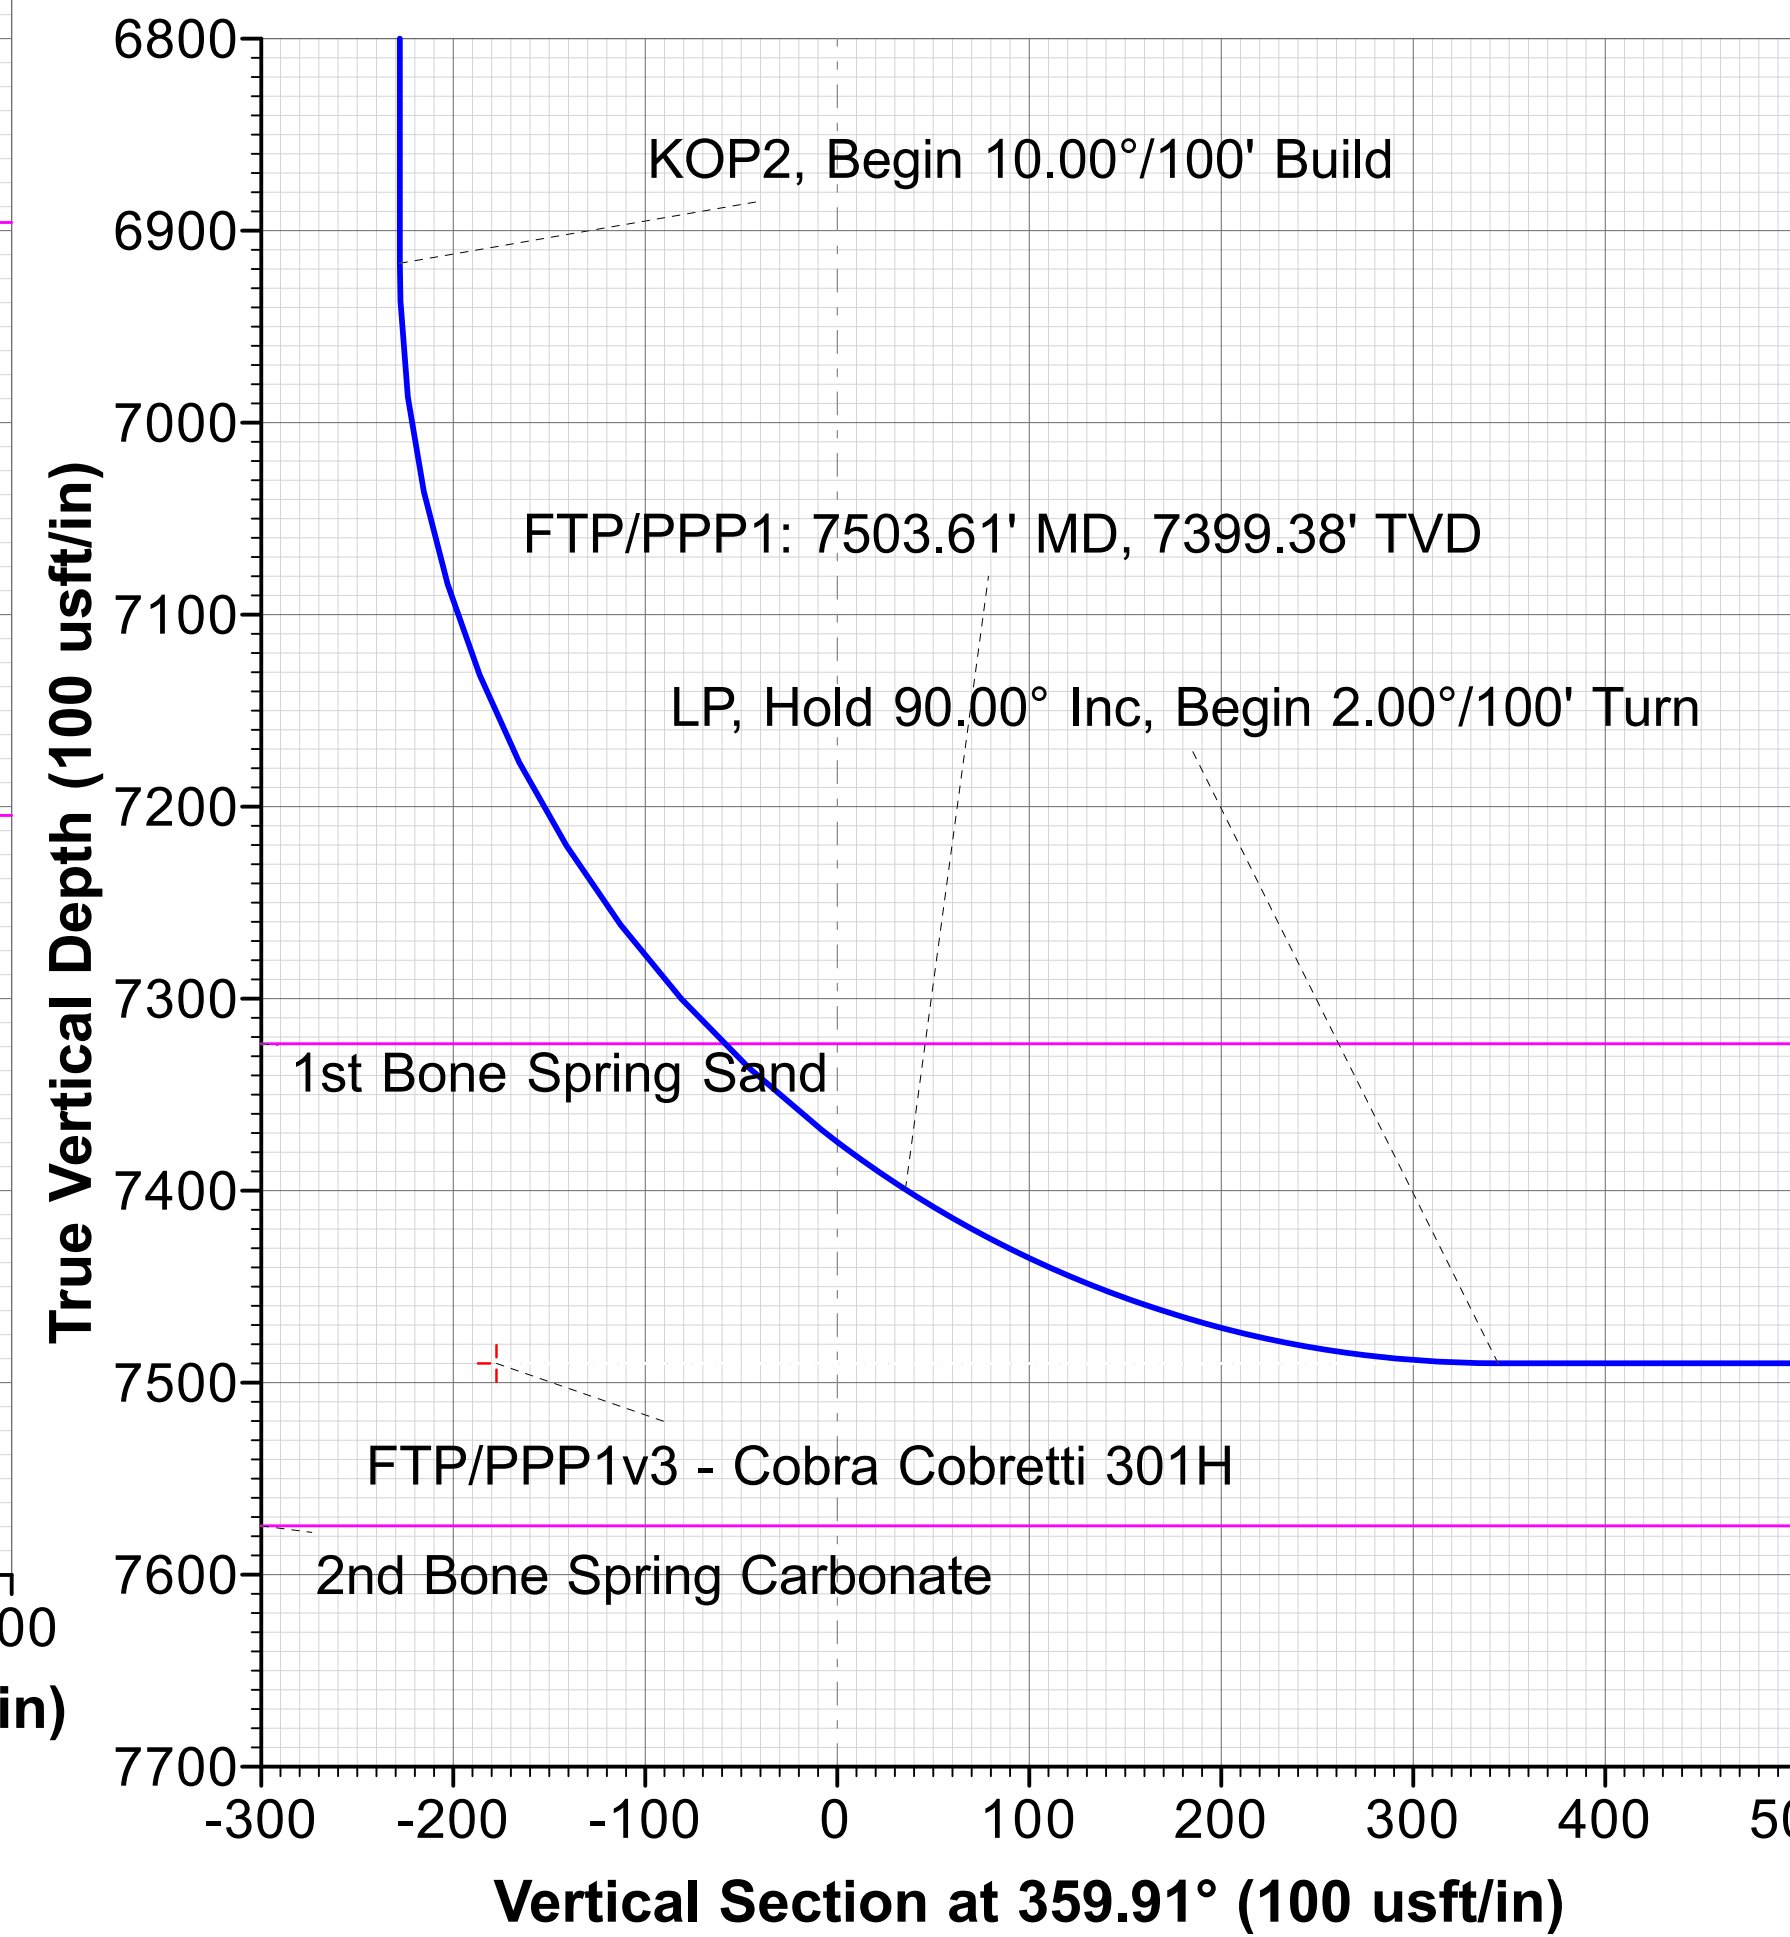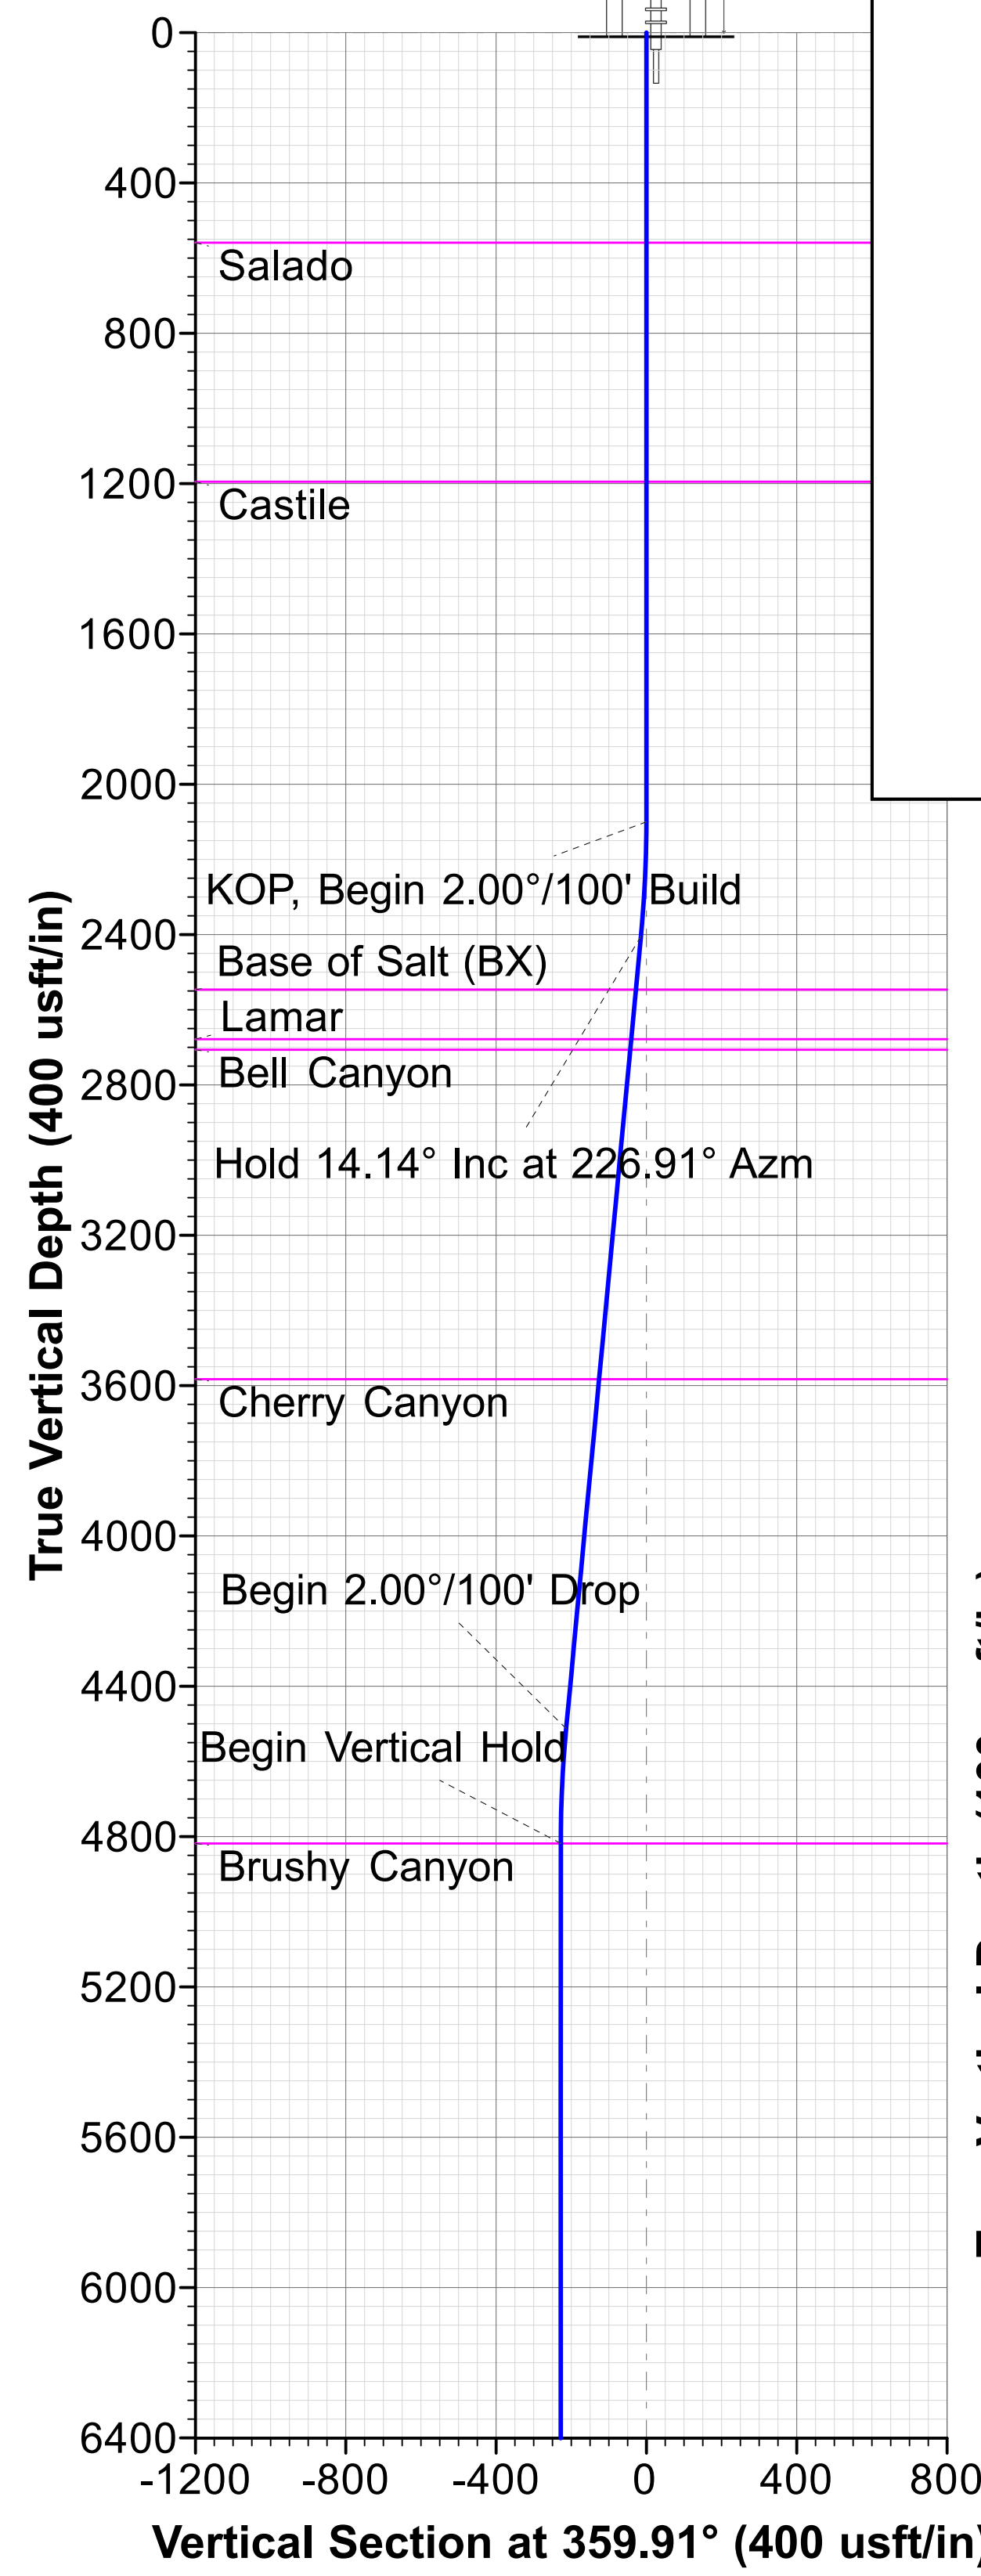



Marathon Oil Permian LLC

Eddy County, NM (NAD27-NME)

Cobra Cobretti

Cobra Cobretti BS Federal Com 301H

OH

Plan: Plan 2 08-27-24

Standard Planning Report

27 August, 2024





Planning Report



Database:	USAEDMDB	Local Co-ordinate Reference:	Well Cobra Cobretti BS Federal Com 301H
Company:	Marathon Oil Permian LLC	TVD Reference:	RKB @ 2939.60usft (Cactus 171)
Project:	Eddy County, NM (NAD27-NME)	MD Reference:	RKB @ 2939.60usft (Cactus 171)
Site:	Cobra Cobretti	North Reference:	Grid
Well:	Cobra Cobretti BS Federal Com 301H	Survey Calculation Method:	Minimum Curvature
Wellbore:	OH		
Design:	Plan 2 08-27-24		

Project	Eddy County, NM (NAD27-NME)		
Map System:	US State Plane 1927 (Exact solution)	System Datum:	Mean Sea Level
Geo Datum:	NAD 1927 (NADCON CONUS)		
Map Zone:	New Mexico East 3001		

Site		Cobra Cobretti				
Site Position:		Northing:	419,387.27 usft	Latitude:	32° 9' 9.586404 N	
From:	Map	Easting:	592,047.05 usft	Longitude:	104° 2' 9.272453 W	
Position Uncertainty:		0.00 usft	Slot Radius:	13-3/16 "	Grid Convergence:	0.158 °

Well	Cobra Cobretti BS Federal Com 301H					
Well Position	+N/-S	-35.68 usft	Northing:	419,351.59 usft	Latitude:	32° 9' 9.245488 N
	+E/-W	-446.83 usft	Easting:	591,600.22 usft	Longitude:	104° 2' 14.471237 W
Position Uncertainty		1.00 usft	Wellhead Elevation:		Ground Level:	2,916.00 usft

Wellbore	OH				
Magnetics	Model Name	Sample Date	Declination (°)	Dip Angle (°)	Field Strength (nT)
	MVHD	2024-10-13	6.461	59.688	47,318.83438083

Design	Plan 2 08-27-24			
Audit Notes:				
Version:	Phase:	PLAN	Tie On Depth:	0.00
Vertical Section:	Depth From (TVD) (usft)	+N/-S (usft)	+E/-W (usft)	Direction (°)
	0.00	0.00	0.00	359.91

Plan Survey Tool Program	Date	2024-08-27			
Depth From (usft)	Depth To (usft)	Survey (Wellbore)	Tool Name	Remarks	
1	0.00	20,380.10	Plan 2 08-27-24 (OH)	A008Mc_MWD+IFR1+MS_	
				MWD+IFR1+MSA	



Planning Report



Database:	USAEDMDB	Local Co-ordinate Reference:	Well Cobra Cobretti BS Federal Com 301H
Company:	Marathon Oil Permian LLC	TVD Reference:	RKB @ 2939.60usft (Cactus 171)
Project:	Eddy County, NM (NAD27-NME)	MD Reference:	RKB @ 2939.60usft (Cactus 171)
Site:	Cobra Cobretti	North Reference:	Grid
Well:	Cobra Cobretti BS Federal Com 301H	Survey Calculation Method:	Minimum Curvature
Wellbore:	OH		
Design:	Plan 2 08-27-24		

Plan Sections										
Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Dogleg Rate (°/100usft)	Build Rate (°/100usft)	Turn Rate (°/100usft)	TFO (°)	Target
0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.000	
2,100.00	0.00	0.00	2,100.00	0.00	0.00	0.00	0.00	0.00	0.000	
2,405.64	6.11	151.75	2,405.06	-14.35	7.71	2.00	2.00	0.00	151.747	
4,525.57	6.11	151.75	4,512.94	-213.20	114.57	0.00	0.00	0.00	0.000	
4,831.21	0.00	0.00	4,818.00	-227.55	122.28	2.00	-2.00	0.00	180.000	
6,930.25	0.00	0.00	6,917.04	-227.55	122.28	0.00	0.00	0.00	0.000	
7,830.25	90.00	356.50	7,490.00	344.34	87.30	10.00	10.00	0.00	356.500	
8,000.64	90.00	359.91	7,490.00	514.62	81.96	2.00	0.00	2.00	90.000	
17,839.27	90.00	359.91	7,490.00	10,353.23	66.12	0.00	0.00	0.00	0.000	Pl1v2 - Cobra Cobr
17,916.03	90.00	1.44	7,490.00	10,429.99	67.02	2.00	0.00	2.00	90.000	
20,380.10	90.00	1.44	7,490.00	12,893.28	129.08	0.00	0.00	0.00	0.000	LTP/BHLv3 - Cobra



Planning Report



Database:	USAEDMDB	Local Co-ordinate Reference:	Well Cobra Cobretti BS Federal Com 301H
Company:	Marathon Oil Permian LLC	TVD Reference:	RKB @ 2939.60usft (Cactus 171)
Project:	Eddy County, NM (NAD27-NME)	MD Reference:	RKB @ 2939.60usft (Cactus 171)
Site:	Cobra Cobretti	North Reference:	Grid
Well:	Cobra Cobretti BS Federal Com 301H	Survey Calculation Method:	Minimum Curvature
Wellbore:	OH		
Design:	Plan 2 08-27-24		

Planned Survey									
Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Vertical Section (usft)	Dogleg Rate (°/100usft)	Build Rate (°/100usft)	Turn Rate (°/100usft)
0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
559.60	0.00	0.00	559.60	0.00	0.00	0.00	0.00	0.00	0.00
Salado									
1,195.60	0.00	0.00	1,195.60	0.00	0.00	0.00	0.00	0.00	0.00
Castile									
2,100.00	0.00	0.00	2,100.00	0.00	0.00	0.00	0.00	0.00	0.00
KOP, Begin 2.00°/100' Build									
2,200.00	2.00	151.75	2,199.98	-1.54	0.83	-1.54	2.00	2.00	0.00
2,300.00	4.00	151.75	2,299.84	-6.15	3.30	-6.15	2.00	2.00	0.00
2,400.00	6.00	151.75	2,399.45	-13.82	7.43	-13.84	2.00	2.00	0.00
2,405.64	6.11	151.75	2,405.06	-14.35	7.71	-14.36	2.00	2.00	0.00
Hold 14.14° Inc at 226.91° Azm									
2,500.00	6.11	151.75	2,498.88	-23.20	12.47	-23.22	0.00	0.00	0.00
2,547.99	6.11	151.75	2,546.60	-27.70	14.89	-27.72	0.00	0.00	0.00
Base of Salt (BX)									
2,600.00	6.11	151.75	2,598.32	-32.58	17.51	-32.61	0.00	0.00	0.00
2,680.74	6.11	151.75	2,678.60	-40.15	21.58	-40.19	0.00	0.00	0.00
Lamar									
2,700.00	6.11	151.75	2,697.75	-41.96	22.55	-42.00	0.00	0.00	0.00
2,708.90	6.11	151.75	2,706.60	-42.79	23.00	-42.83	0.00	0.00	0.00
Bell Canyon									
2,800.00	6.11	151.75	2,797.18	-51.34	27.59	-51.38	0.00	0.00	0.00
2,900.00	6.11	151.75	2,896.61	-60.72	32.63	-60.77	0.00	0.00	0.00
3,000.00	6.11	151.75	2,996.04	-70.10	37.67	-70.16	0.00	0.00	0.00
3,100.00	6.11	151.75	3,095.47	-79.48	42.71	-79.55	0.00	0.00	0.00
3,200.00	6.11	151.75	3,194.90	-88.86	47.75	-88.94	0.00	0.00	0.00
3,300.00	6.11	151.75	3,294.34	-98.24	52.79	-98.32	0.00	0.00	0.00
3,400.00	6.11	151.75	3,393.77	-107.62	57.83	-107.71	0.00	0.00	0.00
3,500.00	6.11	151.75	3,493.20	-117.00	62.87	-117.10	0.00	0.00	0.00
3,590.92	6.11	151.75	3,583.60	-125.53	67.46	-125.64	0.00	0.00	0.00
Cherry Canyon									
3,600.00	6.11	151.75	3,592.63	-126.38	67.91	-126.49	0.00	0.00	0.00
3,700.00	6.11	151.75	3,692.06	-135.76	72.96	-135.88	0.00	0.00	0.00
3,800.00	6.11	151.75	3,791.49	-145.14	78.00	-145.26	0.00	0.00	0.00
3,900.00	6.11	151.75	3,890.92	-154.52	83.04	-154.65	0.00	0.00	0.00
4,000.00	6.11	151.75	3,990.36	-163.90	88.08	-164.04	0.00	0.00	0.00
4,100.00	6.11	151.75	4,089.79	-173.28	93.12	-173.43	0.00	0.00	0.00
4,200.00	6.11	151.75	4,189.22	-182.66	98.16	-182.82	0.00	0.00	0.00
4,300.00	6.11	151.75	4,288.65	-192.04	103.20	-192.20	0.00	0.00	0.00
4,400.00	6.11	151.75	4,388.08	-201.42	108.24	-201.59	0.00	0.00	0.00
4,500.00	6.11	151.75	4,487.51	-210.80	113.28	-210.98	0.00	0.00	0.00
4,525.57	6.11	151.75	4,512.94	-213.20	114.57	-213.38	0.00	0.00	0.00
Begin 2.00°/100' Drop									
4,600.00	4.62	151.75	4,587.04	-219.34	117.87	-219.52	2.00	-2.00	0.00
4,700.00	2.62	151.75	4,686.83	-224.90	120.86	-225.09	2.00	-2.00	0.00
4,800.00	0.62	151.75	4,786.79	-227.40	122.20	-227.59	2.00	-2.00	0.00
4,831.21	0.00	0.00	4,818.00	-227.55	122.28	-227.74	2.00	-2.00	0.00
Begin Vertical Hold									
4,831.81	0.00	0.00	4,818.60	-227.55	122.28	-227.74	0.00	0.00	0.00
Brushy Canyon									
6,423.81	0.00	0.00	6,410.60	-227.55	122.28	-227.74	0.00	0.00	0.00
Bone Spring Lime									



Planning Report



Database:	USAEDMDB	Local Co-ordinate Reference:	Well Cobra Cobretti BS Federal Com 301H
Company:	Marathon Oil Permian LLC	TVD Reference:	RKB @ 2939.60usft (Cactus 171)
Project:	Eddy County, NM (NAD27-NME)	MD Reference:	RKB @ 2939.60usft (Cactus 171)
Site:	Cobra Cobretti	North Reference:	Grid
Well:	Cobra Cobretti BS Federal Com 301H	Survey Calculation Method:	Minimum Curvature
Wellbore:	OH		
Design:	Plan 2 08-27-24		

Planned Survey										
Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Vertical Section (usft)	Dogleg Rate (°/100usft)	Build Rate (°/100usft)	Turn Rate (°/100usft)	
6,759.81	0.00	0.00	6,746.60	-227.55	122.28	-227.74	0.00	0.00	0.00	
Upper Avalon Shale										
6,930.25	0.00	0.00	6,917.04	-227.55	122.28	-227.74	0.00	0.00	0.00	
KOP2, Begin 10.00°/100' Build										
7,000.00	6.97	356.50	6,986.62	-223.32	122.02	-223.51	10.00	10.00	0.00	
7,100.00	16.97	356.50	7,084.31	-202.63	120.76	-202.82	10.00	10.00	0.00	
7,200.00	26.97	356.50	7,176.93	-165.33	118.47	-165.52	10.00	10.00	0.00	
7,300.00	36.97	356.50	7,261.65	-112.54	115.25	-112.72	10.00	10.00	0.00	
7,382.26	45.20	356.50	7,323.60	-58.63	111.95	-58.80	10.00	10.00	0.00	
1st Bone Spring Sand										
7,400.00	46.97	356.50	7,335.90	-45.87	111.17	-46.05	10.00	10.00	0.00	
7,500.00	56.97	356.50	7,397.43	32.65	106.37	32.49	10.00	10.00	0.00	
7,503.61	57.34	356.50	7,399.38	35.68	106.18	35.51	10.00	10.00	0.00	
FTP/PPP1: 7503.61' MD, 7399.38' TVD										
7,600.00	66.97	356.50	7,444.35	120.65	100.98	120.49	10.00	10.00	0.00	
7,700.00	76.97	356.50	7,475.26	215.45	95.19	215.30	10.00	10.00	0.00	
7,800.00	86.97	356.50	7,489.20	314.16	89.15	314.02	10.00	10.00	0.00	
7,830.25	90.00	356.50	7,490.00	344.34	87.30	344.20	10.00	10.00	0.00	
LP, Hold 90.00° Inc, Begin 2.00°/100' Turn										
7,900.00	90.00	357.89	7,490.00	414.00	83.89	413.87	2.00	0.00	2.00	
8,000.00	90.00	359.89	7,490.00	513.98	81.96	513.85	2.00	0.00	2.00	
8,000.64	90.00	359.91	7,490.00	514.62	81.96	514.49	2.00	0.00	2.00	
Hold 359.91° Azm										
8,100.00	90.00	359.91	7,490.00	613.98	81.80	613.85	0.00	0.00	0.00	
8,200.00	90.00	359.91	7,490.00	713.98	81.64	713.85	0.00	0.00	0.00	
8,300.00	90.00	359.91	7,490.00	813.98	81.48	813.85	0.00	0.00	0.00	
8,400.00	90.00	359.91	7,490.00	913.98	81.32	913.85	0.00	0.00	0.00	
8,500.00	90.00	359.91	7,490.00	1,013.98	81.16	1,013.85	0.00	0.00	0.00	
8,600.00	90.00	359.91	7,490.00	1,113.98	81.00	1,113.85	0.00	0.00	0.00	
8,700.00	90.00	359.91	7,490.00	1,213.98	80.84	1,213.85	0.00	0.00	0.00	
8,800.00	90.00	359.91	7,490.00	1,313.98	80.67	1,313.85	0.00	0.00	0.00	
8,900.00	90.00	359.91	7,490.00	1,413.98	80.51	1,413.85	0.00	0.00	0.00	
9,000.00	90.00	359.91	7,490.00	1,513.98	80.35	1,513.85	0.00	0.00	0.00	
9,100.00	90.00	359.91	7,490.00	1,613.98	80.19	1,613.85	0.00	0.00	0.00	
9,200.00	90.00	359.91	7,490.00	1,713.98	80.03	1,713.85	0.00	0.00	0.00	
9,300.00	90.00	359.91	7,490.00	1,813.98	79.87	1,813.85	0.00	0.00	0.00	
9,400.00	90.00	359.91	7,490.00	1,913.98	79.71	1,913.85	0.00	0.00	0.00	
9,500.00	90.00	359.91	7,490.00	2,013.98	79.55	2,013.85	0.00	0.00	0.00	
9,600.00	90.00	359.91	7,490.00	2,113.98	79.39	2,113.85	0.00	0.00	0.00	
9,700.00	90.00	359.91	7,490.00	2,213.98	79.23	2,213.85	0.00	0.00	0.00	
9,800.00	90.00	359.91	7,490.00	2,313.98	79.06	2,313.85	0.00	0.00	0.00	
9,900.00	90.00	359.91	7,490.00	2,413.97	78.90	2,413.85	0.00	0.00	0.00	
10,000.00	90.00	359.91	7,490.00	2,513.97	78.74	2,513.85	0.00	0.00	0.00	
10,100.00	90.00	359.91	7,490.00	2,613.97	78.58	2,613.85	0.00	0.00	0.00	
10,200.00	90.00	359.91	7,490.00	2,713.97	78.42	2,713.85	0.00	0.00	0.00	
10,300.00	90.00	359.91	7,490.00	2,813.97	78.26	2,813.85	0.00	0.00	0.00	
10,400.00	90.00	359.91	7,490.00	2,913.97	78.10	2,913.85	0.00	0.00	0.00	
10,500.00	90.00	359.91	7,490.00	3,013.97	77.94	3,013.85	0.00	0.00	0.00	
10,600.00	90.00	359.91	7,490.00	3,113.97	77.78	3,113.85	0.00	0.00	0.00	
10,700.00	90.00	359.91	7,490.00	3,213.97	77.62	3,213.85	0.00	0.00	0.00	
10,800.00	90.00	359.91	7,490.00	3,313.97	77.45	3,313.85	0.00	0.00	0.00	
10,900.00	90.00	359.91	7,490.00	3,413.97	77.29	3,413.85	0.00	0.00	0.00	
11,000.00	90.00	359.91	7,490.00	3,513.97	77.13	3,513.85	0.00	0.00	0.00	



Planning Report



Database:	USAEDMDB	Local Co-ordinate Reference:	Well Cobra Cobretti BS Federal Com 301H
Company:	Marathon Oil Permian LLC	TVD Reference:	RKB @ 2939.60usft (Cactus 171)
Project:	Eddy County, NM (NAD27-NME)	MD Reference:	RKB @ 2939.60usft (Cactus 171)
Site:	Cobra Cobretti	North Reference:	Grid
Well:	Cobra Cobretti BS Federal Com 301H	Survey Calculation Method:	Minimum Curvature
Wellbore:	OH		
Design:	Plan 2 08-27-24		

Planned Survey									
Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Vertical Section (usft)	Dogleg Rate (°/100usft)	Build Rate (°/100usft)	Turn Rate (°/100usft)
11,100.00	90.00	359.91	7,490.00	3,613.97	76.97	3,613.85	0.00	0.00	0.00
11,200.00	90.00	359.91	7,490.00	3,713.97	76.81	3,713.85	0.00	0.00	0.00
11,300.00	90.00	359.91	7,490.00	3,813.97	76.65	3,813.85	0.00	0.00	0.00
11,400.00	90.00	359.91	7,490.00	3,913.97	76.49	3,913.85	0.00	0.00	0.00
11,500.00	90.00	359.91	7,490.00	4,013.97	76.33	4,013.85	0.00	0.00	0.00
11,600.00	90.00	359.91	7,490.00	4,113.97	76.17	4,113.85	0.00	0.00	0.00
11,700.00	90.00	359.91	7,490.00	4,213.97	76.01	4,213.85	0.00	0.00	0.00
11,800.00	90.00	359.91	7,490.00	4,313.97	75.84	4,313.85	0.00	0.00	0.00
11,900.00	90.00	359.91	7,490.00	4,413.97	75.68	4,413.85	0.00	0.00	0.00
12,000.00	90.00	359.91	7,490.00	4,513.97	75.52	4,513.85	0.00	0.00	0.00
12,100.00	90.00	359.91	7,490.00	4,613.97	75.36	4,613.85	0.00	0.00	0.00
12,200.00	90.00	359.91	7,490.00	4,713.97	75.20	4,713.85	0.00	0.00	0.00
12,300.00	90.00	359.91	7,490.00	4,813.97	75.04	4,813.85	0.00	0.00	0.00
12,400.00	90.00	359.91	7,490.00	4,913.97	74.88	4,913.85	0.00	0.00	0.00
12,500.00	90.00	359.91	7,490.00	5,013.97	74.72	5,013.85	0.00	0.00	0.00
12,600.00	90.00	359.91	7,490.00	5,113.97	74.56	5,113.85	0.00	0.00	0.00
12,700.00	90.00	359.91	7,490.00	5,213.97	74.40	5,213.85	0.00	0.00	0.00
12,800.00	90.00	359.91	7,490.00	5,313.97	74.23	5,313.85	0.00	0.00	0.00
12,900.00	90.00	359.91	7,490.00	5,413.97	74.07	5,413.85	0.00	0.00	0.00
13,000.00	90.00	359.91	7,490.00	5,513.97	73.91	5,513.85	0.00	0.00	0.00
13,100.00	90.00	359.91	7,490.00	5,613.97	73.75	5,613.85	0.00	0.00	0.00
13,200.00	90.00	359.91	7,490.00	5,713.97	73.59	5,713.85	0.00	0.00	0.00
13,300.00	90.00	359.91	7,490.00	5,813.97	73.43	5,813.85	0.00	0.00	0.00
13,400.00	90.00	359.91	7,490.00	5,913.97	73.27	5,913.85	0.00	0.00	0.00
13,500.00	90.00	359.91	7,490.00	6,013.97	73.11	6,013.85	0.00	0.00	0.00
13,600.00	90.00	359.91	7,490.00	6,113.97	72.95	6,113.85	0.00	0.00	0.00
13,700.00	90.00	359.91	7,490.00	6,213.97	72.79	6,213.85	0.00	0.00	0.00
13,800.00	90.00	359.91	7,490.00	6,313.97	72.62	6,313.85	0.00	0.00	0.00
13,900.00	90.00	359.91	7,490.00	6,413.97	72.46	6,413.85	0.00	0.00	0.00
14,000.00	90.00	359.91	7,490.00	6,513.97	72.30	6,513.85	0.00	0.00	0.00
14,100.00	90.00	359.91	7,490.00	6,613.97	72.14	6,613.85	0.00	0.00	0.00
14,200.00	90.00	359.91	7,490.00	6,713.97	71.98	6,713.85	0.00	0.00	0.00
14,300.00	90.00	359.91	7,490.00	6,813.97	71.82	6,813.85	0.00	0.00	0.00
14,400.00	90.00	359.91	7,490.00	6,913.97	71.66	6,913.85	0.00	0.00	0.00
14,500.00	90.00	359.91	7,490.00	7,013.97	71.50	7,013.85	0.00	0.00	0.00
14,600.00	90.00	359.91	7,490.00	7,113.97	71.34	7,113.85	0.00	0.00	0.00
14,700.00	90.00	359.91	7,490.00	7,213.97	71.17	7,213.85	0.00	0.00	0.00
14,800.00	90.00	359.91	7,490.00	7,313.97	71.01	7,313.85	0.00	0.00	0.00
14,900.00	90.00	359.91	7,490.00	7,413.97	70.85	7,413.85	0.00	0.00	0.00
15,000.00	90.00	359.91	7,490.00	7,513.97	70.69	7,513.85	0.00	0.00	0.00
15,100.00	90.00	359.91	7,490.00	7,613.97	70.53	7,613.85	0.00	0.00	0.00
15,200.00	90.00	359.91	7,490.00	7,713.97	70.37	7,713.85	0.00	0.00	0.00
15,300.00	90.00	359.91	7,490.00	7,813.97	70.21	7,813.85	0.00	0.00	0.00
15,400.00	90.00	359.91	7,490.00	7,913.97	70.05	7,913.85	0.00	0.00	0.00
15,500.00	90.00	359.91	7,490.00	8,013.97	69.89	8,013.85	0.00	0.00	0.00
15,600.00	90.00	359.91	7,490.00	8,113.97	69.73	8,113.85	0.00	0.00	0.00
15,700.00	90.00	359.91	7,490.00	8,213.97	69.56	8,213.85	0.00	0.00	0.00
15,800.00	90.00	359.91	7,490.00	8,313.97	69.40	8,313.85	0.00	0.00	0.00
15,900.00	90.00	359.91	7,490.00	8,413.97	69.24	8,413.85	0.00	0.00	0.00
16,000.00	90.00	359.91	7,490.00	8,513.97	69.08	8,513.85	0.00	0.00	0.00
16,100.00	90.00	359.91	7,490.00	8,613.97	68.92	8,613.85	0.00	0.00	0.00
16,200.00	90.00	359.91	7,490.00	8,713.97	68.76	8,713.85	0.00	0.00	0.00
16,300.00	90.00	359.91	7,490.00	8,813.97	68.60	8,813.85	0.00	0.00	0.00
16,400.00	90.00	359.91	7,490.00	8,913.97	68.44	8,913.85	0.00	0.00	0.00



Planning Report



Database:	USAEDMDB	Local Co-ordinate Reference:	Well Cobra Cobretti BS Federal Com 301H
Company:	Marathon Oil Permian LLC	TVD Reference:	RKB @ 2939.60usft (Cactus 171)
Project:	Eddy County, NM (NAD27-NME)	MD Reference:	RKB @ 2939.60usft (Cactus 171)
Site:	Cobra Cobretti	North Reference:	Grid
Well:	Cobra Cobretti BS Federal Com 301H	Survey Calculation Method:	Minimum Curvature
Wellbore:	OH		
Design:	Plan 2 08-27-24		

Planned Survey									
Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Vertical Section (usft)	Dogleg Rate (°/100usft)	Build Rate (°/100usft)	Turn Rate (°/100usft)
16,500.00	90.00	359.91	7,490.00	9,013.97	68.28	9,013.85	0.00	0.00	0.00
16,600.00	90.00	359.91	7,490.00	9,113.97	68.12	9,113.85	0.00	0.00	0.00
16,700.00	90.00	359.91	7,490.00	9,213.97	67.95	9,213.85	0.00	0.00	0.00
16,800.00	90.00	359.91	7,490.00	9,313.97	67.79	9,313.85	0.00	0.00	0.00
16,900.00	90.00	359.91	7,490.00	9,413.97	67.63	9,413.85	0.00	0.00	0.00
17,000.00	90.00	359.91	7,490.00	9,513.97	67.47	9,513.85	0.00	0.00	0.00
17,100.00	90.00	359.91	7,490.00	9,613.97	67.31	9,613.85	0.00	0.00	0.00
17,200.00	90.00	359.91	7,490.00	9,713.97	67.15	9,713.85	0.00	0.00	0.00
17,300.00	90.00	359.91	7,490.00	9,813.97	66.99	9,813.85	0.00	0.00	0.00
17,400.00	90.00	359.91	7,490.00	9,913.97	66.83	9,913.85	0.00	0.00	0.00
17,500.00	90.00	359.91	7,490.00	10,013.97	66.67	10,013.85	0.00	0.00	0.00
17,600.00	90.00	359.91	7,490.00	10,113.97	66.51	10,113.85	0.00	0.00	0.00
17,700.00	90.00	359.91	7,490.00	10,213.97	66.34	10,213.85	0.00	0.00	0.00
17,800.00	90.00	359.91	7,490.00	10,313.96	66.18	10,313.85	0.00	0.00	0.00
17,839.27	90.00	359.91	7,490.00	10,353.23	66.12	10,353.11	0.00	0.00	0.00
Begin 2.00°/100' Turn									
17,900.00	90.00	1.12	7,490.00	10,413.96	66.67	10,413.84	2.00	0.00	2.00
17,916.03	90.00	1.44	7,490.00	10,429.99	67.02	10,429.87	2.00	0.00	2.00
Hold 1.44° Azm									
18,000.00	90.00	1.44	7,490.00	10,513.93	69.14	10,513.81	0.00	0.00	0.00
18,100.00	90.00	1.44	7,490.00	10,613.90	71.66	10,613.77	0.00	0.00	0.00
18,200.00	90.00	1.44	7,490.00	10,713.87	74.18	10,713.74	0.00	0.00	0.00
18,300.00	90.00	1.44	7,490.00	10,813.84	76.69	10,813.70	0.00	0.00	0.00
18,400.00	90.00	1.44	7,490.00	10,913.80	79.21	10,913.67	0.00	0.00	0.00
18,500.00	90.00	1.44	7,490.00	11,013.77	81.73	11,013.63	0.00	0.00	0.00
18,600.00	90.00	1.44	7,490.00	11,113.74	84.25	11,113.59	0.00	0.00	0.00
18,700.00	90.00	1.44	7,490.00	11,213.71	86.77	11,213.56	0.00	0.00	0.00
18,800.00	90.00	1.44	7,490.00	11,313.68	89.29	11,313.52	0.00	0.00	0.00
18,900.00	90.00	1.44	7,490.00	11,413.65	91.81	11,413.49	0.00	0.00	0.00
19,000.00	90.00	1.44	7,490.00	11,513.61	94.32	11,513.45	0.00	0.00	0.00
19,100.00	90.00	1.44	7,490.00	11,613.58	96.84	11,613.42	0.00	0.00	0.00
19,200.00	90.00	1.44	7,490.00	11,713.55	99.36	11,713.38	0.00	0.00	0.00
19,300.00	90.00	1.44	7,490.00	11,813.52	101.88	11,813.34	0.00	0.00	0.00
19,400.00	90.00	1.44	7,490.00	11,913.49	104.40	11,913.31	0.00	0.00	0.00
19,500.00	90.00	1.44	7,490.00	12,013.45	106.92	12,013.27	0.00	0.00	0.00
19,600.00	90.00	1.44	7,490.00	12,113.42	109.43	12,113.24	0.00	0.00	0.00
19,700.00	90.00	1.44	7,490.00	12,213.39	111.95	12,213.20	0.00	0.00	0.00
19,800.00	90.00	1.44	7,490.00	12,313.36	114.47	12,313.16	0.00	0.00	0.00
19,900.00	90.00	1.44	7,490.00	12,413.33	116.99	12,413.13	0.00	0.00	0.00
20,000.00	90.00	1.44	7,490.00	12,513.30	119.51	12,513.09	0.00	0.00	0.00
20,100.00	90.00	1.44	7,490.00	12,613.26	122.03	12,613.06	0.00	0.00	0.00
20,200.00	90.00	1.44	7,490.00	12,713.23	124.54	12,713.02	0.00	0.00	0.00
20,300.00	90.00	1.44	7,490.00	12,813.20	127.06	12,812.99	0.00	0.00	0.00
20,380.10	90.00	1.44	7,490.00	12,893.28	129.08	12,893.06	0.00	0.00	0.00
TD at 20380.10									



Planning Report



Database:	USAEDMDB	Local Co-ordinate Reference:	Well Cobra Cobretti BS Federal Com 301H
Company:	Marathon Oil Permian LLC	TVD Reference:	RKB @ 2939.60usft (Cactus 171)
Project:	Eddy County, NM (NAD27-NME)	MD Reference:	RKB @ 2939.60usft (Cactus 171)
Site:	Cobra Cobretti	North Reference:	Grid
Well:	Cobra Cobretti BS Federal Com 301H	Survey Calculation Method:	Minimum Curvature
Wellbore:	OH		
Design:	Plan 2 08-27-24		

Design Targets

Target Name

- hit/miss target	Dip Angle	Dip Dir.	TVD	+N/-S	+E/-W	Northing	Easting	Latitude	Longitude
- Shape	(°)	(°)	(usft)	(usft)	(usft)	(usft)	(usft)		
FTP/PPP1v3 - Cobra	0.00	0.00	7,490.00	-177.35	82.20	419,174.24	591,682.42	32° 9' 7.488131 N 04° 2' 13.520743 W	
- plan misses target center by 204.63usft at 7400.00usft MD (7335.90 TVD, -45.87 N, 111.17 E)									
- Point									
PI1v2 - Cobra Cobrett	0.00	359.91	7,490.00	10,353.23	66.12	429,704.82	591,666.34	32° 10' 51.702787 N 04° 2' 13.370556 W	
- plan hits target center									
- Rectangle (sides W100.00 H10,530.00 D0.00)									
LTP/BHLv3 - Cobra C	0.00	1.44	7,490.00	12,893.28	129.08	432,244.87	591,729.30	32° 11' 16.838200 N 04° 2' 12.556490 W	
- plan hits target center									
- Rectangle (sides W100.00 H2,540.84 D0.00)									

Formations

Measured Depth	Vertical Depth	Name	Lithology	Dip	Dip Direction
(usft)	(usft)			(°)	(°)
559.60	559.60	Salado		0.000	0.05
1,195.60	1,195.60	Castile		0.000	0.05
2,547.99	2,546.60	Base of Salt (BX)		0.000	0.05
2,680.74	2,678.60	Lamar		0.000	0.05
2,708.90	2,706.60	Bell Canyon		0.000	0.05
3,590.92	3,583.60	Cherry Canyon		0.000	0.05
4,831.81	4,818.60	Brushy Canyon		0.000	0.05
6,423.81	6,410.60	Bone Spring Lime		0.000	0.05
6,759.81	6,746.60	Upper Avalon Shale		0.000	0.05
7,382.26	7,323.60	1st Bone Spring Sand		0.000	0.05

Plan Annotations

Measured Depth	Vertical Depth	Local Coordinates		Comment
(usft)	(usft)	+N/-S (usft)	+E/-W (usft)	
2,100.00	2,100.00	0.00	0.00	KOP, Begin 2.00°/100' Build
2,405.64	2,405.06	-14.35	7.71	Hold 14.14° Inc at 226.91° Azm
4,525.57	4,512.94	-213.20	114.57	Begin 2.00°/100' Drop
4,831.21	4,818.00	-227.55	122.28	Begin Vertical Hold
6,930.25	6,917.04	-227.55	122.28	KOP2, Begin 10.00°/100' Build
7,503.61	7,399.38	35.68	106.18	FTP/PPP1: 7503.61' MD, 7399.38' TVD
7,830.25	7,490.00	344.34	87.30	LP, Hold 90.00° Inc, Begin 2.00°/100' Turn
8,000.64	7,490.00	514.62	81.96	Hold 359.91° Azm
17,839.27	7,490.00	10,353.23	66.12	Begin 2.00°/100' Turn
17,916.03	7,490.00	10,429.99	67.02	Hold 1.44° Azm
20,380.10	7,490.00	12,893.28	129.08	TD at 20380.10

1625 N. French Dr., Hobbs, NM 88240
Phone: (575) 393-6161 Fax: (575) 393-0720
District II
811 S. First St., Artesia, NM 88210
Phone: (575) 748-1283 Fax: (575) 748-9720
District III
1000 Rio Brazos Road, Aztec, NM 87410
Phone: (505) 334-6178 Fax: (505) 334-6170
District IV
1220 S. St. Francis Dr., Santa Fe, NM 87505
Phone: (505) 476-3460 Fax: (505) 476-3462

State of New Mexico
Energy, Minerals & Natural Resources Department
OIL CONSERVATION DIVISION
1220 South St. Francis Dr.
Santa Fe, NM 87505

Form C-102 Revised August 1, 2011
Submit one copy to appropriate
District Office

☐ AMENDED REPORT

WELL LOCATION AND ACREAGE DEDICATION PLAT

¹ API Number 30-015-55318	² Pool Code 64450	³ Pool Name WILLOW LAKE; BONE SPRING
⁴ Property Code 336005	⁵ Property Name COBRA COBRETTI BS FEDERAL COM	⁶ Well Number 301H
⁷ OGRID No. 372098	⁸ Operator Name MARATHON OIL PERMIAN LLC	⁹ Elevation 2919'


¹⁰ Surface Location

UL or lot no.	Section	Township	Range	Lot Idn	Feet from the	North/South line	Feet from the	East/West line	County
O	1	25S	28E		524'	SOUTH	1811'	EAST	EDDY

¹¹ Bottom Hole Location If Different From Surface

UL or lot no.	Section	Township	Range	Lot Idn	Feet from the	North/South line	Feet from the	East/West line	County
B	25	24S	28E		100'	NORTH	2310'	EAST	EDDY
¹² Dedicated Acres 960.08	¹³ Joint or Infill	¹⁴ Consolidation Code	¹⁵ Order No.						

No allowable will be assigned to this completion until all interests have been consolidated or a non-standard unit has been approved by the division.

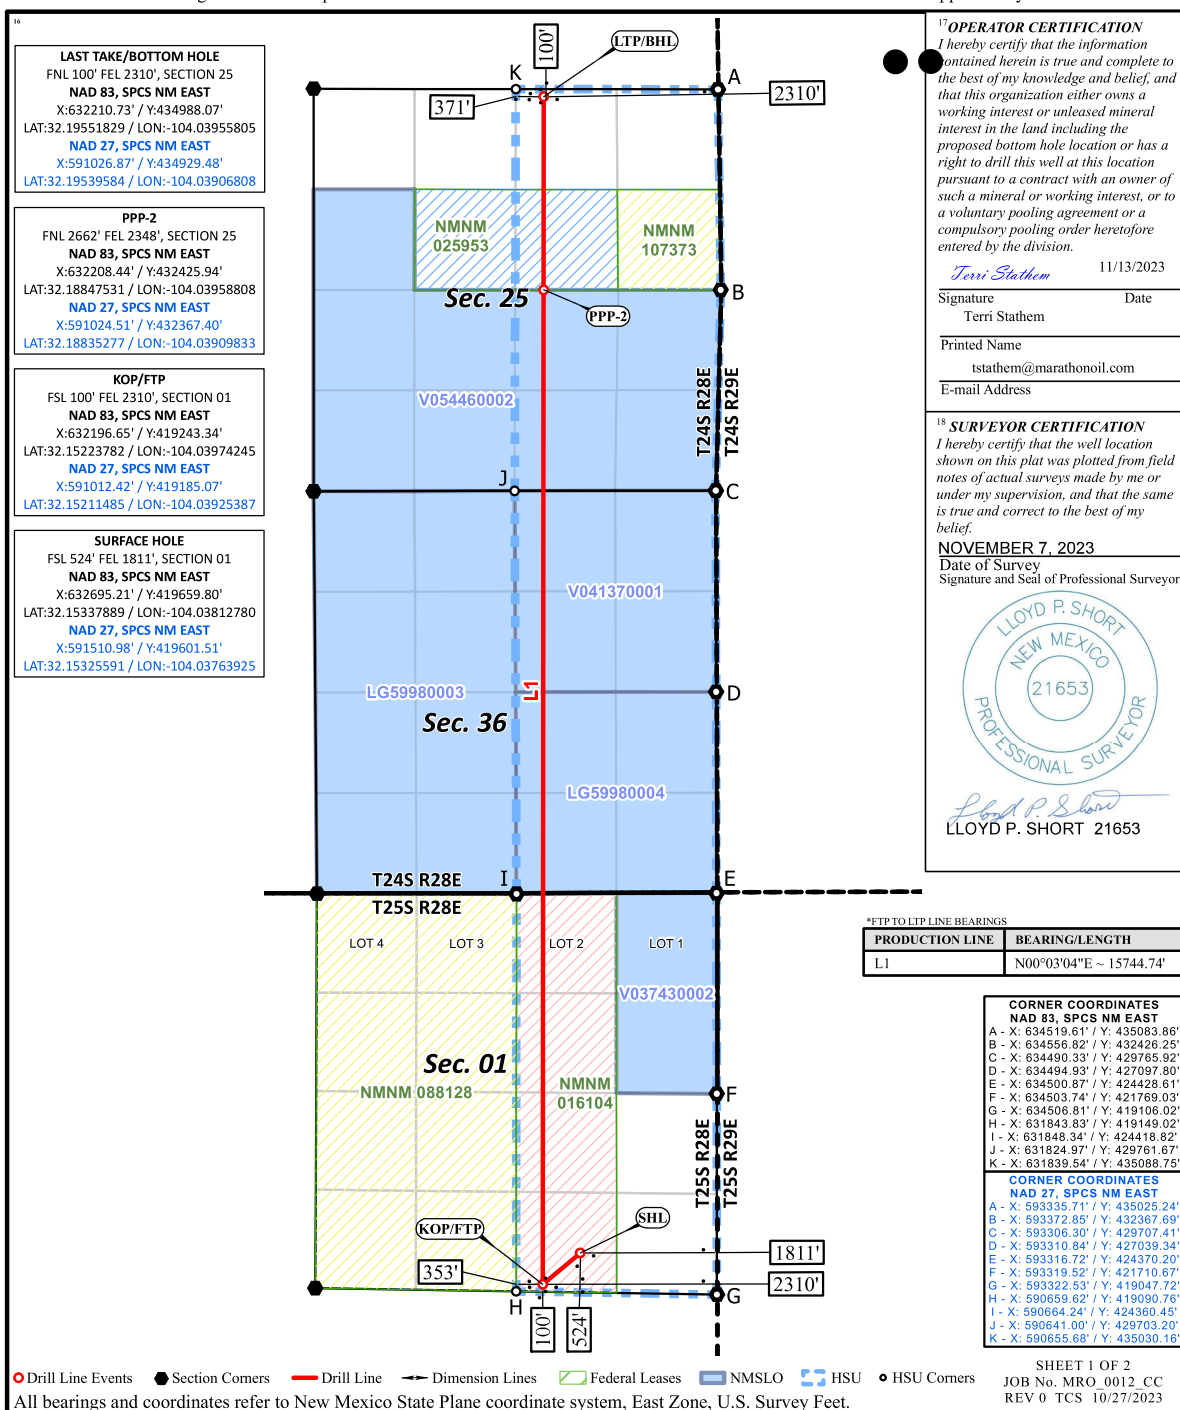

District I
1625 N. French Dr., Hobbs, NM 88240
Phone:(575) 393-6161 Fax:(575) 393-0720
District II
811 S. First St., Artesia, NM 88210
Phone:(575) 748-1283 Fax:(575) 748-9720
District III
1000 Rio Brazos Rd., Aztec, NM 87410
Phone:(505) 334-6178 Fax:(505) 334-6170
District IV
1220 S. St Francis Dr., Santa Fe, NM 87505
Phone:(505) 476-3470 Fax:(505) 476-3462

State of New Mexico
Energy, Minerals and Natural Resources
Oil Conservation Division
1220 S. St Francis Dr.
Santa Fe, NM 87505

CONDITIONS

Action 390214

CONDITIONS

Operator: MARATHON OIL PERMIAN LLC 990 Town & Country Blvd. Houston, TX 77024	OGRID: 372098
	Action Number: 390214
	Action Type: [C-103] NOI Change of Plans (C-103A)

CONDITIONS

Created By	Condition	Condition Date
ward.rikala	All original COA's still apply. Additionally, if cement is not circulated to surface during cementing operations, then a CBL is required.	10/10/2024