| atural Resources Revised July 18, 201  |
|--|
| WELL API NO.<br>20.015 55825   |
| ON DIVISION30-015-558355. Indicate Type of Lease   |
| Stancis Dr.Stancis I be and the state of the |
| I 875056. State Oil & Gas Lease No.  |
|  |
| LS 7. Lease Name or Unit Agreement Name<br>PLUG BACK TO A<br>OCOTILLO STATE COM  |
| 8. Well Number 214H  |
| 9. OGRID Number 372165   |
| 10. Pool name or Wildcat   |
| [98220] Purple Sage; Wolfcamp  |
|  |
| th line and1204feet from the _Eastline   |
| Range 26E NMPM County Eddy   |
| DR, RKB, RT, GR, etc.)   |
|  |
|  |
| Nature of Notice, Report or Other Data   |
| SUBSEQUENT REPORT OF:  |
|  |
|  |
| CASING/CEMENT JOB  |
|  |
| OTHER:   |
| Surface and Intermediate CSG set depth, cement and mud circulation changes.  |
| drilling program.  |
|  |
| drilling program. Date:  |
|  |
| Date:  |
| Date:  |
| Date:  |
| e<br>ne  |

.

Released to Imaging: 1/21/2025 8:21:58 AM

Received by OCD: 12/26/2024 12:57:32 PM


|   |   |  |  |  |   | ural Resources Department  |                |                                 |                | Revised July 9, 2024 |  |
|---|---|--|--|--|---|--|----------------|---------------------------------|----------------|----------------------|--|
|   | Electronicall<br>Permitting   | ý  |  | OIL  | CONSERVA  | HON DIVISION   |                |                                 | 🗹 Initial Su   | ubmittal             |  |
|   | 0   |  |  |  |   |  |                | Submittal<br>Type:              | Amende         | ed Report            |  |
|   |   |  |  |  |   |  |                | Type.                           | 🗆 As Drille    | ed                   |  |
|   |   |  |  |  | WELL LOCATI   | ON INFORMATION   |                |                                 |                |                      |  |
| API Nu  | imber   | 25   | Pool Code  | e  |   | Pool Name  |                |                                 |                |                      |  |
|   | -015-558  | 35   | Duanantus  | 98220  |   | Purple   | Sage; Wo       | lfcamp                          |                |                      |  |
|   | t <b>y Code</b><br>6568   |  | Property I   | vame   | OCOTIL  | LO STATE COM   |                |                                 | Well Numb      | er<br>214H           |  |
| OGRIE   |   | _  | Operator   |  |   |  |                |                                 | -              | vel Elevation        |  |
|   | 37216   | <b>5</b><br>wner: 🗹 Stat   |  |  |   | JRCES OPERATING  | ner: 🗹 State   |                                 |                | ,411.04'             |  |
|   | Surface C   |  |  |  | rederal   | Willeral Ow  |                |                                 |                |                      |  |
|   | L   |  |  |  | Surfa   | ce Location  | k              |                                 |                |                      |  |
| UL  | Section   | Township   | Range  | Lot  | Ft. from N/S  | Ft. from E/W   | Latitude       | Lc                              | ongitude       | County               |  |
| Ρ   | 6   | 23S  | 26E  |  | 325' FSL  | 1,204' FEL   | 32.327         | 161° -10                        | )4.328258°     | EDDY                 |  |
|   |   |  |  | -  | Bottom  | Hole Location  | •<br>•         | I                               |                | ·                    |  |
| JL  | Section   | Township   | Range  | Lot  | Ft. from N/S  | Ft. from E/W   | Latitude       | Lc                              | ongitude       | County               |  |
| Α   | 31  | 22S  | 26E  |  | 100' FNL  | 990' FEL   | 32.355         | 566° -10                        | )4.327103°     | EDDY                 |  |
|   |   |  | -  |  |   |  |                |                                 |                | •                    |  |
| edica)<br>620   | ted Acres   | Infill or Defir<br>Defini:   | -  | Definin  | g Well API  | Overlapping Spacing  | g Unit (Y/N)   | Consolidat                      | on Code        |                      |  |
| Order I   | Numbers.  |  |  | •  |   | Well setbacks are u  | under Comm     | on Ownersh                      | ip: □Yes □I    | No                   |  |
|   |   |  |  |  | Kick Of   | ff Point (KOP)   |                |                                 |                |                      |  |
| JL  | Section   | Township   | Range  | Lot  | Ft. from N/S  | Ft. from E/W   | Latitude       |                                 | ongitude       | County               |  |
| P   | 6   | 235  | 26E  | 201  | 325' FSL  | 1,204' FEL   | 32.327         |                                 | )4.328258°     | EDDY                 |  |
| •   |   |  |  |  |   | ke Point (FTP)   |                |                                 |                |                      |  |
| UL  | Section   | Township   | Range  | Lot  | Ft. from N/S  | Ft. from E/W   | Latitude       | Lc                              | ongitude       | County               |  |
| P   | 6   | 235  | 26E  | 201  | 100' FSL  | 990' FEL   | 32.326         |                                 | )4.327617°     | EDDY                 |  |
| •   | Ŭ   | 200  |  |  |   | ake Point (LTP)  | 02.020         |                                 |                | 2001                 |  |
| JL  | Section   | Township   | Range  | Lot  | Ft. from N/S  | Ft. from E/W   | Latitude       | Lc                              | ongitude       | County               |  |
| Α   | 31  | 225  | 26E  |  | 100' FNL  | 990' FEL   | 32.355         |                                 |                | EDDY                 |  |
| Α   | •   |  |  |  |   | 000122   | 02.000         |                                 |                | 2001                 |  |
| Jnitize   | d Area or A   | rea of Uniform   | n Interest   | Spacing  | g Unit Type 🗆 Ho  | rizontal 🗆 Vertical  | Grou           | nd Floor Ele                    | vation:        |                      |  |
|   |   | TIFICATIONS  |  |  |   | SURVEYOR CERTIF  |                |                                 |                |                      |  |
|   |   |  |  |  |   |  |                |                                 |                |                      |  |
| best of i<br>hat this<br>n the la<br>well at t<br>unlease | my knowledge<br>organization<br>nd including<br>his location p<br>d mineral int | e and belief, and<br>either owns a v<br>the proposed bo<br>ursuant to a cor          | d, if the well is<br>vorking intere-<br>ottom hole loc<br>ntract with an<br>luntary poolin | a vertical o<br>st or unleas<br>ation or has<br>owner of a v | d complete to the<br>r directional well,<br>ed mineral interest<br>a right to drill this<br>working interest or<br>at or a compulsory | I hereby certify that the w<br>actual surveys made by<br>correct to the best of my | me or under m  | y supervision,                  | and that the s |                      |  |
| f this w<br>he con:<br>nineral<br>he well                 | ell is a horizo<br>sent of at leas<br>interest in ea                            | ntal well, I furthe<br>st one lessee or<br>ch tract (in the t<br>interval will be le | er certify that t<br>owner of a we<br>arget pool or t                                      | orking intere<br>formation) ir                               | n which any part of   | NICHOLAS COLE<br>COOSA CONSUL<br>PO BOX 1583, MII                                  | TING CORP      | 9. 29796<br>DRATION<br>AS 79701 | UN PROFESSION  |                      |  |
| Signatu   | re  |  | [  | Date   |   | Signature and Seal of Pr   | ofessional Sur | veyor                           |                | HAL SUN              |  |
| (   | lasoi (   | p<br>Nang-   |  | 12/25/2  | 24  |  |                |                                 |                | -                    |  |
| rinted  | Name  |  |  |  |   | Certificate Number   | Date of Sur    | /ey                             |                |                      |  |
| Printed Name  |   |  |  |  |   | 1  | I              |                                 |                |                      |  |
|   | ssie Eva  | ns   |  |  |   | 12177  |                | 1                               | 1/8/2024       |                      |  |

Note: No allowable will be assigned to this completion until all interests have been consolidated or a non-standard unit has been approved by the division. Released to Imaging: 1/21/2025 8:21:58 AM

#### Received by OCD: 12/26/2024 12:57:32 PM ACREAGE DEDICATION PLATS

This grid represents a standard section. You may superimpose a non-standard section, or larger area, over this grid. Operators must outline the dedicated acreage in a red box, clearly show the well surface location and bottom hole location, if it is directionally drilled, with the dimensions from the section lines in the cardinal directions. If this is a horizontal wellbore show on this plat the location of the First Take Point and Last Take Point, and the point within the Completed interval (other than the First Take Point or Last Take Point) that is closest to any outer boundary of the tract.

Surveyors shall use the latest United States government survey or dependent resurvey. Well locations will be in reference to the New Mexico Principal Meridian. If the land is not surveyed, contact the OCD Engineering Bureau. Independent subdivision surveys will not be acceptable.

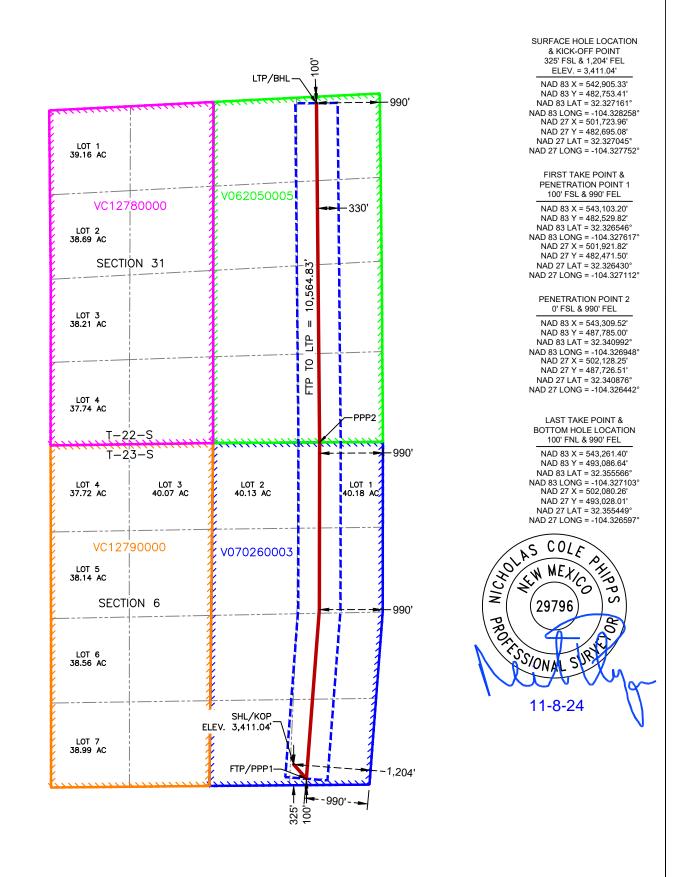

.

# Permian Resources - Ocotillo State Com 214H

# 1. Geologic Formations

| Formation            | Elevation | TVD  | Target |
|----------------------|-----------|------|--------|
| Rustler              | 2991      | 450  | No     |
| Capitan              | 2166      | 1275 | No     |
| Cherry Canyon        | 1055      | 2386 | No     |
| Brushy Canyon        | 7         | 3434 | No     |
| Bone Spring Lime     | -1704     | 5145 | No     |
| 1st Bone Spring Sand | -2290     | 5731 | No     |
| 2nd Bone Spring Sand | -2689     | 6130 | No     |
| 3rd Bone Spring Sand | -4625     | 8066 | No     |
| Wolfcamp             | -5028     | 8469 | Yes    |

## 2. Blowout Prevention

| BOP installed<br>and tested<br>before drilling | Size?   | Min.<br>Required<br>WP | Туре                      |            |    |                  | x   | Tested<br>to: |          |
|--|---------|------------------------|---------------------------|------------|----|------------------|-----|---------------|----------|
|  |         |                        | Ann                       | ular       | Х  | 2500 psi         |     |               |          |
|  |         |                        | Blind                     | Ram        | х  |                  |     |               |          |
| 12.25  | 13-5/8" | 13-5/8"                | 5M                        | 13-5/8" 5M | 5M | 5/8" 5M Pipe Ram | Ram | х             | 5000 poi |
|  |         |                        | Double                    | e Ram      |    | 5000 psi         |     |               |          |
|  |         |                        | Other*                    |            |    |                  |     |               |          |
|  |         |                        | Ann                       | ular       | Х  | 2500 psi         |     |               |          |
|  |         |                        | Blind                     | Ram        | Х  |                  |     |               |          |
| 8.75   | 13-5/8" | 5M                     | 5M Pipe Ram<br>Double Ram |            | Х  | 5000 psi         |     |               |          |
|  |         |                        |                           |            |    |                  |     |               |          |
|  |         |                        | Other*                    |            |    |                  |     |               |          |

**Equipment:** BOPE will meet all requirements for above listed system per 43 CFR 3172. BOPE with working pressure ratings in excess of anticipated maximum surface pressure will be utilized for well control from drill out of surface casing to TMD. The system may be upgraded to a higher pressure but still tested to the working pressure listed in the table above. If the system is upgraded all of the components installed will be functional, tested, and will meet all requirements per 43 CFR 3172. The wellhead will be a multibowl speed head allowing for hangoff of intermediate casing of the surface x intermedicate annulus without breaking the connection between the BOP & wellhead. A variance is requested to utilize a flexible choke line (flexhose) from the BOP to choke manifold.

#### Requesting Variance? YES

Variance request: Multibowl Wellhead, Flexhose, Breaktesting, Offline Cementing Variances. Attachments in Section 8.

**Testing Procedure:** Operator requests to ONLY test broken pressure seals per API Standard 53 and the attachments in Section 8. The BOP test shall be performed before drilling out of the surface casing shoe and will occur at a minimum: a. when initially installed, b. whenever any seal subject to test pressure is broken, c. following related repairs, d. at 21-day intervals. Testing of the ram type preventer(s) and annual type preventer(s) shall be tested per 43 CFR 3172. The BOPE configuration, choke manifold layout, and accumulator system will be in compliance with 43 CFR 3172. Bleed lines will discharge 100' from wellhead in non-H2S scenarios and 150' from wellhead in H2S scenarios.

Choke Diagram Attachemnt: 5M Choke Manifold BOP Diagram Attachment: BOP Schematic

# 3. Casing

| String       | Hole Size | Casing Size | Тор  | Bottom | Top TVD | Bottom TVD | Length  | Grade     | Weight | Connection | Collapse SF | Burst SF | Joint SF Type | Joint SF | Body SF Type | Body SF |
|--------------|-----------|-------------|------|--------|---------|------------|---------|-----------|--------|------------|-------------|----------|---------------|----------|--------------|---------|
| Surface      | 17.5      | 13.375      | 0    | 450    | 0       | 450        | 450     | J55       | 54.5   | BTC        | 5.08        | ###      | Dry           | 7.30     | Dry          | 6.85    |
| Intermediate | 12.25     | 9.625       | 0    | 1375   | 0       | 1375       | 1375    | J55       | 40     | BTC        | 2.76        | 1.62     | Dry           | 4.61     | Dry          | 4.06    |
| Production   | 8.75      | 5.5         | 0    | 8846   | 0       | 8550       | 8846    | P110RY    | 17     | Rattler    | 2.53        | 2.64     | Dry           | 2.35     | Dry          | 2.35    |
| Production   | 8.75      | 5.5         | 8846 | 18990  | 8550    | 8550       | 10144   | P110RY    | 17     | Rattler    | 2.53        | 2.64     | Dry           | 2.35     | Dry          | 2.35    |
|              | BLM       |             |      |        |         | BLM M      | in Safe | ty Factor | 1.125  | 1          |             | 1.6      |               | 1.6      |              |         |

Non API casing spec sheets and casing design assumptions attached.

## 4. Cement

| String       | Lead/Tail | Top MD | Bottom MD | Quanity (sx) | Yield | Density | Cu Ft | Excess % | Cement Type | Additives  |
|--------------|-----------|--------|-----------|--------------|-------|---------|-------|----------|-------------|--|
|              |           |        |           |              |       |         |       |          |             | EconoCem-HLC + 5% Salt +                           |
| Surface      | lead      | 0      | 360       | 280          | 1.88  | 12.9    | 510   | 100%     | Class C     | 5% Kol-Seal  |
| Surface      | Tail      | 360    | 450       | 80           | 1.34  | 14.8    | 100   | 50%      | Class C     | Accelerator  |
|              |           |        |           |              |       |         |       |          |             | EconoCem-HLC + 5% Salt +                           |
| Intermediate | Lead      | 0      | 450       | 120          | 1.88  | 12.9    | 220   | 50%      | Class C     | 5% Kol-Seal  |
| Intermediate | Tail      | 450    | 1375      | 330          | 1.34  | 14.8    | 440   | 50%      | Class C     | Retarder   |
| Production   | Lead      | 875    | 4024      | 450          | 2.41  | 11.5    | 1070  | 40%      | Class H     | POZ, Extender, Fluid Loss,<br>Dispersant, Retarder |
| Production   | Tail      | 4024   | 18990     | 2740         | 1.73  | 12.5    | 4730  | 25%      | Class H     | POZ, Extender, Fluid Loss,<br>Dispersant, Retarder |

## 5. Circulating Medium

#### Mud System Type: Closed

Will an air or gas system be used: No

**Describe what will be on location to control well or mitigate oter conditions**: Sufficient quantities of mud materials will be on the well site at all times for the purpose of assuring well control and maintaining wellbore integrity. Surface interval will employ fresh water mud. The intermediate hole will utilize a saturated brine fluid to inhibit salt washout. The production hole will employ brine based and oil base fluid to inhibit formation reactivity and of the appropriate density to maintain well control.

**Describe the mud monitoring system utilized:** Centrifuge separation system. Open tank monitoring with EDR will be used for drilling fluids and return volumes. Open tank monitoring will be used for cement and cuttings return volumes. Mud properties will be monitored at least every 24 hours using industry accepted mud check practices.

#### Cuttings Volume: 8870 Cu Ft

### **Circulating Medium Table**

| Top Depth | Bottom Depth | Mud Type    | Min Weight | Max Weight |
|-----------|--------------|-------------|------------|------------|
| 0         | 450          | Fresh Water | 8.6        | 9.5        |
| 450       | 1375         | Fresh Water | 8.6        | 9.5        |
| 1375      | 18990        | OBM         | 9          | 10.5       |

List of production tests including testing procedures, equipment and safety measures: Will utilize MWD/LWD from intermediate hole to TD of the well. List of open and cased hole logs run in the well: DIRECTIONAL SURVEY Coring operation description for the well: N/A

## 7. Pressure

| Anticipated Bottom Hole Pressure                    | 4670 | psi |
|---|------|-----|
| Anticipated Surface Pressure                        | 2787 | psi |
| Anticipated Bottom Hole Temperature                 | 142  | °F  |
| Anticipated Abnormal pressure, temp, or geo hazards | No   |     |

Sante Fe Main Office Phone: (505) 476-3441

General Information Phone: (505) 629-6116

Online Phone Directory https://www.emnrd.nm.gov/ocd/contact-us

# State of New Mexico Energy, Minerals and Natural Resources Oil Conservation Division 1220 S. St Francis Dr. Santa Fe, NM 87505

CONDITIONS

|   | Operator:                        | OGRID:                               |  |  |  |  |  |  |
|---|----------------------------------|--------------------------------------|--|--|--|--|--|--|
|   | Permian Resources Operating, LLC | 372165                               |  |  |  |  |  |  |
|   | 300 N. Marienfeld St Ste 1000    | Action Number:                       |  |  |  |  |  |  |
|   | Midland, TX 79701                | 415039                               |  |  |  |  |  |  |
|   |                                  | Action Type:                         |  |  |  |  |  |  |
|   |                                  | [C-103] NOI Change of Plans (C-103A) |  |  |  |  |  |  |
| ( | CONDITIONS                       |                                      |  |  |  |  |  |  |

| Created By  | Condition  | Condition<br>Date |
|-------------|--|-------------------|
| ward.rikala | Any previous COA's not addressed within the updated COA's still apply. | 1/21/2025         |

Page 9 of 9

Action 415039