

Well Name: STEVENS A	Well Location: T17S / R30E / SEC 13 / SESW / 32.8272894 / -103.9296495	County or Parish/State: EDDY / NM
Well Number: 7	Type of Well: OIL WELL	Allottee or Tribe Name:
Lease Number: NMLC030570A	Unit or CA Name:	Unit or CA Number:
US Well Number: 3001521830	Operator: BURNETT OIL COMPANY INCORPORATED	

Notice of Intent

Sundry ID: 2862571

Type of Submission: Notice of Intent	Type of Action: Plug Back
Date Sundry Submitted: 07/10/2025	Time Sundry Submitted: 12:51
Date proposed operation will begin: 08/25/2025	

Procedure Description: Please see attached documents for description of procedures and proposed WBD. The plugback procedure will take 3-5 days to complete.

Surface Disturbance

Is any additional surface disturbance proposed?: No

NOI Attachments

Procedure Description

2025.6.18_Stevens_A__7_7_Rivers___Queen_Completion_Procedure_20250710124408.pdf

Received by OCD: 8/12/2025 2:29:44 PM

Page 2 of 31

Well Name: STEVENS A	Well Location: T17S / R30E / SEC 13 / SESW / 32.8272894 / -103.9296495	County or Parish/State: EDDY / NM
Well Number: 7	Type of Well: OIL WELL	Allottee or Tribe Name:
Lease Number: NMLC030570A	Unit or CA Name:	Unit or CA Number:
US Well Number: 3001521830	Operator: BURNETT OIL COMPANY INCORPORATED	

Conditions of Approval

Specialist Review

STEVENS_A_7___2862571___UPDATED_PROCEDURE_AND_COA_20250805093050.pdf

Operator

I certify that the foregoing is true and correct. Title 18 U.S.C. Section 1001 and Title 43 U.S.C. Section 1212, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction. Electronic submission of Sundry Notices through this system satisfies regulations requiring a

Operator Electronic Signature: RANDY BOLLES	Signed on: JUL 10, 2025 12:50 PM
Name: BURNETT OIL COMPANY INCORPORATED	
Title: Contractor	
Street Address: 5008 HIGHGARDEN AVE	
City: ARCADIA	State: OK
Phone: (405) 738-0183	
Email address: RBOLLES@COX.NET	

Field

Representative Name: Tyler Deans		
Street Address: 87 Square Lake Road		
City: Loco Hills	State: NM	Zip: 88255
Phone: (432)553-4699		
Email address: tdeans@burnettoil.com		

BLM Point of Contact

BLM POC Name: KEITH P IMMATTY	BLM POC Title: ENGINEER
BLM POC Phone: 5759884722	BLM POC Email Address: KIMMATTY@BLM.GOV
Disposition: Approved	Disposition Date: 08/05/2025
Signature: KEITH IMMATTY	

Form 3160-5 (June 2019)	UNITED STATES DEPARTMENT OF THE INTERIOR BUREAU OF LAND MANAGEMENT	FORM APPROVED OMB No. 1004-0137 Expires: October 31, 2021
SUNDRY NOTICES AND REPORTS ON WELLS <i>Do not use this form for proposals to drill or to re-enter an abandoned well. Use Form 3160-3 (APD) for such proposals.</i>		5. Lease Serial No.
		6. If Indian, Allottee or Tribe Name

SUBMIT IN TRIPLICATE - Other instructions on page 2		7. If Unit of CA/Agreement, Name and/or No.
1. Type of Well ☐ Oil Well ☐ Gas Well ☐ Other		8. Well Name and No.
2. Name of Operator		9. API Well No.
3a. Address	3b. Phone No. (include area code)	10. Field and Pool or Exploratory Area
4. Location of Well (Footage, Sec., T.,R.,M., or Survey Description)		11. Country or Parish, State

12. CHECK THE APPROPRIATE BOX(ES) TO INDICATE NATURE OF NOTICE, REPORT OR OTHER DATA				
TYPE OF SUBMISSION	TYPE OF ACTION			
☐ Notice of Intent	☐ Acidize	☐ Deepen	☐ Production (Start/Resume)	☐ Water Shut-Off
	☐ Alter Casing	☐ Hydraulic Fracturing	☐ Reclamation	☐ Well Integrity
☐ Subsequent Report	☐ Casing Repair	☐ New Construction	☐ Recomplete	☐ Other
	☐ Change Plans	☐ Plug and Abandon	☐ Temporarily Abandon	
☐ Final Abandonment Notice	☐ Convert to Injection	☐ Plug Back	☐ Water Disposal	

13. Describe Proposed or Completed Operation: Clearly state all pertinent details, including estimated starting date of any proposed work and approximate duration thereof. If the proposal is to deepen directionally or recompleate horizontally, give subsurface locations and measured and true vertical depths of all pertinent markers and zones. Attach the Bond under which the work will be perfonned or provide the Bond No. on file with BLM/BIA. Required subsequent reports must be filed within 30 days following completion of the involved operations. If the operation results in a multiple completion or recompletion in a new interval, a Form 3160-4 must be filed once testing has been completed. Final Abandonment Notices must be filed only after all requirements, including reclamation, have been completed and the operator has detennined that the site is ready for final inspection.)

14. I hereby certify that the foregoing is true and correct. Name (Printed/Typed)		
	Title	
Signature	Date	

THE SPACE FOR FEDERAL OR STATE OFFICE USE		
Approved by	Title	Date
Conditions of approval, if any, are attached. Approval of this notice does not warrant or certify that the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon.	Office	

Title 18 U.S.C Section 1001 and Title 43 U.S.C Section 1212, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

(Instructions on page 2)

GENERAL INSTRUCTIONS

This form is designed for submitting proposals to perform certain well operations and reports of such operations when completed as indicated on Federal and Indian lands pursuant to applicable Federal law and regulations. Any necessary special instructions concerning the use of this form and the number of copies to be submitted, particularly with regard to local area or regional procedures and practices, are either shown below, will be issued by or may be obtained from the local Federal office.

SPECIFIC INSTRUCTIONS

Item 4 - Locations on Federal or Indian land should be described in accordance with Federal requirements. Consult the local Federal office for specific instructions.

Item 13: Proposals to abandon a well and subsequent reports of abandonment should include such special information as is required by the local Federal office. In addition, such proposals and reports should include reasons for the abandonment; data on any former or present productive zones or other zones with present significant fluid contents not sealed off by cement or otherwise; depths (top and bottom) and method of placement of cement plugs; mud or other material placed below, between and above plugs; amount, size, method of parting of any casing, liner or tubing pulled and the depth to the top of any tubing left in the hole; method of closing top of well and date well site conditioned for final inspection looking for approval of the abandonment. If the proposal will involve **hydraulic fracturing operations**, you must comply with 43 CFR 3162.3-3, including providing information about the protection of usable water. Operators should provide the best available information about all formations containing water and their depths. This information could include data and interpretation of resistivity logs run on nearby wells. Information may also be obtained from state or tribal regulatory agencies and from local BLM offices.

NOTICES

The privacy Act of 1974 and the regulation in 43 CFR 2.48(d) provide that you be furnished the following information in connection with information required by this application.

AUTHORITY: 30 U.S.C. 181 et seq., 351 et seq., 25 U.S.C. 396; 43 CFR 3160.

PRINCIPAL PURPOSE: The information is used to: (1) Evaluate, when appropriate, approve applications, and report completion of subsequent well operations, on a Federal or Indian lease; and (2) document for administrative use, information for the management, disposal and use of National Resource lands and resources, such as: (a) evaluating the equipment and procedures to be used during a proposed subsequent well operation and reviewing the completed well operations for compliance with the approved plan; (b) requesting and granting approval to perform those actions covered by 43 CFR 3162.3-2, 3162.3-3, and 3162.3-4; (c) reporting the beginning or resumption of production, as required by 43 CFR 3162.4-1(c) and (d) analyzing future applications to drill or modify operations in light of data obtained and methods used.

ROUTINE USES: Information from the record and/or the record will be transferred to appropriate Federal, State, local or foreign agencies, when relevant to civil, criminal or regulatory investigations or prosecutions in connection with congressional inquiries or to consumer reporting agencies to facilitate collection of debts owed the Government.

EFFECT OF NOT PROVIDING THE INFORMATION: Filing of this notice and report and disclosure of the information is mandatory for those subsequent well operations specified in 43 CFR 3162.3-2, 3162.3-3, 3162.3-4.

The Paperwork Reduction Act of 1995 requires us to inform you that:

The BLM collects this information to evaluate proposed and/or completed subsequent well operations on Federal or Indian oil and gas leases.

Response to this request is mandatory.

The BLM would like you to know that you do not have to respond to this or any other Federal agency-sponsored information collection unless it displays a currently valid OMB control number.

BURDEN HOURS STATEMENT: Public reporting burden for this form is estimated to average 8 hours per response, including the time for reviewing instructions, gathering and maintaining data, and completing and reviewing the form. Direct comments regarding the burden estimate or any other aspect of this form to U.S. Department of the Interior, Bureau of Land Management (1004-0137), Bureau Information Collection Clearance Officer (WO-630), 1849 C St., N.W., Mail Stop 401 LS, Washington, D.C. 20240

Additional Information

Location of Well

0. SHL: SESW / 25 FSL / 1345 FWL / TWSP: 17S / RANGE: 30E / SECTION: 13 / LAT: 32.8272894 / LONG: -103.9296495 (TVD: 0 feet, MD: 0 feet)

BHL: SESW / 25 FSL / 1345 FWL / TWSP: 17S / SECTION: / LAT: 0.0 / LONG: 0.0 (TVD: 0 feet, MD: 0 feet)

**Burnett Oil Co., Inc.
Stevens A #7
Grayburg Jackson
Eddy Co., NM**

BTY: Stevens A Lease # LC 030570A API#: 30-015-21830
LEGAL: UNIT N, 25' FSL, 1345' FWL, SEC 13, T17S, R30E
Elevation: 3711' GL, 3721' KB, ALL MEAS FROM KB 10' AGL.


TD: 3,300'
PBSD @ +/- 3,077'
Casing: 8-5/8" 22.63# X-42, Set @ 470'
5-9/16" 15.63# X-52 Set @ 3,493'
DVT @ 2,465'

Existing Open Perfs: 2,739-2,951'

Queen Completion Procedure:

- 1) MIRU pulling unit
- 2) POOH Standing back rods /Tbg. LD pump & production BHA.
- 3) RIH to +/-2,700' with Bit/scraper. POOH Standing back & LD Bit/scraper.
- 4) RIH & set 5-9/16" CIBP @ +/- 2,690'. Dump bail 35' cmt on top of CIBP, verify Top of cmt.
- 5) Test casing to +/- 1,500# surface pressure for 10 minutes. Monitor annulus throughout job.
- 6) RIH w/ WL & Perf (1,685-2,616') w/ 3-1/8" guns, Dyna Frac Tune GH Charge type, RDX explosive type, 22.7g explosive weight, 0.42 EHD, "even hole size", holes per logs as indicated below.
- 7) RD & Rls WL.
- 8) RIH w/ 2-7/8" tbg and pkr, spot 500 gal 15% HCL across perfs to breakdown perfs
- 9) Pull up above perfs and set pkr.
- 10) Pump 12,000 gal 15% HCL acid with anti-sludge chem @ 6-12 BPM while dropping 130 balls evenly displaced throughout job, over flush +/- 300 bbl
- 11) Rls pkr, RIH through perfs to ensure balls are clear. POOH LD pkr and stand back tbg.
- 12) RIH w/ (Btm to top) BP, 1- Jt 2-7/8" tbg, Slotted Sub, 2-7/8" SN, 2-7/8" J-55 to Surface. Run pump and rods, Rod Pump should be a 1.5" after frac pump
- 13) RDMO PU & Kill Truck, Return Well to Production

Stevens A #7 7-Rivers & Queen Interval									
1,685	1,695	1,715	1,726	1,732	1,737	1,739	1,751	1,760	1,777
1,781	1,787	1,797	1,806	1,820	1,831	1,843	1,859	1,874	1,892
1,907	1,915	1,928	1,943	1,954	1,958	1,990	2,007	2,032	2,072
2,082	2,095	2,105	2,118	2,127	2,154	2,162	2,185	2,212	2,287
2,297	2,332	2,343	2,354	2,370	2,385	2,400	2,405	2,412	2,425
2,432	2,443	2,449	2,465	2,472	2,492	2,500	2,509	2,520	2,532
2,551	2,557	2,577	2,600	2,616					
Interval	65 Depths	65 @ 2 SPF		2 SPF @ 0.42" holes at 180* phasing					
936'	130 Shots								

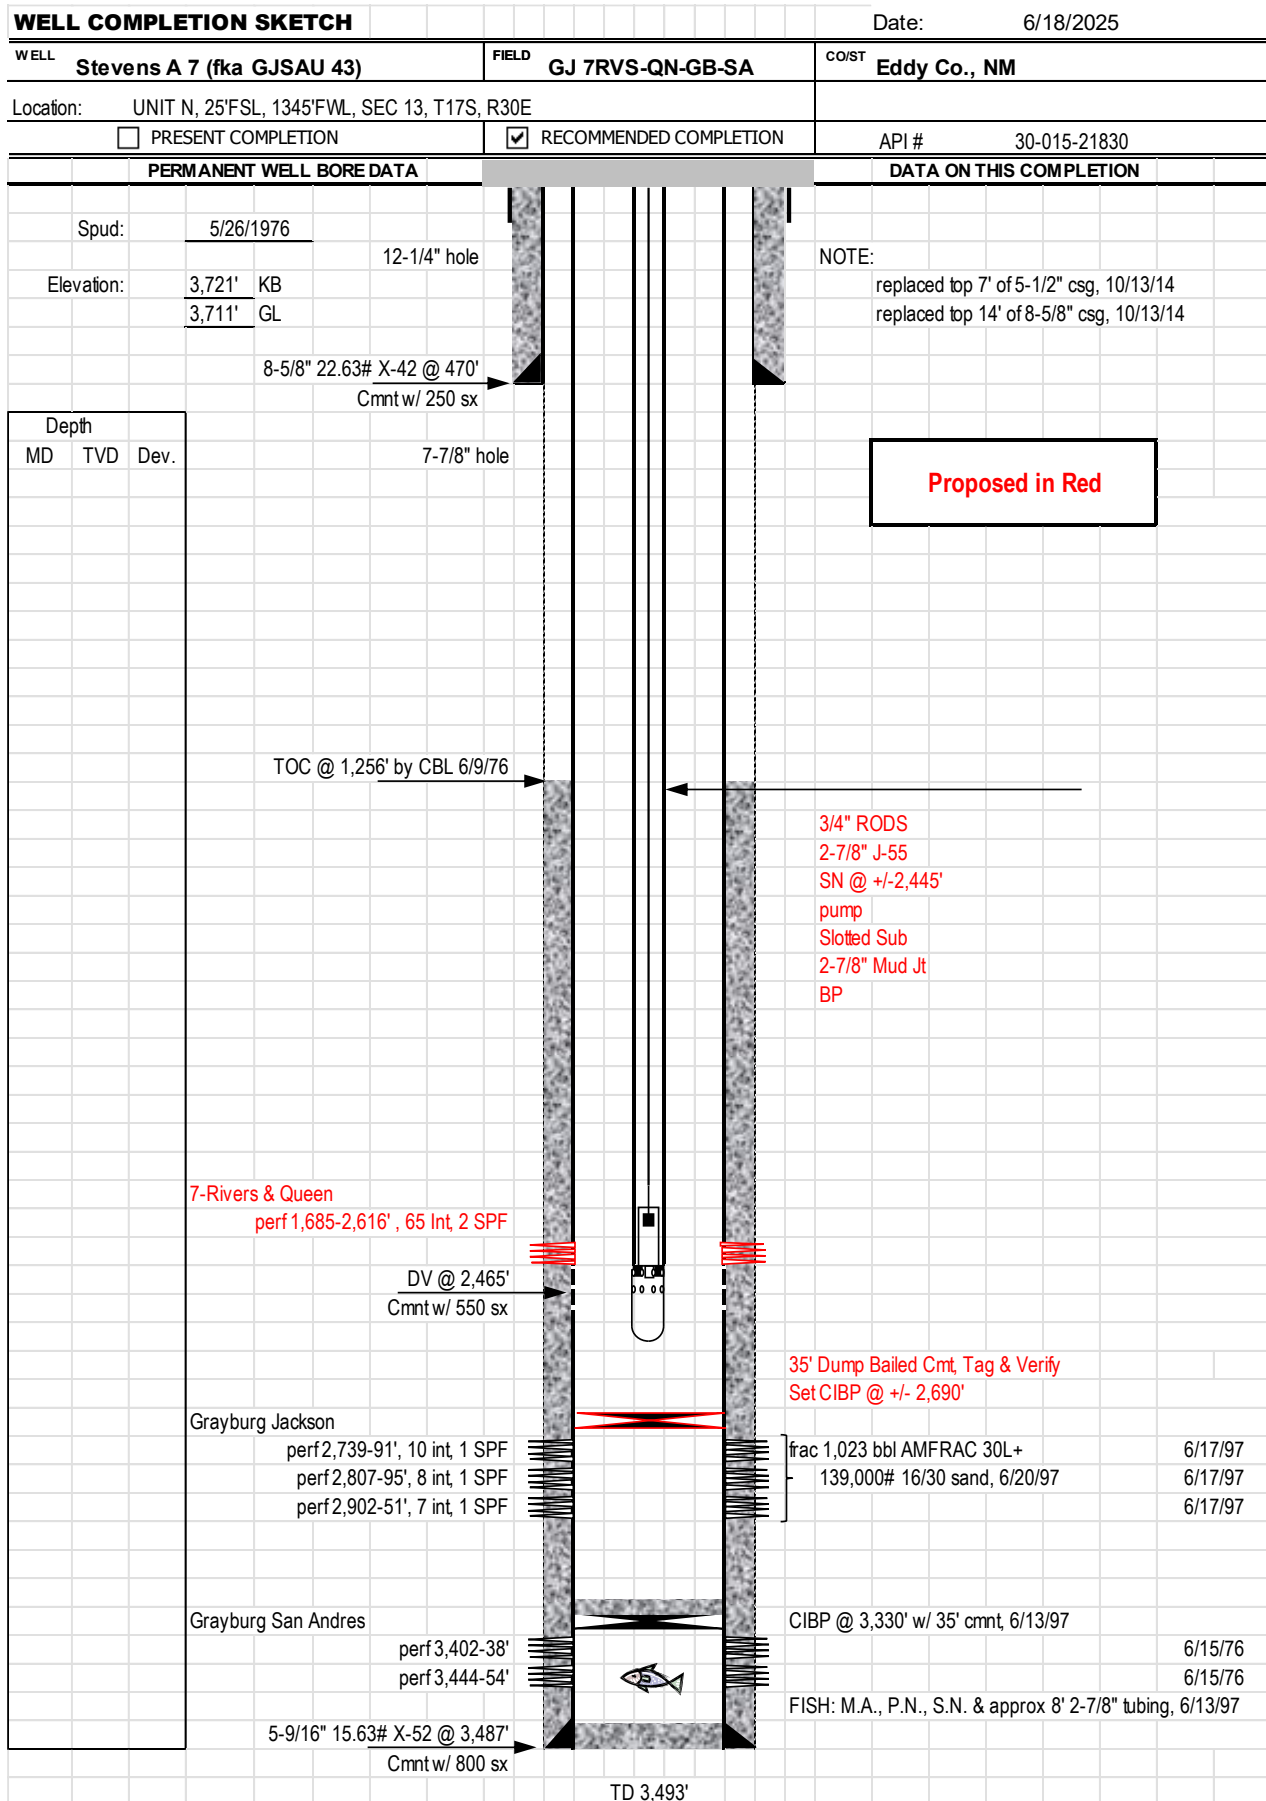

**Burnett Oil Co., Inc.
Stevens A #7
Grayburg Jackson
Eddy Co., NM**

BTY: Stevens A Lease # LC 030570A API#: 30-015-21830
LEGAL: UNIT N, 25' FSL, 1345' FWL, SEC 13, T17S, R30E
Elevation: 3711' GL, 3721' KB, ALL MEAS FROM KB 10' AGL.

TD: 3,300'
PBSD @ +/- 3,077'
Casing: 8-5/8" 22.63# X-42, Set @ 470'
5-9/16" 15.63# X-52 Set @ 3,493'
DVT @ 2,465'

Existing Open Perfs: 2,739-2,951'

Queen Completion Procedure:

- 1) MIRU pulling unit
- 2) POOH Standing back rods /Tbg. LD pump & production BHA.
- 3) RIH to +/-2,700' with Bit/scraper. POOH Standing back & LD Bit/scraper.
- 4) RIH & set 5-9/16" CIBP @ +/- 2,690'. **Spot cement to 2445', verify Top of cmt. 25sks minimum**
- 5) Test casing to +/- 1,500# surface pressure for 15 minutes. Monitor annulus throughout job.
- 6) RIH w/ WL & Perf (1,685-2,616') w/ 3-1/8" guns, Dyna Frac Tune GH Charge type, RDX explosive type, 22.7g explosive weight, 0.42 EHD, "even hole size", holes per logs as indicated below.
- 7) RD & Rls WL.
- 8) RIH w/ 2-7/8" tbg and pkr, spot 500 gal 15% HCL across perfs to breakdown perfs
- 9) Pull up above perfs and set pkr.
- 10) Pump 12,000 gal 15% HCL acid with anti-sludge chem @ 6-12 BPM while dropping 130 balls evenly displaced throughout job, over flush +/- 300 bbl
- 11) Rls pkr, RIH through perfs to ensure balls are clear. POOH LD pkr and stand back tbg.
- 12) RIH w/ (Btm to top) BP, 1- Jt 2-7/8" tbg, Slotted Sub, 2-7/8" SN, 2-7/8" J-55 to Surface. Run pump and rods, Rod Pump should be a 1.5" after frac pump
- 13) RDMO PU & Kill Truck, Return Well to Production

Stevens A #7 7-Rivers & Queen Interval									
1,685	1,695	1,715	1,726	1,732	1,737	1,739	1,751	1,760	1,777
1,781	1,787	1,797	1,806	1,820	1,831	1,843	1,859	1,874	1,892
1,907	1,915	1,928	1,943	1,954	1,958	1,990	2,007	2,032	2,072
2,082	2,095	2,105	2,118	2,127	2,154	2,162	2,185	2,212	2,287
2,297	2,332	2,343	2,354	2,370	2,385	2,400	2,405	2,412	2,425
2,432	2,443	2,449	2,465	2,472	2,492	2,500	2,509	2,520	2,532
2,551	2,557	2,577	2,600	2,616					
Interval	65 Depths	65 @ 2 SPF		2 SPF @ 0.42" holes at 180* phasing					
936'	130 Shots								

WELL COMPLETION SKETCH				Date:	6/18/2025
WELL		Stevens A 7 (fka GJSAU 43)		FIELD	GJ 7RVS-QN-GB-SA
CO/ST		Eddy Co., NM			
Location: UNIT N, 25'FSL, 1345'FWL, SEC 13, T17S, R30E					
☐ PRESENT COMPLETION		☒ RECOMMENDED COMPLETION		API # 30-015-21830	
PERMANENT WELL BORE DATA			DATA ON THIS COMPLETION		
Spud:	5/26/1976				
Elevation:	3,721'	KB	12-1/4" hole		
	3,711'	GL			
8-5/8" 22.63# X-42 @ 470'			NOTE:		
Cmnt w/ 250 sx			replaced top 7' of 5-1/2" csg, 10/13/14		
7-7/8" hole			replaced top 14' of 8-5/8" csg, 10/13/14		
Depth	MD	TVD	Dev.		
				Proposed in Red	
TOC @ 1,256' by CBL 6/9/76					
				3/4" RODS 2-7/8" J-55 SN @ +/-2,445' pump Slotted Sub 2-7/8" Mud Jt BP	
7-Rivers & Queen perf 1,685-2,616', 65 Int, 2 SPF					
DV @ 2,465'					
Cmnt w/ 550 sx					
Grayburg Jackson					
perf 2,739-91', 10 int, 1 SPF				frac 1,023 bbl AMFRAC 30L+ 6/17/97	
perf 2,807-95', 8 int, 1 SPF				139,000# 16/30 sand, 6/20/97 6/17/97	
perf 2,902-51', 7 int, 1 SPF				6/17/97	
Grayburg San Andres					
perf 3,402-38'				CIBP @ 3,330' w/ 35' cmnt, 6/13/97	
perf 3,444-54'				6/15/76	
5-9/16" 15.63# X-52 @ 3,487'				FISH: M.A., P.N., S.N. & approx 8' 2-7/8" tubing, 6/13/97	
Cmnt w/ 800 sx					
TD 3,493'					

BUREAU OF LAND MANAGEMENT
Carlsbad Field Office
620 East Greene Street
Carlsbad, New Mexico 88220
575-234-5972

Conditions of Approval for Permanent Abandonment of a Production Zone

Failure to comply with the following Conditions of Approval may result in a Notice of Incidents of Noncompliance (INC) in accordance with 43 CFR 3163.1.

1. Plugging operations shall commence within ninety (90) days from the approval date of this Notice of Intent to Plug Back.

If you are unable to plug the well by the 90th day provide this office, prior to the 90th day, with the reason for not meeting the deadline and a date when we can expect the completed interval to be plugged. Failure to do so will result in enforcement action.

The rig used for the plugging procedure cannot be released and moved off without the prior approval of the authorized officer. Failure to do so may result in enforcement action.

2. Notification: Contact the appropriate BLM office at least 24 hours prior to the commencing of any plug back operations. For wells in Chaves and Roosevelt County, call 575-627-0272; Eddy County, call 575-361-2822; Lea County, call 575-689-5981
3. Blowout Preventers: A blowout preventer (BOP), as appropriate, shall be installed before commencing any plugging operation. The BOP must be installed and maintained as per API and manufacturer recommendations. The minimum BOP requirement is a 2M system for a well not deeper than 9,100 feet, a 3M system for a well not deeper than 13,600 feet, or a 5M system for a well not deeper than 22,700 feet (all depths are for measured well depth).
4. Mud Requirement: Mud shall be placed between all plugs. Minimum consistency of plugging mud shall be obtained by mixing at the rate of 25 sacks (50 pounds each) of gel per 100 barrels of brine water. Minimum nine (9) pounds per gallon.
5. Cement Requirement: Sufficient cement shall be used to bring any required plug to the specified depth and length. Any given cement volumes on the proposed plugging procedure are merely estimates and are not final. Unless specific approval is received, no plug except the surface plug shall be less than 25 sacks of cement. Any plug that requires a tag will have a minimum WOC time of 4 hours.

In lieu of a cement plug across perforations in a cased hole (not for any other plugs), a bridge plug set within 50 feet to 100 feet above the perforations shall be capped with 25 sacks of cement. If a bailer is used to cap this plug, 35 feet of cement shall be sufficient. **Before pumping or bailing cement on top of CIBP, tag will be required to verify depth. Based on depth, a tag of the cement may be deemed necessary.**

Unless otherwise specified in the approved procedure, the cement plug shall consist of either Neat Class "C", for up to 7,500 feet of depth or Neat Class "H", for deeper than 7,500 feet plugs.

6. Casing Integrity Test: The casing shall be filled with corrosion inhibited fluid above the CIBP and pressure tested to 1000 psi surface pressure with a pressure drop not more than 10 percent over 15-minute period. If the well does not pass the casing integrity test, then the operator shall either repair the casing and re-test or within 30 days submit a procedure to plug and abandon the well.
7. Subsequent Plug back Reporting: Within 30 days after plug back work is completed, file a Subsequent Report (Form 3160-5) or via the AFMSS 2 WISx Module to BLM. The report should give in detail the manner in which the plug back work was carried out, the extent (by depths) of cement plugs placed, and the size and location (by depths) of casing left in the well. Show date zone was plugged. After plugging back to a new zone submit a Completion Report (Form 3160-4) or via the AFMSS 2 WISx Module with the Subsequent Report. The plugged zone shall be in plug back status.

Include the following information:

- a. A well bore diagram with all perforations, CIBP's, and tops of cement on CIBP's.
 - b. A description of the plug back procedure.
 - c. A clear copy or the original of the pressure test chart.
 - d. A copy of any logs ran.
8. Trash: All trash, junk and other waste material shall be contained in trash cages or bins to prevent scattering and will be removed and deposited in an approved sanitary landfill. Burial on site is not permitted.
 9. If well location is within the Timing Limitation Stipulation Area for Lesser Prairie-Chicken:
From March 1st through June 15th annually, abandonment activities will be allowed except between the hours from 3:00 am and 9:00 am. Normal vehicle use on existing roads will not be restricted.

C-102 Submit Electronically Via OCD Permitting	State of New Mexico Energy, Minerals & Natural Resources Department OIL CONSERVATION DIVISION		Revised July 9, 2024	
			Submittal Type:	☐ Initial Submittal
				☒ Amended Report
		☐ As Drilled		

WELL LOCATION INFORMATION

API Number 30-015-21830	Pool Code 28509	Pool Name 7 RIVERS
Property Code 20145	Property Name STEVENS A	Well Number 7
OGRID No. 3080	Operator Name BURNETT OIL COMPANY, INC.	Ground Level Elevation 3708.4'
Surface Owner: ☐ State ☐ Fee ☐ Tribal ☒ Federal		Mineral Owner: ☐ State ☐ Fee ☐ Tribal ☒ Federal

Surface Location

UL N	Section 13	Township 17-S	Range 30-E	Lot	Ft. from N/S 75 FSL	Ft. from E/W 1342 FWL	Latitude 32.827438°N	Longitude 103.929623°W	County EDDY
----------------	----------------------	-------------------------	----------------------	-----	-------------------------------	---------------------------------	--------------------------------	----------------------------------	-----------------------

Bottom Hole Location

UL	Section	Township	Range	Lot	Ft. from N/S	Ft. from E/W	Latitude	Longitude	County
----	---------	----------	-------	-----	--------------	--------------	----------	-----------	--------

Dedicated Acres 40	Infill or Defining Well	Defining Well API	Overlapping Spacing Unit (Y/N)	Consolidation Code
Order Numbers.			Well setbacks are under Common Ownership: ☐ Yes ☐ No	

Kick Off Point (KOP)

UL	Section	Township	Range	Lot	Ft. from N/S	Ft. from E/W	Latitude	Longitude	County
----	---------	----------	-------	-----	--------------	--------------	----------	-----------	--------

First Take Point (FTP)


UL	Section	Township	Range	Lot	Ft. from N/S	Ft. from E/W	Latitude	Longitude	County
----	---------	----------	-------	-----	--------------	--------------	----------	-----------	--------

Last Take Point (LTP)

UL	Section	Township	Range	Lot	Ft. from N/S	Ft. from E/W	Latitude	Longitude	County
----	---------	----------	-------	-----	--------------	--------------	----------	-----------	--------


Unitized Area or Area of Uniform Interest	Spacing Unit Type ☐ Horizontal ☒ Vertical	Ground Floor Elevation:
---	--	-------------------------

OPERATOR CERTIFICATIONS <i>I hereby certify that the information contained herein is true and complete to the best of my knowledge and belief, and, if the well is a vertical or directional well, that this organization either owns a working interest or unleased mineral interest in the land including the proposed bottom hole location or has a right to drill this well at this location pursuant to a contract with an owner of a working interest or unleased mineral interest, or to a voluntary pooling agreement or a compulsory pooling order heretofore entered by the division.</i> <i>If this well is a horizontal well, I further certify that this organization has received the consent of at least one lessee or owner of a working interest or unleased mineral interest in each tract (in the target pool or formation) in which any part of the well's completed interval will be located or obtained a compulsory pooling order from the division.</i>		SURVEYOR CERTIFICATIONS <i>I hereby certify that the well location shown on this plat was plotted from field notes of actual surveys made by me or under my supervision, and that the same is true and correct to the best of my belief.</i>	
Signature <i>Randy Bolles</i>	Date 8/11/25	Signature and Seal of Professional Surveyor <i>Chad Harcrow</i> 8/7/25	
Printed Name Randy Bolles	Email Address rbolles@cox.net	Certificate Number 17777	Date of Survey AUGUST 4, 2025 W.O.#25-960 DRAWN BY: WN PAGE 1 OF 2



This grid represents a standard section. You may superimpose a non-standard section, or larger area, over this grid. Operators must outline the dedicated acreage in a red box, clearly show the well surface location and bottom hole location, if it is directionally drilled, with the dimensions from the section lines in the cardinal directions. If this is a horizontal wellbore show on this plat the location of the First Take Point and Last Take Point, and the point within the Completed interval (other than the First Take Point or Last Take Point) that is closest to any outer boundary of the tract.

Surveyors shall use the latest United States government survey or dependent resurvey. Well locations will be in reference to the New Mexico Principal Meridian. If the land is not surveyed, contact the OCD Engineering Bureau. Independent subdivision surveys will not be acceptable.

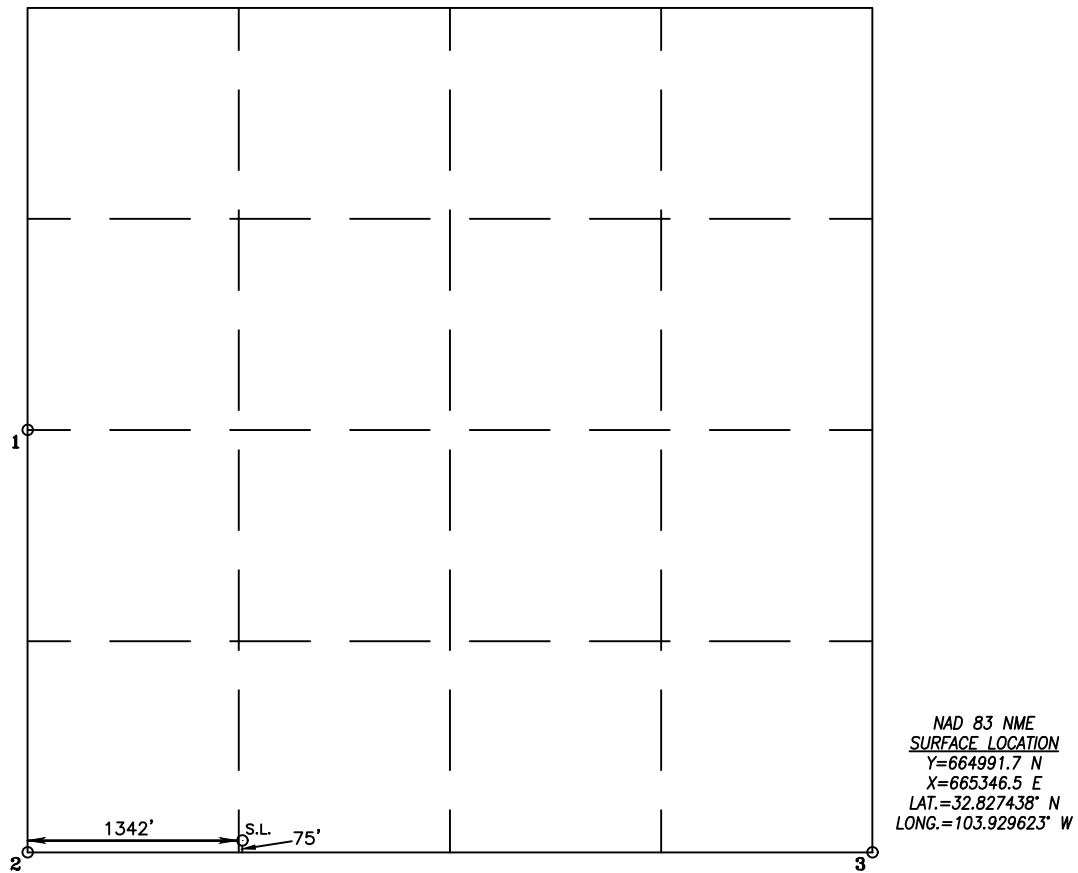

POINT LEGEND	
1	Y=667555.1 N X=664012.6 E
2	Y=664913.3 N X=664004.5 E
3	Y=664925.5 N X=669283.1 E

**Burnett Oil Co., Inc.
Stevens A #7
Grayburg Jackson
Eddy Co., NM**

BTY: Stevens A Lease # LC 030570A API#: 30-015-21830
LEGAL: UNIT N, 25' FSL, 1345' FWL, SEC 13, T17S, R30E
Elevation: 3711' GL, 3721' KB, ALL MEAS FROM KB 10' AGL.


TD: 3,300'
PBSD @ +/- 3,077'
Casing: 8-5/8" 22.63# X-42, Set @ 470'
5-9/16" 15.63# X-52 Set @ 3,493'
DVT @ 2,465'

Existing Open Perfs: 2,739-2,951'

Queen Completion Procedure:

- 1) MIRU pulling unit
- 2) POOH Standing back rods /Tbg. LD pump & production BHA.
- 3) RIH to +/-2,700' with Bit/scrapper. POOH Standing back & LD Bit/scrapper.
- 4) RIH & set 5-9/16" CIBP @ +/- 2,690'. **Spot cement to 2445', verify Top of cmt. 25sks minimum**
- 5) Test casing to +/- 1,500# surface pressure for 15 minutes. Monitor annulus throughout job.
- 6) RIH w/ WL & Perf (1,685-2,616') w/ 3-1/8" guns, Dyna Frac Tune GH Charge type, RDX explosive type, 22.7g explosive weight, 0.42 EHD, "even hole size", holes per logs as indicated below.
- 7) RD & Rls WL.
- 8) RIH w/ 2-7/8" tbg and pkr, spot 500 gal 15% HCL across perfs to breakdown perfs
- 9) Pull up above perfs and set pkr.
- 10) Pump 12,000 gal 15% HCL acid with anti-sludge chem @ 6-12 BPM while dropping 130 balls evenly displaced throughout job, over flush +/- 300 bbl
- 11) Rls pkr, RIH through perfs to ensure balls are clear. POOH LD pkr and stand back tbg.
- 12) RIH w/ (Btm to top) BP, 1- Jt 2-7/8" tbg, Slotted Sub, 2-7/8" SN, 2-7/8" J-55 to Surface. Run pump and rods, Rod Pump should be a 1.5" after frac pump
- 13) RDMO PU & Kill Truck, Return Well to Production

Stevens A #7 7-Rivers & Queen Interval									
1,685	1,695	1,715	1,726	1,732	1,737	1,739	1,751	1,760	1,777
1,781	1,787	1,797	1,806	1,820	1,831	1,843	1,859	1,874	1,892
1,907	1,915	1,928	1,943	1,954	1,958	1,990	2,007	2,032	2,072
2,082	2,095	2,105	2,118	2,127	2,154	2,162	2,185	2,212	2,287
2,297	2,332	2,343	2,354	2,370	2,385	2,400	2,405	2,412	2,425
2,432	2,443	2,449	2,465	2,472	2,492	2,500	2,509	2,520	2,532
2,551	2,557	2,577	2,600	2,616					
Interval	65 Depths	65 @ 2 SPF		2 SPF @ 0.42" holes at 180* phasing					
936'	130 Shots								

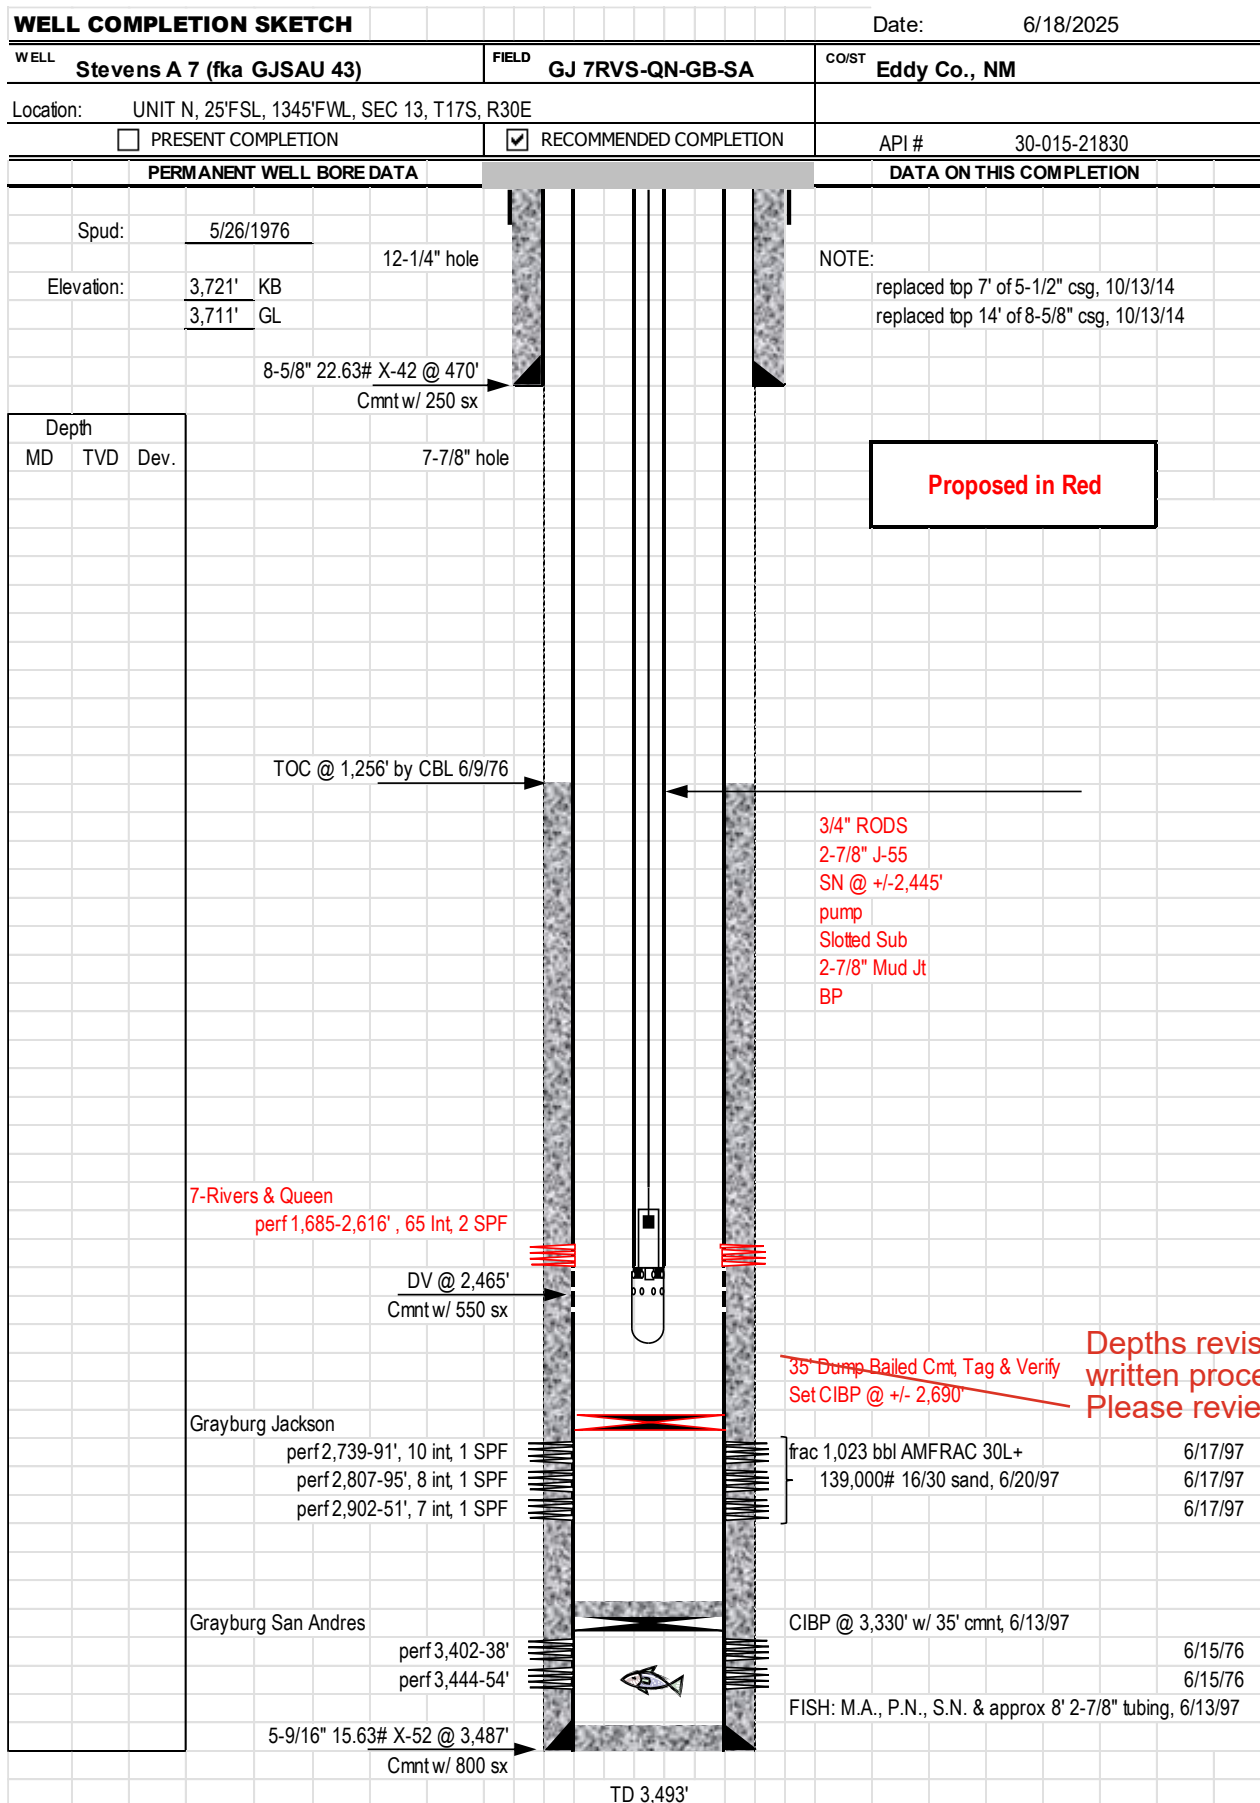

BUREAU OF LAND MANAGEMENT
Carlsbad Field Office
620 East Greene Street
Carlsbad, New Mexico 88220
575-234-5972

Conditions of Approval for Permanent Abandonment of a Production Zone

Failure to comply with the following Conditions of Approval may result in a Notice of Incidents of Noncompliance (INC) in accordance with 43 CFR 3163.1.

1. Plugging operations shall commence within ninety (90) days from the approval date of this Notice of Intent to Plug Back.

If you are unable to plug the well by the 90th day provide this office, prior to the 90th day, with the reason for not meeting the deadline and a date when we can expect the completed interval to be plugged. Failure to do so will result in enforcement action.

The rig used for the plugging procedure cannot be released and moved off without the prior approval of the authorized officer. Failure to do so may result in enforcement action.

2. Notification: Contact the appropriate BLM office at least 24 hours prior to the commencing of any plug back operations. For wells in Chaves and Roosevelt County, call 575-627-0272; Eddy County, call 575-361-2822; Lea County, call 575-689-5981
3. Blowout Preventers: A blowout preventer (BOP), as appropriate, shall be installed before commencing any plugging operation. The BOP must be installed and maintained as per API and manufacturer recommendations. The minimum BOP requirement is a 2M system for a well not deeper than 9,100 feet, a 3M system for a well not deeper than 13,600 feet, or a 5M system for a well not deeper than 22,700 feet (all depths are for measured well depth).
4. Mud Requirement: Mud shall be placed between all plugs. Minimum consistency of plugging mud shall be obtained by mixing at the rate of 25 sacks (50 pounds each) of gel per 100 barrels of brine water. Minimum nine (9) pounds per gallon.
5. Cement Requirement: Sufficient cement shall be used to bring any required plug to the specified depth and length. Any given cement volumes on the proposed plugging procedure are merely estimates and are not final. Unless specific approval is received, no plug except the surface plug shall be less than 25 sacks of cement. Any plug that requires a tag will have a minimum WOC time of 4 hours.


In lieu of a cement plug across perforations in a cased hole (not for any other plugs), a bridge plug set within 50 feet to 100 feet above the perforations shall be capped with 25 sacks of cement. If a bailer is used to cap this plug, 35 feet of cement shall be sufficient. **Before pumping or bailing cement on top of CIBP, tag will be required to verify depth. Based on depth, a tag of the cement may be deemed necessary.**

Unless otherwise specified in the approved procedure, the cement plug shall consist of either Neat Class "C", for up to 7,500 feet of depth or Neat Class "H", for deeper than 7,500 feet plugs.

6. Casing Integrity Test: The casing shall be filled with corrosion inhibited fluid above the CIBP and pressure tested to 1000 psi surface pressure with a pressure drop not more than 10 percent over 15-minute period. If the well does not pass the casing integrity test, then the operator shall either repair the casing and re-test or within 30 days submit a procedure to plug and abandon the well.
7. Subsequent Plug back Reporting: Within 30 days after plug back work is completed, file a Subsequent Report (Form 3160-5) or via the AFMSS 2 WISx Module to BLM. The report should give in detail the manner in which the plug back work was carried out, the extent (by depths) of cement plugs placed, and the size and location (by depths) of casing left in the well. Show date zone was plugged. After plugging back to a new zone submit a Completion Report (Form 3160-4) or via the AFMSS 2 WISx Module with the Subsequent Report. The plugged zone shall be in plug back status.

Include the following information:

- a. A well bore diagram with all perforations, CIBP's, and tops of cement on CIBP's.
 - b. A description of the plug back procedure.
 - c. A clear copy or the original of the pressure test chart.
 - d. A copy of any logs ran.
8. Trash: All trash, junk and other waste material shall be contained in trash cages or bins to prevent scattering and will be removed and deposited in an approved sanitary landfill. Burial on site is not permitted.
 9. If well location is within the Timing Limitation Stipulation Area for Lesser Prairie-Chicken:
From March 1st through June 15th annually, abandonment activities will be allowed except between the hours from 3:00 am and 9:00 am. Normal vehicle use on existing roads will not be restricted.

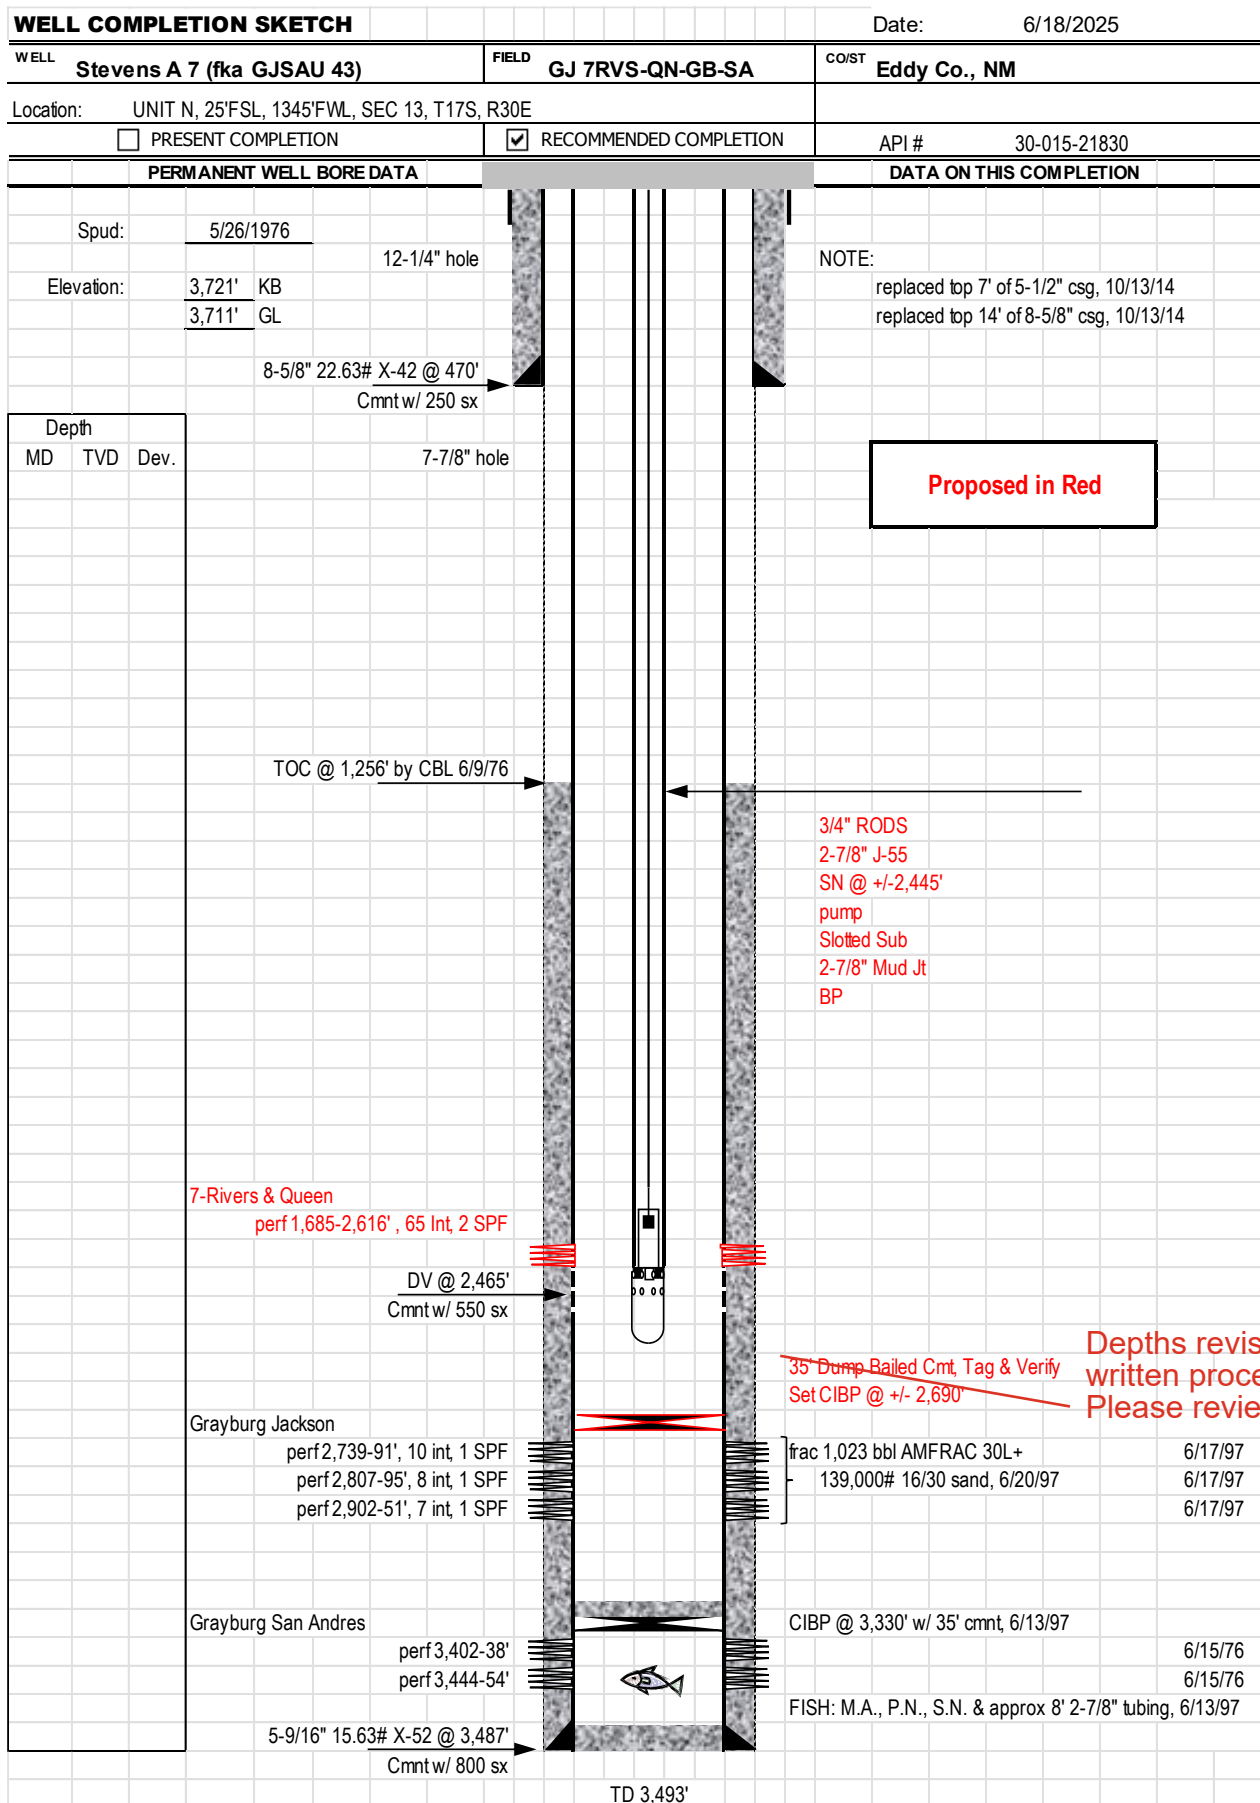

State of New Mexico
Energy, Minerals and Natural Resources Department

Submit Electronically
Via E-permitting

Oil Conservation Division
1220 South St. Francis Dr.
Santa Fe, NM 87505

NATURAL GAS MANAGEMENT PLAN

This Natural Gas Management Plan must be submitted with each Application for Permit to Drill (APD) for a new or recompleted well.

Section 1 – Plan Description **Effective May 25, 2021**

I. Operator: Burnett Oil Co., Inc. OGRID: 03080 Date: 8/12/2025

II. Type: ☒ Original ☐ Amendment due to ☐ 19.15.27.9.D(6)(a) NMAC ☐ 19.15.27.9.D(6)(b) NMAC ☒

Other. If Other, please describe: Recompletion

III. Well(s): Provide the following information for each new or recompleted well or set of wells proposed to be drilled or proposed to be recompleted from a single well pad or connected to a central delivery point.

Well Name	API	ULSTR	Footages	Anticipated Oil BBL/D	Anticipated Gas MCF/D	Anticipated Produced Water BBL/D
Stevens A #7	30-015-21830	N-13-17S-30E	25" FSL 1345' FWL	150	250	800

IV. Central Delivery Point Name: Stevens A Battery [See 19.15.27.9(D)(1) NMAC]

V. Anticipated Schedule: Provide the following information for each new or recompleted well or set of wells proposed to be drilled or proposed to be recompleted from a single well pad or connected to a central delivery point.

Well Name	API	Spud Date	TD Reached Date	Completion Commencement Date	Initial Flow Back Date	First Production Date
Stevens A #7	30-015-21830	TBD	TBD	TBD	TBD	TBD

VI. Separation Equipment: ☒ Attach a complete description of how Operator will size separation equipment to optimize gas capture.

VII. Operational Practices: ☒ Attach a complete description of the actions Operator will take to comply with the requirements of Subsection A through F of 19.15.27.8 NMAC.

VIII. Best Management Practices: ☒ Attach a complete description of Operator's best management practices to minimize venting during active and planned maintenance.

Section 2 – Enhanced Plan

EFFECTIVE APRIL 1, 2022

Beginning April 1, 2022, an operator that is not in compliance with its statewide natural gas capture requirement for the applicable reporting area must complete this section.

☒ Operator certifies that it is not required to complete this section because Operator is in compliance with its statewide natural gas capture requirement for the applicable reporting area.

IX. Anticipated Natural Gas Production:

Well	API	Anticipated Average Natural Gas Rate MCF/D	Anticipated Volume of Natural Gas for the First Year MCF

X. Natural Gas Gathering System (NGGS):

Operator	System	ULSTR of Tie-in	Anticipated Gathering Start Date	Available Maximum Daily Capacity of System Segment Tie-in

XI. Map. ☐ Attach an accurate and legible map depicting the location of the well(s), the anticipated pipeline route(s) connecting the production operations to the existing or planned interconnect of the natural gas gathering system(s), and the maximum daily capacity of the segment or portion of the natural gas gathering system(s) to which the well(s) will be connected.

XII. Line Capacity. The natural gas gathering system ☐ will ☐ will not have capacity to gather 100% of the anticipated natural gas production volume from the well prior to the date of first production.

XIII. Line Pressure. Operator ☐ does ☐ does not anticipate that its existing well(s) connected to the same segment, or portion, of the natural gas gathering system(s) described above will continue to meet anticipated increases in line pressure caused by the new well(s).

☐ Attach Operator's plan to manage production in response to the increased line pressure.

XIV. Confidentiality: ☐ Operator asserts confidentiality pursuant to Section 71-2-8 NMSA 1978 for the information provided in Section 2 as provided in Paragraph (2) of Subsection D of 19.15.27.9 NMAC, and attaches a full description of the specific information for which confidentiality is asserted and the basis for such assertion.

Section 3 - Certifications

Effective May 25, 2021

Operator certifies that, after reasonable inquiry and based on the available information at the time of submittal:

☒ Operator will be able to connect the well(s) to a natural gas gathering system in the general area with sufficient capacity to transport one hundred percent of the anticipated volume of natural gas produced from the well(s) commencing on the date of first production, taking into account the current and anticipated volumes of produced natural gas from other wells connected to the pipeline gathering system; or

☐ Operator will not be able to connect to a natural gas gathering system in the general area with sufficient capacity to transport one hundred percent of the anticipated volume of natural gas produced from the well(s) commencing on the date of first production, taking into account the current and anticipated volumes of produced natural gas from other wells connected to the pipeline gathering system.

If Operator checks this box, Operator will select one of the following:

Well Shut-In. ☐ Operator will shut-in and not produce the well until it submits the certification required by Paragraph (4) of Subsection D of 19.15.27.9 NMAC; or

Venting and Flaring Plan. ☐ Operator has attached a venting and flaring plan that evaluates and selects one or more of the potential alternative beneficial uses for the natural gas until a natural gas gathering system is available, including:

- (a) power generation on lease;
- (b) power generation for grid;
- (c) compression on lease;
- (d) liquids removal on lease;
- (e) reinjection for underground storage;
- (f) reinjection for temporary storage;
- (g) reinjection for enhanced oil recovery;
- (h) fuel cell production; and
- (i) other alternative beneficial uses approved by the division.

Section 4 - Notices

1. If, at any time after Operator submits this Natural Gas Management Plan and before the well is spud:

(a) Operator becomes aware that the natural gas gathering system it planned to connect the well(s) to has become unavailable or will not have capacity to transport one hundred percent of the production from the well(s), no later than 20 days after becoming aware of such information, Operator shall submit for OCD's approval a new or revised venting and flaring plan containing the information specified in Paragraph (5) of Subsection D of 19.15.27.9 NMAC; or

(b) Operator becomes aware that it has, cumulatively for the year, become out of compliance with its baseline natural gas capture rate or natural gas capture requirement, no later than 20 days after becoming aware of such information, Operator shall submit for OCD's approval a new or revised Natural Gas Management Plan for each well it plans to spud during the next 90 days containing the information specified in Paragraph (2) of Subsection D of 19.15.27.9 NMAC, and shall file an update for each Natural Gas Management Plan until Operator is back in compliance with its baseline natural gas capture rate or natural gas capture requirement.

2. OCD may deny or conditionally approve an APD if Operator does not make a certification, fails to submit an adequate venting and flaring plan which includes alternative beneficial uses for the anticipated volume of natural gas produced, or if OCD determines that Operator will not have adequate natural gas takeaway capacity at the time a well will be spud.

I certify that, after reasonable inquiry, the statements in and attached to this Natural Gas Management Plan are true and correct to the best of my knowledge and acknowledge that a false statement may be subject to civil and criminal penalties under the Oil and Gas Act.

Signature: *Randy Bolles*

Printed Name: Randy Bolles

Title: Regulatory Consultant

E-mail Address: rbolles@cox.net

Date: 08/12/2025

Phone: 405-738-0183

OIL CONSERVATION DMSION
(Only applicable when submitted as a standalone form)

Approved By:

Title:

Approval Date:

Conditions of Approval:

NATURAL GAS MANAGEMENT PLAN

Section 1 – Attachments

Company: Burnett Oil Co., Inc. Well Name: Stevens A #7 API 30-015-21830

VI. Separation Equipment: Description of how Operator will size separation equipment to optimize gas capture.

- A. This well will be added to an existing tank battery.
- B. The engineered system is designed to handle 1450 MCF/D. It will produce through the following vessels:
 - 1. 2-phase separator,
 - 2. free-water knockout,
 - 3. heater treater, and then finally a
 - 4. 2-phase gas scrubber.
- C. Current battery throughput is 745 MCF/D.
- D. The referenced well is anticipated to produce a maximum of 250 MCF/D for a total throughput of 995 MCF/D.

VII. Operational Practices: Description of the actions Operator will take to comply with the requirements of Subsection A through F of 19.15.27.8 NMAC.

- A. In all circumstances, the operator shall flare rather than vent natural gas except when flaring is technically infeasible or would pose a risk to safe operations or personnel safety, and venting is a safer alternative than flaring.
- B. During drilling operations a mud/gas separator will be on location. If needed, it will be utilized to capture natural gas for purposes of flaring. If flaring is required, a properly-sized flare stack will be at a minimum of 100' from the nearest surface hole location unless otherwise approved by the division.
- C. Venting and flaring during completion or recompletion operations
 - 1. During completion or recompletion, gas is trapped/retained in the wellbore through use of properly weighted "kill" fluids.
 - 2. During the completion phase, the well will be routed directly into an existing battery. With this initial flowback already being connected to the existing battery, all flowback gasses will be routed, if applicable, only to flare. No venting will occur during this initial flowback period. As soon as it is feasible, the existing separation will be utilized.
- D. Equipment redundancies within the system, along with the overall battery design, enables us to service equipment without interruption to gas flow in most scenarios. With the existing battery compression at this

facility, in most cases we can avoid flaring during times of elevated transmission line pressures caused by mid-stream maintenance. Additionally, we have gas takeaway with two (2) midstream companies to try and keep gas going to sales in case one of them has a problem.

E. Performance Standards

1. The existing facility is designed for maximum anticipated throughput and pressure to minimize waste.
2. The existing storage tanks are routed to a combustor.
3. The existing flare stack is properly sized and designed to ensure proper combustion efficiency.
4. The existing flare stack is securely anchored and located at least 100 feet from the storage tanks.
5. AVO inspections are conducted weekly.
6. NA
7. NA
8. We strive to minimize waste and shall resolve emergencies as quickly and safely as possible.

F. Measurement or estimation of vented and flared natural gas

1. We shall measure or estimate the volume of natural gas that is vented, flared, or beneficially used during drilling, completion and production operations regardless of the reason or authorization for such venting or flaring.
2. The existing flare has a meter to measure the gas going to it.
3. The measurement equipment conforms to an industry standard such as American Petroleum Institute (API) Manual of Petroleum Measurement Standards (MPMS) Chapter 14.10 Measurement of Flow to Flares
4. The measuring equipment is not equipped with a manifold that allows the diversion of natural gas around the metering element except for the sole purpose of inspecting and servicing the measurement equipment.
5. If metering is not practicable due to circumstances such as low flow rate or low pressure venting and flaring, the operator will estimate the volume of vented or flared natural gas using a methodology that can be independently verified.
6. NA
7. The operator shall install measuring equipment whenever the division determines that metering is practicable or the existing measuring equipment or GOR test is not sufficient to measure the volume of vented and flared natural gas.

VIII. Best Management Practices: Operator's best management practices to minimize venting during active and planned maintenance.

- A. The existing facility is designed for maximum anticipated throughput and pressure to minimize waste.
- B. Equipment redundancies within the system, along with the overall battery design, enables us to service equipment without interruption to gas flow in most scenarios. With the existing battery compression at this facility, in most cases we can avoid flaring during times of elevated transmission line pressures caused by mid-stream maintenance.
- C. During well maintenance, gas is trapped/retained in the wellbore through use of properly weighted "kill" fluids.
- D. Additionally, we have gas takeaway with two (2) midstream companies to try and keep gas going to sales in case one of them has a problem.

**Burnett Oil Co., Inc.
Stevens A #7
Grayburg Jackson
Eddy Co., NM**

BTY: Stevens A Lease # LC 030570A API#: 30-015-21830
LEGAL: UNIT N, 25' FSL, 1345' FWL, SEC 13, T17S, R30E
Elevation: 3711' GL, 3721' KB, ALL MEAS FROM KB 10' AGL.

TD: 3,300'
PBSD @ +/- 3,077'
Casing: 8-5/8" 22.63# X-42, Set @ 470'
5-9/16" 15.63# X-52 Set @ 3,493'
DVT @ 2,465'

Existing Open Perfs: 2,739-2,951'

Queen Completion Procedure:

- 1) MIRU pulling unit
- 2) POOH Standing back rods /Tbg. LD pump & production BHA.
- 3) RIH to +/-2,700' with Bit/scrapper. POOH Standing back & LD Bit/scrapper.
- 4) RIH & set 5-9/16" CIBP @ +/- 2,690'. **Spot cement to 2445', verify Top of cmt. 25sks minimum**
- 5) Test casing to +/- 1,500# surface pressure for 15 minutes. Monitor annulus throughout job.
- 6) RIH w/ WL & Perf (1,685-2,616') w/ 3-1/8" guns, Dyna Frac Tune GH Charge type, RDX explosive type, 22.7g explosive weight, 0.42 EHD, "even hole size", holes per logs as indicated below.
- 7) RD & Rls WL.
- 8) RIH w/ 2-7/8" tbg and pkr, spot 500 gal 15% HCL across perfs to breakdown perfs
- 9) Pull up above perfs and set pkr.
- 10) Pump 12,000 gal 15% HCL acid with anti-sludge chem @ 6-12 BPM while dropping 130 balls evenly displaced throughout job, over flush +/- 300 bbl
- 11) Rls pkr, RIH through perfs to ensure balls are clear. POOH LD pkr and stand back tbg.
- 12) RIH w/ (Btm to top) BP, 1- Jt 2-7/8" tbg, Slotted Sub, 2-7/8" SN, 2-7/8" J-55 to Surface. Run pump and rods, Rod Pump should be a 1.5" after frac pump
- 13) RDMO PU & Kill Truck, Return Well to Production

Stevens A #7 7-Rivers & Queen Interval									
1,685	1,695	1,715	1,726	1,732	1,737	1,739	1,751	1,760	1,777
1,781	1,787	1,797	1,806	1,820	1,831	1,843	1,859	1,874	1,892
1,907	1,915	1,928	1,943	1,954	1,958	1,990	2,007	2,032	2,072
2,082	2,095	2,105	2,118	2,127	2,154	2,162	2,185	2,212	2,287
2,297	2,332	2,343	2,354	2,370	2,385	2,400	2,405	2,412	2,425
2,432	2,443	2,449	2,465	2,472	2,492	2,500	2,509	2,520	2,532
2,551	2,557	2,577	2,600	2,616					
Interval	65 Depths	65 @ 2 SPF		2 SPF @ 0.42" holes at 180* phasing					
936'	130 Shots								

WELL COMPLETION SKETCH				Date:	6/18/2025
WELL		Stevens A 7 (fka GJSAU 43)		FIELD	GJ 7RVS-QN-GB-SA
CO/ST		Eddy Co., NM			
Location: UNIT N, 25'FSL, 1345'FWL, SEC 13, T17S, R30E					
☐ PRESENT COMPLETION		☒ RECOMMENDED COMPLETION		API # 30-015-21830	
PERMANENT WELL BORE DATA			DATA ON THIS COMPLETION		
Spud:	5/26/1976				
Elevation:	3,721'	KB	12-1/4" hole		
	3,711'	GL			
8-5/8" 22.63# X-42 @ 470'			NOTE:		
Cmnt w/ 250 sx			replaced top 7' of 5-1/2" csg, 10/13/14		
7-7/8" hole			replaced top 14' of 8-5/8" csg, 10/13/14		
Depth	MD	TVD	Dev.		
				Proposed in Red	
TOC @ 1,256' by CBL 6/9/76					
				3/4" RODS 2-7/8" J-55 SN @ +/-2,445' pump Slotted Sub 2-7/8" Mud Jt BP	
7-Rivers & Queen perf 1,685-2,616', 65 Int, 2 SPF					
DV @ 2,465'					
Cmnt w/ 550 sx					
Grayburg Jackson					
perf 2,739-91', 10 int, 1 SPF				frac 1,023 bbl AMFRAC 30L+ 6/17/97	
perf 2,807-95', 8 int, 1 SPF				139,000# 16/30 sand, 6/20/97 6/17/97	
perf 2,902-51', 7 int, 1 SPF				6/17/97	
Grayburg San Andres					
perf 3,402-38'				CIBP @ 3,330' w/ 35' cmnt, 6/13/97	
perf 3,444-54'				6/15/76	
5-9/16" 15.63# X-52 @ 3,487'				FISH: M.A., P.N., S.N. & approx 8' 2-7/8" tubing, 6/13/97	
Cmnt w/ 800 sx					
TD 3,493'					

BUREAU OF LAND MANAGEMENT
Carlsbad Field Office
620 East Greene Street
Carlsbad, New Mexico 88220
575-234-5972

Conditions of Approval for Permanent Abandonment of a Production Zone

Failure to comply with the following Conditions of Approval may result in a Notice of Incidents of Noncompliance (INC) in accordance with 43 CFR 3163.1.

1. Plugging operations shall commence within ninety (90) days from the approval date of this Notice of Intent to Plug Back.

If you are unable to plug the well by the 90th day provide this office, prior to the 90th day, with the reason for not meeting the deadline and a date when we can expect the completed interval to be plugged. Failure to do so will result in enforcement action.

The rig used for the plugging procedure cannot be released and moved off without the prior approval of the authorized officer. Failure to do so may result in enforcement action.

2. Notification: Contact the appropriate BLM office at least 24 hours prior to the commencing of any plug back operations. For wells in Chaves and Roosevelt County, call 575-627-0272; Eddy County, call 575-361-2822; Lea County, call 575-689-5981
3. Blowout Preventers: A blowout preventer (BOP), as appropriate, shall be installed before commencing any plugging operation. The BOP must be installed and maintained as per API and manufacturer recommendations. The minimum BOP requirement is a 2M system for a well not deeper than 9,100 feet, a 3M system for a well not deeper than 13,600 feet, or a 5M system for a well not deeper than 22,700 feet (all depths are for measured well depth).
4. Mud Requirement: Mud shall be placed between all plugs. Minimum consistency of plugging mud shall be obtained by mixing at the rate of 25 sacks (50 pounds each) of gel per 100 barrels of brine water. Minimum nine (9) pounds per gallon.
5. Cement Requirement: Sufficient cement shall be used to bring any required plug to the specified depth and length. Any given cement volumes on the proposed plugging procedure are merely estimates and are not final. Unless specific approval is received, no plug except the surface plug shall be less than 25 sacks of cement. Any plug that requires a tag will have a minimum WOC time of 4 hours.

In lieu of a cement plug across perforations in a cased hole (not for any other plugs), a bridge plug set within 50 feet to 100 feet above the perforations shall be capped with 25 sacks of cement. If a bailer is used to cap this plug, 35 feet of cement shall be sufficient. **Before pumping or bailing cement on top of CIBP, tag will be required to verify depth. Based on depth, a tag of the cement may be deemed necessary.**

Unless otherwise specified in the approved procedure, the cement plug shall consist of either Neat Class "C", for up to 7,500 feet of depth or Neat Class "H", for deeper than 7,500 feet plugs.

6. Casing Integrity Test: The casing shall be filled with corrosion inhibited fluid above the CIBP and pressure tested to 1000 psi surface pressure with a pressure drop not more than 10 percent over 15-minute period. If the well does not pass the casing integrity test, then the operator shall either repair the casing and re-test or within 30 days submit a procedure to plug and abandon the well.
7. Subsequent Plug back Reporting: Within 30 days after plug back work is completed, file a Subsequent Report (Form 3160-5) or via the AFMSS 2 WISx Module to BLM. The report should give in detail the manner in which the plug back work was carried out, the extent (by depths) of cement plugs placed, and the size and location (by depths) of casing left in the well. Show date zone was plugged. After plugging back to a new zone submit a Completion Report (Form 3160-4) or via the AFMSS 2 WISx Module with the Subsequent Report. The plugged zone shall be in plug back status.

Include the following information:

- a. A well bore diagram with all perforations, CIBP's, and tops of cement on CIBP's.
 - b. A description of the plug back procedure.
 - c. A clear copy or the original of the pressure test chart.
 - d. A copy of any logs ran.
8. Trash: All trash, junk and other waste material shall be contained in trash cages or bins to prevent scattering and will be removed and deposited in an approved sanitary landfill. Burial on site is not permitted.
 9. If well location is within the Timing Limitation Stipulation Area for Lesser Prairie-Chicken:
From March 1st through June 15th annually, abandonment activities will be allowed except between the hours from 3:00 am and 9:00 am. Normal vehicle use on existing roads will not be restricted.

Sante Fe Main Office
Phone: (505) 476-3441

General Information
Phone: (505) 629-6116

Online Phone Directory
<https://www.emnrd.nm.gov/ocd/contact-us>

State of New Mexico
Energy, Minerals and Natural Resources
Oil Conservation Division
1220 S. St Francis Dr.
Santa Fe, NM 87505

CONDITIONS

Action 495250

CONDITIONS

Operator: BURNETT OIL CO INC 801 Cherry Street Unit #9 Fort Worth, TX 76102	OGRID: 3080
	Action Number: 495250
	Action Type: [C-103] NOI Recompletion (C-103E)

CONDITIONS

Created By	Condition	Condition Date
ward.rikala	Notify the OCD inspection supervisor via email 24 Hours Prior to beginning operations.	9/16/2025
ward.rikala	All conducted logs shall be submitted to the OCD as a [UF-WL] EP Well Log Submission (WellLog).	9/16/2025
ward.rikala	If Cement is not adequate to protect casing and isolate strata: (a) the uppermost perforation in each additional pool to at least 150 feet above that perforation; and (b) the lowermost perforation in each added pool to at least 100 feet below that perforation, the appropriate Inspection supervisor shall be consulted and remedial action conducted as directed.	9/16/2025
ward.rikala	A C-104 packet is required if, a pool is added, or perforations are added above or below existing perms.	9/16/2025