

Submit Copy To Appropriate District
Office
District I - (575) 393-6161
1625 N. French Dr., Hobbs, NM 88240
District II - (575) 748-1283
811 S. First St., Artesia, NM 88210
District III - (505) 334-6178
1000 Rio Brazos Rd., Aztec, NM 87410
District IV - (505) 476-3460
1220 S. St. Francis Dr., Santa Fe, NM
87505

State of New Mexico
Energy, Minerals and Natural Resources

Form C-103
Revised July 18, 2013

OIL CONSERVATION DIVISION
1220 South St. Francis Dr.
Santa Fe, NM 87505

WELL API NO.
30-005-60108
5. Indicate Type of Lease
STATE [X] FEE []
6. State Oil & Gas Lease No.
7. Lease Name or Unit Agreement Name
DOUBLE L QUEEN
8. Well Number #008
9. OGRID Number
269864
10. Pool name or Wildcat
DOUBLE L;QUEEN (ASSOC)

SUNDRY NOTICES AND REPORTS ON WELLS
(DO NOT USE THIS FORM FOR PROPOSALS TO DRILL OR TO DEEPEN OR PLUG BACK TO A
DIFFERENT RESERVOIR. USE "APPLICATION FOR PERMIT" (FORM C-101) FOR SUCH
PROPOSALS.)
1. Type of Well: Oil Well [X] Gas Well [] Other []
2. Name of Operator
CANYON E & P COMPANY
3. Address of Operator
251 O'Connor Ridge Blvd.Suite 265, Irving, TX 75038
4. Well Location
Unit Letter P: 330 feet from the S line and 330 feet from the E line
Section 36 Township 14S Range 29E NMPM Chaves
11. Elevation (Show whether DR, RKB, RT, GR, etc.)

12. Check Appropriate Box to Indicate Nature of Notice, Report or Other Data

NOTICE OF INTENTION TO:
PERFORM REMEDIAL WORK [] PLUG AND ABANDON []
TEMPORARILY ABANDON [] CHANGE PLANS []
PULL OR ALTER CASING [] MULTIPLE COMPL []
DOWNHOLE COMMINGLE []
CLOSED-LOOP SYSTEM []
OTHER: []
SUBSEQUENT REPORT OF:
REMEDIAL WORK [] ALTERING CASING []
COMMENCE DRILLING OPNS. [] P AND A [X]
CASING/CEMENT JOB []
OTHER: []

13. Describe proposed or completed operations. (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work). SEE RULE 19.15.7.14 NMAC. For Multiple Completions: Attach wellbore diagram of proposed completion or recompletion.

NMOCD has plugged this well in accordance with the attached documents and uploaded daily reports.

Move on location: 3-4-26
Move off location: 4-2-26

Please see additional notes on plug summary page.

Spud Date: []

Rig Release Date: []

I hereby certify that the information above is true and complete to the best of my knowledge and belief.

SIGNATURE: Ethan Wakefield

TITLE: Authorized Representative

DATE 4/8/26

Type or print name: Ethan Wakefield

E-mail address: e.wakefield@dwsrigs.com

PHONE: 405-343-7736

For State Use Only

APPROVED BY: [] TITLE [] DATE []

Conditions of Approval (if any):



As Plugged Wellbore Diagram

CANYON E&P COMPANY
DOUBLE L QUEEN UNIT #008
API: 30-005-60108
Chaves County, New Mexico

Plug 4
Balanced Over Perfs
Perfs @ 429, 300, 275
PLUG WAS DRILLED OUT
479' to Surface
64 sacks Type III Cement

Plug 3
Balanced Inside
1384' to 1000'
384 foot plug
35 sacks Type III Cement

Plug 2
Above CR
1885' to 1750'
135 foot plug
10 sacks Type III Cement


Plug 1
SQ Under CR
Top 1885'
10 sacks Type III Cement

Surface Casing
8-5/8" 20# @ 328'
OH: 11"
Circulated to Surface

Formation
Anhydrite - 272'
T Salt - 379'
B Salt - 1138'
Yates - 1200'
7 Rivers - 1334'

Production Casing
5-1/2" 14# @ 2008'
OH: 7-7/8"
Circulated to Surface
CBL TOC: ≈600

Perforations
1935' to 1944'

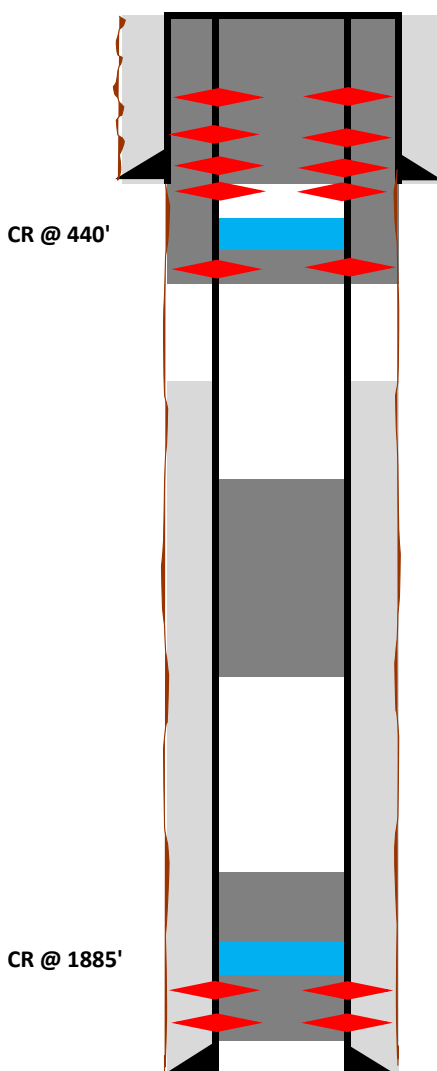

Plug 7
Balanced Over Perfs
Perfs @ 335', 210
312' to Surface
50 sacks Type III Cement
Additional 30 Sacks for Top Off

Plug 6
SQ under CR
Top 440
20 sacks Type III Cement

Plug 5
SQ From Surface
Pumped in 5-1/2" and 8-5/8"
Annulus
40 sacks Type III Cement

Plug Summary

Plug #	Plug Type	Perfs	CR/CIBP Depth	Outside SQ Sxs	Inside Sxs	Class/Type	Bottom	Top	Tag Depth
1	SQ under CR		1885		10	III		1885	
2	Above CR		1885		10	III	1885	1785	1750
3	Balanced Inside				35	III	1384	1038	1000
4	SQ Inside/Outside	429, 300, 275	No Injection		64	III	479	0	
5	SQ from surface			40		III			
6	SQ under CR		440	20		III		440	
7	Balanced Inside	335, 210	Perfs completed 3/23		50	III	312	0	30
	Top off				10	III	30	0	0

Additional Notes:

3/17/26 – Plug #3 was tagged at 1000'. Wireline perforated at 429', 300', and 275'. Multiple attempts were made to circulate into perforations and out the BH with no success. Plug #4 was pumped from 479' to surface through tubing in the 5.5" casing. After WOC bubbles were noticed at surface. This was reported to the regulators.

3/18/26 – The decision was made to pump cement down the 8-5/8" and 5-1/2" annulus. 40 sacks were pumped until cement began circulating on the outside of the surface casing (Plug #5).

3/19/26 – Drilled to 100'. Rig up to 5.5". Attempt to pressure test, pressure test fell from 800 psi to 500 psi in 3 min. Continued drilling to 120'.

3/20/26 – Drilled to 218'. Attempt to pressure test, pressure test fell from 600 psi to 250 psi in 3 min. Continued drilling to 269'.

3/21/26 – Drilled to 439'

3/22/26 – Drilled and cleaned to 1000'. Ran CBL. Cannot inject. Pressure builds to 600 psi then slowly drops. Perforated at 460'. Able to inject at 0.8 BPM and 500 psi. P/U CR. Set CR at 440'. Inject 20 sx under CR (plug #6) and pressured up to 1200 psi.

3/23/26 – Well still gassing. Tried to inject and pressured up to 1400 psi, held for 5 minutes. Perforated at 335', unable to inject. Monitored well. Perforated at 210', unable to inject. ND BOP. Install adaptor and pressure gauge.

Well was monitored until 4/1/26

4/1/26 – MOL. TIH and tagged at 312'. Pumped plug #7 from 312' to surface.

4/2/26 – Tagged plug #7 at 30'. Cut off, installed marker. Topped off 5.5" casing and cellar.



Figure 1: Top Off



Figure 2: Top Off



Figure 3: Marker

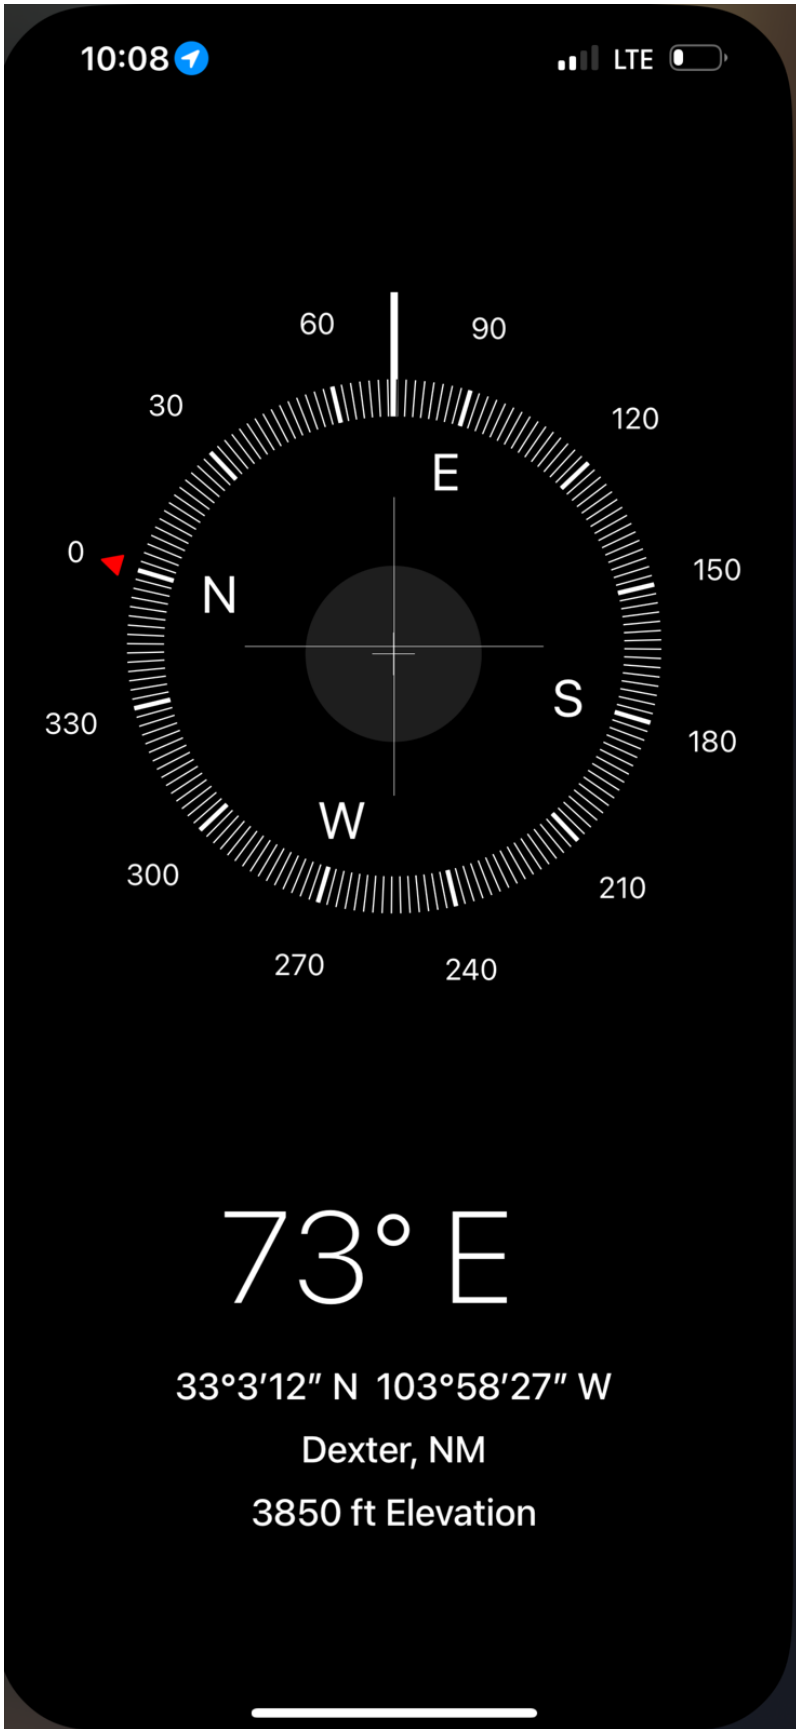


Figure 4: GPS

Sante Fe Main Office
Phone: (505) 476-3441

General Information
Phone: (505) 629-6116

Online Phone Directory
<https://www.emnrd.nm.gov/ocd/contact-us>

State of New Mexico
Energy, Minerals and Natural Resources
Oil Conservation Division
1220 S. St Francis Dr.
Santa Fe, NM 87505

DEFINITIONS

Action 572768

DEFINITIONS

Operator: J.A. Drake Well Service Inc. (OPG Vendor) 607 W. Pinon St Farmington, NM 87401	OGRID: 333581
	Action Number: 572768
	Action Type: [UF-OMA] Sub. Plugging (UF-OMA-C-103P)

DEFINITIONS

The OCD Mitigation Activity (OMA) forms are a subset of the OCD's forms exclusively designed for activities related to State of New Mexico's contracted evaluation, plugging, decommissioning, remediation, salvage and reclamation activities. Specifically, these forms are typically used where the OCD has acquired a hearing order allowing the OCD to perform mitigation activities on wells and associated facilities that no longer have an authorized or viable operator to perform the necessary work. These forms are not to be utilized for any other purpose.

Sante Fe Main Office
Phone: (505) 476-3441

General Information
Phone: (505) 629-6116

Online Phone Directory
<https://www.emnrd.nm.gov/oecd/contact-us>

State of New Mexico
Energy, Minerals and Natural Resources
Oil Conservation Division
1220 S. St Francis Dr.
Santa Fe, NM 87505

QUESTIONS

Action 572768

QUESTIONS

Operator: J.A. Drake Well Service Inc. (OPG Vendor) 607 W. Pinon St Farmington, NM 87401	OGRID: 333581
	Action Number: 572768
	Action Type: [UF-OMA] Sub. Plugging (UF-OMA-C-103P)

QUESTIONS

Prerequisites	
[OGRID] Well Operator	[269864] CANYON E & P COMPANY
[API] Well Name and Number	[30-005-60108] DOUBLE L QUEEN UNIT #008
Well Status	Plugged (not released)

Sante Fe Main Office
Phone: (505) 476-3441

General Information
Phone: (505) 629-6116

Online Phone Directory
<https://www.emnrd.nm.gov/ocd/contact-us>

State of New Mexico
Energy, Minerals and Natural Resources
Oil Conservation Division
1220 S. St Francis Dr.
Santa Fe, NM 87505

CONDITIONS

Action 572768

CONDITIONS

Operator: J.A. Drake Well Service Inc. (OPG Vendor) 607 W. Pinon St Farmington, NM 87401	OGRID: 333581
	Action Number: 572768
	Action Type: [UF-OMA] Sub. Plugging (UF-OMA-C-103P)

CONDITIONS

Created By	Condition	Condition Date
loren.diede	None	4/8/2026