

Form 3160-3
(October 2024)FORM APPROVED
OMB No. 1004-0220
Expires: October 31, 2027UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

APPLICATION FOR PERMIT TO DRILL OR REENTER

***Please refer to most recently approved NOI appended to this application for updated changes to well**

1a. Type of work: ☒ DRILL ☐ REENTER		5. Lease Serial No. NMNM0475051
1b. Type of Well: ☒ Oil Well ☐ Gas Well ☐ Other		6. If Indian, Allottee or Tribe Name
1c. Type of Completion: ☐ Hydraulic Fracturing ☒ Single Zone ☐ Multiple Zone		7. If Unit or CA Agreement, Name and No.
2. Name of Operator FLAT CREEK RESOURCES LLC		8. Lease Name and Well No. JURNEGAN BS FED COM ~~008H~~ 011H
3a. Address 777 MAIN STREET, SUITE 3600, FORT WORTH, TX 761	3b. Phone No. (include area code) (817) 310-8570	9. API Well No. 30-015-58069
4. Location of Well (Report location clearly and in accordance with any State requirements. *) At surface SWSW / 1050 FSL / 805 FWL / LAT 32.1985388 / LONG -104.2869495 At proposed prod. zone SESE / 393 FSL / 15 FEL / LAT 32.1966172 / LONG -104.255398		10. Field and Pool, or Exploratory WILLOW LAKE/BONE SPRING WEST
11. Sec., T. R. M. or Blk. and Survey or Area SEC 22/T24S/R26E/NMP		
14. Distance in miles and direction from nearest town or post office* 5 miles		12. County or Parish EDDY
13. State NM		
15. Distance from proposed* location to nearest property or lease line, ft. (Also to nearest drig. unit line, if any) 805 feet	16. No of acres in lease	17. Spacing Unit dedicated to this well 640.0
18. Distance from proposed location* to nearest well, drilling, completed, applied for, on this lease, ft. 30 feet	19. Proposed Depth 7851 feet / 18117 feet	20. BLM/BIA Bond No. in file FED: NMB001675
21. Elevations (Show whether DF, KDB, RT, GL, etc.) 3334 feet	22. Approximate date work will start* 11/01/2025	23. Estimated duration 60 days
24. Attachments		

The following, completed in accordance with the requirements of Onshore Oil and Gas Order No. 1, and the Hydraulic Fracturing rule per 43 CFR 3162.3-3 (as applicable)

- | | |
|--|---|
| 1. Well plat certified by a registered surveyor. | 4. Bond to cover the operations unless covered by an existing bond on file (see Item 20 above). |
| 2. A Drilling Plan. | 5. Operator certification. |
| 3. A Surface Use Plan (if the location is on National Forest System Lands, the SUPO must be filed with the appropriate Forest Service Office). | 6. Such other site specific information and/or plans as may be requested by the BLM. |

25. Signature (Electronic Submission)	Name (Printed/Typed) CORY WALK / Ph: (817) 310-8570	Date 03/24/2025
Title Permitting Agent		
Approved by (Signature) (Electronic Submission)	Name (Printed/Typed) CODY LAYTON / Ph: (575) 234-5959	Date 10/14/2025
Title Assistant Field Manager Lands & Minerals Carlsbad Field Office		

Application approval does not warrant or certify that the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon.
Conditions of approval, if any, are attached.

Title 18 U.S.C. Section 1001 and Title 43 U.S.C. Section 1212, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

(Continued on page 2)

*(Instructions on page 2)



Approval Date: 10/14/2025

C-102 Submit Electronically Via OCD Permitting	State of New Mexico Energy, Minerals & Natural Resources Department OIL CONSERVATION DIVISION	Revised July 9, 2024	
		Submittal Type:	☒ Initial Submittal
			☐ Amended Report
*Please refer to most recently approved NOI appended to this application for the C-102 and Plat		July Date:	

WELL LOCATION AND ACREAGE DEDICATION PLAT

API Number 30-015-	Pool Code 96415	Pool Name WILLOW LAKE; BONE SPRING, WEST
Property Code	Property Name JURNEGAN BS FED COM	Well Number 8H
OGRID No. 374034	Operator Name FLAT CREEK RESOURCES, LLC.	Ground Level Elevation 3334'
Surface Owner: ☐ State ☐ Fee ☐ Tribal ☒ Federal		Mineral Owner: ☐ State ☒ Fee ☐ Tribal ☒ Federal

Surface Location

UL or lot no. M	Section 22	Township 24-S	Range 26-E	Lot Idn -	Feet from the N/S 1050' S	Feet from the E/W 805' W	Latitude N 32.1985388	Longitude W 104.2869495	County EDDY
--------------------	---------------	------------------	---------------	--------------	------------------------------	-----------------------------	--------------------------	----------------------------	----------------

Bottom Hole Location

UL or lot no. P	Section 23	Township 24-S	Range 26-E	Lot Idn -	Feet from the N/S 393' S	Feet from the E/W 15' E	Latitude N 32.1966172	Longitude W 104.2553980	County EDDY
--------------------	---------------	------------------	---------------	--------------	-----------------------------	----------------------------	--------------------------	----------------------------	----------------

Dedicated Acres 640	Infill or Defining Well	Defining Well API	Overlapping Spacing Unit (Y/N)	Consolidated Code
Order Numbers			Well Setbacks are under Common Ownership: ☐ Yes ☐ No	

Kick Off Point (KOP)

UL or lot no. M	Section 22	Township 24-S	Range 26-E	Lot Idn -	Feet from the N/S 393' S	Feet from the E/W 15' W	Latitude N 32.1967141	Longitude W 104.2895160	County EDDY
--------------------	---------------	------------------	---------------	--------------	-----------------------------	----------------------------	--------------------------	----------------------------	----------------

First Take Point (FTP)

UL or lot no. M	Section 22	Township 24-S	Range 26-E	Lot Idn -	Feet from the N/S 392' S	Feet from the E/W 100' W	Latitude N 32.1967134	Longitude W 104.2892413	County EDDY
--------------------	---------------	------------------	---------------	--------------	-----------------------------	-----------------------------	--------------------------	----------------------------	----------------

Last Take Point (LTP)

UL or lot no. P	Section 23	Township 24-S	Range 26-E	Lot Idn -	Feet from the N/S 392' S	Feet from the E/W 100' E	Latitude N 32.1966180	Longitude W 104.2556727	County EDDY
--------------------	---------------	------------------	---------------	--------------	-----------------------------	-----------------------------	--------------------------	----------------------------	----------------

Unitized Area or Area of Uniform Interest	Spacing Unity Type ☒ Horizontal ☐ Vertical	Ground Floor Elevation ----
---	--	--------------------------------

OPERATOR CERTIFICATION

I hereby certify that the information contained herein is true and complete to the best of my knowledge and belief; and, if the well is a vertical or directional well, that this organization either owns a working interest or unleased mineral interest in the land including the proposed bottom hole location or has a right to drill this well at this location pursuant to a contract with an owner of a working interest or unleased mineral interest, or to a voluntary pooling agreement or a compulsory pooling order heretofore entered by the division.

If this well is a horizontal well, I further certify that this organization has received The consent of at least one lessee or owner of a working interest or unleased mineral interest in each tract (in the target pool or formation) in which any part of the well's completed interval will be located or obtained a compulsory pooling order from the division.

Rodney Littleton 3/5/2025

Signature
Rodney Littleton

Print Name
rlittleton@freedomenergy.com

E-mail Address

SURVEYORS CERTIFICATION

I hereby certify that the well location shown on this plat was plotted from field notes of actual surveys made by me or under my supervision, and that the same is true and correct to the best of my belief.

24508
NEW MEXICO
PROFESSIONAL SURVEYOR


3/5/2025 9:17:07 AM

Signature and Seal of Professional Surveyor Date

Certificate Number

Date of Survey
10/29/2024

C-102 Submit Electronically Via OCD Permitting	State of New Mexico Energy, Minerals & Natural Resources Department OIL CONSERVATION DIVISION	Revised July 9, 2024 Submittal Type: ☒ Initial Submittal ☐ Amended Report ☐ As Drilled
Property Name and Well Number JURNEGAN BS FED COM 8H		

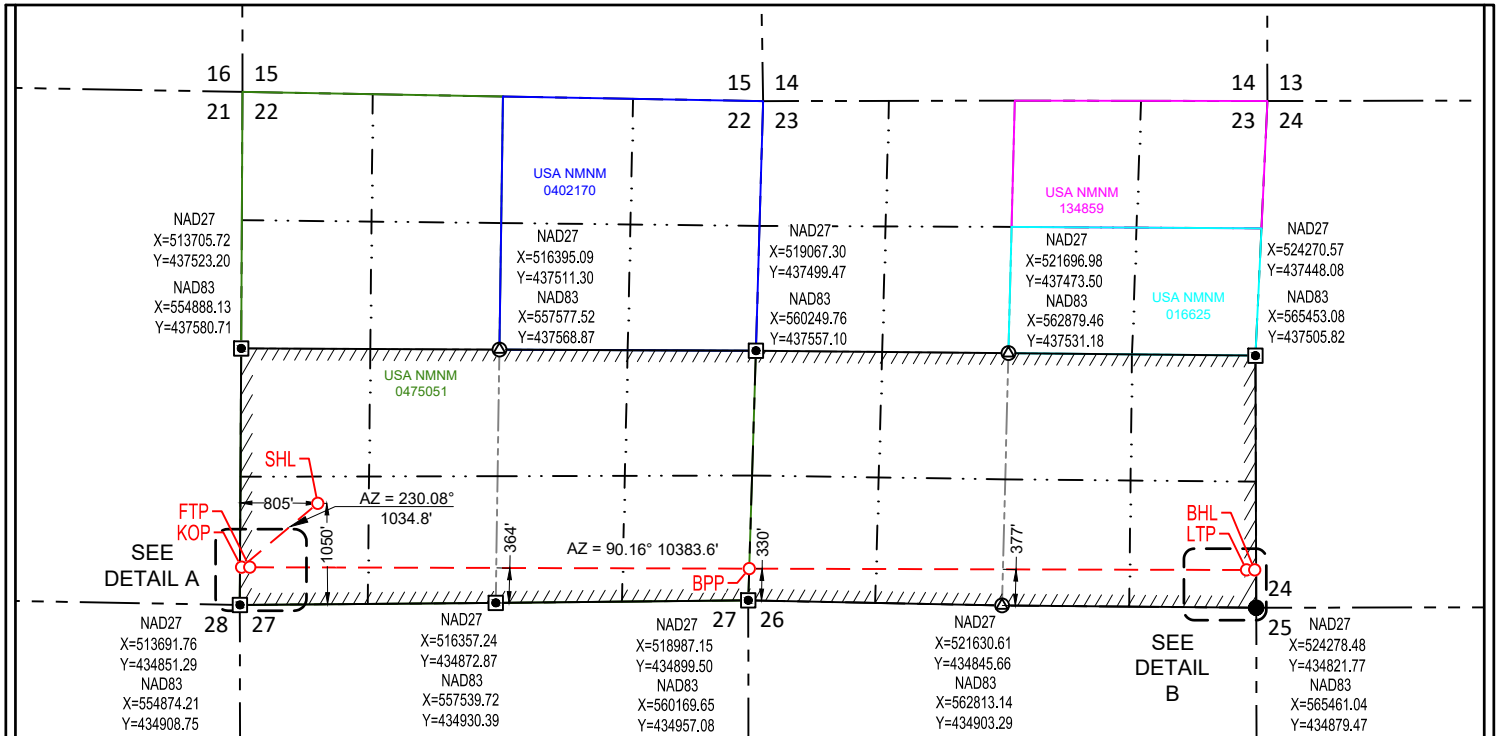**SURFACE LOCATION (SHL)**

NEW MEXICO EAST
NAD 1983
X=555685 Y=435966
LAT.: N 32.1985388
LONG.: W 104.2869495
NAD 1927
X=514502 Y=435908
LAT.: N 32.1984204
LONG.: W 104.2864493
1050' FSL 805' FWL

KICK OFF POINT (KOP)

NEW MEXICO EAST
NAD 1983
X=554891 Y=435302
LAT.: N 32.1967141
LONG.: W 104.2895160
NAD 1927
X=513709 Y=435244
LAT.: N 32.1965958
LONG.: W 104.2890158
393' FSL 15' FWL

FIRST TAKE POINT (FTP)

NEW MEXICO EAST
NAD 1983
X=554976 Y=435301
LAT.: N 32.1967134
LONG.: W 104.2892413
NAD 1927
X=513794 Y=435244
LAT.: N 32.1965950
LONG.: W 104.2887410
392' FSL 100' FWL

BLM PERF. POINT (BPP)


NEW MEXICO EAST
NAD 1983
X=560180 Y=435287
LAT.: N 32.1966667
LONG.: W 104.2724190
NAD 1927
X=518997 Y=435229
LAT.: N 32.1965480
LONG.: W 104.2719193
330' FSL 0' FWL

LAST TAKE POINT (LTP)

NEW MEXICO EAST
NAD 1983
X=565360 Y=435273
LAT.: N 32.1966180
LONG.: W 104.2556727
NAD 1927
X=524177 Y=435215
LAT.: N 32.1964989
LONG.: W 104.2551736
392' FSL 100' FEL

BOTTOM HOLE LOCATION (BHL)

NEW MEXICO EAST
NAD 1983
X=565445 Y=435272
LAT.: N 32.1966172
LONG.: W 104.2553980
NAD 1927
X=524262 Y=435215
LAT.: N 32.1964981
LONG.: W 104.2548988
393' FSL 15' FEL

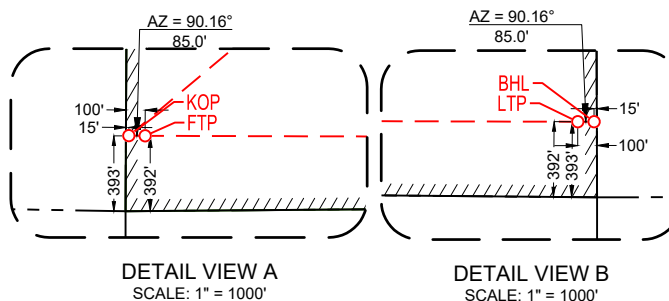**SURVEYORS CERTIFICATION**

I hereby certify that the well location shown on this plat was plotted from field notes of actual surveys made by me or under my supervision, and that the same is true and correct to the best of my belief, 10/29/2024


Date of Survey
Signature and Seal of Professional Surveyor:





3/5/2025 9:17:08 AM




SECTION 22, TOWNSHIP 24-S, RANGE 26-E, N.M.P.M.
EDDY COUNTY, NEW MEXICO

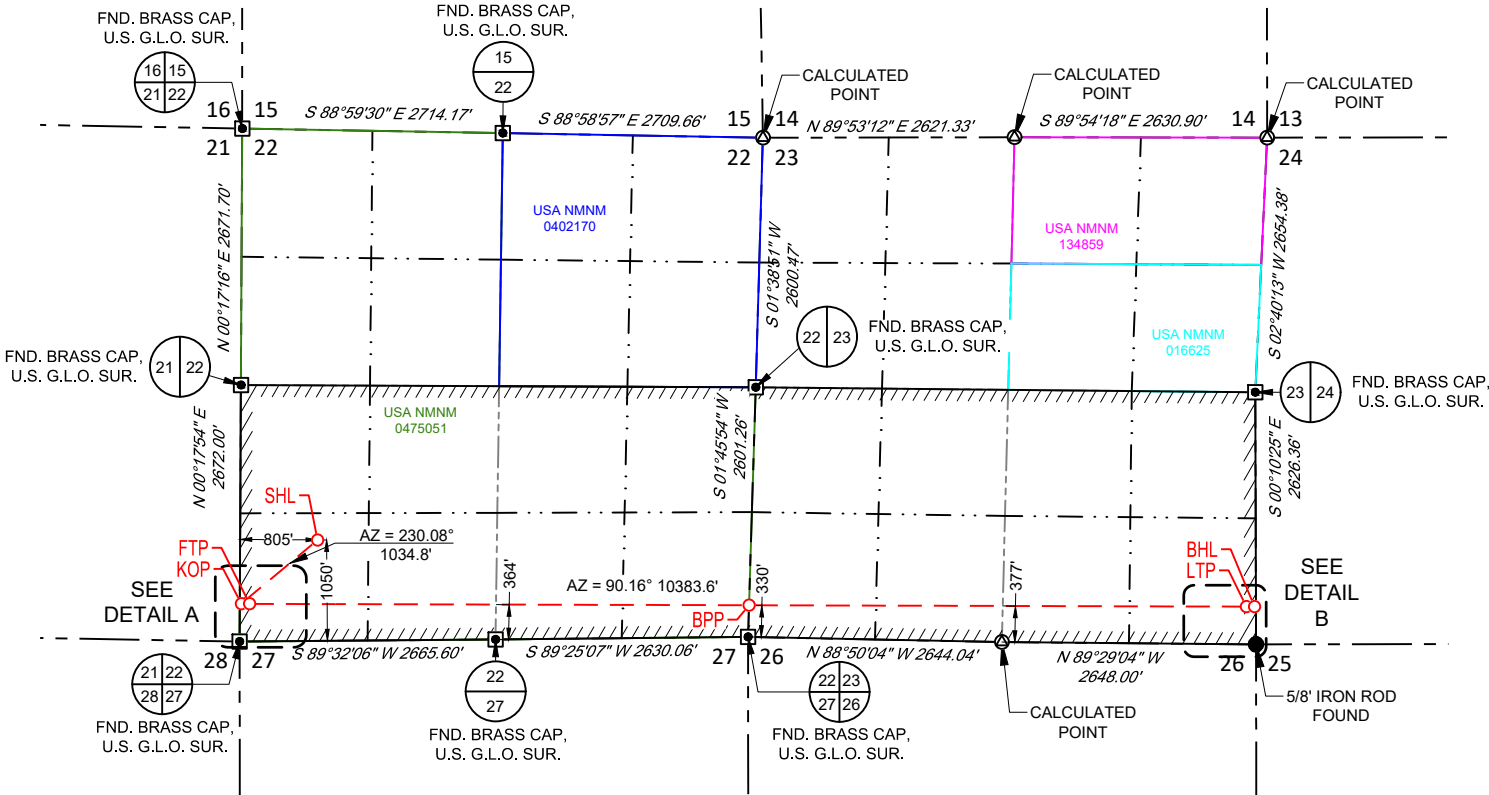

SURFACE LOCATION (SHL)	KICK OFF POINT (KOP)	FIRST TAKE POINT (FTP)
NEW MEXICO EAST NAD 1983 X=555685 Y=435966 LAT.: N 32.1985388 LONG.: W 104.2869495 1050' FSL 805' FWL	NEW MEXICO EAST NAD 1983 X=554891 Y=435302 LAT.: N 32.1967141 LONG.: W 104.2895160 393' FSL 15' FWL	NEW MEXICO EAST NAD 1983 X=554976 Y=435301 LAT.: N 32.1967134 LONG.: W 104.2892413 392' FSL 100' FWL
BLM PERF. POINT (BPP)	LAST TAKE POINT (LTP)	BOTTOM HOLE LOCATION (BHL)
NEW MEXICO EAST NAD 1983 X=560180 Y=435287 LAT.: N 32.1966667 LONG.: W 104.2724190 330' FSL 0' FWL	NEW MEXICO EAST NAD 1983 X=565360 Y=435273 LAT.: N 32.1966180 LONG.: W 104.2556727 392' FSL 100' FEL	NEW MEXICO EAST NAD 1983 X=565445 Y=435272 LAT.: N 32.1966172 LONG.: W 104.2553980 393' FSL 15' FEL

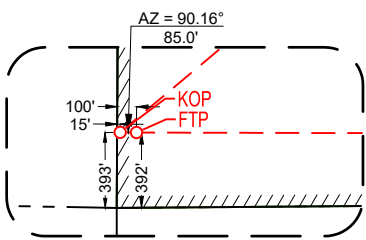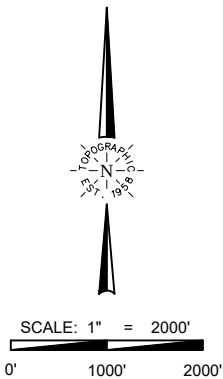

DETAIL VIEW A
SCALE: 1" = 1000'

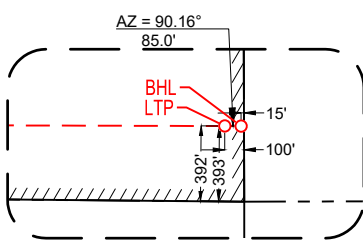

DETAIL VIEW B
SCALE: 1" = 1000'

LEASE NAME & WELL NO.: JURNEGAN BS FED COM 8H

SECTION 22 TWP 24-S RGE 26-E SURVEY N.M.P.M.
COUNTY EDDY STATE NM
DESCRIPTION 1050' FSL & 805' FWL

DISTANCE & DIRECTION

FROM INT. OF NM-529 & US-82W, GO WEST ON US-82W ±18.9 MILES.
THENCE LEFT ON ILLINOIS CAMP RD ±9.4 MILES. THENCE RIGHT ON
NETHERLIN RD. ±0.2 MILES, THENCE SOUTHWEST (LEFT) ON A LEASE
RD. ±7489 FEET, THENCE NORTH (RIGHT) ON A PROPOSED ROAD ±32
FEET TO A POINT ±353 FEET SOUTHEAST OF THE LOCATION.



3/5/2025 9:17:08 AM

Ramon A. Dominguez, P.S. No. 24508

ALL BEARINGS, DISTANCES, AND COORDINATE VALUES CONTAINED HEREON ARE GRID
BASED UPON THE NEW MEXICO COORDINATE SYSTEM OF 1983, EAST ZONE, U.S. SURVEY
FEET.

THIS EASEMENT/SERVITUDE LOCATION SHOWN HEREON HAS BEEN SURVEYED ON THE GROUND
UNDER MY SUPERVISION AND PREPARED ACCORDING TO THE EVIDENCE FOUND AT THE TIME OF
SURVEY, AND DATA PROVIDED BY FLAT CREEK RESOURCES, LLC. THIS CERTIFICATION IS MADE AND
LIMITED TO THOSE PERSONS OR ENTITIES SHOWN ON THE FACE OF THIS PLAT AND IS
NON-TRANSFERABLE. THIS SURVEY IS CERTIFIED FOR THIS TRANSACTION ONLY.



481 WINSOTT ROAD, Ste. 200 • BENBROOK, TEXAS 76126
TELEPHONE: (817) 744-7512 • FAX (817) 744-7554
2903 NORTH BIG SPRING • MIDLAND, TEXAS 79705
TELEPHONE: (432) 682-1653 OR (800) 767-1653 • FAX (432) 682-1743
WWW.TOPOGRAPHIC.COM

State of New Mexico
Energy, Minerals and Natural Resources Department

Submit Electronically
Via E-permitting

Oil Conservation Division
1220 South St. Francis Dr.
Santa Fe, NM 87505

NATURAL GAS MANAGEMENT PLAN

This Natural Gas Management Plan must be submitted with each Application for Permit to Drill (APD) for a new or recompleted well.

Section 1 – Plan Description

Effective May 25, 2021

I. Operator: Flat Creek Resources, LLC **OGRID:** 374034 **Date:** 03 / 11 / 2025

II. Type: ☒ Original ☐ Amendment due to ☐ 19.15.27.9.D(6)(a) NMAC ☐ 19.15.27.9.D(6)(b) NMAC ☐ Other.

If Other, please describe: _____

III. Well(s): Provide the following information for each new or recompleted well or set of wells proposed to be drilled or proposed to be recompleted from a single well pad or connected to a central delivery point.

Well Name	API	ULSTR	Footages	Anticipated Oil BBL/D	Anticipated Gas MCF/D	Anticipated Produced Water BBL/D
Jurnegan BS Fed Com 3H		M-22-24S-26E	1106' S 773' W	1500	3200	3500
Jurnegan BS Fed Com 4H		M-22-24S-26E	1087' S 757' W	1500	3200	3500
Jurnegan BS Fed Com 7H		M-22-24S-26E	1069' S 781' W	750	2300	1950
Jurnegan BS Fed Com 8H		M-22-24S-26E	1050' S 805' W	750	2300	1950

IV. Central Delivery Point Name: Jurnegan South Pad Tank Battery [See 19.15.27.9(D)(1) NMAC]

V. Anticipated Schedule: Provide the following information for each new or recompleted well or set of wells proposed to be drilled or proposed to be recompleted from a single well pad or connected to a central delivery point.

Well Name	API	Spud Date	TD Reached Date	Completion Commencement Date	Initial Flow Back Date	First Production Date
Jurnegan BS Fed Com 3H		July 1, 2026	July 15, 2026	Sept. 1, 2026	Oct. 1, 2026	Oct. 15, 2026
Jurnegan BS Fed Com 4H		July 2, 2026	July 30, 2026	Sept. 1, 2026	Oct. 1, 2026	Oct. 15, 2026
Jurnegan BS Fed Com 7H		July 1, 2027	July 15, 2027	Sept. 1, 2027	Oct. 1, 2027	Oct. 15, 2027
Jurnegan BS Fed Com 8H		July 2, 2027	July 30, 2027	Sept. 1, 2027	Oct. 1, 2027	Oct. 15, 2027

VI. Separation Equipment: ☒ Attach a complete description of how Operator will size separation equipment to optimize gas capture.

VII. Operational Practices: ☒ Attach a complete description of the actions Operator will take to comply with the requirements of Subsection A through F of 19.15.27.8 NMAC.

VIII. Best Management Practices: ☒ Attach a complete description of Operator's best management practices to minimize venting during active and planned maintenance.

Section 2 – Enhanced Plan

EFFECTIVE APRIL 1, 2022

Beginning April 1, 2022, an operator that is not in compliance with its statewide natural gas capture requirement for the applicable reporting area must complete this section.

☒ Operator certifies that it is not required to complete this section because Operator is in compliance with its statewide natural gas capture requirement for the applicable reporting area.

IX. Anticipated Natural Gas Production:

Well	API	Anticipated Average Natural Gas Rate MCF/D	Anticipated Volume of Natural Gas for the First Year MCF

X. Natural Gas Gathering System (NGGS):

Operator	System	ULSTR of Tie-in	Anticipated Gathering Start Date	Available Maximum Daily Capacity of System Segment Tie-in

XI. Map. ☐ Attach an accurate and legible map depicting the location of the well(s), the anticipated pipeline route(s) connecting the production operations to the existing or planned interconnect of the natural gas gathering system(s), and the maximum daily capacity of the segment or portion of the natural gas gathering system(s) to which the well(s) will be connected.

XII. Line Capacity. The natural gas gathering system ☐ will ☐ will not have capacity to gather 100% of the anticipated natural gas production volume from the well prior to the date of first production.

XIII. Line Pressure. Operator ☐ does ☐ does not anticipate that its existing well(s) connected to the same segment, or portion, of the natural gas gathering system(s) described above will continue to meet anticipated increases in line pressure caused by the new well(s).

☐ Attach Operator's plan to manage production in response to the increased line pressure.

XIV. Confidentiality: ☐ Operator asserts confidentiality pursuant to Section 71-2-8 NMSA 1978 for the information provided in Section 2 as provided in Paragraph (2) of Subsection D of 19.15.27.9 NMAC, and attaches a full description of the specific information for which confidentiality is asserted and the basis for such assertion.

Section 3 - Certifications

Effective May 25, 2021

Operator certifies that, after reasonable inquiry and based on the available information at the time of submittal:

☒ Operator will be able to connect the well(s) to a natural gas gathering system in the general area with sufficient capacity to transport one hundred percent of the anticipated volume of natural gas produced from the well(s) commencing on the date of first production, taking into account the current and anticipated volumes of produced natural gas from other wells connected to the pipeline gathering system; or

☐ Operator will not be able to connect to a natural gas gathering system in the general area with sufficient capacity to transport one hundred percent of the anticipated volume of natural gas produced from the well(s) commencing on the date of first production, taking into account the current and anticipated volumes of produced natural gas from other wells connected to the pipeline gathering system.

If Operator checks this box, Operator will select one of the following:

Well Shut-In. ☐ Operator will shut-in and not produce the well until it submits the certification required by Paragraph (4) of Subsection D of 19.15.27.9 NMAC; or

Venting and Flaring Plan. ☐ Operator has attached a venting and flaring plan that evaluates and selects one or more of the potential alternative beneficial uses for the natural gas until a natural gas gathering system is available, including:

- (a) power generation on lease;
- (b) power generation for grid;
- (c) compression on lease;
- (d) liquids removal on lease;
- (e) reinjection for underground storage;
- (f) reinjection for temporary storage;
- (g) reinjection for enhanced oil recovery;
- (h) fuel cell production; and
- (i) other alternative beneficial uses approved by the division.

Section 4 - Notices

1. If, at any time after Operator submits this Natural Gas Management Plan and before the well is spud:

(a) Operator becomes aware that the natural gas gathering system it planned to connect the well(s) to has become unavailable or will not have capacity to transport one hundred percent of the production from the well(s), no later than 20 days after becoming aware of such information, Operator shall submit for OCD's approval a new or revised venting and flaring plan containing the information specified in Paragraph (5) of Subsection D of 19.15.27.9 NMAC; or

(b) Operator becomes aware that it has, cumulatively for the year, become out of compliance with its baseline natural gas capture rate or natural gas capture requirement, no later than 20 days after becoming aware of such information, Operator shall submit for OCD's approval a new or revised Natural Gas Management Plan for each well it plans to spud during the next 90 days containing the information specified in Paragraph (2) of Subsection D of 19.15.27.9 NMAC, and shall file an update for each Natural Gas Management Plan until Operator is back in compliance with its baseline natural gas capture rate or natural gas capture requirement.

2. OCD may deny or conditionally approve an APD if Operator does not make a certification, fails to submit an adequate venting and flaring plan which includes alternative beneficial uses for the anticipated volume of natural gas produced, or if OCD determines that Operator will not have adequate natural gas takeaway capacity at the time a well will be spud.

I certify that, after reasonable inquiry, the statements in and attached to this Natural Gas Management Plan are true and correct to the best of my knowledge and acknowledge that a false statement may be subject to civil and criminal penalties under the Oil and Gas Act.

Signature:	<i>Rodney Littleton</i>
Printed Name:	Rodney Littleton
Title:	VP of Drilling
E-mail Address:	rlittleton@freedomenergy.com
Date:	March 12, 2025
Phone:	817-310-8570
OIL CONSERVATION DIVISION (Only applicable when submitted as a standalone form)	
Approved By:	
Title:	
Approval Date:	
Conditions of Approval:	

VI. SEPARATION EQUIPMENT

Flat Creek Resources, LLC, will install:

- four 48" OD x 15', 500#, 3 phase separators
- one 96" OD x 20', 250# heater treater
- four 750 BBL water tanks
- three 750 BBL oil tanks
- one 15'6" x 30', 1000 BBL gun barrel
- one 72" OD x 15' gas scrubber
- one vapor recovery tower
- one vapor recovery unit
- vapor recovery piping for oil and water tanks

System is designed to capture 120% of the expected gas volume from separation all the way through the vapor recovery equipment.

VII. OPERATIONAL PRACTICES

NMAC 19.15.27.8 (A) Venting & Flaring of Natural Gas

1. Flat Creek Resources will comply with NMAC 19.15.27.8 – venting and flaring of gas during drilling, completion, or production that constitutes waste as defined in 19.15.2 is banned.

NMAC 19.15.27.8 (B) Venting & Flaring During Drilling

1. Flat Creek will combust gas if technically feasible during drilling operations using best industry practices.
2. A flare stack with a 100% capacity for expected volume will be set on the pad greater than 100 feet from the nearest well head and storage tank.
3. In an emergency, Flat Creek will vent the gas in order to avoid substantial impact. Flat Creek will report vented or flared gas to the NMOCD.

NMAC 19.15.27.8 (C) Venting & Flaring During Completion or Recompletion

1. Facilities will be built and ready from the first day of flowback.
2. Test separator will properly separate gas and liquids. Temporary test separator will be used initially to process volumes. In addition, separator will be tied into flowback tanks which will be tied into the gas processing equipment for sale down a pipeline.
3. Should the facility not be ready to process gas or the gas does not meet quality standards then the flowback will be delayed until the facility and pipeline are ready.

NMAC 19.15.27.8 (D) Venting & Flaring During Production

Flat Creek will not vent or flare natural gas except:

1. During and emergency or malfunction.
2. To unload or clean-up liquid holdup in a well to atmospheric pressure, provided
 - a. Flat Creek does not vent after the well achieves a stabilized rate and pressure
 - b. Flat Creek will be on-site while unloading liquids by manual purging and take all reasonable actions to achieve a stabilized rate and pressure as soon as possible
 - c. Flat Creek will optimize the system to minimize gas venting if the well is equipped with a plunger lift or auto control system
 - d. Best management practices will be used during downhole well maintenance
3. During the following activities unless prohibited
 - a. Gauging or sampling a storage tank or low-pressure production vessel
 - b. Loading out liquids from a storage tank
 - c. Repair and maintenance
 - d. Normal operations of a gas-activated pneumatic controller or pump
 - e. Normal operation of a storage tank but not including venting from a thief hatch
 - f. Normal operation of a dehydration units
 - g. Normal operations of compressors, engines, turbines, valves, flanges, & connectors
 - h. During bradenhead, packer leakage test, or production test lasting less than 24 hours
 - i. When natural gas does not meet the gathering line specifications

- j. Commissioning of pipelines, equipment, or facilities only for as long as necessary to purge introduced impurities

NMAC 19.15.27.8 (E) Performance Standards

1. Flat Creek used a safety factor to design the separation and storage equipment. The equipment will be routed to a vapor recovery system and uses a flare as back up to startup, shutdown, maintenance, or malfunction of the VRU system.
2. Flat Creek will install a flare that will handle the full volume of vapors from the facility in case of VRU failure. It will have an auto-ignition system.
3. Flare stacks will be appropriately sized and designed to ensure proper combustion efficiency
 - a. Flare stacks installed or replaced will be equipped with an automatic ignitor or continuous pilot.
 - b. Flare stacks will be located greater than 100 feet from well head and storage tanks and securely anchored
4. Flat Creek will conduct an AVO inspection on all components for leaks and defects every week.
5. Flat Creek will make and keep records of AVO inspection available to the NMOCD for at least 5 years.
6. Flat Creek may use a remote or automated monitoring technology to detect leaks and releases in lieu of AVO inspections with prior NMOCD approval.
7. Facilities will be designed to minimize waste.
8. Flat Creek will resolve emergencies as promptly as possible.

NMAC 19.15.27.8 (F) Measuring or Estimating Vented and Flared Natural Gas

1. Flat Creek will have meters on both the low pressure and high-pressure sides of the flares. Volumes will be recorded in the SCADA system.
2. Flat Creek will install equipment to measure the volume of flared natural gas that has an average production of greater than 60 MCFD.
3. Flat Creek's measuring equipment will conform to industry standards.
4. Measurement system will be designed such that it cannot be bypassed except for inspections and servicing the meters.
5. Flat Creek will estimate the volume of vented or flared gas using a methodology that can be independently verified if metering is not practicable due to low flow rate or pressure.
6. Flat Creek will estimate the volume of vented and/or flared gas based on the results of an annual GOR test for wells that do not require measuring equipment reported on form C-116.
7. Flat Creek will install measuring equipment whenever the NMOCD determines that metering is necessary.

VIII. BEST MANAGEMENT PRACTICES

Flat Creek Resources, LLC, will minimize venting during maintenance by:

1. System will be designed and operated to route storage tank and process equipment emissions to the VRU. If the VRU is not operable, then the vapors will be routed to the flare.
2. Scheduling maintenance for multiple tasks to minimize the need for blowdowns.
3. After completion of maintenance, gas will be flared until it meets pipeline specifications.



U.S. Department of the Interior
BUREAU OF LAND MANAGEMENT

Drilling Plan Data Report

10/15/2025

APD ID: 10400104126

Submission Date: 03/24/2025

Highlighted data
reflects the most
recent changes

Operator Name: FLAT CREEK RESOURCES LLC

Well Name: JURNEGAN BS FED COM

Well Number: 008H

Well Type: OIL WELL

Well Work Type: Drill

[Show Final Text](#)

Section 1 - Geologic Formations

Formation ID	Formation Name	Elevation	True Vertical	Measured Depth	Lithologies	Mineral Resources	Producing Formatio
16590602	QUATERNARY	3334	0	0	OTHER : None	NONE	N
16590603	UNKNOWN	3308	26	26	ALLUVIUM	USEABLE WATER	N
16590604	RUSTLER ANHYDRITE	3104	230	230	ANHYDRITE	NONE	N
16590605	TOP SALT	2134	1200	1200	SALT	NONE	N
16590606	BASE OF SALT	1834	1500	1500	SALT	NONE	N
16590607	LAMAR	1534	1800	1800	LIMESTONE	NONE	N
16590608	BELL CANYON	1434	1900	1900	SANDSTONE	NONE	N
16590609	CHERRY CANYON	648	2686	2700	SANDSTONE	NONE	N
16590614	BRUSHY CANYON	-313	3647	3700	SANDSTONE	NONE	N
16590599	BONE SPRING LIME	-1946	5280	5400	LIMESTONE	NATURAL GAS, OIL	N
16590611	BONE SPRING 1ST	-2866	6200	6336	SANDSTONE	NATURAL GAS, OIL	N
16590612	BONE SPRING 2ND	-3130	6464	6600	SHALE	NATURAL GAS, OIL	N
16590613	BONE SPRING 2ND	-3330	6664	6800	SANDSTONE	NATURAL GAS, OIL	N
16590600	BONE SPRING 3RD	-3630	6964	7100	LIMESTONE	NATURAL GAS, OIL	N
16590601	BONE SPRING 3RD	-4087	7421	7575	LIMESTONE, OTHER : Lower	NATURAL GAS, OIL	Y

Section 2 - Blowout Prevention

Operator Name: FLAT CREEK RESOURCES LLC**Well Name:** JURNEGAN BS FED COM**Well Number:** 008H**Pressure Rating (PSI):** 10M**Rating Depth:** 20000

Equipment: A 20,000', 10,000 psi BOP stack will consist of a single ram, mud cross and double ram-type (10,000 psi WP) preventer, and an annular preventer (5000-psi WP). Both units will be hydraulically operated, and the ram-type will be equipped with blind rams on bottom and drill pipe rams on top. All BOPE will be tested in accordance with 43 CFR 3172.

Requesting Variance? YES

Variance request: Variance is requested to use a co-flex line between the BOP and choke manifold (instead of using a 4" OD steel line).

Testing Procedure: 1. Use water to test BOPs. 2. Make up test assembly (test plug) and set in the wellhead profile. Ensure the casing valve is left open. Monitor the casing valve outlet while testing for potential leak past the test plug. 3. Circulate through the choke/kill lines, choke manifold, standpipe manifold, and valves to ensure that all lines are full of water. This will prevent pressure drop (compression) while testing. 4. Line up test unit and test rams, valves and lines as per the chart below. 5. Pressure tests must be low and high, respectively, and the pressure should stabilize with minimum bleed off within 10 minutes. If a test plug is utilized, no bleed-off of pressure is acceptable. For a test not utilizing a test plug, if a decline in pressure of more than 10 percent in 30 minutes occurs, the test shall be considered to have failed. Pressure should be recorded on a chart recorder (add scale to be use) 6. Any equipment that does not pass the pressure test must be reported to the drilling supervisor. Equipment must be repaired and retested. 7. Continue with pressure testing until all equipment has been tested as per the specific rig requirements. 8. Rig down test assembly. 9. All tests and drills to be recorded in the drilling log.

Choke Diagram Attachment:

Choke_Rev_20250319124135.pdf

Choke_Rev_20250904151623.pdf

BOP Diagram Attachment:

10M_BOP_5M_Annular_Diagram_20250319124144.pdf

10M_BOP_5M_Annular_Diagram_20250904151635.pdf

Section 3 - Casing

Casing ID	String Type	Hole Size	Csg Size	Condition	Standard	Tapered String	Top Set MD	Bottom Set MD	Top Set TVD	Bottom Set TVD	Top Set MSL	Bottom Set MSL	Calculated casing length MD	Grade	Weight	Joint Type	Collapse SF	Burst SF	Joint SF Type	Joint SF	Body SF Type	Body SF
1	SURFACE	14.75	10.75	NEW	API	N	0	400	0	400	3334	2934	400	J-55	45.5	ST&C	11.2	19.1	DRY	44.1	DRY	44.1
2	INTERMEDIATE	9.875	7.625	NEW	API	N	0	1780	0	1778	3329	1556	1780	OTHER - P-110 HC	29.7	BUTT	7.7	7.4	DRY	12.9	DRY	12.9
3	PRODUCTION	6.75	5.5	NEW	NON API	N	0	18111	0	7851	3329	-4517	18111	OTHER - P-110 HC	20	OTHER - TCBC-HT	3.1	3.2	DRY	4.2	DRY	4.2

Operator Name: FLAT CREEK RESOURCES LLC**Well Name:** JURNEGAN BS FED COM**Well Number:** 008H**Casing Attachments**

Casing ID: 1 **String** SURFACE**Inspection Document:****Spec Document:****Tapered String Spec:****Casing Design Assumptions and Worksheet(s):**

Jurnegan_BS_8H_Casing_Design_Assumptions_20250319124208.pdf

Jurnegan_BS_8H_Casing_Design_Assumptions_20250904151654.pdf

Casing ID: 2 **String** INTERMEDIATE**Inspection Document:****Spec Document:****Tapered String Spec:****Casing Design Assumptions and Worksheet(s):**

Jurnegan_BS_8H_Casing_Design_Assumptions_20250319124227.pdf

Jurnegan_BS_8H_Casing_Design_Assumptions_20250904151710.pdf

Casing ID: 3 **String** PRODUCTION**Inspection Document:****Spec Document:**

5.5in_Casing_Spec_20lb_TCBC_HT_20250319124254.pdf

5.5in_Casing_Spec_20lb_TCBC_HT_20250904151733.pdf

Tapered String Spec:**Casing Design Assumptions and Worksheet(s):**

Jurnegan_BS_8H_Casing_Design_Assumptions_20250319124304.pdf

Jurnegan_BS_8H_Casing_Design_Assumptions_20250904151747.pdf

Operator Name: FLAT CREEK RESOURCES LLC

Well Name: JURNEGAN BS FED COM

Well Number: 008H

Section 4 - Cement

String Type	Lead/Tail	Stage Tool Depth	Top MD	Bottom MD	Quantity(sx)	Yield	Density	Cu Ft	Excess%	Cement type	Additives
SURFACE	Lead		0	200	135	1.68	12.8	227	100	35/65 Poz Premium C	5% bwow Sodium chloride + 6% bentonite gel + 0.4% CPT-503P + 0.125 lbs/sk Dura fiber
SURFACE	Tail		200	400	170	1.34	14.8	228	100	Class C	1% Calcium chloride + 0.25 lb/sk cellophane flake
INTERMEDIATE	Lead		0	1280	250	1.68	12.8	420	50	35/65 Poz Premium C	5% bwow Sodium chloride + 6% bentonite gel + 0.4% CPT-503P + 0.125 lbs/sk Dura fiber
INTERMEDIATE	Tail		1280	1780	85	1.74	13.5	148	50	Class C	1% calcium chloride + 4% bentonite gel + 0.4% CPT-503P + 0.125 lbs/sk Dura fiber
PRODUCTION	Lead		0	6500	225	2.82	10.4	635	15	Class H	10% bwoc light weight bead + 5% silica fume alternative + 0.2% suspension aid + 0.3% fluid loss additive + 0.3% dispersant + 0.2% cement retarder
PRODUCTION	Tail		6500	1808 5	790	1.42	13.2	1122	15	35/65 Poz Premium H	0.2% CPT-23

Operator Name: FLAT CREEK RESOURCES LLC

Well Name: JURNEGAN BS FED COM

Well Number: 008H

Section 5 - Circulating Medium

Mud System Type: Closed

Will an air or gas system be Used? NO

Description of the equipment for the circulating system in accordance with 43 CFR 3172:

Diagram of the equipment for the circulating system in accordance with 43 CFR 3172:

Describe what will be on location to control well or mitigate other conditions: Sufficient mud materials (e. g., barite, bentonite, LCM) to maintain mud properties and meet minimum lost circulation and weight increase requirements will always be kept on site.

Describe the mud monitoring system utilized: An electronic pit volume totalizer (PVT) mud system will monitor pit volumes for gains or losses, flow rate, pump pressures, and stroke rate.

Circulating Medium Table

Top Depth	Bottom Depth	Mud Type	Min Weight (lbs/gal)	Max Weight (lbs/gal)	Density (lbs/cu ft)	Gel Strength (lbs/100 sqft)	PH	Viscosity (CP)	Salinity (ppm)	Filtration (cc)	Additional Characteristics
0	400	OTHER : Fresh Water Spud Mud	8.8	8.8							
1780	1811 1	OTHER : Cut Brine	9.4	9.4							
400	1780	OTHER : Cut Brine	10	10							

Section 6 - Test, Logging, Coring

List of production tests including testing procedures, equipment and safety measures:

Production tests include Gama Ray log and resistivity log. No open and cased hole logs are planned at this time.

List of open and cased hole logs run in the well:

POROSITY-RESISTIVITY LOG,

Coring operation description for the well:

No coring operation is planned.

Operator Name: FLAT CREEK RESOURCES LLC**Well Name:** JURNEGAN BS FED COM**Well Number:** 008H

Section 7 - Pressure

Anticipated Bottom Hole Pressure: 3520**Anticipated Surface Pressure:** 1792**Anticipated Bottom Hole Temperature(F):** 170**Anticipated abnormal pressures, temperatures, or potential geologic hazards?** NO**Describe:****Contingency Plans geohazards description:****Contingency Plans geohazards****Hydrogen Sulfide drilling operations plan required?** YES**Hydrogen sulfide drilling operations**

Jurnegan_South_H2S_Plan_20250319124429.pdf

Jurnegan_South_H2S_Plan_20250904151847.pdf

Section 8 - Other Information

Proposed horizontal/directional/multi-lateral plan submission:

Jurnegan_BS_8H_Directional_Plan_20250319124450.pdf

Jurnegan_BS_8H_Directional_Plan_20250904151907.pdf

Other proposed operations facets description:**Other proposed operations facets attachment:**

Jurnegan_BS_8H_Drill_Plan_20250319124459.pdf

Jurnegan_BS_8H_Anticollision_Report_20250319124509.pdf

CoFlex_Certs_Rev_20250319124519.pdf

BOP_Wellhead_Testing_v2_20250319124530.pdf

Wellhead_Diagram_20250319124542.pdf

Jurnegan_South_WMP_20250319124554.pdf

Jurnegan_BS_8H_Drill_Plan_20250904151921.pdf

Jurnegan_BS_8H_Anticollision_Report_20250904151931.pdf

CoFlex_Certs_Rev_20250904151944.pdf

Wellhead_Diagram_20250904152002.pdf


BOP_Wellhead_Testing_v2_20250904152013.pdf

Jurnegan_South_WMP_20250904152030.pdf

Other Variance request(s)?: N**Other Variance attachment:**

Freedom Energy

Company: Freedom Energy
Field: Eddy County, NM NAD83
Location: Jurnegan
Well: Jurnegan BS Fed Com 8H
OH
Plan: Plan 1
GL 3333' + 26.5' KB @ 3359.50usft



Azimuths to Grid North
True North: -0.02°
Magnetic North: 6.43°

Magnetic Field
Strength: 47042.5nT
Dip Angle: 59.66°
Date: 12/17/2024
Model: IGRF2020

PROJECT DETAILS: Eddy County, NM NAD83

Geodetic System: US State Plane 1983
Datum: North American Datum 1983
Ellipsoid: GRS 1980
Zone: New Mexico Eastern Zone
System Datum: Mean Sea Level





WELL DETAILS: Jurnegan BS Fed Com 8H

GL 3333' + 26.5' KB @ 3359.50usft		3333.00			
+N/-S	+E/-W	Northing	Easting	Latitude	Longitude
0.00	0.00	436115.00	555565.00	32.198949	-104.287337

Rig: H&P 651

To convert a Magnetic Direction to a Grid Direction, Add 6.43°

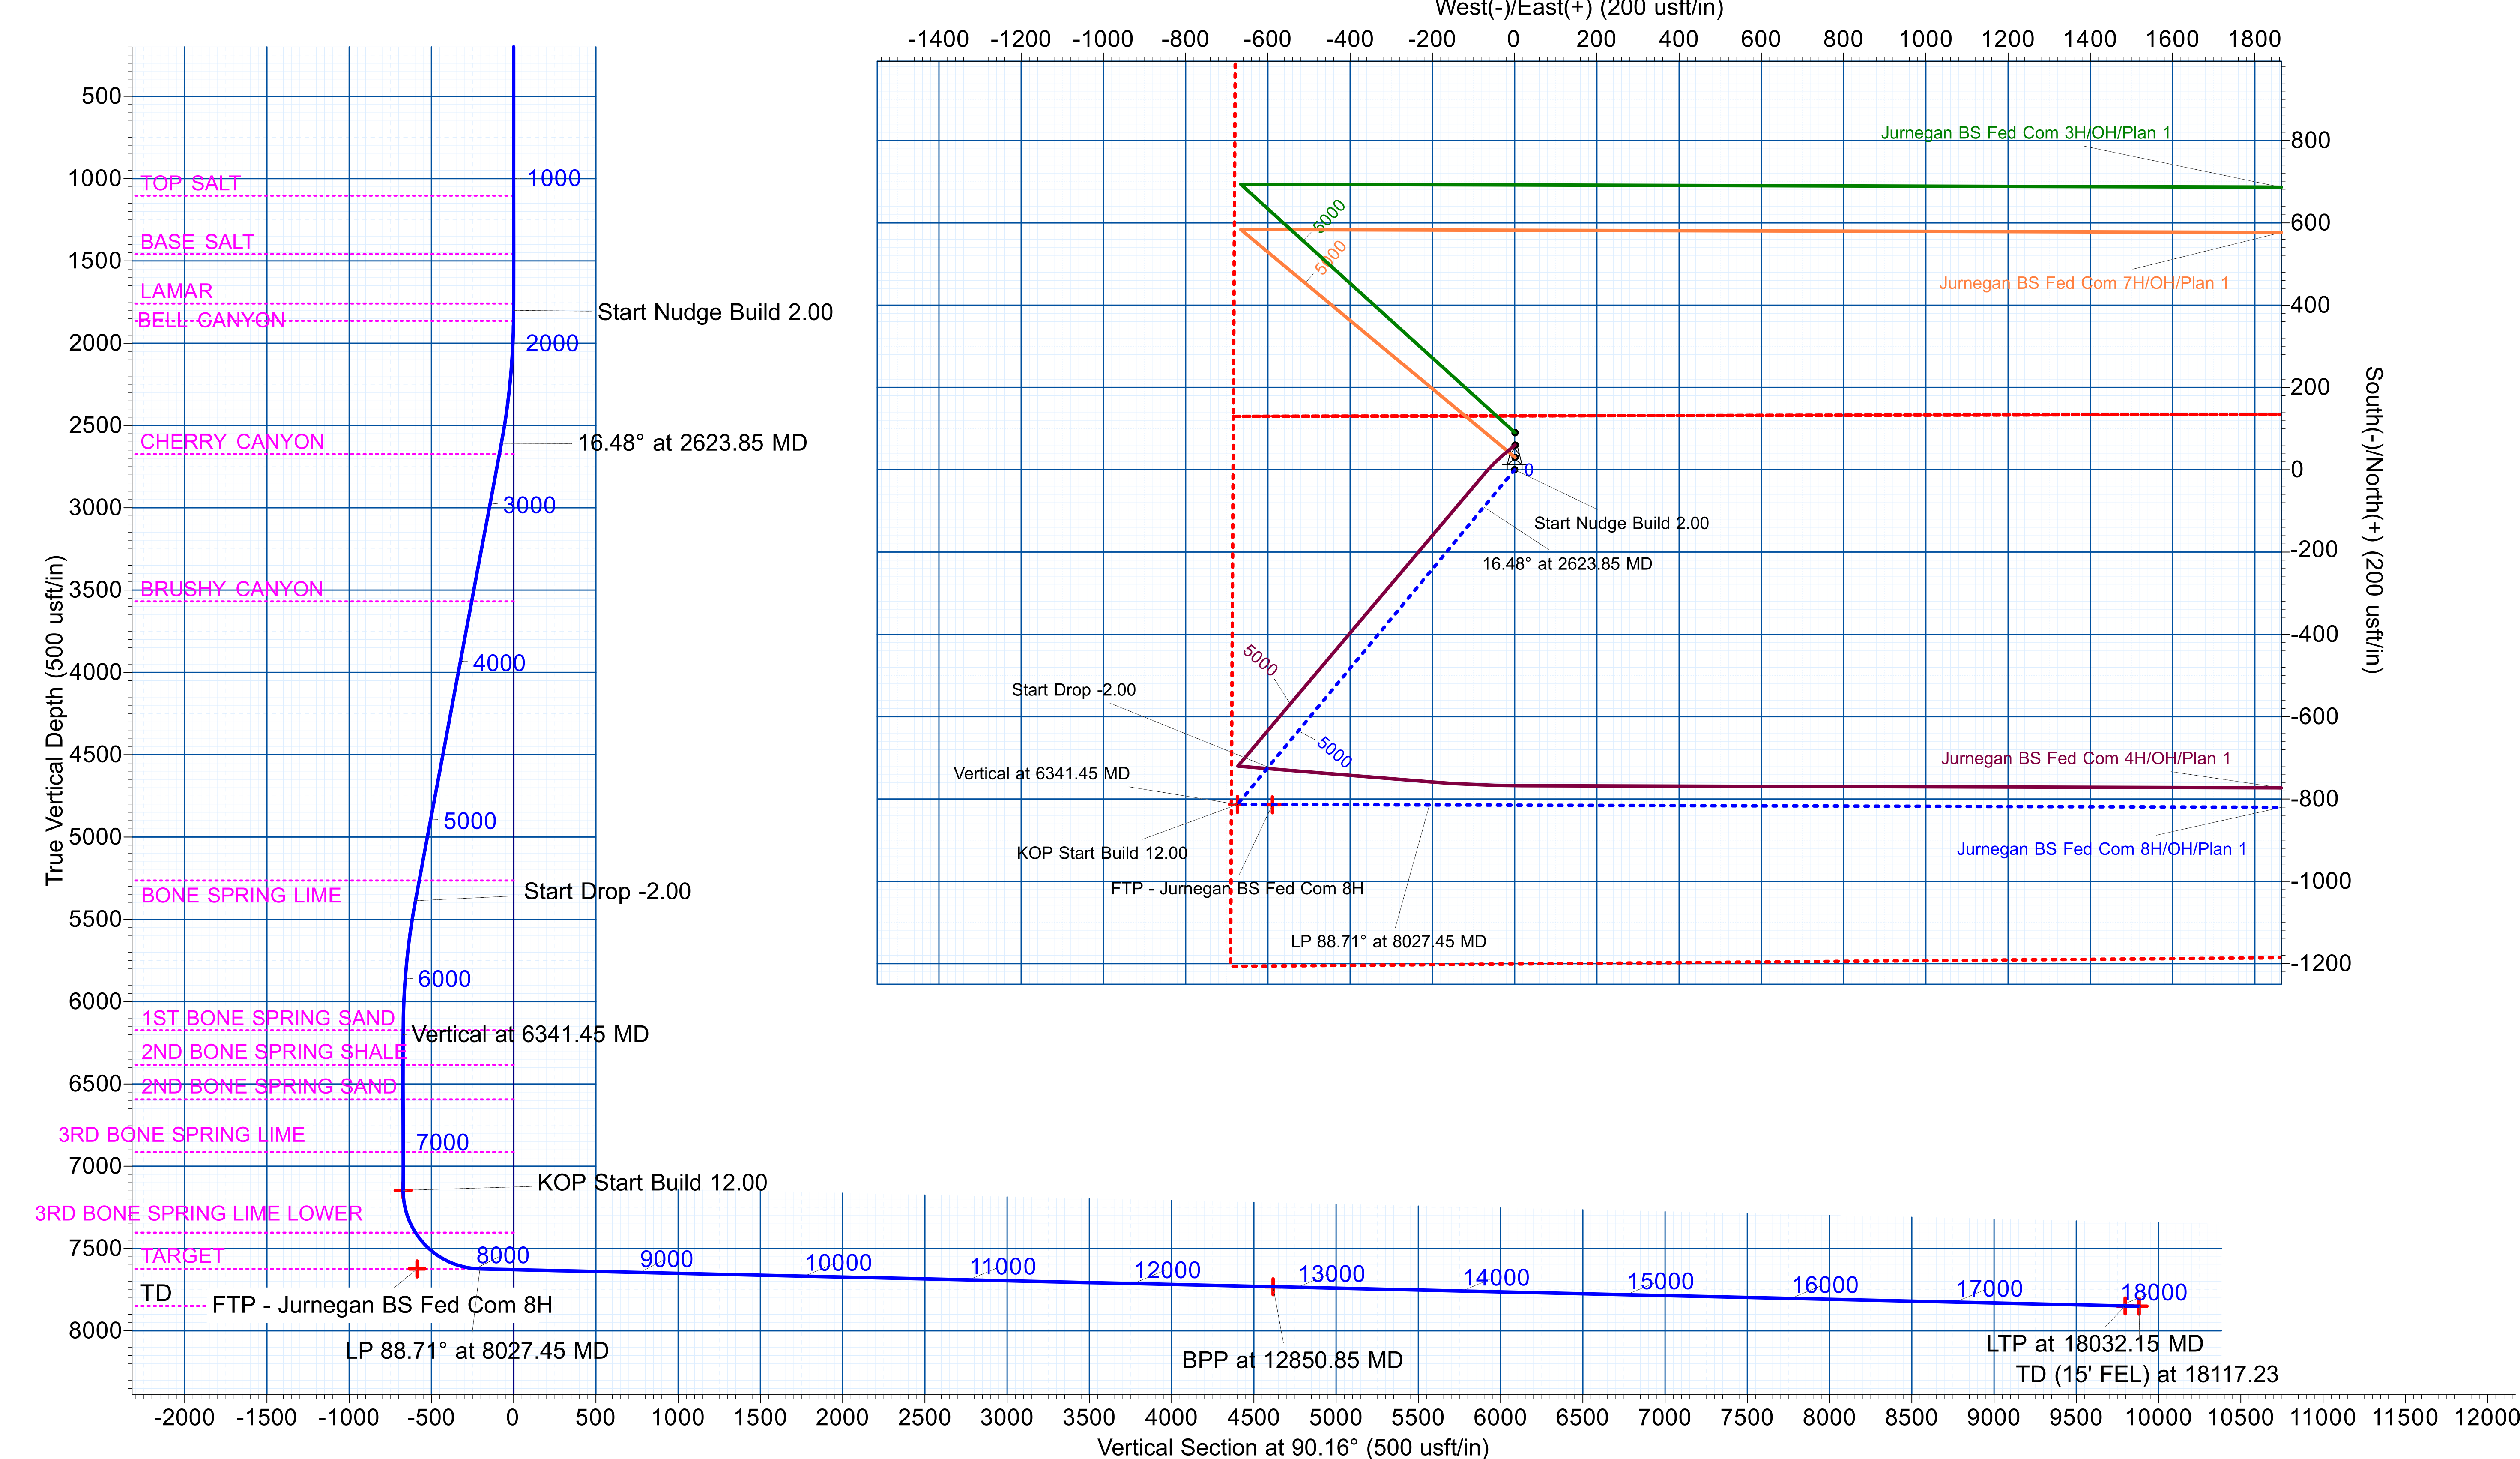

DESIGN TARGET DETAILS							
Name	TVD	+N/-S	+E/-W	Northing	Easting	Latitude	Longitude
KOP - Jurnegan BS Fed Com 8H	7146.50	-813.00	-674.00	435302.00	554891.00	32.196715	-104.289517
FTP - Jurnegan BS Fed Com 8H	7624.00	-814.00	-589.00	435301.00	554976.00	32.196712	-104.289242
BPP - Jurnegan BS Fed Com 8H	7732.50	-828.00	4615.00	435287.00	560180.00	32.196667	-104.272418
LTP - Jurnegan BS Fed Com 8H	7849.00	-842.00	9795.00	435273.00	565360.00	32.196619	-104.255672
BHL - Jurnegan BS Fed Com 8H	7850.91	-843.00	9880.00	435272.00	565445.00	32.196616	-104.255397

SECTION DETAILS									
Sec	MD	Inc	Azi	TVD	+N/-S	+E/-W	Dleg	TFace	VSeet
1	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
2	1800.00	0.00	0.00	1800.00	0.00	0.00	0.00	0.00	0.00
3	2623.85	16.48	219.66	2612.54	-90.57	-75.09	2.00	219.66	-74.83
4	5517.60	16.48	219.66	5387.46	-722.43	-598.91	0.00	0.00	-596.89
5	6341.45	0.00	0.00	6200.00	-813.00	-674.00	2.00	180.00	-671.73
6	7287.95	0.00	0.00	7146.50	-813.00	-674.00	0.00	0.00	-671.73
7	8027.45	88.71	90.16	7624.00	-814.29	-207.13	12.00	90.16	-204.85
8	12850.85	88.71	90.16	7732.50	-827.64	4615.03	0.00	0.00	4617.32
9	18032.15	88.71	90.16	7849.00	-842.00	9795.00	0.00	0.00	9797.31
10	18117.23	88.71	90.16	7850.91	-842.24	9880.07	0.00	0.00	9882.38

FORMATION TOP DETAILS			
TVDPath	MDPath	Formation	
31.00	31.00	SALADO	
1104.00	1104.00	TOP SALT	
1459.00	1459.00	BASE SALT	
1759.00	1759.00	LAMAR	
1864.00	1864.01	BELL CANYON	
2674.00	2674.94	CHERRY CANYON	
3569.00	3621.27	BRUSHY CANYON	
5264.00	5388.86	BONE SPRING LIME	
6174.00	6315.45	1ST BONE SPRING SAND	
6384.00	6525.45	2ND BONE SPRING SHALE	
6594.00	6735.45	2ND BONE SPRING SAND	
6914.00	7055.45	3RD BONE SPRING LIME	
7404.00	7559.91	3RD BONE SPRING LIME LOWER	
7824.00	8027.45	TARGET	
7849.00	18032.15	TD	

Freedom Energy

Eddy County, NM NAD83

Jurnegan

Jurnegan BS Fed Com 8H

OH

*Please refer to most recently approved NOI appended to this application for the directional plan

Plan: Plan 1

Standard Planning Report

26 December, 2024

Legacy Directional Drilling
Planning Report

Database:	EDM_WA	Local Co-ordinate Reference:	Well Jurnegan BS Fed Com 8H
Company:	Freedom Energy	TVD Reference:	GL 3333' + 26.5' KB @ 3359.50usft
Project:	Eddy County, NM NAD83	MD Reference:	GL 3333' + 26.5' KB @ 3359.50usft
Site:	Jurnegan	North Reference:	Grid
Well:	Jurnegan BS Fed Com 8H	Survey Calculation Method:	Minimum Curvature
Wellbore:	OH		
Design:	Plan 1		

Project	Eddy County, NM NAD83		
Map System:	US State Plane 1983	System Datum:	Mean Sea Level
Geo Datum:	North American Datum 1983		
Map Zone:	New Mexico Eastern Zone		

Site	Jurnegan				
Site Position:		Northing:	439,291.00 usft	Latitude:	32.207680
From:	Map	Easting:	555,610.00 usft	Longitude:	-104.287187
Position Uncertainty:	0.00 usft	Slot Radius:	13-3/16 "		

Well	Jurnegan BS Fed Com 8H					
Well Position	+N/-S	0.00 usft	Northing:	436,115.00 usft	Latitude:	32.198949
	+E/-W	0.00 usft	Easting:	555,565.00 usft	Longitude:	-104.287337
Position Uncertainty		0.00 usft	Wellhead Elevation:	usft	Ground Level:	3,333.00 usft
Grid Convergence:		0.02 °				

Wellbore	OH				
Magnetics	Model Name	Sample Date	Declination (°)	Dip Angle (°)	Field Strength (nT)
	IGRF2020	12/17/2024	6.46	59.66	47,042.49184619

Design	Plan 1				
Audit Notes:					
Version:		Phase:	PLAN	Tie On Depth:	0.00
Vertical Section:	Depth From (TVD) (usft)	+N/-S (usft)	+E/-W (usft)	Direction (°)	
	0.00	0.00	0.00	90.16	

Plan Survey Tool Program	Date	12/26/2024			
Depth From (usft)	Depth To (usft)	Survey (Wellbore)	Tool Name	Remarks	
1	0.00	18,117.24 Plan 1 (OH)	MWD		
			OWSG MWD - Standard		

Database:	EDM_WA	Local Co-ordinate Reference:	Well Jurnegan BS Fed Com 8H
Company:	Freedom Energy	TVD Reference:	GL 3333' + 26.5' KB @ 3359.50usft
Project:	Eddy County, NM NAD83	MD Reference:	GL 3333' + 26.5' KB @ 3359.50usft
Site:	Jurnegan	North Reference:	Grid
Well:	Jurnegan BS Fed Com 8H	Survey Calculation Method:	Minimum Curvature
Wellbore:	OH		
Design:	Plan 1		

Plan Sections										
Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Dogleg Rate (°/100usft)	Build Rate (°/100usft)	Turn Rate (°/100usft)	TFO (°)	Target
0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
1,800.00	0.00	0.00	1,800.00	0.00	0.00	0.00	0.00	0.00	0.00	
2,623.85	16.48	219.66	2,612.54	-90.57	-75.09	2.00	2.00	0.00	219.66	
5,517.60	16.48	219.66	5,387.46	-722.43	-598.91	0.00	0.00	0.00	0.00	
6,341.45	0.00	0.00	6,200.00	-813.00	-674.00	2.00	-2.00	0.00	180.00	
7,287.95	0.00	0.00	7,146.50	-813.00	-674.00	0.00	0.00	0.00	0.00	
8,027.45	88.71	90.16	7,624.00	-814.29	-207.13	12.00	12.00	0.00	90.16	
12,850.85	88.71	90.16	7,732.50	-827.64	4,615.03	0.00	0.00	0.00	0.00	BPP - Jurnegan BS F
18,032.15	88.71	90.16	7,849.00	-842.00	9,795.00	0.00	0.00	0.00	0.00	LTP - Jurnegan BS Fe
18,117.24	88.71	90.16	7,850.91	-842.24	9,880.07	0.00	0.00	0.00	0.00	BHL - Jurnegan BS Fi

Legacy Directional Drilling

Planning Report

Database:	EDM_WA	Local Co-ordinate Reference:	Well Jurnegan BS Fed Com 8H
Company:	Freedom Energy	TVD Reference:	GL 3333' + 26.5' KB @ 3359.50usft
Project:	Eddy County, NM NAD83	MD Reference:	GL 3333' + 26.5' KB @ 3359.50usft
Site:	Jurnegan	North Reference:	Grid
Well:	Jurnegan BS Fed Com 8H	Survey Calculation Method:	Minimum Curvature
Wellbore:	OH		
Design:	Plan 1		

Planned Survey									
Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Vertical Section (usft)	Dogleg Rate (°/100usft)	Build Rate (°/100usft)	Turn Rate (°/100usft)
0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
31.00	0.00	0.00	31.00	0.00	0.00	0.00	0.00	0.00	0.00
SALADO									
100.00	0.00	0.00	100.00	0.00	0.00	0.00	0.00	0.00	0.00
200.00	0.00	0.00	200.00	0.00	0.00	0.00	0.00	0.00	0.00
300.00	0.00	0.00	300.00	0.00	0.00	0.00	0.00	0.00	0.00
400.00	0.00	0.00	400.00	0.00	0.00	0.00	0.00	0.00	0.00
500.00	0.00	0.00	500.00	0.00	0.00	0.00	0.00	0.00	0.00
600.00	0.00	0.00	600.00	0.00	0.00	0.00	0.00	0.00	0.00
700.00	0.00	0.00	700.00	0.00	0.00	0.00	0.00	0.00	0.00
800.00	0.00	0.00	800.00	0.00	0.00	0.00	0.00	0.00	0.00
900.00	0.00	0.00	900.00	0.00	0.00	0.00	0.00	0.00	0.00
1,000.00	0.00	0.00	1,000.00	0.00	0.00	0.00	0.00	0.00	0.00
1,100.00	0.00	0.00	1,100.00	0.00	0.00	0.00	0.00	0.00	0.00
1,104.00	0.00	0.00	1,104.00	0.00	0.00	0.00	0.00	0.00	0.00
TOP SALT									
1,200.00	0.00	0.00	1,200.00	0.00	0.00	0.00	0.00	0.00	0.00
1,300.00	0.00	0.00	1,300.00	0.00	0.00	0.00	0.00	0.00	0.00
1,400.00	0.00	0.00	1,400.00	0.00	0.00	0.00	0.00	0.00	0.00
1,459.00	0.00	0.00	1,459.00	0.00	0.00	0.00	0.00	0.00	0.00
BASE SALT									
1,500.00	0.00	0.00	1,500.00	0.00	0.00	0.00	0.00	0.00	0.00
1,600.00	0.00	0.00	1,600.00	0.00	0.00	0.00	0.00	0.00	0.00
1,700.00	0.00	0.00	1,700.00	0.00	0.00	0.00	0.00	0.00	0.00
1,759.00	0.00	0.00	1,759.00	0.00	0.00	0.00	0.00	0.00	0.00
LAMAR									
1,800.00	0.00	0.00	1,800.00	0.00	0.00	0.00	0.00	0.00	0.00
Start Nudge Build 2.00									
1,864.01	1.28	219.66	1,864.00	-0.55	-0.46	-0.45	2.00	2.00	0.00
BELL CANYON									
1,900.00	2.00	219.66	1,899.98	-1.34	-1.11	-1.11	2.00	2.00	0.00
2,000.00	4.00	219.66	1,999.84	-5.37	-4.45	-4.44	2.00	2.00	0.00
2,100.00	6.00	219.66	2,099.45	-12.08	-10.02	-9.98	2.00	2.00	0.00
2,200.00	8.00	219.66	2,198.70	-21.46	-17.79	-17.73	2.00	2.00	0.00
2,300.00	10.00	219.66	2,297.47	-33.51	-27.78	-27.68	2.00	2.00	0.00
2,400.00	12.00	219.66	2,395.62	-48.19	-39.95	-39.82	2.00	2.00	0.00
2,500.00	14.00	219.66	2,493.06	-65.51	-54.31	-54.13	2.00	2.00	0.00
2,600.00	16.00	219.66	2,589.64	-85.44	-70.83	-70.59	2.00	2.00	0.00
2,623.85	16.48	219.66	2,612.54	-90.57	-75.09	-74.83	2.00	2.00	0.00
16.48° at 2623.85 MD									
2,687.94	16.48	219.66	2,674.00	-104.56	-86.69	-86.39	0.00	0.00	0.00
CHERRY CANYON									
2,700.00	16.48	219.66	2,685.56	-107.20	-88.87	-88.57	0.00	0.00	0.00
2,800.00	16.48	219.66	2,781.46	-129.03	-106.97	-106.61	0.00	0.00	0.00
2,900.00	16.48	219.66	2,877.35	-150.87	-125.07	-124.65	0.00	0.00	0.00
3,000.00	16.48	219.66	2,973.24	-172.70	-143.18	-142.69	0.00	0.00	0.00
3,100.00	16.48	219.66	3,069.14	-194.54	-161.28	-160.73	0.00	0.00	0.00
3,200.00	16.48	219.66	3,165.03	-216.37	-179.38	-178.78	0.00	0.00	0.00
3,300.00	16.48	219.66	3,260.92	-238.21	-197.48	-196.82	0.00	0.00	0.00
3,400.00	16.48	219.66	3,356.82	-260.04	-215.58	-214.86	0.00	0.00	0.00
3,500.00	16.48	219.66	3,452.71	-281.88	-233.69	-232.90	0.00	0.00	0.00
3,600.00	16.48	219.66	3,548.60	-303.72	-251.79	-250.94	0.00	0.00	0.00
3,621.27	16.48	219.66	3,569.00	-308.36	-255.64	-254.78	0.00	0.00	0.00

Legacy Directional Drilling

Planning Report

Database:	EDM_WA	Local Co-ordinate Reference:	Well Jurnegan BS Fed Com 8H
Company:	Freedom Energy	TVD Reference:	GL 3333' + 26.5' KB @ 3359.50usft
Project:	Eddy County, NM NAD83	MD Reference:	GL 3333' + 26.5' KB @ 3359.50usft
Site:	Jurnegan	North Reference:	Grid
Well:	Jurnegan BS Fed Com 8H	Survey Calculation Method:	Minimum Curvature
Wellbore:	OH		
Design:	Plan 1		

Planned Survey									
Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Vertical Section (usft)	Dogleg Rate (°/100usft)	Build Rate (°/100usft)	Turn Rate (°/100usft)
BRUSHY CANYON									
3,700.00	16.48	219.66	3,644.50	-325.55	-269.89	-268.98	0.00	0.00	0.00
3,800.00	16.48	219.66	3,740.39	-347.39	-287.99	-287.02	0.00	0.00	0.00
3,900.00	16.48	219.66	3,836.28	-369.22	-306.09	-305.06	0.00	0.00	0.00
4,000.00	16.48	219.66	3,932.18	-391.06	-324.20	-323.10	0.00	0.00	0.00
4,100.00	16.48	219.66	4,028.07	-412.89	-342.30	-341.14	0.00	0.00	0.00
4,200.00	16.48	219.66	4,123.96	-434.73	-360.40	-359.19	0.00	0.00	0.00
4,300.00	16.48	219.66	4,219.86	-456.56	-378.50	-377.23	0.00	0.00	0.00
4,400.00	16.48	219.66	4,315.75	-478.40	-396.61	-395.27	0.00	0.00	0.00
4,500.00	16.48	219.66	4,411.64	-500.23	-414.71	-413.31	0.00	0.00	0.00
4,600.00	16.48	219.66	4,507.54	-522.07	-432.81	-431.35	0.00	0.00	0.00
4,700.00	16.48	219.66	4,603.43	-543.90	-450.91	-449.39	0.00	0.00	0.00
4,800.00	16.48	219.66	4,699.32	-565.74	-469.01	-467.43	0.00	0.00	0.00
4,900.00	16.48	219.66	4,795.22	-587.57	-487.12	-485.47	0.00	0.00	0.00
5,000.00	16.48	219.66	4,891.11	-609.41	-505.22	-503.51	0.00	0.00	0.00
5,100.00	16.48	219.66	4,987.00	-631.24	-523.32	-521.56	0.00	0.00	0.00
5,200.00	16.48	219.66	5,082.90	-653.08	-541.42	-539.60	0.00	0.00	0.00
5,300.00	16.48	219.66	5,178.79	-674.92	-559.52	-557.64	0.00	0.00	0.00
5,388.86	16.48	219.66	5,264.00	-694.32	-575.61	-573.67	0.00	0.00	0.00
BONE SPRING LIME									
5,400.00	16.48	219.66	5,274.68	-696.75	-577.63	-575.68	0.00	0.00	0.00
5,500.00	16.48	219.66	5,370.58	-718.59	-595.73	-593.72	0.00	0.00	0.00
5,517.60	16.48	219.66	5,387.46	-722.43	-598.91	-596.89	0.00	0.00	0.00
Start Drop -2.00									
5,600.00	14.83	219.66	5,466.80	-739.54	-613.10	-611.04	2.00	-2.00	0.00
5,700.00	12.83	219.66	5,563.89	-757.94	-628.36	-626.24	2.00	-2.00	0.00
5,800.00	10.83	219.66	5,661.76	-773.73	-641.44	-639.28	2.00	-2.00	0.00
5,900.00	8.83	219.66	5,760.29	-786.87	-652.33	-650.13	2.00	-2.00	0.00
6,000.00	6.83	219.66	5,859.35	-797.35	-661.03	-658.80	2.00	-2.00	0.00
6,100.00	4.83	219.66	5,958.83	-805.17	-667.51	-665.26	2.00	-2.00	0.00
6,200.00	2.83	219.66	6,058.60	-810.31	-671.77	-669.51	2.00	-2.00	0.00
6,300.00	0.83	219.66	6,158.55	-812.77	-673.81	-671.54	2.00	-2.00	0.00
6,315.45	0.52	219.66	6,174.00	-812.91	-673.92	-671.65	2.00	-2.00	0.00
1ST BONE SPRING SAND									
6,341.45	0.00	0.00	6,200.00	-813.00	-674.00	-671.73	2.00	-2.00	0.00
Vertical at 6341.45 MD									
6,400.00	0.00	0.00	6,258.55	-813.00	-674.00	-671.73	0.00	0.00	0.00
6,500.00	0.00	0.00	6,358.55	-813.00	-674.00	-671.73	0.00	0.00	0.00
6,525.45	0.00	0.00	6,384.00	-813.00	-674.00	-671.73	0.00	0.00	0.00
2ND BONE SPRING SHALE									
6,600.00	0.00	0.00	6,458.55	-813.00	-674.00	-671.73	0.00	0.00	0.00
6,700.00	0.00	0.00	6,558.55	-813.00	-674.00	-671.73	0.00	0.00	0.00
6,735.45	0.00	0.00	6,594.00	-813.00	-674.00	-671.73	0.00	0.00	0.00
2ND BONE SPRING SAND									
6,800.00	0.00	0.00	6,658.55	-813.00	-674.00	-671.73	0.00	0.00	0.00
6,900.00	0.00	0.00	6,758.55	-813.00	-674.00	-671.73	0.00	0.00	0.00
7,000.00	0.00	0.00	6,858.55	-813.00	-674.00	-671.73	0.00	0.00	0.00
7,055.45	0.00	0.00	6,914.00	-813.00	-674.00	-671.73	0.00	0.00	0.00
3RD BONE SPRING LIME									
7,100.00	0.00	0.00	6,958.55	-813.00	-674.00	-671.73	0.00	0.00	0.00
7,200.00	0.00	0.00	7,058.55	-813.00	-674.00	-671.73	0.00	0.00	0.00
7,287.95	0.00	0.00	7,146.50	-813.00	-674.00	-671.73	0.00	0.00	0.00
KOP Start Build 12.00									

Legacy Directional Drilling

Planning Report

Database:	EDM_WA	Local Co-ordinate Reference:	Well Jurnegan BS Fed Com 8H
Company:	Freedom Energy	TVD Reference:	GL 3333' + 26.5' KB @ 3359.50usft
Project:	Eddy County, NM NAD83	MD Reference:	GL 3333' + 26.5' KB @ 3359.50usft
Site:	Jurnegan	North Reference:	Grid
Well:	Jurnegan BS Fed Com 8H	Survey Calculation Method:	Minimum Curvature
Wellbore:	OH		
Design:	Plan 1		

Planned Survey									
Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Vertical Section (usft)	Dogleg Rate (°/100usft)	Build Rate (°/100usft)	Turn Rate (°/100usft)
7,300.00	1.45	90.16	7,158.54	-813.00	-673.85	-671.58	12.00	12.00	0.00
7,325.00	4.44	90.16	7,183.51	-813.00	-672.56	-670.29	12.00	12.00	0.00
7,350.00	7.44	90.16	7,208.37	-813.01	-669.98	-667.70	12.00	12.00	0.00
7,375.00	10.44	90.16	7,233.07	-813.02	-666.09	-663.82	12.00	12.00	0.00
7,400.00	13.44	90.16	7,257.52	-813.04	-660.92	-658.64	12.00	12.00	0.00
7,425.00	16.44	90.16	7,281.67	-813.05	-654.47	-652.20	12.00	12.00	0.00
7,450.00	19.44	90.16	7,305.46	-813.08	-646.77	-644.50	12.00	12.00	0.00
7,475.00	22.44	90.16	7,328.80	-813.10	-637.84	-635.57	12.00	12.00	0.00
7,500.00	25.44	90.16	7,351.65	-813.13	-627.70	-625.42	12.00	12.00	0.00
7,525.00	28.44	90.16	7,373.93	-813.16	-616.37	-614.10	12.00	12.00	0.00
7,550.00	31.44	90.16	7,395.60	-813.19	-603.90	-601.63	12.00	12.00	0.00
7,559.91	32.62	90.16	7,404.00	-813.21	-598.64	-596.37	12.00	12.00	0.00
3RD BONE SPRING LIME LOWER									
7,575.00	34.43	90.16	7,416.58	-813.23	-590.31	-588.04	12.00	12.00	0.00
7,600.00	37.43	90.16	7,436.82	-813.27	-575.64	-573.37	12.00	12.00	0.00
7,625.00	40.43	90.16	7,456.26	-813.32	-559.93	-557.66	12.00	12.00	0.00
7,650.00	43.43	90.16	7,474.86	-813.36	-543.23	-540.95	12.00	12.00	0.00
7,675.00	46.43	90.16	7,492.55	-813.41	-525.57	-523.30	12.00	12.00	0.00
7,700.00	49.43	90.16	7,509.30	-813.46	-507.02	-504.74	12.00	12.00	0.00
7,725.00	52.43	90.16	7,525.06	-813.52	-487.61	-485.34	12.00	12.00	0.00
7,750.00	55.43	90.16	7,539.78	-813.57	-467.41	-465.13	12.00	12.00	0.00
7,775.00	58.43	90.16	7,553.42	-813.63	-446.46	-444.19	12.00	12.00	0.00
7,800.00	61.43	90.16	7,565.94	-813.69	-424.83	-422.55	12.00	12.00	0.00
7,825.00	64.42	90.16	7,577.32	-813.75	-402.57	-400.30	12.00	12.00	0.00
7,850.00	67.42	90.16	7,587.52	-813.81	-379.75	-377.47	12.00	12.00	0.00
7,875.00	70.42	90.16	7,596.51	-813.88	-356.42	-354.15	12.00	12.00	0.00
7,900.00	73.42	90.16	7,604.27	-813.94	-332.66	-330.38	12.00	12.00	0.00
7,925.00	76.42	90.16	7,610.77	-814.01	-308.52	-306.25	12.00	12.00	0.00
7,950.00	79.42	90.16	7,616.00	-814.08	-284.08	-281.80	12.00	12.00	0.00
7,975.00	82.42	90.16	7,619.95	-814.15	-259.40	-257.12	12.00	12.00	0.00
8,000.00	85.42	90.16	7,622.59	-814.22	-234.54	-232.26	12.00	12.00	0.00
8,027.45	88.71	90.16	7,624.00	-814.29	-207.13	-204.85	12.00	12.00	0.00
LP 88.71° at 8027.45 MD - TARGET									
8,100.00	88.71	90.16	7,625.63	-814.49	-134.60	-132.32	0.00	0.00	0.00
8,200.00	88.71	90.16	7,627.88	-814.77	-34.62	-32.35	0.00	0.00	0.00
8,300.00	88.71	90.16	7,630.13	-815.05	65.35	67.63	0.00	0.00	0.00
8,400.00	88.71	90.16	7,632.38	-815.32	165.33	167.60	0.00	0.00	0.00
8,500.00	88.71	90.16	7,634.63	-815.60	265.30	267.58	0.00	0.00	0.00
8,600.00	88.71	90.16	7,636.88	-815.88	365.27	367.55	0.00	0.00	0.00
8,700.00	88.71	90.16	7,639.13	-816.15	465.25	467.53	0.00	0.00	0.00
8,800.00	88.71	90.16	7,641.38	-816.43	565.22	567.50	0.00	0.00	0.00
8,900.00	88.71	90.16	7,643.63	-816.71	665.20	667.47	0.00	0.00	0.00
9,000.00	88.71	90.16	7,645.88	-816.98	765.17	767.45	0.00	0.00	0.00
9,100.00	88.71	90.16	7,648.13	-817.26	865.15	867.42	0.00	0.00	0.00
9,200.00	88.71	90.16	7,650.38	-817.54	965.12	967.40	0.00	0.00	0.00
9,300.00	88.71	90.16	7,652.63	-817.81	1,065.09	1,067.37	0.00	0.00	0.00
9,400.00	88.71	90.16	7,654.88	-818.09	1,165.07	1,167.35	0.00	0.00	0.00
9,500.00	88.71	90.16	7,657.13	-818.37	1,265.04	1,267.32	0.00	0.00	0.00
9,600.00	88.71	90.16	7,659.38	-818.64	1,365.02	1,367.30	0.00	0.00	0.00
9,700.00	88.71	90.16	7,661.62	-818.92	1,464.99	1,467.27	0.00	0.00	0.00
9,800.00	88.71	90.16	7,663.87	-819.20	1,564.97	1,567.25	0.00	0.00	0.00
9,900.00	88.71	90.16	7,666.12	-819.47	1,664.94	1,667.22	0.00	0.00	0.00
10,000.00	88.71	90.16	7,668.37	-819.75	1,764.91	1,767.20	0.00	0.00	0.00

Legacy Directional Drilling

Planning Report

Database:	EDM_WA	Local Co-ordinate Reference:	Well Jurnegan BS Fed Com 8H
Company:	Freedom Energy	TVD Reference:	GL 3333' + 26.5' KB @ 3359.50usft
Project:	Eddy County, NM NAD83	MD Reference:	GL 3333' + 26.5' KB @ 3359.50usft
Site:	Jurnegan	North Reference:	Grid
Well:	Jurnegan BS Fed Com 8H	Survey Calculation Method:	Minimum Curvature
Wellbore:	OH		
Design:	Plan 1		

Planned Survey									
Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Vertical Section (usft)	Dogleg Rate (°/100usft)	Build Rate (°/100usft)	Turn Rate (°/100usft)
10,100.00	88.71	90.16	7,670.62	-820.03	1,864.89	1,867.17	0.00	0.00	0.00
10,200.00	88.71	90.16	7,672.87	-820.30	1,964.86	1,967.15	0.00	0.00	0.00
10,300.00	88.71	90.16	7,675.12	-820.58	2,064.84	2,067.12	0.00	0.00	0.00
10,400.00	88.71	90.16	7,677.37	-820.86	2,164.81	2,167.10	0.00	0.00	0.00
10,500.00	88.71	90.16	7,679.62	-821.13	2,264.79	2,267.07	0.00	0.00	0.00
10,600.00	88.71	90.16	7,681.87	-821.41	2,364.76	2,367.04	0.00	0.00	0.00
10,700.00	88.71	90.16	7,684.12	-821.69	2,464.73	2,467.02	0.00	0.00	0.00
10,800.00	88.71	90.16	7,686.37	-821.97	2,564.71	2,566.99	0.00	0.00	0.00
10,900.00	88.71	90.16	7,688.62	-822.24	2,664.68	2,666.97	0.00	0.00	0.00
11,000.00	88.71	90.16	7,690.87	-822.52	2,764.66	2,766.94	0.00	0.00	0.00
11,100.00	88.71	90.16	7,693.12	-822.80	2,864.63	2,866.92	0.00	0.00	0.00
11,200.00	88.71	90.16	7,695.37	-823.07	2,964.61	2,966.89	0.00	0.00	0.00
11,300.00	88.71	90.16	7,697.62	-823.35	3,064.58	3,066.87	0.00	0.00	0.00
11,400.00	88.71	90.16	7,699.87	-823.63	3,164.55	3,166.84	0.00	0.00	0.00
11,500.00	88.71	90.16	7,702.12	-823.90	3,264.53	3,266.82	0.00	0.00	0.00
11,600.00	88.71	90.16	7,704.37	-824.18	3,364.50	3,366.79	0.00	0.00	0.00
11,700.00	88.71	90.16	7,706.62	-824.46	3,464.48	3,466.77	0.00	0.00	0.00
11,800.00	88.71	90.16	7,708.87	-824.73	3,564.45	3,566.74	0.00	0.00	0.00
11,900.00	88.71	90.16	7,711.11	-825.01	3,664.43	3,666.72	0.00	0.00	0.00
12,000.00	88.71	90.16	7,713.36	-825.29	3,764.40	3,766.69	0.00	0.00	0.00
12,100.00	88.71	90.16	7,715.61	-825.56	3,864.37	3,866.67	0.00	0.00	0.00
12,200.00	88.71	90.16	7,717.86	-825.84	3,964.35	3,966.64	0.00	0.00	0.00
12,300.00	88.71	90.16	7,720.11	-826.12	4,064.32	4,066.61	0.00	0.00	0.00
12,400.00	88.71	90.16	7,722.36	-826.39	4,164.30	4,166.59	0.00	0.00	0.00
12,500.00	88.71	90.16	7,724.61	-826.67	4,264.27	4,266.56	0.00	0.00	0.00
12,600.00	88.71	90.16	7,726.86	-826.95	4,364.25	4,366.54	0.00	0.00	0.00
12,700.00	88.71	90.16	7,729.11	-827.22	4,464.22	4,466.51	0.00	0.00	0.00
12,800.00	88.71	90.16	7,731.36	-827.50	4,564.20	4,566.49	0.00	0.00	0.00
12,850.85	88.71	90.16	7,732.50	-827.64	4,615.03	4,617.32	0.00	0.00	0.00
BPP at 12850.85 MD									
12,900.00	88.71	90.16	7,733.61	-827.78	4,664.17	4,666.46	0.00	0.00	0.00
13,000.00	88.71	90.16	7,735.86	-828.05	4,764.14	4,766.44	0.00	0.00	0.00
13,100.00	88.71	90.16	7,738.11	-828.33	4,864.12	4,866.41	0.00	0.00	0.00
13,200.00	88.71	90.16	7,740.36	-828.61	4,964.09	4,966.39	0.00	0.00	0.00
13,300.00	88.71	90.16	7,742.61	-828.88	5,064.07	5,066.36	0.00	0.00	0.00
13,400.00	88.71	90.16	7,744.86	-829.16	5,164.04	5,166.34	0.00	0.00	0.00
13,500.00	88.71	90.16	7,747.11	-829.44	5,264.02	5,266.31	0.00	0.00	0.00
13,600.00	88.71	90.16	7,749.36	-829.71	5,363.99	5,366.29	0.00	0.00	0.00
13,700.00	88.71	90.16	7,751.61	-829.99	5,463.96	5,466.26	0.00	0.00	0.00
13,800.00	88.71	90.16	7,753.86	-830.27	5,563.94	5,566.24	0.00	0.00	0.00
13,900.00	88.71	90.16	7,756.11	-830.54	5,663.91	5,666.21	0.00	0.00	0.00
14,000.00	88.71	90.16	7,758.35	-830.82	5,763.89	5,766.18	0.00	0.00	0.00
14,100.00	88.71	90.16	7,760.60	-831.10	5,863.86	5,866.16	0.00	0.00	0.00
14,200.00	88.71	90.16	7,762.85	-831.37	5,963.84	5,966.13	0.00	0.00	0.00
14,300.00	88.71	90.16	7,765.10	-831.65	6,063.81	6,066.11	0.00	0.00	0.00
14,400.00	88.71	90.16	7,767.35	-831.93	6,163.78	6,166.08	0.00	0.00	0.00
14,500.00	88.71	90.16	7,769.60	-832.20	6,263.76	6,266.06	0.00	0.00	0.00
14,600.00	88.71	90.16	7,771.85	-832.48	6,363.73	6,366.03	0.00	0.00	0.00
14,700.00	88.71	90.16	7,774.10	-832.76	6,463.71	6,466.01	0.00	0.00	0.00
14,800.00	88.71	90.16	7,776.35	-833.03	6,563.68	6,565.98	0.00	0.00	0.00
14,900.00	88.71	90.16	7,778.60	-833.31	6,663.66	6,665.96	0.00	0.00	0.00
15,000.00	88.71	90.16	7,780.85	-833.59	6,763.63	6,765.93	0.00	0.00	0.00
15,100.00	88.71	90.16	7,783.10	-833.86	6,863.60	6,865.91	0.00	0.00	0.00
15,200.00	88.71	90.16	7,785.35	-834.14	6,963.58	6,965.88	0.00	0.00	0.00

Planning Report

Database:	EDM_WA	Local Co-ordinate Reference:	Well Jurnegan BS Fed Com 8H
Company:	Freedom Energy	TVD Reference:	GL 3333' + 26.5' KB @ 3359.50usft
Project:	Eddy County, NM NAD83	MD Reference:	GL 3333' + 26.5' KB @ 3359.50usft
Site:	Jurnegan	North Reference:	Grid
Well:	Jurnegan BS Fed Com 8H	Survey Calculation Method:	Minimum Curvature
Wellbore:	OH		
Design:	Plan 1		

Planned Survey									
Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Vertical Section (usft)	Dogleg Rate (°/100usft)	Build Rate (°/100usft)	Turn Rate (°/100usft)
15,300.00	88.71	90.16	7,787.60	-834.42	7,063.55	7,065.86	0.00	0.00	0.00
15,400.00	88.71	90.16	7,789.85	-834.70	7,163.53	7,165.83	0.00	0.00	0.00
15,500.00	88.71	90.16	7,792.10	-834.97	7,263.50	7,265.80	0.00	0.00	0.00
15,600.00	88.71	90.16	7,794.35	-835.25	7,363.48	7,365.78	0.00	0.00	0.00
15,700.00	88.71	90.16	7,796.60	-835.53	7,463.45	7,465.75	0.00	0.00	0.00
15,800.00	88.71	90.16	7,798.85	-835.80	7,563.42	7,565.73	0.00	0.00	0.00
15,900.00	88.71	90.16	7,801.10	-836.08	7,663.40	7,665.70	0.00	0.00	0.00
16,000.00	88.71	90.16	7,803.35	-836.36	7,763.37	7,765.68	0.00	0.00	0.00
16,100.00	88.71	90.16	7,805.60	-836.63	7,863.35	7,865.65	0.00	0.00	0.00
16,200.00	88.71	90.16	7,807.84	-836.91	7,963.32	7,965.63	0.00	0.00	0.00
16,300.00	88.71	90.16	7,810.09	-837.19	8,063.30	8,065.60	0.00	0.00	0.00
16,400.00	88.71	90.16	7,812.34	-837.46	8,163.27	8,165.58	0.00	0.00	0.00
16,500.00	88.71	90.16	7,814.59	-837.74	8,263.24	8,265.55	0.00	0.00	0.00
16,600.00	88.71	90.16	7,816.84	-838.02	8,363.22	8,365.53	0.00	0.00	0.00
16,700.00	88.71	90.16	7,819.09	-838.29	8,463.19	8,465.50	0.00	0.00	0.00
16,800.00	88.71	90.16	7,821.34	-838.57	8,563.17	8,565.48	0.00	0.00	0.00
16,900.00	88.71	90.16	7,823.59	-838.85	8,663.14	8,665.45	0.00	0.00	0.00
17,000.00	88.71	90.16	7,825.84	-839.12	8,763.12	8,765.43	0.00	0.00	0.00
17,100.00	88.71	90.16	7,828.09	-839.40	8,863.09	8,865.40	0.00	0.00	0.00
17,200.00	88.71	90.16	7,830.34	-839.68	8,963.06	8,965.37	0.00	0.00	0.00
17,300.00	88.71	90.16	7,832.59	-839.95	9,063.04	9,065.35	0.00	0.00	0.00
17,400.00	88.71	90.16	7,834.84	-840.23	9,163.01	9,165.32	0.00	0.00	0.00
17,500.00	88.71	90.16	7,837.09	-840.51	9,262.99	9,265.30	0.00	0.00	0.00
17,600.00	88.71	90.16	7,839.34	-840.78	9,362.96	9,365.27	0.00	0.00	0.00
17,700.00	88.71	90.16	7,841.59	-841.06	9,462.94	9,465.25	0.00	0.00	0.00
17,800.00	88.71	90.16	7,843.84	-841.34	9,562.91	9,565.22	0.00	0.00	0.00
17,900.00	88.71	90.16	7,846.09	-841.61	9,662.89	9,665.20	0.00	0.00	0.00
18,000.00	88.71	90.16	7,848.34	-841.89	9,762.86	9,765.17	0.00	0.00	0.00
18,032.15	88.71	90.16	7,849.00	-842.00	9,795.00	9,797.31	0.00	0.00	0.00
LTP at 18032.15 MD - TD									
18,100.00	88.71	90.16	7,850.53	-842.19	9,862.84	9,865.15	0.00	0.00	0.00
18,117.24	88.71	90.16	7,850.91	-842.24	9,880.07	9,882.38	0.00	0.00	0.00
TD (15' FEL) at 18117.23									

Legacy Directional Drilling

Planning Report

Database:	EDM_WA	Local Co-ordinate Reference:	Well Jurnegan BS Fed Com 8H
Company:	Freedom Energy	TVD Reference:	GL 3333' + 26.5' KB @ 3359.50usft
Project:	Eddy County, NM NAD83	MD Reference:	GL 3333' + 26.5' KB @ 3359.50usft
Site:	Jurnegan	North Reference:	Grid
Well:	Jurnegan BS Fed Com 8H	Survey Calculation Method:	Minimum Curvature
Wellbore:	OH		
Design:	Plan 1		

Design Targets									
Target Name									
- hit/miss target	Dip Angle	Dip Dir.	TVD	+N/-S	+E/-W	Northing	Easting	Latitude	Longitude
- Shape	(°)	(°)	(usft)	(usft)	(usft)	(usft)	(usft)		
KOP - Jurnegan BS Fed	0.00	0.00	7,146.50	-813.00	-674.00	435,302.00	554,891.00	32.196715	-104.289517
- plan hits target center									
- Point									
FTP - Jurnegan BS Fed	0.00	0.00	7,624.00	-814.00	-589.00	435,301.00	554,976.00	32.196712	-104.289242
- plan misses target center by 140.57usft at 7708.65usft MD (7514.87 TVD, -813.48 N, -500.40 E)									
- Point									
BPP - Jurnegan BS Fed	0.00	0.00	7,732.50	-828.00	4,615.00	435,287.00	560,180.00	32.196667	-104.272419
- plan misses target center by 0.36usft at 12850.82usft MD (7732.50 TVD, -827.64 N, 4615.00 E)									
- Point									
LTP - Jurnegan BS Fed	0.00	0.00	7,849.00	-842.00	9,795.00	435,273.00	565,360.00	32.196619	-104.255673
- plan hits target center									
- Point									
BHL - Jurnegan BS Fed	0.00	0.00	7,850.91	-843.00	9,880.00	435,272.00	565,445.00	32.196616	-104.255398
- plan misses target center by 0.76usft at 18117.17usft MD (7850.91 TVD, -842.24 N, 9880.00 E)									
- Point									

Formations						
Measured Depth	Vertical Depth	Name	Lithology	Dip	Dip Direction	
(usft)	(usft)			(°)	(°)	
31.00	31.00	SALADO				
1,104.00	1,104.00	TOP SALT				
1,459.00	1,459.00	BASE SALT				
1,759.00	1,759.00	LAMAR				
1,864.01	1,864.00	BELL CANYON				
2,687.94	2,674.00	CHERRY CANYON				
3,621.27	3,569.00	BRUSHY CANYON				
5,388.86	5,264.00	BONE SPRING LIME				
6,315.45	6,174.00	1ST BONE SPRING SAND				
6,525.45	6,384.00	2ND BONE SPRING SHALE				
6,735.45	6,594.00	2ND BONE SPRING SAND				
7,055.45	6,914.00	3RD BONE SPRING LIME				
7,559.91	7,404.00	3RD BONE SPRING LIME LOWER				
8,027.45	7,624.00	TARGET				
18,032.15	7,849.00	TD				

Legacy Directional Drilling

Planning Report

Database:	EDM_WA	Local Co-ordinate Reference:	Well Jurnegan BS Fed Com 8H
Company:	Freedom Energy	TVD Reference:	GL 3333' + 26.5' KB @ 3359.50usft
Project:	Eddy County, NM NAD83	MD Reference:	GL 3333' + 26.5' KB @ 3359.50usft
Site:	Jurnegan	North Reference:	Grid
Well:	Jurnegan BS Fed Com 8H	Survey Calculation Method:	Minimum Curvature
Wellbore:	OH		
Design:	Plan 1		

Plan Annotations				
Measured Depth (usft)	Vertical Depth (usft)	Local Coordinates		Comment
		+N/-S (usft)	+E/-W (usft)	
1,800.00	1,800.00	0.00	0.00	Start Nudge Build 2.00
2,623.85	2,612.54	-90.57	-75.09	16.48° at 2623.85 MD
5,517.60	5,387.46	-722.43	-598.91	Start Drop -2.00
6,341.45	6,200.00	-813.00	-674.00	Vertical at 6341.45 MD
7,287.95	7,146.50	-813.00	-674.00	KOP Start Build 12.00
8,027.45	7,624.00	-814.29	-207.13	LP 88.71° at 8027.45 MD
12,850.85	7,732.50	-827.64	4,615.03	BPP at 12850.85 MD
18,032.15	7,849.00	-842.00	9,795.00	LTP at 18032.15 MD
18,117.24	7,850.91	-842.24	9,880.07	TD (15' FEL) at 18117.23

*Please refer to the appended approved NOI for additional or updated COAs for this well.

**PECOS DISTRICT
DRILLING CONDITIONS OF APPROVAL**

OPERATOR'S NAME:	Flat Creek Resources LLC
LOCATION:	Section 22, T.24 S., R.26 E., NMPM
COUNTY:	Eddy County, New Mexico

WELL NAME & NO.:	Jurnegan BS Fed Com 1H
ATS/API ID:	ATS-25-1275
APD ID:	10400104086
Sundry ID:	N/a

WELL NAME & NO.:	Jurnegan BS Fed Com 2H
ATS/API ID:	ATS-25-1276
APD ID:	10400104092
Sundry ID:	N/a

WELL NAME & NO.:	Jurnegan BS Fed Com 3H
ATS/API ID:	ATS-25-1280
APD ID:	10400104123
Sundry ID:	N/a

WELL NAME & NO.:	Jurnegan BS Fed Com 4H
ATS/API ID:	ATS-25-1281
APD ID:	10400104124
Sundry ID:	N/a

WELL NAME & NO.:	Jurnegan BS Fed Com 5H
ATS/API ID:	ATS-25-1277
APD ID:	10400104093
Sundry ID:	N/a

WELL NAME & NO.:	Jurnegan BS Fed Com 6H
ATS/API ID:	ATS-25-1279
APD ID:	10400104102
Sundry ID:	N/a

WELL NAME & NO.:	Jurnegan BS Fed Com 7H
ATS/API ID:	ATS-25-1282
APD ID:	10400104125
Sundry ID:	N/a

WELL NAME & NO.:	Jurnegan BS Fed Com 8H
ATS/API ID:	ATS-25-1283
APD ID:	10400104126
Sundry ID:	N/a

WELL NAME & NO.:	Jurnegan WC Fed Com 1H
ATS/API ID:	ATS-25-1284
APD ID:	10400104103
Sundry ID:	N/a

WELL NAME & NO.:	Jurnegan WC Fed Com 2H
ATS/API ID:	ATS-25-1285
APD ID:	10400104109
Sundry ID:	N/a

COA

H2S	No		
Potash	None	None	
Cave/Karst Potential	Low		
Cave/Karst Potential	☒ Critical		
Variance	☐ None	☒ Flex Hose	☐ Other
Wellhead	Conventional and Multibowl		
Other	☐ 4 String ☐ 5 String	Capitan Reef None	☐ WIPP
Other	Pilot Hole None	☐ Open Annulus	
Cementing	Contingency Squeeze None	Echo-Meter None	Primary Cement Squeeze None
Special Requirements	☐ Water Disposal/Injection	☒ COM	☐ Unit
Special Requirements	☐ Batch Sundry	Waste Prevention Waste MP	
Special Requirements Variance	☐ BOPE Break Testing ☐ Offline BOPE Testing	☐ Offline Cementing	☐ Casing Clearance

A. HYDROGEN SULFIDE

Hydrogen Sulfide (H₂S) monitors shall be installed prior to drilling out the surface shoe. If H₂S is detected in concentrations greater than 100 ppm, the Hydrogen Sulfide area shall meet **43 CFR part 3170 Subpart 3176**, which includes equipment and personnel/public protection items. If Hydrogen Sulfide is encountered, provide measured values and formations to the BLM.

B. CASING

1. The **10-3/4** inch surface casing shall be set at approximately **150 feet** (a minimum of **70 feet (Eddy County)** into the Rustler Anhydrite and above the salt when present, and below usable fresh water) and cemented to the surface. The surface hole shall be **14 3/4** inch in diameter.
 - a. If cement does not circulate to the surface, the appropriate BLM office shall be notified and a temperature survey utilizing an electronic type temperature survey with surface log readout will be used or a cement bond log shall be run to verify the top of the cement. Temperature survey will be run a minimum of six hours after pumping cement and ideally between 8-10 hours after completing the cement job.
 - b. Wait on cement (WOC) time for a primary cement job will be a minimum of **8 hours** or 500 pounds compressive strength, whichever is greater. (This is to include the lead cement)
 - c. Wait on cement (WOC) time for a remedial job will be a minimum of 4 hours after bringing cement to surface or 500 pounds compressive strength, whichever is greater.
 - d. If cement falls back, remedial cementing will be done prior to drilling out that string.
2. The minimum required fill of cement behind the **7-5/8** inch intermediate casing is:
 - Cement to surface. If cement does not circulate see B.1.a, c-d above.
Wait on cement (WOC) time for a primary cement job is to include the lead cement slurry due to cave/karst or potash.

❖ In Critical Cave/Karst Areas cement must come to surface on the first three casing strings.
3. The minimum required fill of cement behind the **5-1/2** inch production casing is:
 - Cement to surface. If cement does not circulate, contact the appropriate BLM office. Operator shall provide method of verification.
Wait on cement (WOC) time for a primary cement job is to include the lead cement slurry due to cave/karst or potash.

Cement excess is less than 25%, more cement is required if washout occurs. Adjust cement volume and excess based on a fluid caliper or similar method that reflects the as-drilled size of the wellbore.

C. PRESSURE CONTROL

1. Variance approved to use flex line from BOP to choke manifold. Manufacturer's specification to be readily available. No external damage to flex line. Flex line to be installed as straight as possible (no hard bends).'

2.

Option 1:

- a. Minimum working pressure of the blowout preventer (BOP) and related equipment (BOPE) required for drilling below the surface casing shoe shall be **3000 (3M)** psi.
- b. Minimum working pressure of the blowout preventer (BOP) and related equipment (BOPE) required for drilling below the **7-5/8** inch intermediate casing shoe shall be **5000 (5M)** psi.

Option 2:

Operator has proposed a multi-bowl wellhead assembly. This assembly will only be tested when installed on the **10-3/4** inch surface casing. Minimum working pressure of the blowout preventer (BOP) and related equipment (BOPE) required for drilling below the surface casing shoe shall be **5000 (5M)** psi.

- a. Wellhead shall be installed by manufacturer's representatives, submit documentation with subsequent sundry.
- b. If the welding is performed by a third party, the manufacturer's representative shall monitor the temperature to verify that it does not exceed the maximum temperature of the seal.
- c. Manufacturer representative shall install the test plug for the initial BOP test.
- d. If the cement does not circulate and one inch operations would have been possible with a standard wellhead, the well head shall be cut off, cementing operations performed and another wellhead installed.
- e. Whenever any seal subject to test pressure is broken, all the tests in 43 CFR 3172.6(b)(9) must be followed.

D. SPECIAL REQUIREMENT (S)

Communitization Agreement

- The operator will submit a Communitization Agreement to the Santa Fe Office, 301 Dinosaur Trail Santa Fe, New Mexico 87508, at least 90 days before the anticipated

date of first production from a well subject to a spacing order issued by the New Mexico Oil Conservation Division. The Communitization Agreement will include the signatures of all working interest owners in all Federal and Indian leases subject to the Communitization Agreement (i.e., operating rights owners and lessees of record), or certification that the operator has obtained the written signatures of all such owners and will make those signatures available to the BLM immediately upon request.

- The operator will submit an as-drilled survey well plat of the well completion, but are not limited to, those specified in **43 CFR part 3170 Subpart 3171**
- If the operator does not comply with this condition of approval, the BLM may take enforcement actions that include, but are not limited to, those specified in 43 CFR 3163.1.
- In addition, the well sign shall include the surface and bottom hole lease numbers. When the Communitization Agreement number is known, it shall also be on the sign.

GENERAL REQUIREMENTS

The BLM is to be notified in advance for a representative to witness:

- a. Spudding well (minimum of 24 hours)
- b. Setting and/or Cementing of all casing strings (minimum of 4 hours)
- c. BOPE tests (minimum of 4 hours)

☒ Eddy County

EMAIL or call the Carlsbad Field Office, 620 East Greene St., Carlsbad, NM 88220,

BLM_NM_CFO_DrillingNotifications@BLM.GOV

(575) 361-2822

1. Unless the production casing has been run and cemented or the well has been properly plugged, the drilling rig shall not be removed from over the hole without prior approval.
 - a. In the event the operator has proposed to drill multiple wells utilizing a skid/walking rig. Operator shall secure the wellbore on the current well, after installing and testing the wellhead, by installing a blind flange of like pressure rating to the wellhead and a pressure gauge that can be monitored while drilling is performed on the other well(s).
 - b. When the operator proposes to set surface casing with Spudder Rig
 - Notify the BLM when moving in and removing the Spudder Rig.
 - Notify the BLM when moving in the 2nd Rig. Rig to be moved in within 90 days of notification that Spudder Rig has left the location.
 - BOP/BOPE test to be conducted per **43 CFR part 3170 Subpart 3172** as soon as 2nd Rig is rigged up on well.
2. Floor controls are required for 3M or Greater systems. These controls will be on the rig floor, unobstructed, readily accessible to the driller and will be operational at all times during drilling and/or completion activities. Rig floor is defined as the area immediately around the rotary table; the area immediately above the substructure on which the draw works are located, this does not include the dog house or stairway area.

A. CASING

1. Changes to the approved APD casing program need prior approval if the items substituted are of lesser grade or different casing size or are Non-API. The Operator can exchange the components of the proposal with that of superior strength (i.e. changing from J-55 to N-80, or from 36# to 40#). Changes to the approved cement program need prior approval if the altered cement plan has less volume or strength or

if the changes are substantial (i.e. Multistage tool, ECP, etc.). The initial wellhead installed on the well will remain on the well with spools used as needed.

2. Wait on cement (WOC) for Potash Areas: After cementing but before commencing any tests, the casing string shall stand cemented under pressure until both of the following conditions have been met: 1) cement reaches a minimum compressive strength of 500 psi for all cement blends of both lead and tail cement, 2) until cement has been in place at least 8 hours. WOC time will be recorded in the driller's log. The casing integrity test can be done (prior to the cement setting up) immediately after bumping the plug.
3. Wait on cement (WOC) for Water Basin: After cementing but before commencing any tests, the casing string shall stand cemented under pressure until both of the following conditions have been met: 1) cement reaches a minimum compressive strength of 500 psi at the shoe, 2) until cement has been in place at least 8 hours. WOC time will be recorded in the driller's log. See individual casing strings for details regarding lead cement slurry requirements. The casing integrity test can be done (prior to the cement setting up) immediately after bumping the plug.
4. Provide compressive strengths including hours to reach required 500 pounds compressive strength prior to cementing each casing string. Have well specific cement details onsite prior to pumping the cement for each casing string.
5. No pea gravel permitted for remedial or fall back remedial without prior authorization from the BLM engineer.
6. On that portion of any well approved for a 5M BOPE system or greater, a pressure integrity test of each casing shoe shall be performed. Formation at the shoe shall be tested to a minimum of the mud weight equivalent anticipated to control the formation pressure to the next casing depth or at total depth of the well. This test shall be performed before drilling more than 20 feet of new hole.
7. If hardband drill pipe is rotated inside casing, returns will be monitored for metal. If metal is found in samples, drill pipe will be pulled and rubber protectors which have a larger diameter than the tool joints of the drill pipe will be installed prior to continuing drilling operations.
8. Whenever a casing string is cemented in the R-111-P potash area, the NMOC requirements shall be followed.

B. PRESSURE CONTROL

1. All blowout preventer (BOP) and related equipment (BOPE) shall comply with well control requirements as described in **43 CFR part 3170 Subpart 3172 and API STD 53 Sec. 5.3.**

2. If a variance is approved for a flexible hose to be installed from the BOP to the choke manifold, the following requirements apply: The flex line must meet the requirements of API 16C. Check condition of flexible line from BOP to choke manifold, replace if exterior is damaged or if line fails test. Line to be as straight as possible with no hard bends and is to be anchored according to Manufacturer's requirements. The flexible hose can be exchanged with a hose of equal size and equal or greater pressure rating. Anchor requirements, specification sheet and hydrostatic pressure test certification matching the hose in service, to be onsite for review. These documents shall be posted in the company man's trailer and on the rig floor.
3. 5M or higher system requires an HCR valve, remote kill line and annular to match. The remote kill line is to be installed prior to testing the system and tested to stack pressure.
4. If the operator has proposed a multi-bowl wellhead assembly in the APD. The following requirements must be met:
 - a. Wellhead shall be installed by manufacturer's representatives, submit documentation with subsequent sundry.
 - b. If the welding is performed by a third party, the manufacturer's representative shall monitor the temperature to verify that it does not exceed the maximum temperature of the seal.
 - c. Manufacturer representative shall install the test plug for the initial BOP test.
 - d. Whenever any seal subject to test pressure is broken, all the tests in 43 CFR 3172.6(b)(9) must be followed.
 - e. If the cement does not circulate and one inch operations would have been possible with a standard wellhead, the well head shall be cut off, cementing operations performed and another wellhead installed.
5. The appropriate BLM office shall be notified a minimum of 4 hours in advance for a representative to witness the tests.
 - a. In a water basin, for all casing strings utilizing slips, these are to be set as soon as the crew and rig are ready and any fallback cement remediation has been done. The casing cut-off and BOP installation can be initiated four hours after installing the slips, which will be approximately six hours after bumping the plug. For those casing strings not using slips, the minimum wait time before cut-off is eight hours after bumping the plug. BOP/BOPE testing can begin after cut-off or once cement reaches 500 psi compressive strength (including lead cement), whichever is greater. However, if the float does not hold, cut-off cannot be initiated until cement reaches 500 psi compressive strength (including lead when specified).
 - b. In potash areas, for all casing strings utilizing slips, these are to be set as soon as the crew and rig are ready and any fallback cement remediation has been

done. For all casing strings, casing cut-off and BOP installation can be initiated at twelve hours after bumping the cement plug. The BOPE test can be initiated after bumping the cement plug with the casing valve open. (only applies to single stage cement jobs, prior to the cement setting up.)

- c. The tests shall be done by an independent service company utilizing a test plug not a cup or J-packer and can be initiated immediately with the casing valve open. The operator also has the option of utilizing an independent tester to test without a plug (i.e. against the casing) pursuant to **43 CFR part 3170 Subpart 3172** with the pressure not to exceed 70% of the burst rating for the casing. Any test against the casing must meet the WOC time for 8 hours or 500 pounds compressive strength, whichever is greater, prior to initiating the test (see casing segment as lead cement may be critical item).
- d. The test shall be run on a 5000 psi chart for a 2-3M BOP/BOP, on a 10000 psi chart for a 5M BOP/BOPE and on a 15000 psi chart for a 10M BOP/BOPE. If a linear chart is used, it shall be a one hour chart. A circular chart shall have a maximum 2 hour clock. If a twelve hour or twenty-four hour chart is used, tester shall make a notation that it is run with a two hour clock.
- e. The results of the test shall be reported to the appropriate BLM office.
- f. All tests are required to be recorded on a calibrated test chart. A copy of the BOP/BOPE test chart and a copy of independent service company test will be submitted to the appropriate BLM office.
- g. The BOP/BOPE test shall include a low pressure test from 250 to 300 psi. The test will be held for a minimum of 10 minutes if test is done with a test plug and 30 minutes without a test plug. This test shall be performed prior to the test at full stack pressure.
- h. BOP/BOPE must be tested by an independent service company within 500 feet of the top of the Wolfcamp formation if the time between the setting of the intermediate casing and reaching this depth exceeds 20 days. This test does not exclude the test prior to drilling out the casing shoe as per **43 CFR part 3170 Subpart 3172**.

C. DRILLING MUD

Mud system monitoring equipment, with derrick floor indicators and visual and audio alarms, shall be operating before drilling into the Wolfcamp formation, and shall be used until production casing is run and cemented.

D. WASTE MATERIAL AND FLUIDS

All waste (i.e. drilling fluids, trash, salts, chemicals, sewage, gray water, etc.) created as a result of drilling operations and completion operations shall be safely contained and disposed of properly at a waste disposal facility. No waste material or fluid shall be disposed of on the well location or surrounding area.

Porto-johns and trash containers will be on-location during fracturing operations or any other crew-intensive operations.

Long Vo (LVO) 4/30/2025

Hydrogen Sulfide Drilling

Operations Plan

Flat Creek Resources

1 H2S safety instructions to the following:

- Characteristics of H2S
- Physical effects and hazards
- Principal and operation of H2S detectors, warning system and briefing areas
- Evacuation procedures, routes and first aid
- Proper use of safety equipment & life support systems
- Essential personnel meeting medical evaluation criteria will receive additional training on the proper use of 30min pressure demand air packs

2 H2S Detection and Alarm Systems:

- H2S sensor/detectors to be located on the drilling rig floor, in the base of the sub structure / cellar area, on the mud pits in the shale shaker area. Additional H2S detectors may be placed as deemed necessary
- An audio alarm system will be installed on the derrick floor and in the doghouse

3 Windsocks and / Wind Streamers:

- Windsocks at mud pit area should be high enough to be visible
- Windsock on the rig floor and / top of doghouse should be high enough to be visible

4 Condition Flags and Signs:

- Warning sign on access road to location
- Flags to be displayed on sign at entrance to location
 - Green Flag – Normal Safe Operation Condition
 - Yellow Flag – Potential Pressure and Danger
 - Red Flag – Danger (H2S present in dangerous concentrations) Only H2S trained personnel admitted on location

5 Well Control Equipment:

- See Drilling Operations Plan Schematics

6 Communication:

- While working under masks chalkboards will be used for communications
- Hand signals will be used where chalk board is inappropriate
- Two way radio will be used to communicate off location in case of emergency help is required. In most cases cellular telephones will be available at most drilling foreman's trailer or living quarters.

7 Drilling Stem Testing:

- No DST cores are planned at this time

8 Drilling contractor supervisor will be required to be familiar with the effects H₂S has on tubulars good and other mechanical equipment

9 If H₂S is encountered, mud system will be altered if necessary to maintain control of formation. A mud gas separator will be brought into service along with H₂S scavengers if necessary

11 Emergency Contacts


Emergency Contacts		
Carlsbad Police Department	575.887.7551	911
Carlsbad Medical Center	575.887.4100	911
Eddy County Fire Service	575.628.5450	911
Eddy County Sherriff	575.887.7551	911
Lea County Fire Service	575.391.2983	911
Lea County Sherriff	575.396.3611	911
Jal Police Department	575.395.2121	911
Jal Fire Department	575.395.2221	911
Flat Creek Resources	817.731.4100	

Flat Creek Resources, LLC

Jurnegan Fed Com - South Pad H2S Map

Section 22, Township 24S, Range 26E
Eddy County, New Mexico


 Pad Center Point





NAD 1983 New Mexico State Plane East
FIPS 3001 Feet




Prepared by Permits West, Inc., Mar. 13, 2025
for Flat Creek Resources, LLC

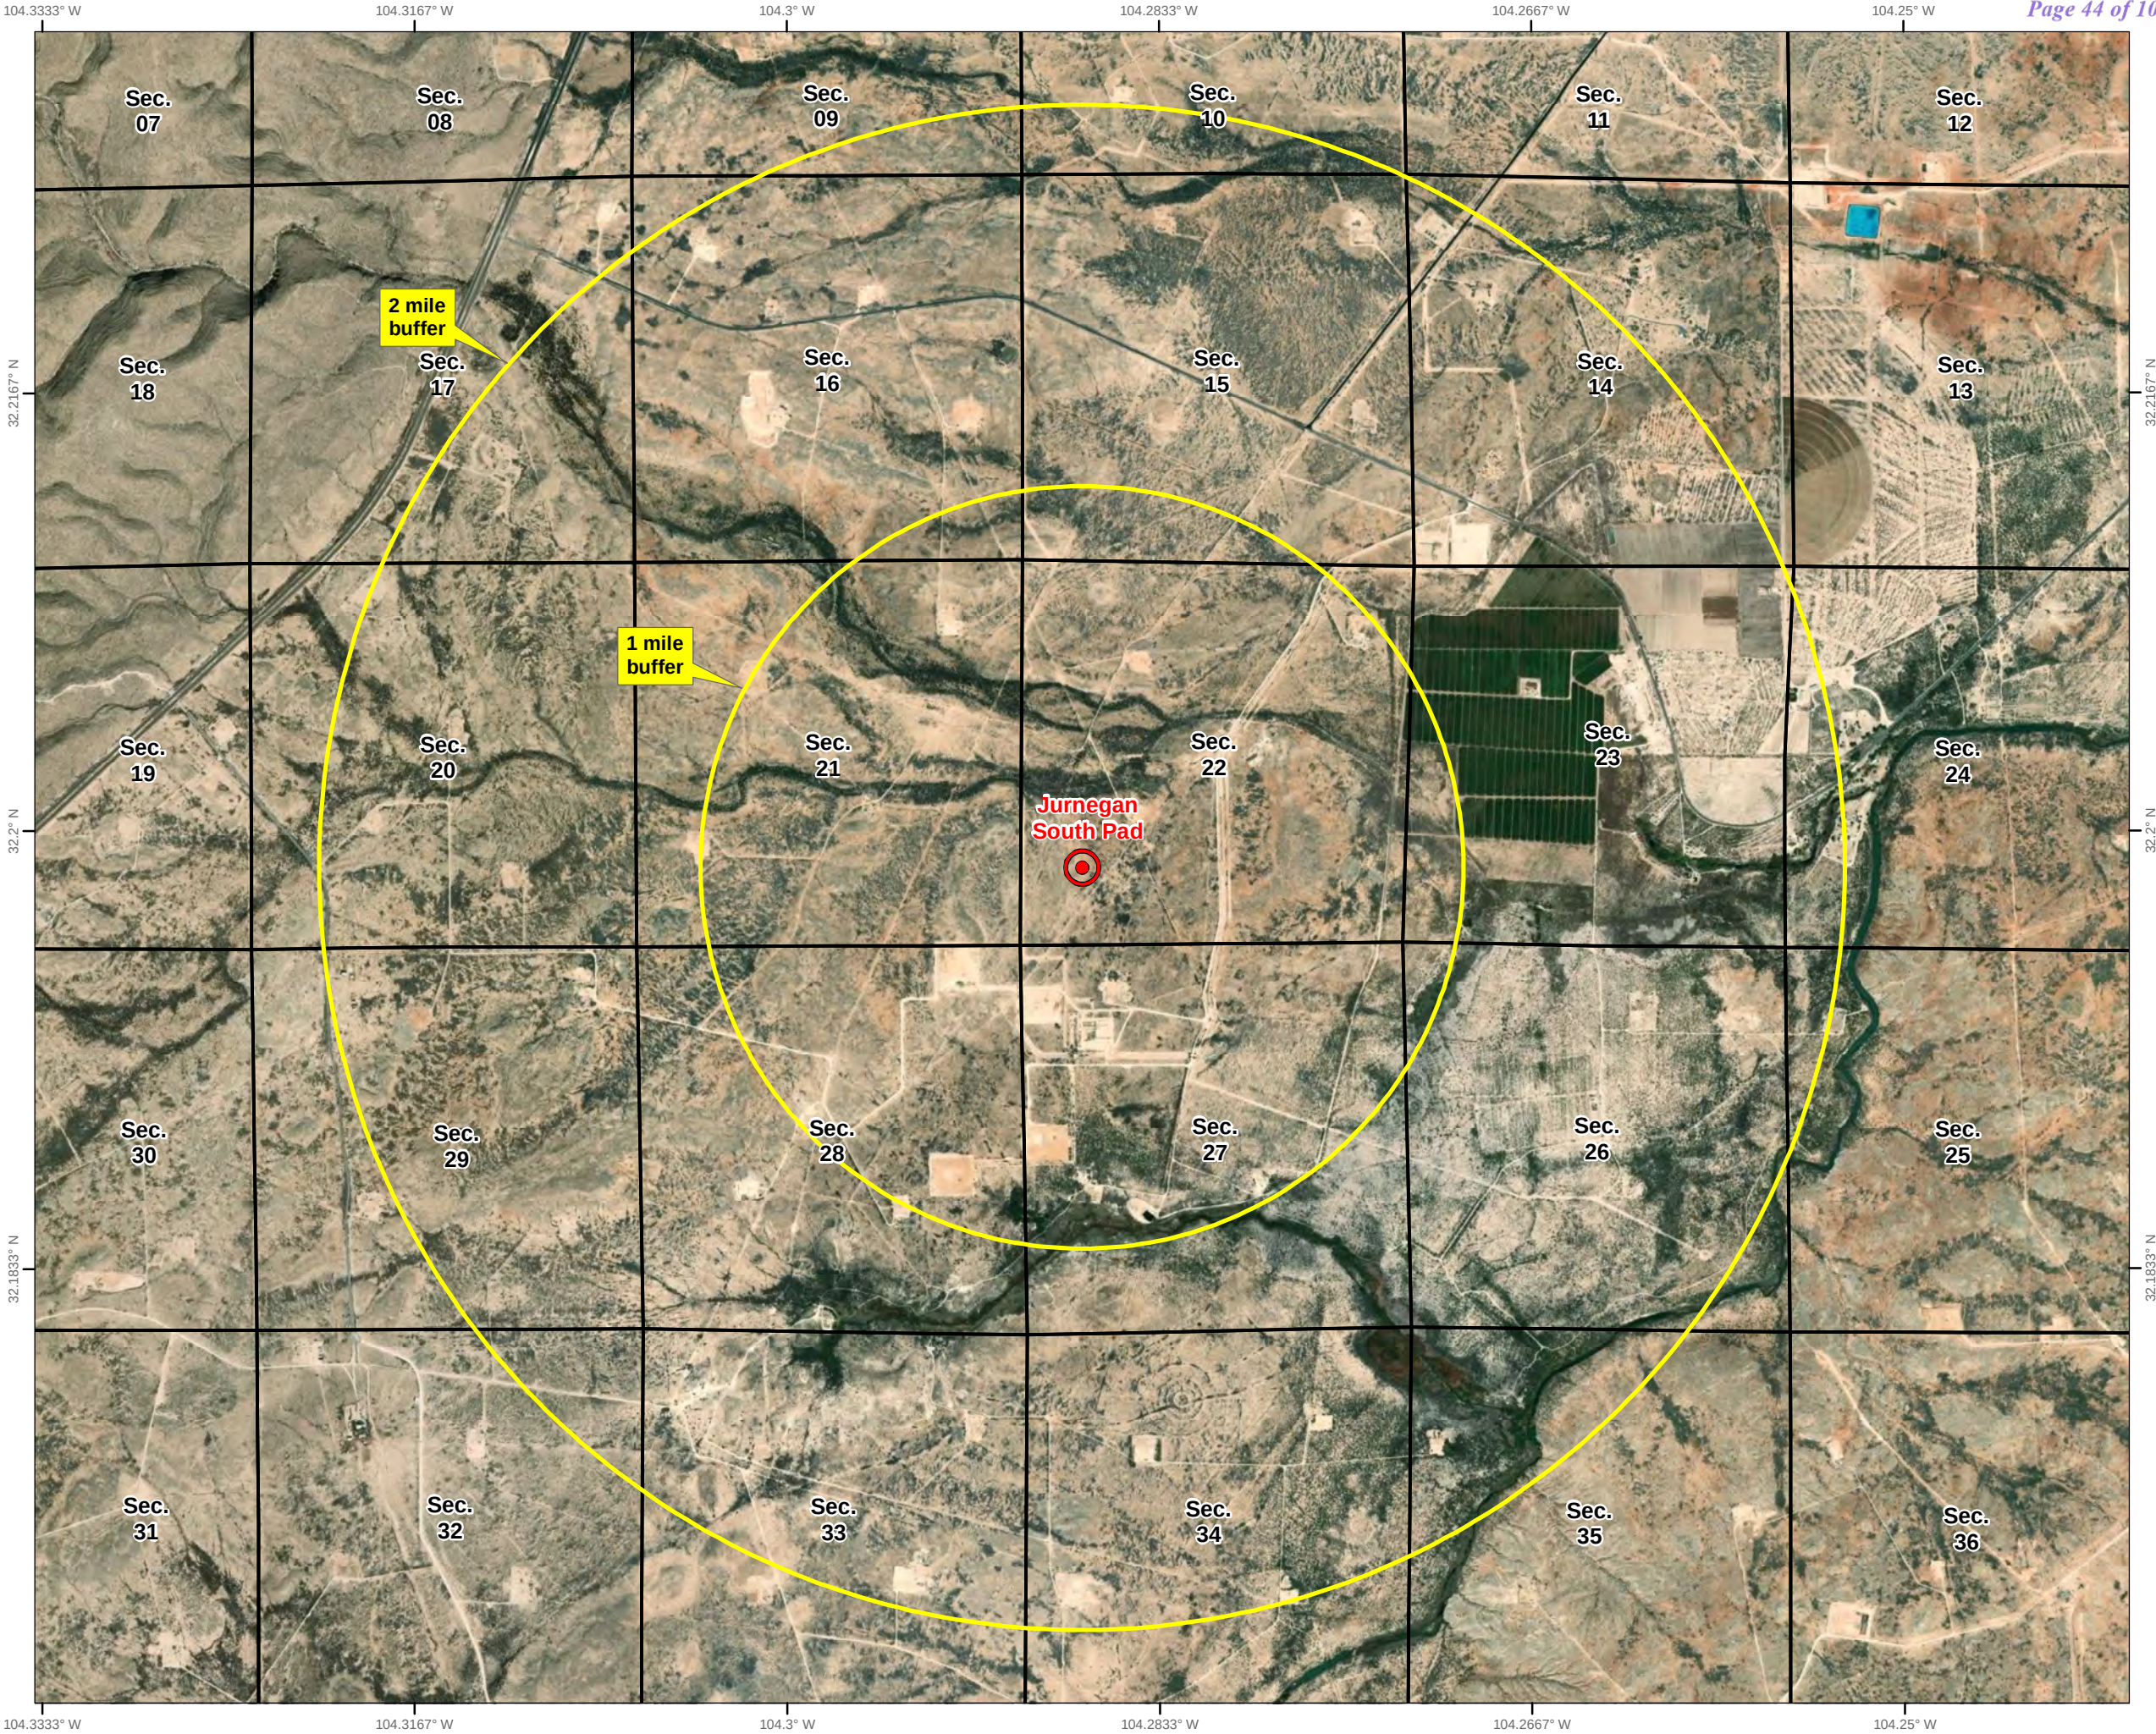

Rig Diagram
Jurnegan South Pad
Tap Rock Operating, LLC
22-24S-26E
Eddy County, NM

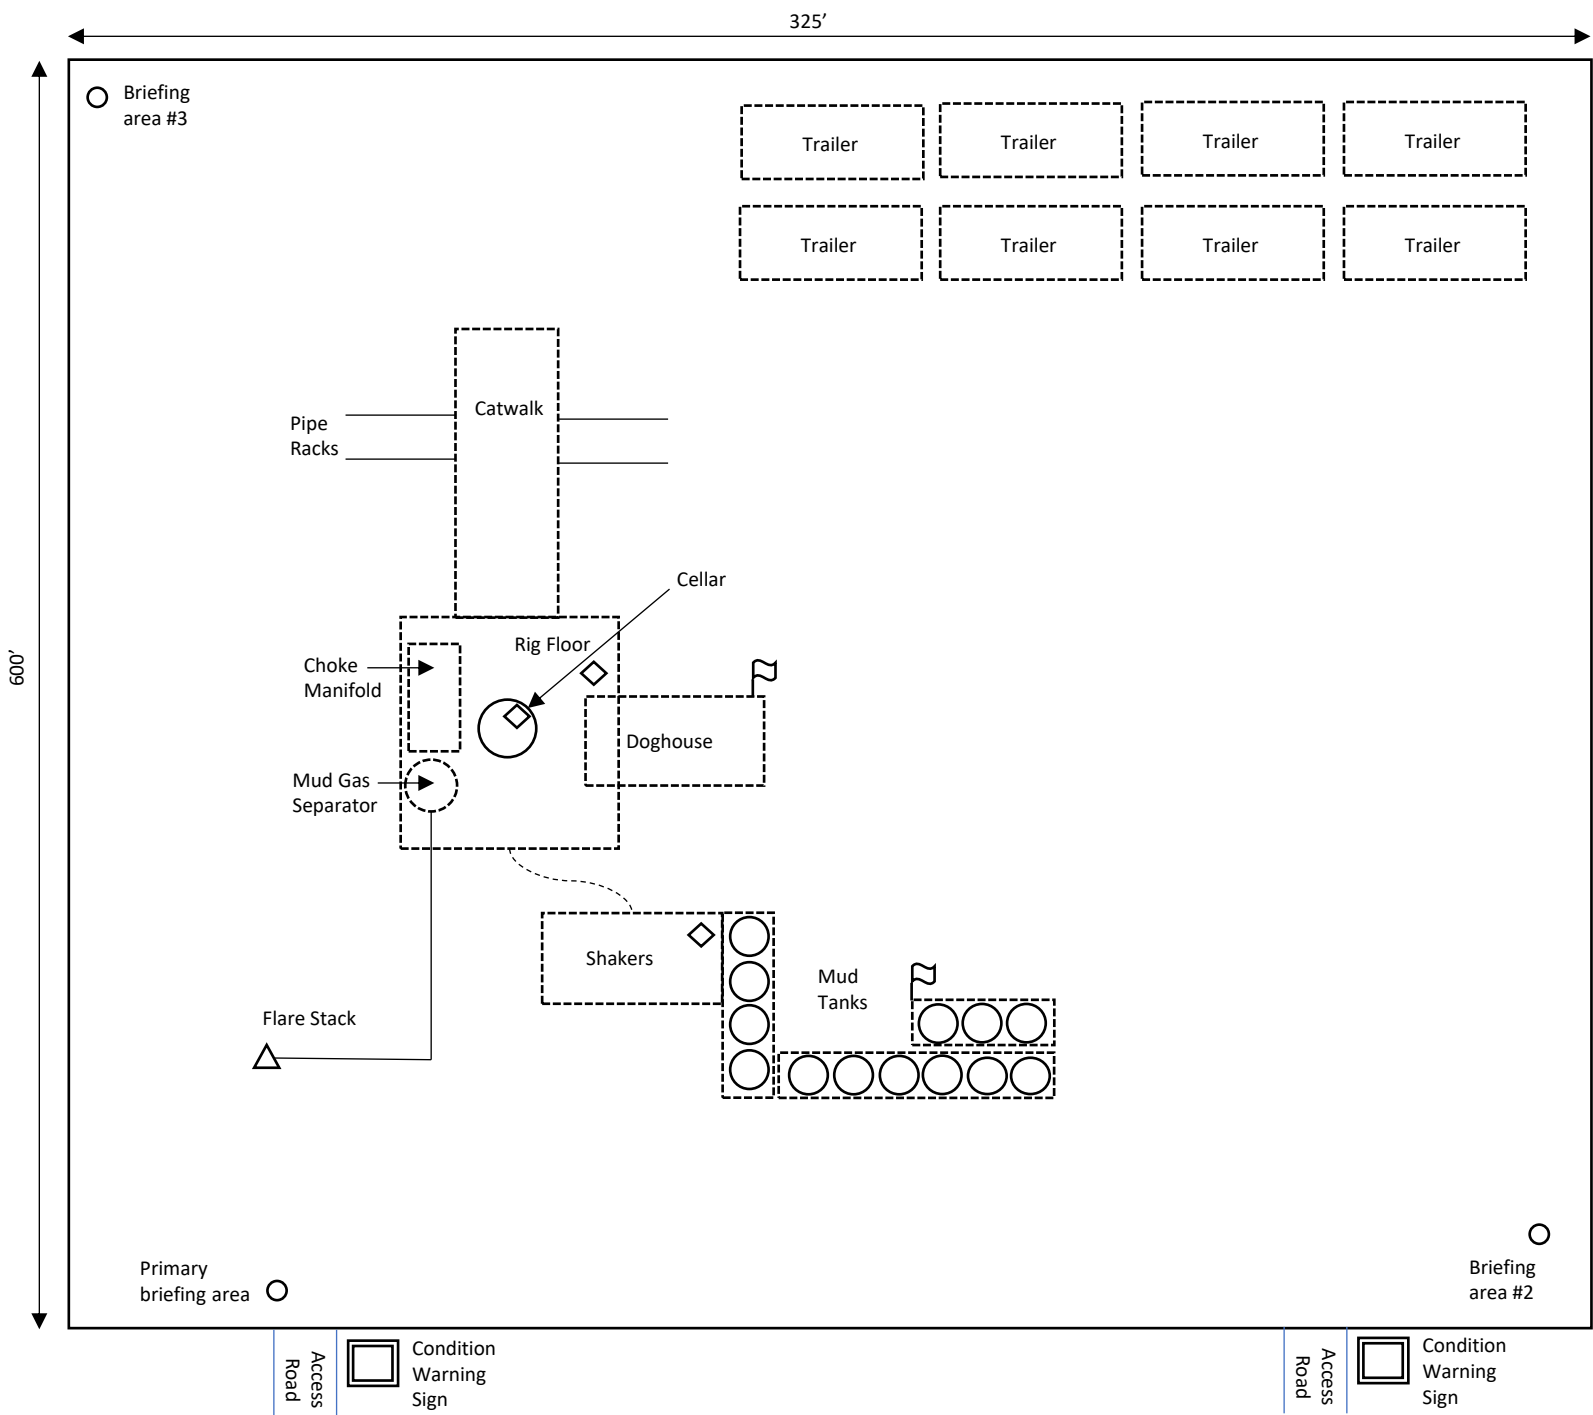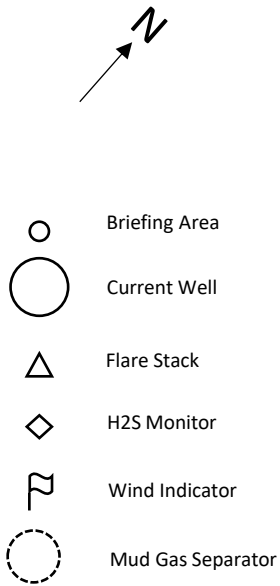

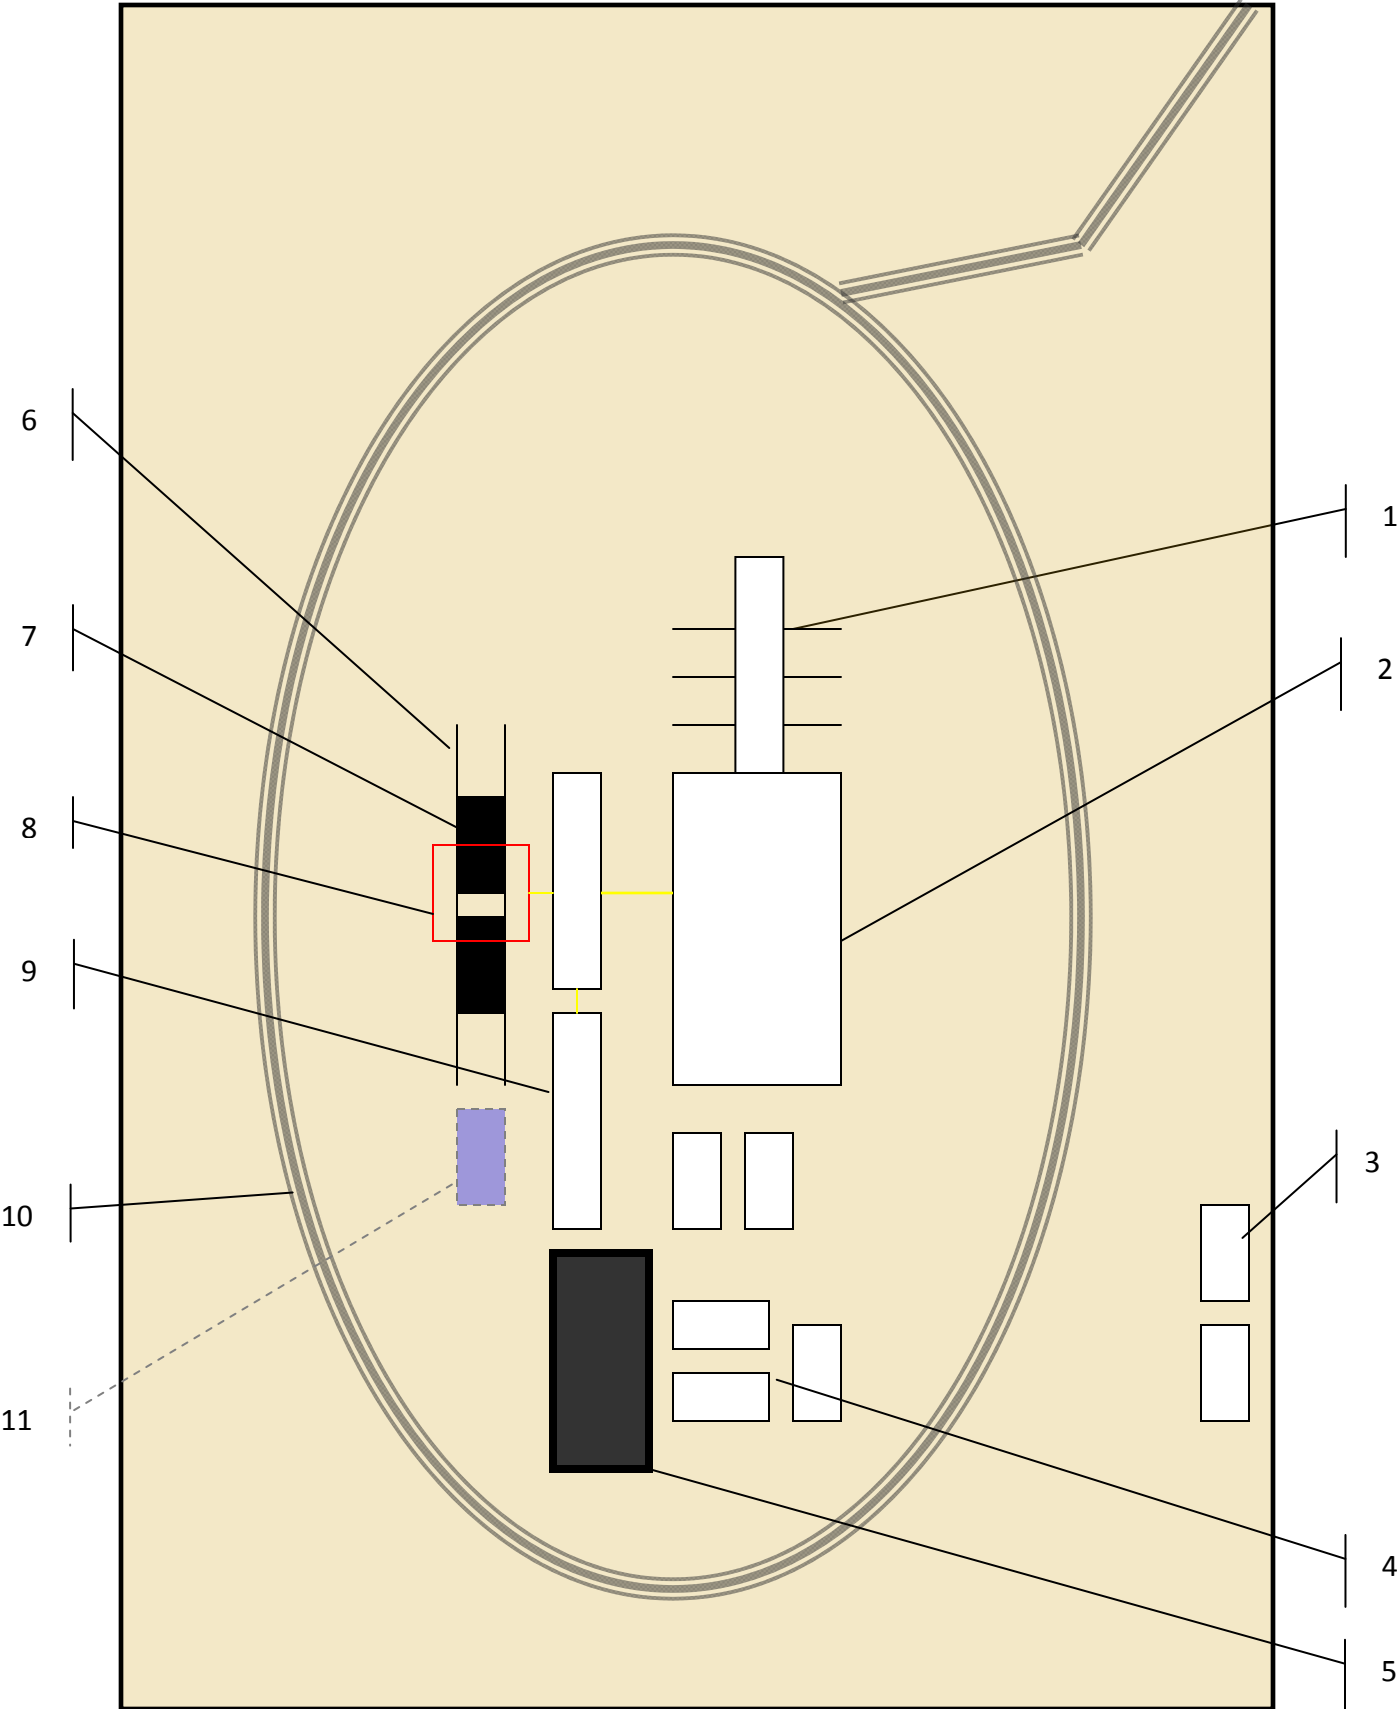

Schematic Closed Loop Drilling Rig*

- 1. Pipe Rack
- 2. Drill Rig
- 3. House Trailers/ Offices
- 4. Generator/Fuel/Storage
- 5. Overflow-Frac Tank
- 6. Skids
- 7. Roll Offs
- 8. Hopper or Centrifuge
- 9. Mud Tanks
- 10. Loop Drive
- 11. Generator (only for use with centrifuge)

*Not drawn to scale: Closed loop system requires at least 30 feet beyond mud tanks. Ideally 60 feet would be available



Above: Centrifugal Closed Loop System




PERMITS WEST, INC.
PROVIDING PERMITS for LAND USERS
37Verano Loop, Santa Fe, New Mexico 87508 (505) 466-8120



- Closed Loop Drilling System: Mud tanks to right (1)
Hopper in air to settle out solids (2)
Water return pipe (3)
Shaker between hopper and mud tanks (4)
Roll offs on skids (5)

Flow Chart for Drilling Fluids and Solids

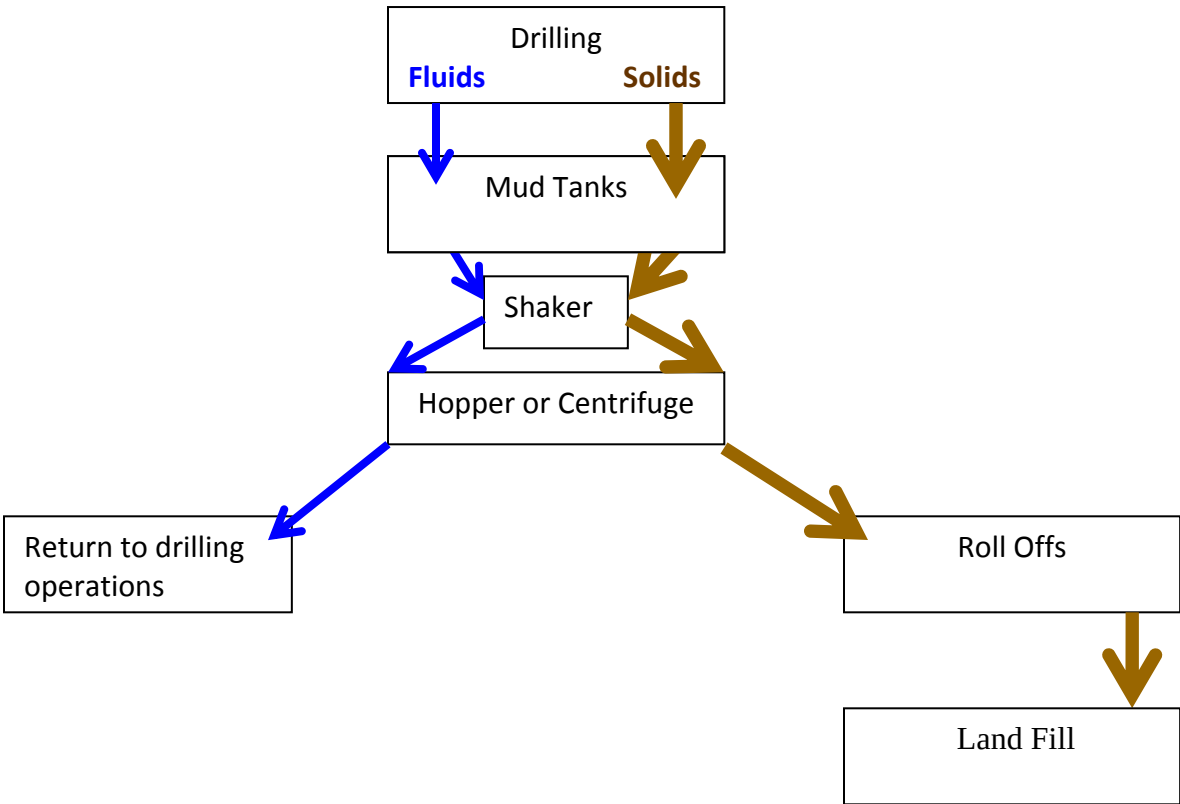

Photos Courtesy of Gandy Corporation Oil Field Service

Form 3160-5
(October 2024)

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

FORM APPROVED
OMB No. 1004-0220
Expires: October 31, 2027

SUNDRY NOTICES AND REPORTS ON WELLS
Do not use this form for proposals to drill or to re-enter an abandoned well. Use Form 3160-3 (APD) for such proposals.

5. Lease Serial No. NMNM0475051

6. If Indian, Allottee or Tribe Name

SUBMIT IN TRIPLICATE - Other instructions on page 2

1. Type of Well
☒ Oil Well ☐ Gas Well ☐ Other

2. Name of Operator
FLAT CREEK RESOURCES LLC

3a. Address 777 MAIN STREET, SUITE 3600, FORT WORTH 3b. Phone No. (include area code)
(817) 310-8570

4. Location of Well (Footage, Sec., T.,R.,M., or Survey Description)
SEC 22/T24S/R26E/NMP

7. If Unit of CA/Agreement, Name and/or No.

8. Well Name and No.
JURNEGAN BS FED COM/008H **New Well #011H**

9. API Well No.
30-015-58069

10. Field and Pool or Exploratory Area
WILLOW LAKE/BONE SPRING WEST

11. Country or Parish, State
EDDY/NM

12. CHECK THE APPROPRIATE BOX(ES) TO INDICATE NATURE OF NOTICE, REPORT OR OTHER DATA

TYPE OF SUBMISSION	TYPE OF ACTION				
☒ Notice of Intent	☐ Acidize	☐ Deepen	☐ Production (Start/Resume)	☐ Water Shut-Off	
☐ Subsequent Report	☐ Alter Casing	☐ Hydraulic Fracturing	☐ Reclamation	☐ Well Integrity	
☐ Final Abandonment Notice	☐ Casing Repair	☐ New Construction	☐ Recomplete	☐ Other	
	☒ Change Plans	☐ Plug and Abandon	☐ Temporarily Abandon		
	☐ Convert to Injection	☐ Plug Back	☐ Water Disposal		

13. Describe Proposed or Completed Operation: Clearly state all pertinent details, including estimated starting date of any proposed work and approximate duration thereof. If the proposal is to deepen directionally or recompleate horizontally, give subsurface locations and measured and true vertical depths of all pertinent markers and zones. Attach the Bond under which the work will be perfonned or provide the Bond No. on file with BLM/BIA. Required subsequent reports must be filed within 30 days following completion of the involved operations. If the operation results in a multiple completion or recompletion in a new interval, a Form 3160-4 must be filed once testing has been completed. Final Abandonment Notices must be filed only after all requirements, including reclamation, have been completed and the operator has detennined that the site is ready for final inspection.)

Flat Creek Resources, LLC would like to request a change to the Well Name, SHL, target formation, and a variance on Break Testing the BOP. The well name will change from Jurnegan BS Fed Com 8H to Jurnegan BS Fed Com 11H. The Surface Hole Location will move from 1050' FSL & 805' FWL, Section 22, T. 24S, R. 26E, SWSW (32.1985388, -104.2869495) to 1004' FSL & 947' FWL, Section 22, T. 24S, R. 26E, SWSW (32.1984138, -104.2864921). The target formation will change from the Third Bone Spring Lime to the Second Bone Spring Shale. Please see attached C102 plat, Break Testing procedure, drill plan, directional plan and anticollision report for more detailed information. APD ID 10400104126.

14. I hereby certify that the foregoing is true and correct. Name (Printed/Typed)
CORY WALK / Ph: (505) 466-8120

(Electronic Submission)

Signature

Title Permitting Agent

Date 01/30/2026

THE SPACE FOR FEDERAL OR STATE OFFICE USE

Approved by
CHRISTOPHER WALLS / Ph: (575) 234-2234 / Approved

Conditions of approval, if any, are attached. Approval of this notice does not warrant or certify that the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon.

Title Petroleum Engineer

Office CARLSBAD

Date 02/04/2026

Title 18 U.S.C Section 1001 and Title 43 U.S.C Section 1212, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

(Instructions on page 2)

PECOS DISTRICT DRILLING CONDITIONS OF APPROVAL

OPERATOR'S NAME:	Flat Creek Resources LLC
LOCATION:	Section 22, T.24 S., R.26 E., NMPM
COUNTY:	Eddy County, New Mexico

WELL NAME & NO.:	Jurnegan BS Fed Com 11H
ATS/API ID:	ATS-25-1283
APD ID:	10400104126
Sundry ID:	2884334

COA

H2S	No		
Potash	None	None	
Cave/Karst Potential	Low		
Cave/Karst Potential	☒ Critical		
Variance	☐ None	☒ Flex Hose	☐ Other
Wellhead	Conventional and Multibowl		
Other	☐ 4 String ☐ 5 String	Capitan Reef None	☐ WIPP
Other	Pilot Hole None	☐ Open Annulus	
Cementing	Contingency Squeeze None	Echo-Meter None	Primary Cement Squeeze None
Special Requirements	☐ Water Disposal/Injection	☒ COM	☐ Unit
Special Requirements	☐ Batch Sundry	Waste Prevention Waste MP	
Special Requirements Variance	☒ BOPE Break Testing ☐ Offline BOPE Testing	☐ Offline Cementing	☐ Casing Clearance

A. HYDROGEN SULFIDE

Hydrogen Sulfide (H₂S) monitors shall be installed prior to drilling out the surface shoe. If H₂S is detected in concentrations greater than 100 ppm, the Hydrogen Sulfide area shall meet **43 CFR part 3170 Subpart 3176**, which includes equipment and personnel/public protection items. If Hydrogen Sulfide is encountered, provide measured values and formations to the BLM.

B. CASING

1. The **10-3/4** inch surface casing shall be set at approximately 150 feet (a minimum of 70 feet into the Rustler Anhydrite and above the salt when present, and below usable fresh water) and cemented to the surface. The surface hole shall be **14 3/4** inch in diameter.
 - a. If cement does not circulate to the surface, the appropriate BLM office shall be notified and a temperature survey utilizing an electronic type temperature survey with surface log readout will be used or a cement bond log shall be run to verify the top of the cement. Temperature survey will be run a minimum of six hours after pumping cement and ideally between 8-10 hours after completing the cement job.
 - b. Wait on cement (WOC) time for a primary cement job will be a minimum of **8 hours** or 500 pounds compressive strength, whichever is greater. (This is to include the lead cement)
 - c. Wait on cement (WOC) time for a remedial job will be a minimum of 4 hours after bringing cement to surface or 500 pounds compressive strength, whichever is greater.
 - d. If cement falls back, remedial cementing will be done prior to drilling out that string.
 2. The minimum required fill of cement behind the **7-5/8** inch intermediate casing is:
 - Cement to surface. If cement does not circulate see B.1.a, c-d above.
Wait on cement (WOC) time for a primary cement job is to include the lead cement slurry due to cave/karst or potash.
- ❖ In Critical Cave/Karst Areas cement must come to surface on the first three casing strings.

3. The minimum required fill of cement behind the 5-1/2 inch production casing is:
 - Cement to surface. If cement does not circulate, contact the appropriate BLM office. Operator shall provide method of verification.
Wait on cement (WOC) time for a primary cement job is to include the lead cement slurry due to cave/karst or potash.
Cement excess is less than 25%, more cement is required if washout occurs. Adjust cement volume and excess based on a fluid caliper or similar method that reflects the as-drilled size of the wellbore.

C. PRESSURE CONTROL

1. Variance approved to use flex line from BOP to choke manifold. Manufacturer's specification to be readily available. No external damage to flex line. Flex line to be installed as straight as possible (no hard bends).'
- 2.

Option 1:

- a. Minimum working pressure of the blowout preventer (BOP) and related equipment (BOPE) required for drilling below the surface casing shoe shall be **3000 (3M) psi. Annular which shall be tested to 2100 (70% Working Pressure) psi.**
- b. Minimum working pressure of the blowout preventer (BOP) and related equipment (BOPE) required for drilling below the 7-5/8 inch intermediate casing shoe shall be **5000 (5M) psi.**

Option 2:

Operator has proposed a multi-bowl wellhead assembly. This assembly will only be tested when installed on the 10-3/4 inch surface casing. Minimum working pressure of the blowout preventer (BOP) and related equipment (BOPE) required for drilling below the surface casing shoe shall be **5000 (5M) psi.**

- a. Wellhead shall be installed by manufacturer's representatives, submit documentation with subsequent sundry.
- b. If the welding is performed by a third party, the manufacturer's representative shall monitor the temperature to verify that it does not exceed the maximum temperature of the seal.
- c. Manufacturer representative shall install the test plug for the initial BOP test.
- d. If the cement does not circulate and one inch operations would have been possible with a standard wellhead, the well head shall be cut off, cementing operations performed and another wellhead installed.

- e. Whenever any seal subject to test pressure is broken, all the tests in 43 CFR 3172.6(b)(9) must be followed.

D. SPECIAL REQUIREMENT (S)

Communitization Agreement

- The operator will submit a Communitization Agreement to the Santa Fe Office, 301 Dinosaur Trail Santa Fe, New Mexico 87508, at least 90 days before the anticipated date of first production from a well subject to a spacing order issued by the New Mexico Oil Conservation Division. The Communitization Agreement will include the signatures of all working interest owners in all Federal and Indian leases subject to the Communitization Agreement (i.e., operating rights owners and lessees of record), or certification that the operator has obtained the written signatures of all such owners and will make those signatures available to the BLM immediately upon request.
- The operator will submit an as-drilled survey well plat of the well completion, but are not limited to, those specified in **43 CFR part 3170 Subpart 3171**
- If the operator does not comply with this condition of approval, the BLM may take enforcement actions that include, but are not limited to, those specified in 43 CFR 3163.1.
- In addition, the well sign shall include the surface and bottom hole lease numbers. When the Communitization Agreement number is known, it shall also be on the sign.

BOPE Break Testing Variance (Approved)

- BOPE Break Testing is **ONLY** permitted for 5M psi MASP or less. **(Annular preventer must be tested to a minimum of 70% of BOPE working pressure and shall be higher than the MASP)**
- While in transfer between wells, the BOPE shall be secured by the hydraulic carrier or cradle.
- Any well control event while drilling require notification to the BLM Petroleum Engineer **(575-706-2779)** prior to the commencement of any BOPE Break Testing operations.
- The BLM is to be contacted **(575-361-2822 Eddy County)** 4 hours prior to BOPE tests.
- As a minimum, a full BOPE test shall be performed at **21-day** intervals.
- In the event any repairs or replacement of the BOPE is required, the BOPE shall test as per **43 CFR part 3170 Subpart 3172**.
- If in the event break testing is not utilized, then a full BOPE test would be conducted.
- The BOPE testing shall be conducted while the rig is stationary.

Intermediate Break Testing Section:

- Variance only pertains to the intermediate hole-sections and no deeper than the Bone Springs formation.
- A full BOPE test is required prior to drilling the first deep intermediate hole section. If any subsequent hole interval is deeper than the first, a full BOPE test will be required. (200' TVD tolerance between intermediate shoes is allowable).

GENERAL REQUIREMENTS

The BLM is to be notified in advance for a representative to witness:

- a. Spudding well (minimum of 24 hours)
- b. Setting and/or Cementing of all casing strings (minimum of 4 hours)
- c. BOPE tests (minimum of 4 hours)

☒ Eddy County

EMAIL or call the Carlsbad Field Office, 620 East Greene St., Carlsbad, NM 88220,

BLM_NM_CFO_DrillingNotifications@BLM.GOV
(575) 361-2822

1. Unless the production casing has been run and cemented or the well has been properly plugged, the drilling rig shall not be removed from over the hole without prior approval.
 - a. In the event the operator has proposed to drill multiple wells utilizing a skid/walking rig. Operator shall secure the wellbore on the current well, after installing and testing the wellhead, by installing a blind flange of like pressure rating to the wellhead and a pressure gauge that can be monitored while drilling is performed on the other well(s).
 - b. When the operator proposes to set surface casing with Spudder Rig
 - Notify the BLM when moving in and removing the Spudder Rig.
 - Notify the BLM when moving in the 2nd Rig. Rig to be moved in within 90 days of notification that Spudder Rig has left the location.
 - BOP/BOPE test to be conducted per **43 CFR part 3170 Subpart 3172** as soon as 2nd Rig is rigged up on well.
2. Floor controls are required for 3M or Greater systems. These controls will be on the rig floor, unobstructed, readily accessible to the driller and will be operational at all times during drilling and/or completion activities. Rig floor is defined as the area immediately around the rotary table; the area immediately above the substructure on which the draw works are located, this does not include the dog house or stairway area.

A. CASING

1. Changes to the approved APD casing program need prior approval if the items substituted are of lesser grade or different casing size or are Non-API. The Operator can exchange the components of the proposal with that of superior strength (i.e. changing from J-55 to N-80, or from 36# to 40#). Changes to the approved cement program need prior approval if the altered cement plan has less volume or strength or

if the changes are substantial (i.e. Multistage tool, ECP, etc.). The initial wellhead installed on the well will remain on the well with spools used as needed.

2. Wait on cement (WOC) for Potash Areas: After cementing but before commencing any tests, the casing string shall stand cemented under pressure until both of the following conditions have been met: 1) cement reaches a minimum compressive strength of 500 psi for all cement blends of both lead and tail cement, 2) until cement has been in place at least 8 hours. WOC time will be recorded in the driller's log. The casing integrity test can be done (prior to the cement setting up) immediately after bumping the plug.
3. Wait on cement (WOC) for Water Basin: After cementing but before commencing any tests, the casing string shall stand cemented under pressure until both of the following conditions have been met: 1) cement reaches a minimum compressive strength of 500 psi at the shoe, 2) until cement has been in place at least 8 hours. WOC time will be recorded in the driller's log. See individual casing strings for details regarding lead cement slurry requirements. The casing integrity test can be done (prior to the cement setting up) immediately after bumping the plug.
4. Acceptable Method of Cement Verifications:
 - a. Observing cement circulated to surface.
 - b. Cement bond log (CBL).
 - c. Temperature log within 8-10 hours after completing the cement job.
 - d. Echometer (if a second-stage bradenhead squeeze is being used).
5. Provide compressive strengths including hours to reach required 500 pounds compressive strength prior to cementing each casing string. Have well specific cement details onsite prior to pumping the cement for each casing string.
6. No pea gravel permitted for remedial or fall back remedial without prior authorization from the BLM engineer.
7. On that portion of any well approved for a 5M BOPE system or greater, a pressure integrity test of each casing shoe shall be performed. Formation at the shoe shall be tested to a minimum of the mud weight equivalent anticipated to control the formation pressure to the next casing depth or at total depth of the well. This test shall be performed before drilling more than 20 feet of new hole.
8. If hardband drill pipe is rotated inside casing, returns will be monitored for metal. If metal is found in samples, drill pipe will be pulled and rubber protectors which have a larger diameter than the tool joints of the drill pipe will be installed prior to continuing drilling operations.
9. Whenever a casing string is cemented in the R-111-P potash area, the NMOCD requirements shall be followed.

B. PRESSURE CONTROL

1. All blowout preventer (BOP) and related equipment (BOPE) shall comply with well control requirements as described in **43 CFR part 3170 Subpart 3172 and API STD 53 Sec. 5.3**.
2. If a variance is approved for a flexible hose to be installed from the BOP to the choke manifold, the following requirements apply: The flex line must meet the requirements of API 16C. Check condition of flexible line from BOP to choke manifold, replace if exterior is damaged or if line fails test. Line to be as straight as possible with no hard bends and is to be anchored according to Manufacturer's requirements. The flexible hose can be exchanged with a hose of equal size and equal or greater pressure rating. Anchor requirements, specification sheet and hydrostatic pressure test certification matching the hose in service, to be onsite for review. These documents shall be posted in the company man's trailer and on the rig floor.
3. 5M or higher system requires an HCR valve, remote kill line and annular to match. The remote kill line is to be installed prior to testing the system and tested to stack pressure.
4. If the operator has proposed a multi-bowl wellhead assembly in the APD. The following requirements must be met:
 - a. Wellhead shall be installed by manufacturer's representatives, submit documentation with subsequent sundry.
 - b. If the welding is performed by a third party, the manufacturer's representative shall monitor the temperature to verify that it does not exceed the maximum temperature of the seal.
 - c. Manufacturer representative shall install the test plug for the initial BOP test.
 - d. Whenever any seal subject to test pressure is broken, all the tests in 43 CFR 3172.6(b)(9) must be followed.
 - e. If the cement does not circulate and one inch operations would have been possible with a standard wellhead, the well head shall be cut off, cementing operations performed and another wellhead installed.
5. The appropriate BLM office shall be notified a minimum of 4 hours in advance for a representative to witness the tests.
 - a. In a water basin, for all casing strings utilizing slips, these are to be set as soon as the crew and rig are ready and any fallback cement remediation has been done. The casing cut-off and BOP installation can be initiated four hours after installing the slips, which will be approximately six hours after bumping the plug. For those casing strings not using slips, the minimum wait time before cut-off is eight hours after bumping the plug. BOP/BOPE testing can begin

after cut-off or once cement reaches 500 psi compressive strength (including lead cement), whichever is greater. However, if the float does not hold, cut-off cannot be initiated until cement reaches 500 psi compressive strength (including lead when specified).

- b. In potash areas, for all casing strings utilizing slips, these are to be set as soon as the crew and rig are ready and any fallback cement remediation has been done. For all casing strings, casing cut-off and BOP installation can be initiated at twelve hours after bumping the cement plug. The BOPE test can be initiated after bumping the cement plug with the casing valve open. (only applies to single stage cement jobs, prior to the cement setting up.)
- c. The tests shall be done by an independent service company utilizing a test plug not a cup or J-packer and can be initiated immediately with the casing valve open. The operator also has the option of utilizing an independent tester to test without a plug (i.e. against the casing) pursuant to **43 CFR part 3170 Subpart 3172** with the pressure not to exceed 70% of the burst rating for the casing. Any test against the casing must meet the WOC time for 8 hours or 500 pounds compressive strength, whichever is greater, prior to initiating the test (see casing segment as lead cement may be critical item).
- d. The test shall be run on a 5000 psi chart for a 2-3M BOP/BOP, on a 10000 psi chart for a 5M BOP/BOPE and on a 15000 psi chart for a 10M BOP/BOPE. If a linear chart is used, it shall be a one hour chart. A circular chart shall have a maximum 2 hour clock. If a twelve hour or twenty-four hour chart is used, tester shall make a notation that it is run with a two hour clock.
- e. The results of the test shall be reported to the appropriate BLM office.
- f. All tests are required to be recorded on a calibrated test chart. A copy of the BOP/BOPE test chart and a copy of independent service company test will be submitted to the appropriate BLM office.
- g. The BOP/BOPE test shall include a low pressure test from 250 to 300 psi. The test will be held for a minimum of 10 minutes if test is done with a test plug and 30 minutes without a test plug. This test shall be performed prior to the test at full stack pressure.
- h. BOP/BOPE must be tested by an independent service company within 500 feet of the top of the Wolfcamp formation if the time between the setting of the intermediate casing and reaching this depth exceeds 20 days. This test does not exclude the test prior to drilling out the casing shoe as per **43 CFR part 3170 Subpart 3172**.

C. DRILLING MUD

Mud system monitoring equipment, with derrick floor indicators and visual and audio alarms, shall be operating before drilling into the Wolfcamp formation, and shall be used until production casing is run and cemented.

D. WASTE MATERIAL AND FLUIDS

All waste (i.e. drilling fluids, trash, salts, chemicals, sewage, gray water, etc.) created as a result of drilling operations and completion operations shall be safely contained and disposed of properly at a waste disposal facility. No waste material or fluid shall be disposed of on the well location or surrounding area.

Porto-johns and trash containers will be on-location during fracturing operations or any other crew-intensive operations.

Long Vo (LVO) 2/3/2026

22-24-26-M Sundry ID 2884334 Jurnegan BS Fed Com 11H.xlsm

Jurnegan BS Fed Com 11H

10 3/4	surface csg in a		14 3/4	inch hole.		Design Factors				Surface		
Segment	#/ft	Grade		Coupling	Joint	Collapse	Burst	Length	B@s	a-B	a-C	Weight
"A"	45.50		j 55	stc	72.23	30.48	3.88	150	52	6.72	58.76	6,825
"B"				stc				0				0
w/8.4#/g mud, 30min Sfc Csg Test psig: 1,500				Tail Cmt	does not	circ to sfc.	Totals:	150				6,825
<u>Comparison of Proposed to Minimum Required Cement Volumes</u>												
Hole Size	Annular Volume	1 Stage Cmt Sx	1 Stage CuFt Cmt	Min Cu Ft	1 Stage % Excess	Drilling Mud Wt	Calc MASP	Req'd BOPE				Min Dist Hole-Cplg
14 3/4	0.5563	305	455	83	445	8.80	532	2M				1.50
Site plot (pipe racks 3 or 4) as per D.O.D. 1.0, D.O. 4.1, not found.												

7 5/8		casing inside the		10 3/4		Design Factors				Int 1				
Segment	#/ft	Grade		Coupling		Body	Collapse	Burst	Length	B@s	a-B	a-C	Weight	
"A"	29.70			p 110		btc	17.79	5.79	2.92	1,780	10	5.31	10.05	52,866
"B"										0				0
w/8.4#/g mud, 30min Sfc Csg Test psig: 1,500									Totals:		1,780			52,866
The cement volume(s) are intended to achieve a top of									0	ft from surface or a		150		overlap.
Hole Size	Annular Volume	1 Stage Cmt Sx		1 Stage CuFt Cmt		Min Cu Ft	1 Stage % Excess	Drilling Mud Wt	Calc MASP	Req'd BOPE				Min Dist Hole-Cplg
9 7/8	0.2148	335		568		383	48	10.00	1785	2M				0.69
D V Tool(s):									sum of sx		Σ CuFt			Σ%excess
t by stage % :									#VALUE!		#VALUE!			
Class 'C' tail cmt yld > 1.35														

5 1/2	casing inside the		7 5/8	Design Factors					Prod 1			
Segment	#/ft	Grade	Coupling	Joint	Collapse	Burst	Length	B@s	a-B	a-C	Weight	
"A"	20.00	hpc	110	tcbc-ht	4.51	3.54	3.69	16,893	4	6.72	6.44	337,860
"B"							0				0	
"C"							0				0	
"D"							0				0	
w/8.4#/g mud, 30min Sfc Csg Test psig: 1,500								Totals:	16,893		337,860	
The cement volume(s) are intended to achieve a top of								0	ft from surface or a		1780	overlap.
Hole Size	Annular Volume	1 Stage Cmt Sx	1 Stage CuFt Cmt	Min Cu Ft	1 Stage % Excess	Drilling Mud Wt	Calc MASP	Req'd BOPE			Min Dist Hole-Cplg	
6 3/4	0.0835	935	1643	1427	15	9.40					0.43	
Class 'C' tail cmt yld > 1.35												

#N/A											
0			5 1/2		Design Factors			<Choose Casing>			
Segment	#/ft	Grade	Coupling	#N/A	Collapse	Burst	Length	B@s	a-B	a-C	Weight
"A"			0.00				0				0
"B"			0.00				0				0
w/8.4#/g mud, 30min Sfc Csg Test psig:							Totals:	0	0		
Cmt vol calc below includes this csg, TOC intended							#N/A	ft from surface or a	#N/A	overlap.	
Hole Size	Annular Volume	1 Stage Cmt Sx	1 Stage CuFt Cmt	Min Cu Ft	1 Stage % Excess	Drilling Mud Wt	Calc MASP	Req'd BOPE	Min Dist Hole-Cplg		
0		#N/A	#N/A	0	#N/A						
#N/A Capitan Reef est top XXXX.											

C-102 Submit Electronically Via OCD Permitting	State of New Mexico Energy, Minerals & Natural Resources Department OIL CONSERVATION DIVISION	Revised July 9, 2024	
		Submittal Type:	☐ Initial Submittal
			☒ Amended Report
		☐ As Drilled	

WELL LOCATION AND ACREAGE DEDICATION PLAT

API Number 30-015- 58069	Pool Code 96415	Pool Name WILLOW LAKE; BONE SPRING, WEST
Property Code 339064	Property Name JURNEGAN BS FED COM	Well Number 11H
OGRID No. 374034	Operator Name FLAT CREEK RESOURCES, LLC.	Ground Level Elevation 3329'
Surface Owner: ☐ State ☐ Fee ☐ Tribal ☒ Federal		Mineral Owner: ☐ State ☒ Fee ☐ Tribal ☒ Federal

Surface Location

UL or lot no.	Section	Township	Range	Lot Idn	Feet from the N/S	Feet from the E/W	Latitude	Longitude	County
M	22	24-S	26-E	-	1004' S	947' W	N 32.1984138	W 104.2864921	EDDY

Bottom Hole Location

UL or lot no.	Section	Township	Range	Lot Idn	Feet from the N/S	Feet from the E/W	Latitude	Longitude	County
P	23	24-S	26-E	-	1119' S	15' E	N 32.1986148	W 104.2554034	EDDY

Dedicated Acres 640	Infill or Defining Well Infill	Defining Well API 30-015-xxxxx (3H)	Overlapping Spacing Unit (Y/N) N	Consolidated Code C
Order Numbers N/A			Well Setbacks are under Common Ownership: ☒ Yes ☐ No	

Kick Off Point (KOP)

UL or lot no.	Section	Township	Range	Lot Idn	Feet from the N/S	Feet from the E/W	Latitude	Longitude	County
M	22	24-S	26-E	-	1120' S	15' W	N 32.1987128	W 104.2895028	EDDY

First Take Point (FTP)

UL or lot no.	Section	Township	Range	Lot Idn	Feet from the N/S	Feet from the E/W	Latitude	Longitude	County
M	22	24-S	26-E	-	1119' S	100' W	N 32.1987121	W 104.2892280	EDDY

Last Take Point (LTP)


UL or lot no.	Section	Township	Range	Lot Idn	Feet from the N/S	Feet from the E/W	Latitude	Longitude	County
P	23	24-S	26-E	-	1119' S	100' E	N 32.1986156	W 104.2556782	EDDY

Unitized Area or Area of Uniform Intrest pending (com)	Spacing Unity Type ☒ Horizontal ☐ Vertical	Ground Floor Elevation 3329'
--	--	--


OPERATOR CERTIFICATION <i>I hereby certify that the information contained herein is true and complete to the best of my knowledge and belief; and, if the well is a vertical or directional well, that this organization either owns a working interest or unleased mineral interest in the land including the proposed bottom hole location or has a right to drill this well at this location pursuant to a contract with an owner of a working interest or unleased mineral interest, or to a voluntary pooling agreement or a compulsory pooling order heretofore entered by the division.</i> <i>If this well is a horizontal well, I further certify that this organization has received The consent of at least one lessee or owner of a working interest or unleased mineral interest in each tract (in the target pool or formation) in which any part of the well's completed interval will be located or obtained a compulsory pooling order from the division.</i> Rodney Littleton November 20, 2025 Signature Date Rodney Littleton Print Name rlittleton@freedomenergy.com E-mail Address		SURVEYORS CERTIFICATION <i>I hereby certify that the well location shown on this plat was plotted from field notes of actual surveys made by me or under my supervision, and that the same is true and correct to the best of my belief.</i>  11/20/2025 9:38:15 AM Signature and Seal of Professional Surveyor Date Certificate Number Date of Survey 10/29/2024	
--	--	---	--



SECTION 22, TOWNSHIP 24-S, RANGE 26-E, N.M.P.M.
EDDY COUNTY, NEW MEXICO

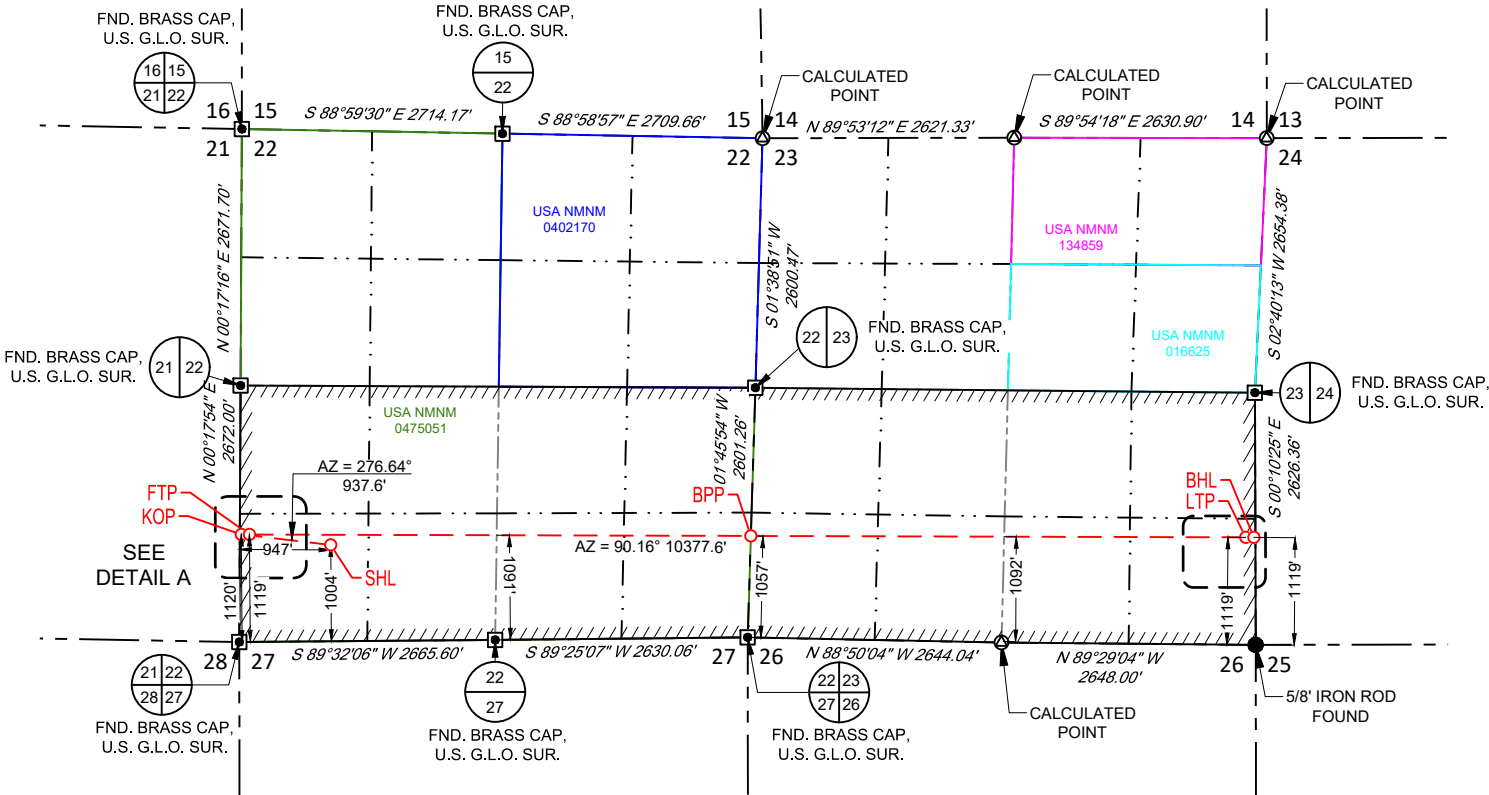

SURFACE LOCATION (SHL)	KICK OFF POINT (KOP)	FIRST TAKE POINT (FTP)
NEW MEXICO EAST NAD 1983 X=555826 Y=435920 LAT.: N 32.1984138 LONG.: W 104.2864921 1004' FSL 947' FWL	NEW MEXICO EAST NAD 1983 X=554895 Y=436029 LAT.: N 32.1987128 LONG.: W 104.2895028 1120' FSL 15' FWL	NEW MEXICO EAST NAD 1983 X=554980 Y=736029 LAT.: N 32.1987121 LONG.: W 104.2892280 1119' FSL 100' FWL
BLM PERF. POINT (BPP)	LAST TAKE POINT (LTP)	BOTTOM HOLE LOCATION (BHL)
NEW MEXICO EAST NAD 1983 X=560202 Y=436014 LAT.: N 32.1986647 LONG.: W 104.2723452 1057' FSL 0' FWL	NEW MEXICO EAST NAD 1983 X=565358 Y=435999 LAT.: N 32.1986156 LONG.: W 104.2556782 1119' FSL 100' FEL	NEW MEXICO EAST NAD 1983 X=565443 Y=435999 LAT.: N 32.1986148 LONG.: W 104.2554034 1119' FSL 15' FEL

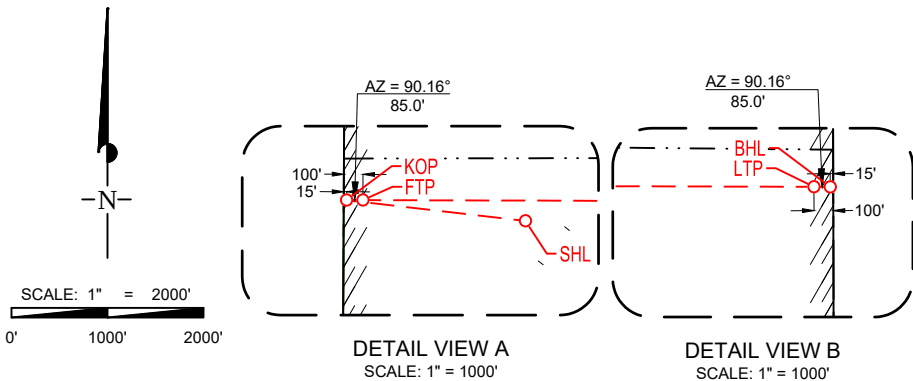

LEASE NAME & WELL NO.: JURNEGAN BS FED COM 11H

SECTION 22 TWP 24-S RGE 26-E SURVEY N.M.P.M.
COUNTY EDDY STATE NM
DESCRIPTION 1004' FSL & 947' FWL

DISTANCE & DIRECTION

FROM INT. OF NM-529. & US-82W. GO WEST ON US-82W ±18.9 MILES.
THENCE LEFT ON ILLINOIS CAMP RD ±9.4 MILES. THENCE RIGHT ON
NETHERLIN RD. ±0.2 MILES, THENCE SOUTHWEST (LEFT) ON A LEASE
RD. ±7489 FEET, THENCE NORTH (RIGHT) ON A PROPOSED ROAD ±32
FEET TO A POINT ±353 FEET SOUTHEAST OF THE LOCATION.



11/20/2025 9:38:18 AM
Ramon A. Dominguez, P.S. No. 24508

ALL BEARINGS, DISTANCES, AND COORDINATE VALUES CONTAINED HEREON ARE GRID
BASED UPON THE NEW MEXICO COORDINATE SYSTEM OF 1983, EAST ZONE, U.S. SURVEY
FEET.

THIS EASEMENT/SERVITUDE LOCATION SHOWN HEREON HAS BEEN SURVEYED ON THE GROUND
UNDER MY SUPERVISION AND PREPARED ACCORDING TO THE EVIDENCE FOUND AT THE TIME OF
SURVEY, AND DATA PROVIDED BY FLAT CREEK RESOURCES, LLC. THIS CERTIFICATION IS MADE AND
LIMITED TO THOSE PERSONS OR ENTITIES SHOWN ON THE FACE OF THIS PLAT AND IS
NON-TRANSFERABLE. THIS SURVEY IS CERTIFIED FOR THIS TRANSACTION ONLY.

TOPOGRAPHIC
LOYALTY INNOVATION LEGACY

481 WINSOTT ROAD, Ste. 200 • BENBROOK, TEXAS 76126
TELEPHONE: (817) 744-7512 • FAX (817) 744-7554
2903 NORTH BIG SPRING • MIDLAND, TEXAS 79705
TELEPHONE: (432) 682-1653 OR (800) 767-1653 • FAX (432) 682-1743
WWW.TOPOGRAPHIC.COM





FLAT CREEK
RESOURCES

LEGEND

--- SECTION LINE
--- PROPOSED ROAD

DETAIL VIEW
SCALE: 1" = 100'

SECTION 22, TOWNSHIP 24-S, RANGE 26-E, N.M.P.M.
EDDY COUNTY, NEW MEXICO

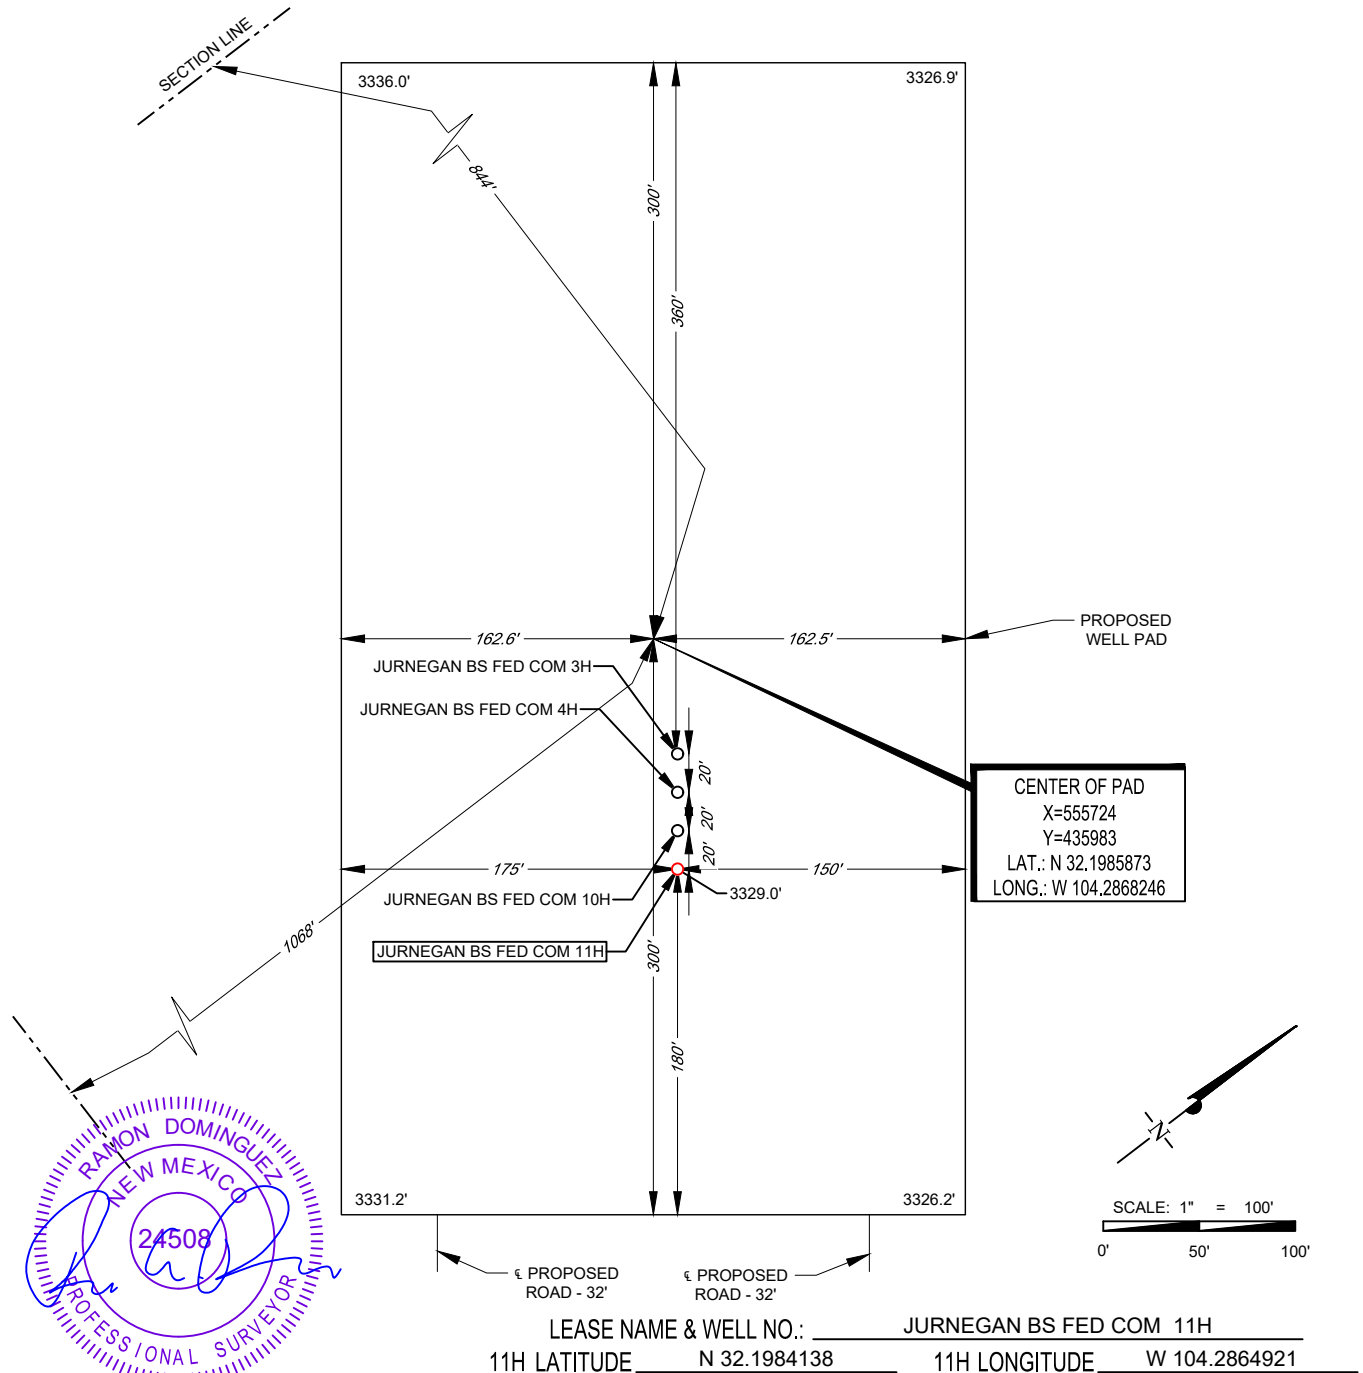

11/20/2025 9:38:19 AM

Ramon A. Dominguez, P.S. No. 24508

CENTER OF PAD IS 1068' FSL & 844' FWL

ALL BEARINGS, DISTANCES, AND COORDINATE VALUES CONTAINED HEREON ARE GRID BASED UPON THE NEW MEXICO COORDINATE SYSTEM OF 1983, EAST ZONE, U.S. SURVEY FEET. ELEVATIONS USED ARE NAVD88, OBTAINED THROUGH AN OPUS SOLUTION.

THIS PROPOSED PAD SITE LOCATION SHOWN HEREON HAS BEEN SURVEYED ON THE GROUND UNDER MY SUPERVISION AND PREPARED ACCORDING TO THE EVIDENCE FOUND AT THE TIME OF SURVEY, AND DATA PROVIDED BY FLAT CREEK RESOURCES, LLC. ONLY THE DATA SHOWN ABOVE IS BEING CERTIFIED TO, ALL OTHER INFORMATION WAS INTENTIONALLY OMITTED. THIS PLAT IS ONLY INTENDED TO BE USED FOR A PERMIT AND IS NOT A BOUNDARY SURVEY. THIS CERTIFICATION IS MADE AND LIMITED TO THOSE PERSONS OR ENTITIES SHOWN ON THE FACE OF THIS PLAT AND IS NON-TRANSFERABLE. THIS SURVEY IS CERTIFIED FOR THIS TRANSACTION ONLY.

ORIGINAL DOCUMENT SIZE: 8.5" X 11"

TOPOGRAPHIC
LOYALTY INNOVATION LEGACY

481 WINSOTT ROAD, Ste. 200 • BENBROOK, TEXAS 76126
TELEPHONE: (817) 744-7512 • FAX (817) 744-7554
2903 NORTH BIG SPRING • MIDLAND, TEXAS 79705
TELEPHONE: (432) 682-1653 OR (800) 767-1653 • FAX (432) 682-1743
WWW.TOPOGRAPHIC.COM

Flat Creek Resources, LLC
 Jurnegan BS Fed Com 11H
 SHL 1004' FSL & 947' FWL 22-24S-26E
 BHL 1119' FSL & 15' FEL 23-24S-26E
 Eddy County, NM

DRILL PLAN PAGE 1

Drilling Program

1. ESTIMATED TOPS

Formation	TVD	MD	Bearing
Alluvium	26'	26'	water
Top Salt	1101'	1101'	N/A
Base Salt	1456'	1456'	N/A
Lamar/Delaware Mountain Group	1756'	1756'	N/A
Bell Canyon	1861'	1861'	N/A
Cherry Canyon	2671'	2685'	N/A
Brushy Canyon	3566'	3620'	N/A
Bone Spring Lime	5261'	5386'	Hydrocarbons
KOP	5942'	6069'	
1st Bone Spring Sand	6171'	6308'	Hydrocarbons
2 nd Bone Spring Shale	6371'	6601'	Hydrocarbons
2 nd Bone Spring Shale Target	6411'	6727'	Hydrocarbons
TD	6652'	16893'	

2. NOTABLE ZONES

Second Bone Spring Shale is the goal. All perforations will be $\geq 100'$ from the dedication perimeter.

3. PRESSURE CONTROL

A 20,000', 10,000 psi BOP stack will consist of a single ram, mud cross and double ram-type (10,000 psi WP) preventer, and an annular preventer (5000-psi WP). Both units will be hydraulically operated, and the ram-type will be equipped with blind rams on bottom and drill pipe rams on top. All BOPE will be tested in accordance with 43 CFR 3172. See BOP & Choke diagrams for additional information.

Flat Creek Resources, LLC
Jurnegan BS Fed Com 11H
SHL 1004' FSL & 947' FWL 22-24S-26E
BHL 1119' FSL & 15' FEL 23-24S-26E
Eddy County, NM

DRILL PLAN PAGE 2

Variance is requested to use a co-flex line between the BOP and choke manifold (instead of using a 4" OD steel line).

BOP Testing Procedure

1. Use water to test BOP's.
2. Make up test assembly (test plug) and set in the wellhead profile. Ensure the casing valve is left open. Monitor the casing valve outlet while testing for potential leak past the test plug.
3. Circulate through the choke/kill lines, choke manifold, standpipe manifold, and valves to ensure that all lines are full of water. This will prevent pressure drop (compression) while testing.
4. Line up test unit and test rams, valves and lines as per the chart below.
5. Pressure tests must be low and high, respectively, and the pressure should stabilize with minimum bleed-off within 10 minutes. If a test plug is utilized, no bleed-off of pressure is acceptable. For a test not utilizing a test plug, if a decline in pressure of more than 10 percent in 30 minutes occurs, the test shall be considered to have failed. Pressure should be recorded on a chart recorder (add scale to be used)
6. Any equipment that does not pass the pressure test must be reported to the drilling supervisor. The equipment must be repaired and retested.
7. Continue with pressure testing until all equipment has been tested as per the specific rig requirements.
8. Rig down test assembly.
9. All tests and drills to be recorded in the drilling log.

Flat Creek Resources, LLC
 Jurnegan BS Fed Com 11H
 SHL 1004' FSL & 947' FWL 22-24S-26E
 BHL 1119' FSL & 15' FEL 23-24S-26E
 Eddy County, NM

DRILL PLAN PAGE 3

Surface Casing & BOP Equipment Test			
Component	High Test	Low Test	Duration
Wellhead Test	5000 psi	250 psi	10 min
BOP Rams	5000 psi	250 psi	10 min
Annular	3500 psi	250 psi	10 min
HCR	5000 psi	250 psi	10 min
Manifold	5000 psi	250 psi	10 min
Upper/Lower Kelly valves	5000 psi	250 psi	10 min
TIW safety valves/dart	5000 psi	250 psi	10 min
Standpipe/mudlines	5000 psi	250 psi	10 min
Orbit valve/rotating head	300 psi	-	10 min
Surface casing	1500 psi	-	30 min

4. CASING & CEMENT

All casing will be new and API. See attached casing assumption worksheets.

Name	Hole OD	Casing OD	Tapered	Top MD	Bottom MD	Top TVD	BTM TVD	Grade	Weight	Thread	Collapse	Burst	Tension	Coupling
Surface	14.75"	10.75	No	0	400	0	400	J-55	45.5	STC	11.2	19.1	44.1	Standard
1st Intermediate	9.875"	7.625"	No	0	1780	0	1778	P-110 HC	29.7	BTC	7.7	7.4	12.9	Standard
Production	6.75"	5.5"	No	0	16893	0	6652	P-110 HC	20	TCBC-HT	3.6	3.8	5.0	Special Clearance 5.9" OD

Flat Creek Resources, LLC
 Jurnegan BS Fed Com 11H
 SHL 1004' FSL & 947' FWL 22-24S-26E
 BHL 1119' FSL & 15' FEL 23-24S-26E
 Eddy County, NM

DRILL PLAN PAGE 4

Name	Type	Top MD	Sacks	Yield	Cu. Ft	Weight	Excess	Cement	Additives
Surface	Lead	0	135	1.68	227	12.8	100%	35/65 Poz-Premium C	5% bwow Sodium chloride + 6% bentonite gel + 0.4% CPT-503P + 0.125 lbs/sk Dura fiber
	Tail	200	170	1.34	228	14.8	100%	C	1% Calcium chloride + 0.25 lb/sk cellophane flake
Intermediate	Lead	0	250	1.68	420	12.8	50%	35/65 Poz-Premium C	5% bwow Sodium chloride + 6% bentonite gel + 0.4% CPT-503P + 0.125 lbs/sk Dura fiber
	Tail	1280	85	1.74	148	13.5	50%	C	1% calcium chloride + 4% bentonite gel + 0.4% CPT-503P + 0.125 lbs/sk Dura fiber
Production	Lead	0	225	2.82	635	10.4	15%	H	10% bwoc light weight bead + 5% silica fume alternative + 0.2% suspension aid + 0.3% fluid loss additive + 0.3% dispersant + 0.2% cement retarder
	Tail	6500	710	1.42	1008	13.2	15%	35/65 Poz-Premium H	0.2% CPT-23

5. MUD PROGRAM

A closed loop system will be used. An electronic pit volume totalizer (PVT) mud system will monitor pit volumes for gains or losses, flow rate, pump pressures, and stroke rate. Sufficient mud materials (e.g. barite, bentonite, LCM) to maintain mud properties and meet minimum lost circulation and weight increase requirements will always be kept on site.

Name	Top	Bottom	Type	Mud Weight (ppg)	Visc	Fluid Loss
Surface	0	400	FW Spud Mud	8.8	45-60	NC
Intermediate 1	400	1780	Cut Brine	10	29 - 30	NC
Production	1780	16893	Cut Brine	9.4	34-38	6-8

6. CORES, TESTS, & LOGS

Production tests include Gama Ray log and resistivity log. No open and cased hole logs are planned at this time. No coring operation is planned.

Flat Creek Resources, LLC
Jurnegan BS Fed Com 11H
SHL 1004' FSL & 947' FWL 22-24S-26E
BHL 1119' FSL & 15' FEL 23-24S-26E
Eddy County, NM

DRILL PLAN PAGE 5

7. DOWN HOLE CONDITIONS

No abnormal pressure or temperature is expected. Maximum expected bottom hole pressure is ≈ 2984 psi. Expected bottom hole temperature is $\approx 144^{\circ}$ F.

An H2S plan is attached. H2S monitoring equipment will be used from surface casing setting point to TD.

8. OTHER INFORMATION

Anticipated spud date is upon approval. It is expected it will take ≈ 2 months to drill and complete the well.

Flat Creek Resources

BOP Break Testing Variance

Flat Creek Resources respectfully requests a variance from the minimum standards for well control equipment testing of 43 CFR 3172 to allow a testing schedule of the blowout preventer and blowout prevention equipment along with Batch Drilling operations to include the following:

Procedures:

1. Flat Creek Resources will use this document for our break testing plan for New Mexico Delaware Basin.
2. Flat Creek will perform BOP break testing on multi-well pads where multiple intermediate sections will be drilled.
 - a. Full BOPE test at first installation on the pad.
 - b. The first intermediate hole section on the pad will be the deepest. All the remaining intermediate hole sections will be the same depth or shallower.
3. After performing a complete BOP test on the first well, the intermediate hole section will be drilled and cased. After the well section is cemented and secured with a pack off, the BOP will be disconnected from the wellhead, and the choke line will be disconnected.
4. The BOP is then lifted and removed from the wellhead by a hydraulic lift system.
5. TA cap will be installed according to manufacturer recommendations and pressure inside the casing will be monitored via the valve on the TA cap.
6. After skidding to the next well, the BOP is moved onto the wellhead by the hydraulic lift system and installed.
7. The BOP and choke line will then be reconnected.
8. Install a test plug into the wellhead.
9. A shell test is performed against the upper pipe ram and the valves on the choke manifold (valves to be rotated each test)
10. The shell test will consist of a 250-psi low test and a high test to 5000 psi. A function test will be performed on the following components: lower pipe rams, blind rams, and annular.
11. This process will be repeated for subsequent wells on the pad.

Standard Procedures:

1. Full BOPE test every 21 days
2. Annular preventer shall be tested to 70% or higher than the MASP of the deepest hole section.
3. Function test BOP elements per 43 CFR 3172.
4. Contact BLM if a well control event occurs.
5. If a well control event occurs, go back to full BOP test.
6. If the upcoming well section cannot be completed within 21 days, then a full BOPE test will always be completed.
7. Break test not to be used for production hole section (full BOP test)
8. The drill sections shall be higher than the Wolfcamp formation.
9. This Break Test Variance only to depths above a TVD of 12,000'

Barriers

Before nipple down:

- Floats in casing
- Kill weight fluid in casing
- Kill weight fluid in annulus
- Solid body mandrel and/or fluted mandrel with pack off

After nipple down

- Floats in casing
- Kill weight fluid in casing
- Kill weight fluid in annulus
- Solid body mandrel and/or fluted mandrel with pack off
- Capping flange

Well Control Response:

1. Primary barrier remains fluid
2. In the event of an influx due to being underbalanced and after a realized gain or flow, the order of closing the BOP is as follows:
 - a. Annular first

- b. If annular were not to hold, upper pipe rams second (which were tested on the break test)
- c. If the upper pipe rams were not to hold, the lower pipe rams would be third

Summary

A variance is requested to test broken pressure seals on the BOPE when moving between wells on a multi-well pad, subject to the following conditions:

- A full BOPE test conducted on the first well of the pad. API Standard 53 requires testing annular BOP to 70% of working pressure or 100% of MASP, whichever is greater.
- If the first well on the pad does not have the deepest section, a full BOPE test will be performed prior to the deeper well.
- The hole section to be drilled has a MASP under 5000 psi.
- If a well control event occurs, BLM will be contacted for permission to continue break testing.


While skidding the rig, the BOP stack will be secured via a hydraulic handling system. A full BOPE test will be performed at least every 21 days.



BOP Quick Connect Adapter


Wellhead Body

Surface Casing

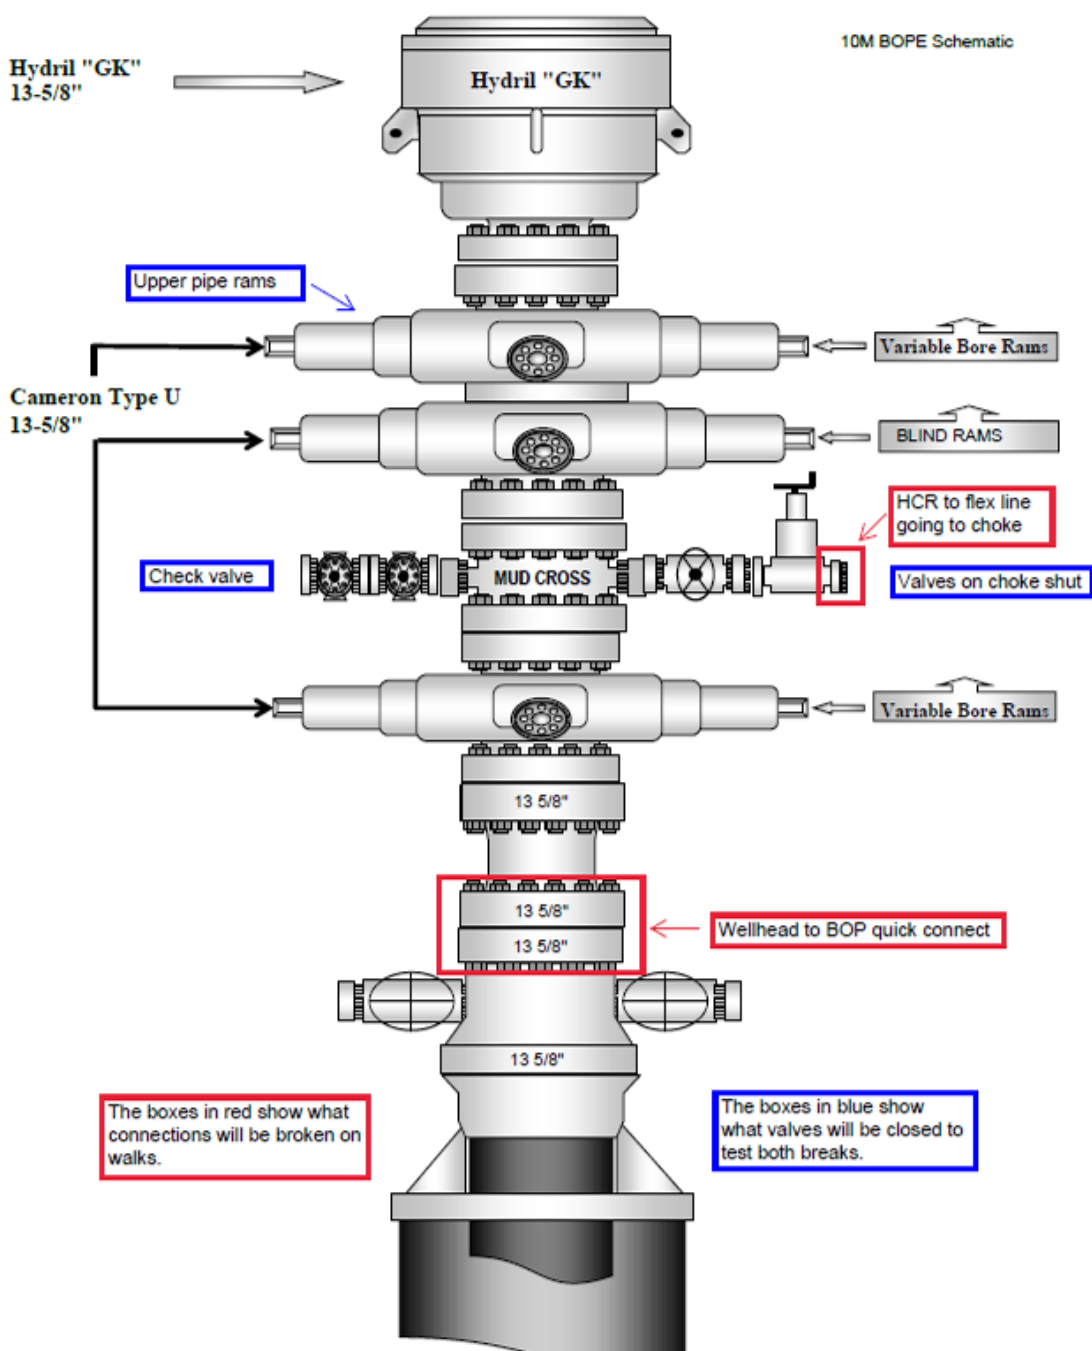

Break Testing

TO BE CLOSED DURING BREAK TEST

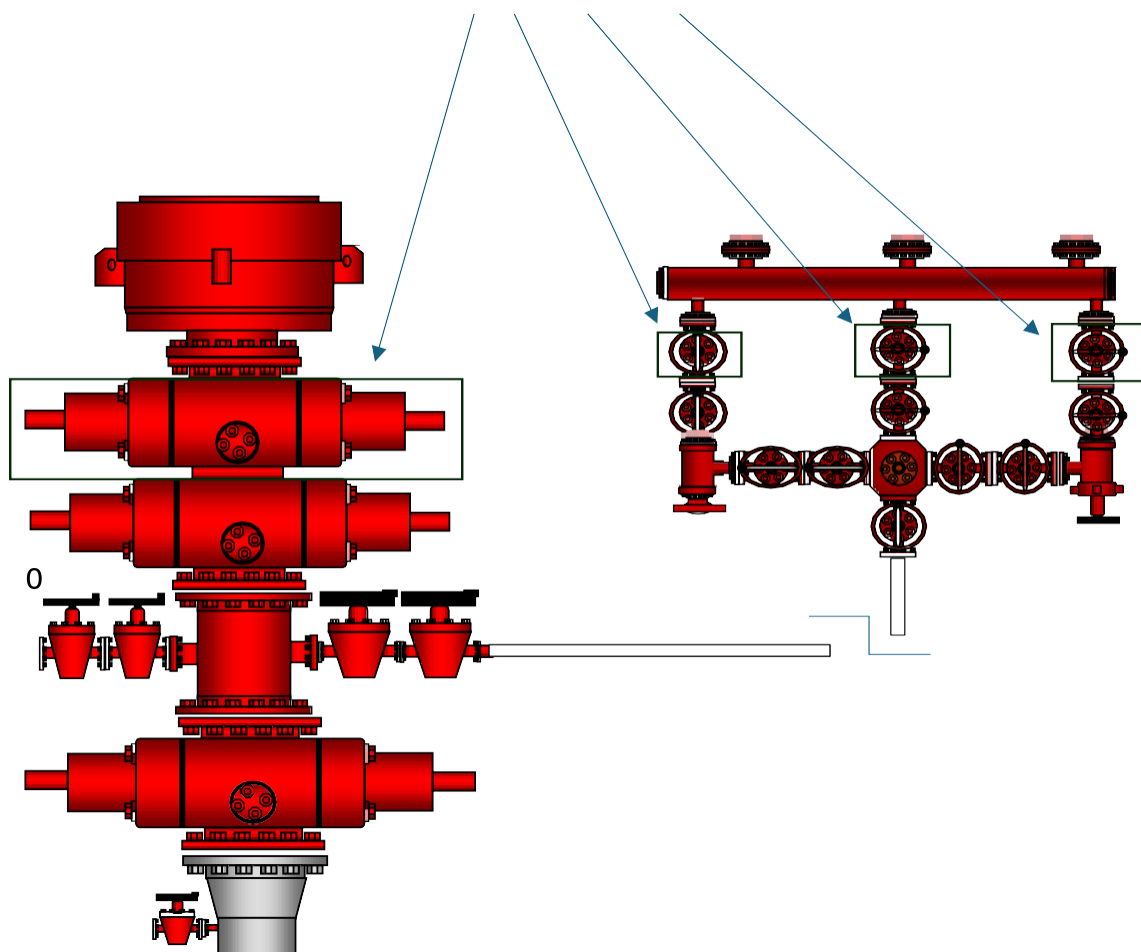




Stack Handler back view



Stack Handler side view

Freedom Energy

Company: Freedom Energy
Field: Eddy County, NM NAD83
Location: Jurnegan
Well: Jurnegan BS Fed Com 11H
OH
Plan: Plan 5
GL 3333' + 26.5' KB @ 3359.50usft



Azimuths to Grid North
True North: -0.02°
Magnetic North: 6.52°

Magnetic Field
Strength: 46895.7nT
Dip Angle: 59.62°
Date: 10/20/2025
Model: IGRF2025

Rig:




To convert a Magnetic Direction to a Grid Direction, Add 6.52°

PROJECT DETAILS: Eddy County, NM NAD83

Geodetic System: US State Plane 1983
Datum: North American Datum 1983
Ellipsoid: GRS 1980
Zone: New Mexico Eastern Zone
System Datum: Mean Sea Level



GL 3333' + 26.5' KB @ 3359.50usft		3333.00	
+N/-S	+E/-W	Northing	Easting
0.00	0.00	435921.61	555826.89
		Latitude	Longitude
		32.198417	-104.286490

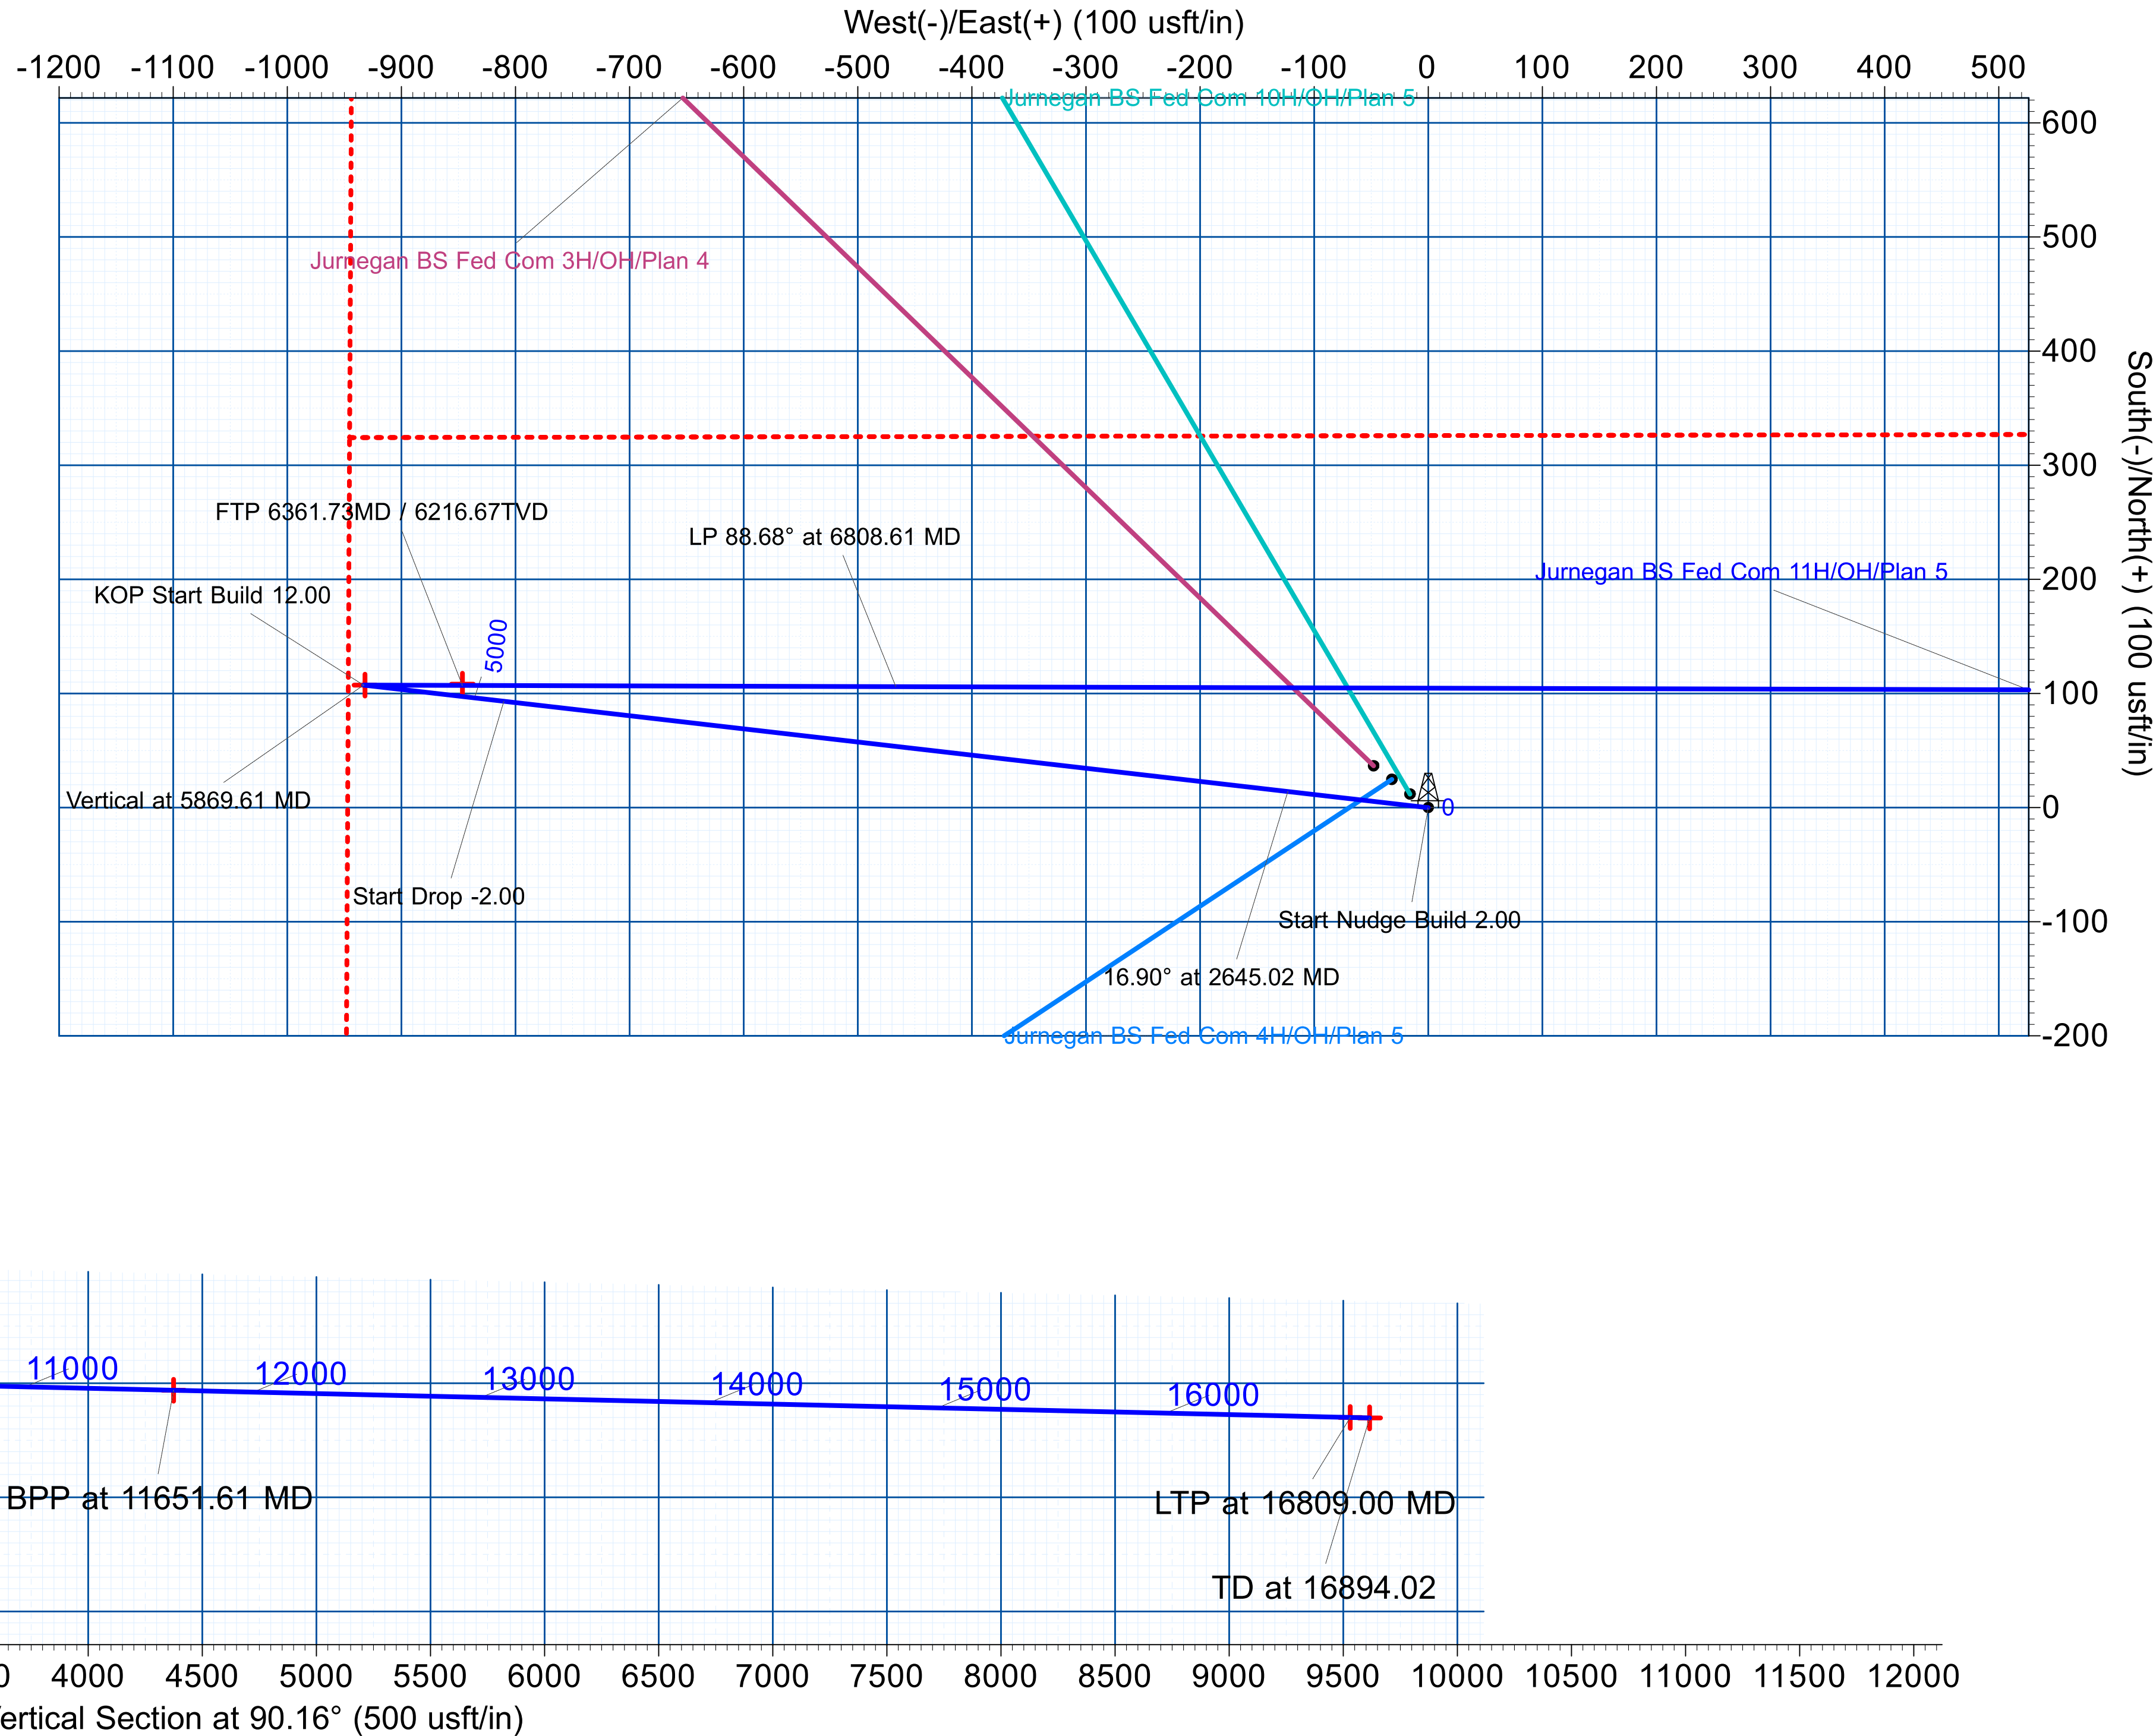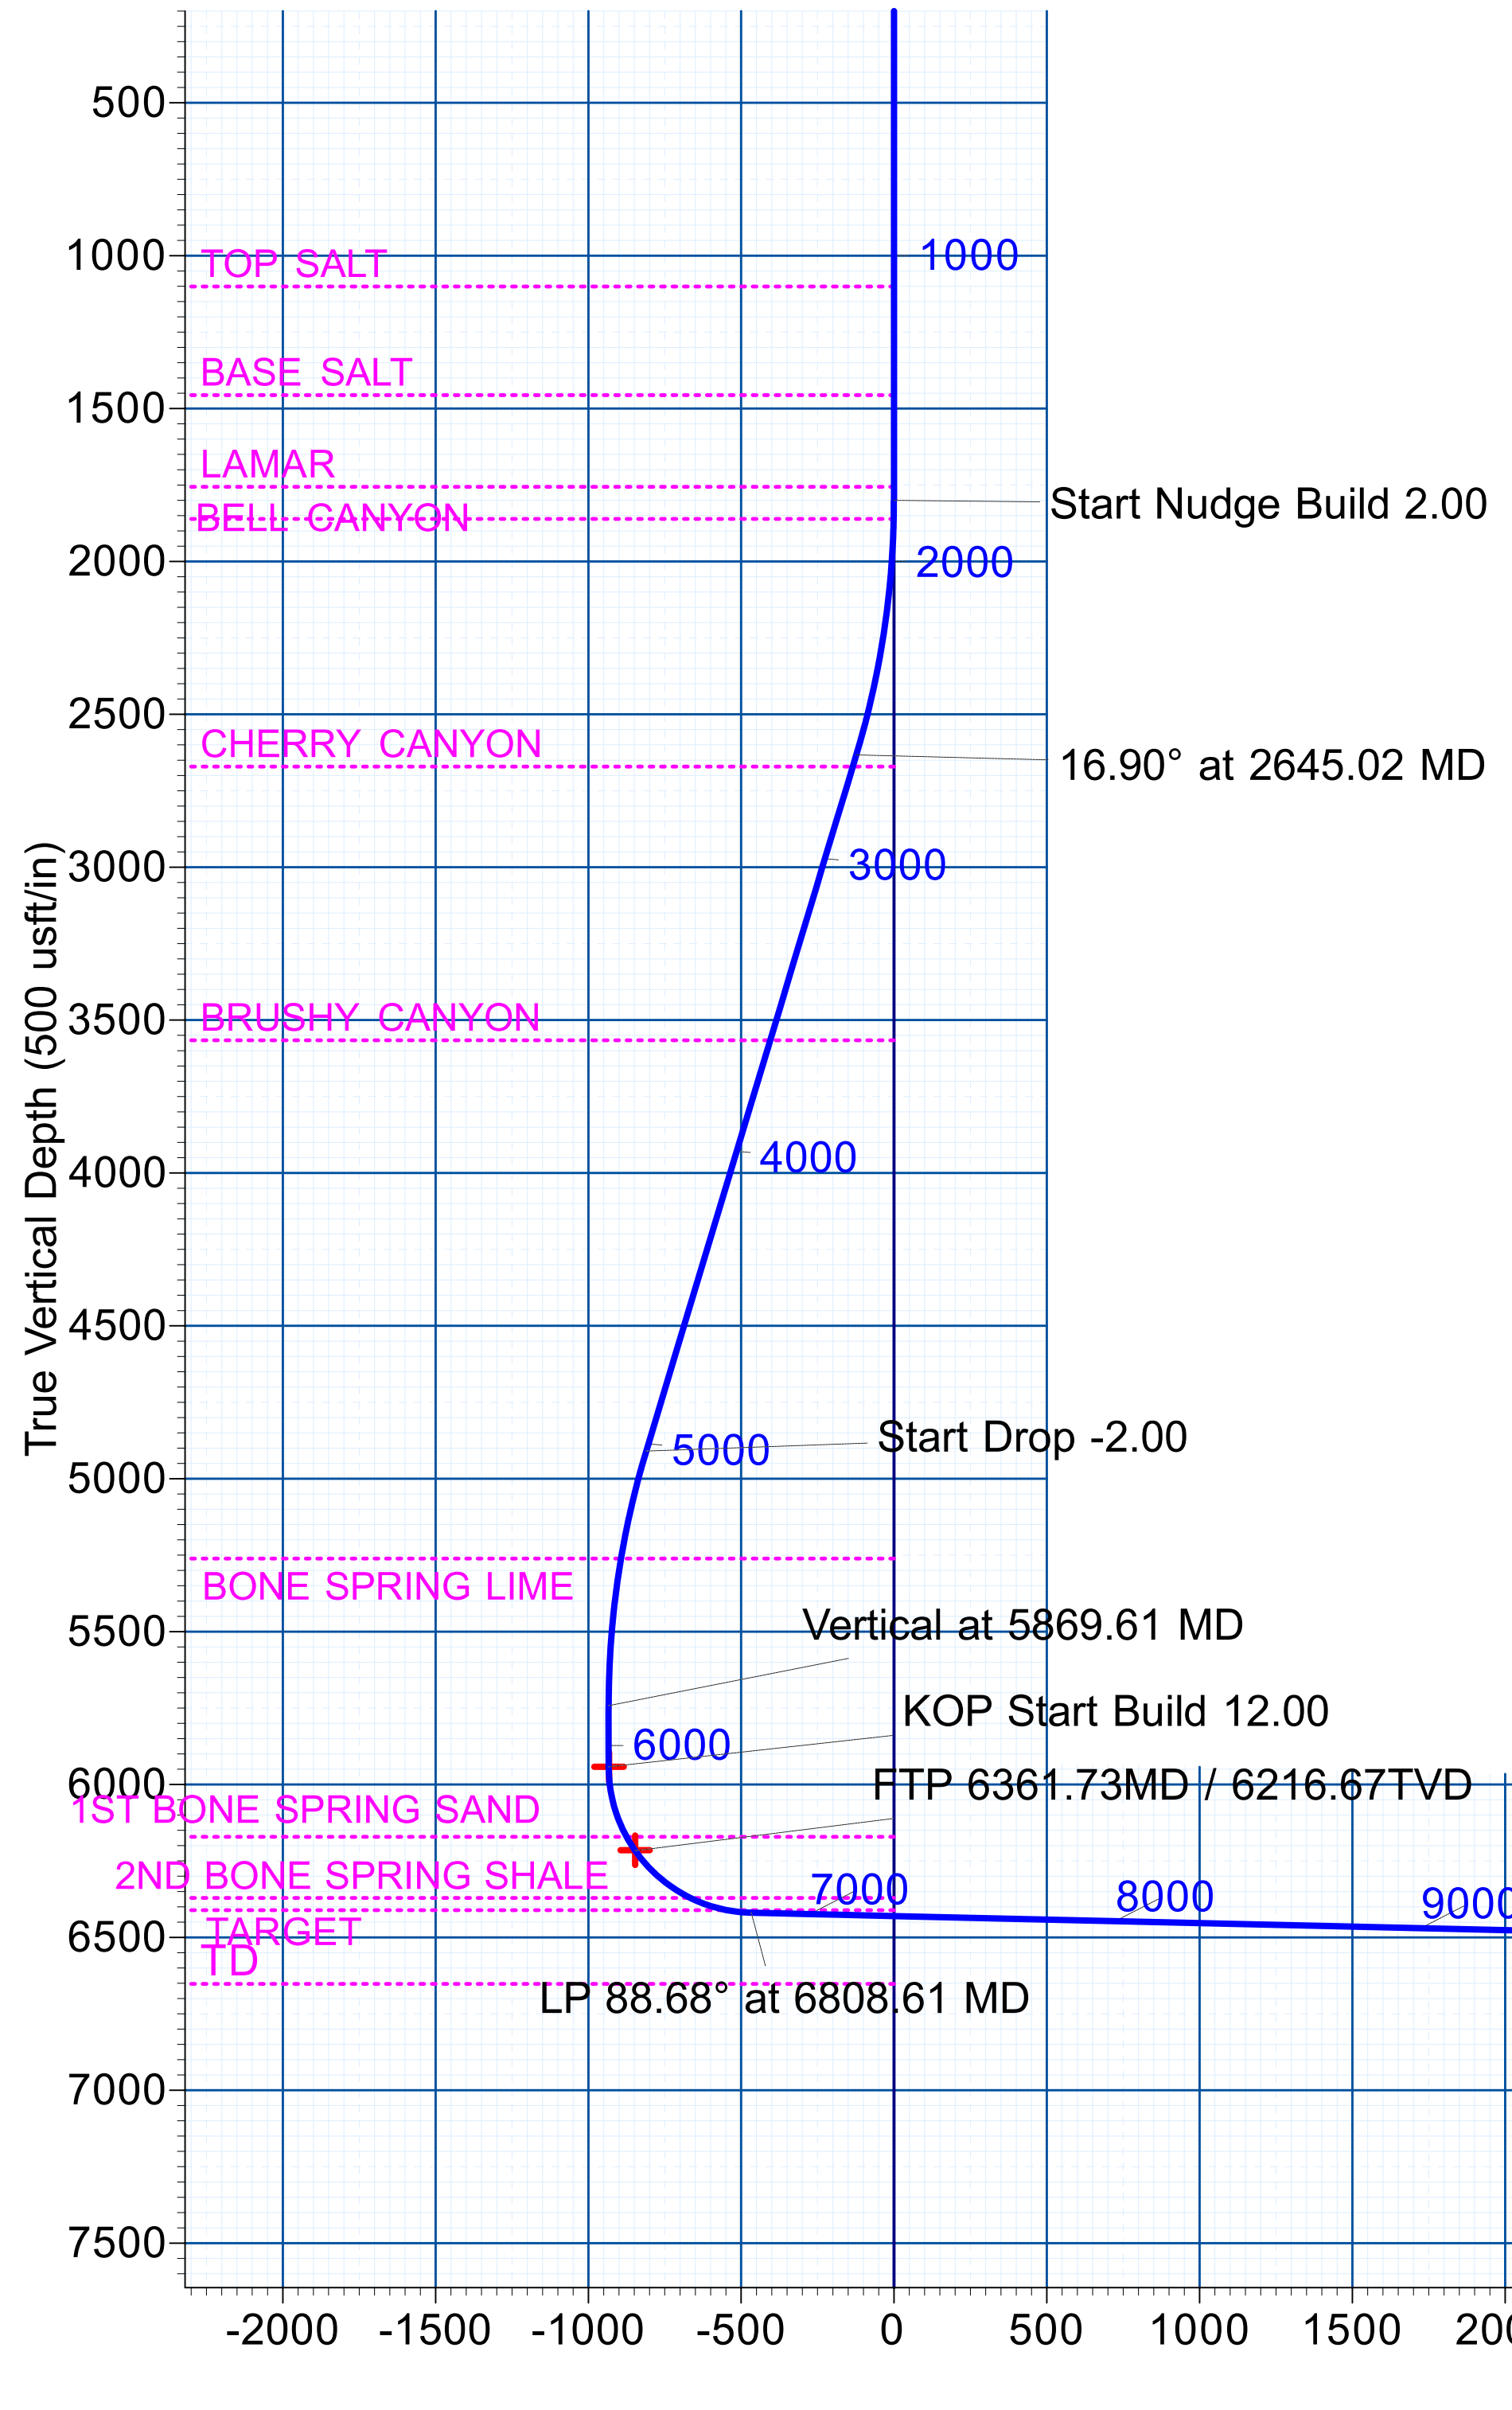

DESIGN TARGET DETAILS							
Name	TVD	+N/-S	+E/-W	Northing	Easting	Latitude	Longitude
KOP - Jurnegan BS Fed Com 11H	5942.00	107.39	-931.89	436029.00	554895.00	32.198713	-104.289503
FTP(100' FWL) - Jurnegan BS Fed Com 11H	6215.08	108.13	-846.45	436029.75	554980.45	32.198715	-104.289227
BPP - Jurnegan BS Fed Com 11H	6531.30	92.39	4375.11	436014.00	560202.00	32.198665	-104.272346
LTP (100' FEL) - Jurnegan BS Fed Com 11H	6650.04	77.39	9531.11	435999.00	565358.00	32.198615	-104.255677
BHL(15'FEL) - Jurnegan BS Fed Com 11H	6652.00	77.39	9616.11	435999.00	565443.00	32.198614	-104.255402

SECTION DETAILS									
Sec	MD	Inc	Azi	TVD	+N/-S	+E/-W	Dleg	TFace	VSect
1	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
2	1800.00	0.00	0.00	1800.00	0.00	0.00	0.00	0.00	0.00
3	2645.02	16.90	276.56	2632.82	14.14	-122.91	2.00	276.56	-122.95
4	5024.59	16.90	276.56	4909.62	93.19	-810.14	0.00	0.00	-810.40
5	5869.61	0.00	90.16	5742.44	107.33	-933.06	2.00	180.00	-933.35
6	6069.61	0.00	90.16	5942.44	107.33	-933.06	0.00	0.00	-933.35
7	6808.61	88.68	90.16	6419.78	106.01	-466.59	12.00	0.00	-466.88
8	11651.61	88.68	90.16	6531.30	92.39	4375.11	0.00	0.00	4374.83
9	16809.00	88.68	90.16	6650.06	77.87	9531.11	0.00	0.00	9530.85
10	16894.02	88.68	90.16	6652.02	77.63	9616.11	0.00	0.00	9615.85

FORMATION TOP DETAILS		
TVDPath	MDPath	Formation
26.50	26.50	SALADO
1101.00	1101.00	TOP SALT
1456.00	1456.00	BASE SALT
1756.00	1756.00	LAMAR
1861.00	1861.00	BELL CANYON
2671.00	2671.00	CHERRY CANYON
3566.00	3566.00	BRUSHY CANYON
5281.00	5385.87	BONE SPRING LIME
6171.00	6307.95	1ST BONE SPRING SAND
6371.00	6601.62	2ND BONE SPRING SHALE
6411.00	6727.26	TARGET
6652.00	16893.04	TD



Freedom Energy

Eddy County, NM NAD83

Jurnegan

Jurnegan BS Fed Com 11H

OH

Plan: Plan 5

Standard Planning Report

26 January, 2026



Legacy Directional Drilling

Planning Report

Database:	EDM_WA	Local Co-ordinate Reference:	Well Jurnegan BS Fed Com 11H
Company:	Freedom Energy	TVD Reference:	GL 3333' + 26.5' KB @ 3359.50usft
Project:	Eddy County, NM NAD83	MD Reference:	GL 3333' + 26.5' KB @ 3359.50usft
Site:	Jurnegan	North Reference:	Grid
Well:	Jurnegan BS Fed Com 11H	Survey Calculation Method:	Minimum Curvature
Wellbore:	OH		
Design:	Plan 5		

Project	Eddy County, NM NAD83		
Map System:	US State Plane 1983	System Datum:	Mean Sea Level
Geo Datum:	North American Datum 1983		
Map Zone:	New Mexico Eastern Zone		

Site	Jurnegan				
Site Position:		Northing:	439,291.00 usft	Latitude:	32.207680
From:	Map	Easting:	555,610.00 usft	Longitude:	-104.287187
Position Uncertainty:	0.00 usft	Slot Radius:	13-3/16 "		

Well	Jurnegan BS Fed Com 11H					
Well Position	+N/-S	0.00 usft	Northing:	435,921.61 usft	Latitude:	32.198417
	+E/-W	0.00 usft	Easting:	555,826.90 usft	Longitude:	-104.286491
Position Uncertainty		0.00 usft	Wellhead Elevation:	usft	Ground Level:	3,333.00 usft
Grid Convergence:		0.02 °				

Wellbore	OH				
Magnetics	Model Name	Sample Date	Declination (°)	Dip Angle (°)	Field Strength (nT)
	IGRF2025	10/20/2025	6.55	59.62	46,895.72390425

Design	Plan 5				
Audit Notes:					
Version:		Phase:	PLAN	Tie On Depth:	0.00
Vertical Section:	Depth From (TVD) (usft)	+N/-S (usft)	+E/-W (usft)	Direction (°)	
	0.00	0.00	0.00	90.16	

Plan Survey Tool Program	Date	1/26/2026			
Depth From (usft)	Depth To (usft)	Survey (Wellbore)	Tool Name	Remarks	
1	0.00	16,894.02 Plan 5 (OH)	MWD		
			OWSG MWD - Standard		



Legacy Directional Drilling
Planning Report

Database:	EDM_WA	Local Co-ordinate Reference:	Well Jurnegan BS Fed Com 11H
Company:	Freedom Energy	TVD Reference:	GL 3333' + 26.5' KB @ 3359.50usft
Project:	Eddy County, NM NAD83	MD Reference:	GL 3333' + 26.5' KB @ 3359.50usft
Site:	Jurnegan	North Reference:	Grid
Well:	Jurnegan BS Fed Com 11H	Survey Calculation Method:	Minimum Curvature
Wellbore:	OH		
Design:	Plan 5		

Plan Sections										
Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Dogleg Rate (°/100usft)	Build Rate (°/100usft)	Turn Rate (°/100usft)	TFO (°)	Target
0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
1,800.00	0.00	0.00	1,800.00	0.00	0.00	0.00	0.00	0.00	0.00	
2,645.02	16.90	276.56	2,632.82	14.14	-122.91	2.00	2.00	0.00	276.56	
5,024.59	16.90	276.56	4,909.62	93.19	-810.14	0.00	0.00	0.00	0.00	
5,869.61	0.00	90.16	5,742.44	107.33	-933.06	2.00	-2.00	0.00	180.00	
6,069.61	0.00	90.16	5,942.44	107.33	-933.06	0.00	0.00	0.00	0.00	
6,808.61	88.68	90.16	6,419.78	106.01	-466.59	12.00	12.00	0.00	0.00	
11,651.61	88.68	90.16	6,531.30	92.39	4,375.11	0.00	0.00	0.00	0.00	BPP - Jurnegan BS F
16,809.00	88.68	90.16	6,650.06	77.87	9,531.11	0.00	0.00	0.00	0.00	LTP (100' FEL) - Jurn
16,894.02	88.68	90.16	6,652.02	77.63	9,616.11	0.00	0.00	0.00	0.00	BHL(15'FEL) - Jurneg



Legacy Directional Drilling

Planning Report

Database:	EDM_WA	Local Co-ordinate Reference:	Well Jurnegan BS Fed Com 11H
Company:	Freedom Energy	TVD Reference:	GL 3333' + 26.5' KB @ 3359.50usft
Project:	Eddy County, NM NAD83	MD Reference:	GL 3333' + 26.5' KB @ 3359.50usft
Site:	Jurnegan	North Reference:	Grid
Well:	Jurnegan BS Fed Com 11H	Survey Calculation Method:	Minimum Curvature
Wellbore:	OH		
Design:	Plan 5		

Planned Survey									
Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Vertical Section (usft)	Dogleg Rate (°/100usft)	Build Rate (°/100usft)	Turn Rate (°/100usft)
0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
26.50	0.00	0.00	26.50	0.00	0.00	0.00	0.00	0.00	0.00
SALADO									
100.00	0.00	0.00	100.00	0.00	0.00	0.00	0.00	0.00	0.00
200.00	0.00	0.00	200.00	0.00	0.00	0.00	0.00	0.00	0.00
300.00	0.00	0.00	300.00	0.00	0.00	0.00	0.00	0.00	0.00
400.00	0.00	0.00	400.00	0.00	0.00	0.00	0.00	0.00	0.00
500.00	0.00	0.00	500.00	0.00	0.00	0.00	0.00	0.00	0.00
600.00	0.00	0.00	600.00	0.00	0.00	0.00	0.00	0.00	0.00
700.00	0.00	0.00	700.00	0.00	0.00	0.00	0.00	0.00	0.00
800.00	0.00	0.00	800.00	0.00	0.00	0.00	0.00	0.00	0.00
900.00	0.00	0.00	900.00	0.00	0.00	0.00	0.00	0.00	0.00
1,000.00	0.00	0.00	1,000.00	0.00	0.00	0.00	0.00	0.00	0.00
1,100.00	0.00	0.00	1,100.00	0.00	0.00	0.00	0.00	0.00	0.00
1,101.00	0.00	0.00	1,101.00	0.00	0.00	0.00	0.00	0.00	0.00
TOP SALT									
1,200.00	0.00	0.00	1,200.00	0.00	0.00	0.00	0.00	0.00	0.00
1,300.00	0.00	0.00	1,300.00	0.00	0.00	0.00	0.00	0.00	0.00
1,400.00	0.00	0.00	1,400.00	0.00	0.00	0.00	0.00	0.00	0.00
1,456.00	0.00	0.00	1,456.00	0.00	0.00	0.00	0.00	0.00	0.00
BASE SALT									
1,500.00	0.00	0.00	1,500.00	0.00	0.00	0.00	0.00	0.00	0.00
1,600.00	0.00	0.00	1,600.00	0.00	0.00	0.00	0.00	0.00	0.00
1,700.00	0.00	0.00	1,700.00	0.00	0.00	0.00	0.00	0.00	0.00
1,756.00	0.00	0.00	1,756.00	0.00	0.00	0.00	0.00	0.00	0.00
LAMAR									
1,800.00	0.00	0.00	1,800.00	0.00	0.00	0.00	0.00	0.00	0.00
Start Nudge Build 2.00									
1,861.00	1.22	276.56	1,861.00	0.07	-0.65	-0.65	2.00	2.00	0.00
BELL CANYON									
1,900.00	2.00	276.56	1,899.98	0.20	-1.73	-1.73	2.00	2.00	0.00
2,000.00	4.00	276.56	1,999.84	0.80	-6.93	-6.93	2.00	2.00	0.00
2,100.00	6.00	276.56	2,099.45	1.79	-15.59	-15.60	2.00	2.00	0.00
2,200.00	8.00	276.56	2,198.70	3.19	-27.70	-27.71	2.00	2.00	0.00
2,300.00	10.00	276.56	2,297.47	4.97	-43.24	-43.25	2.00	2.00	0.00
2,400.00	12.00	276.56	2,395.62	7.15	-62.19	-62.21	2.00	2.00	0.00
2,500.00	14.00	276.56	2,493.06	9.72	-84.54	-84.57	2.00	2.00	0.00
2,600.00	16.00	276.56	2,589.64	12.68	-110.25	-110.29	2.00	2.00	0.00
2,645.02	16.90	276.56	2,632.82	14.14	-122.91	-122.95	2.00	2.00	0.00
16.90° at 2645.02 MD									
2,684.92	16.90	276.56	2,671.00	15.46	-134.44	-134.48	0.00	0.00	0.00
CHERRY CANYON									
2,700.00	16.90	276.56	2,685.43	15.96	-138.79	-138.84	0.00	0.00	0.00
2,800.00	16.90	276.56	2,781.11	19.29	-167.67	-167.73	0.00	0.00	0.00
2,900.00	16.90	276.56	2,876.79	22.61	-196.55	-196.62	0.00	0.00	0.00
3,000.00	16.90	276.56	2,972.47	25.93	-225.43	-225.51	0.00	0.00	0.00
3,100.00	16.90	276.56	3,068.15	29.25	-254.32	-254.40	0.00	0.00	0.00
3,200.00	16.90	276.56	3,163.83	32.57	-283.20	-283.29	0.00	0.00	0.00
3,300.00	16.90	276.56	3,259.51	35.90	-312.08	-312.17	0.00	0.00	0.00
3,400.00	16.90	276.56	3,355.19	39.22	-340.96	-341.06	0.00	0.00	0.00
3,500.00	16.90	276.56	3,450.87	42.54	-369.84	-369.95	0.00	0.00	0.00
3,600.00	16.90	276.56	3,546.56	45.86	-398.72	-398.84	0.00	0.00	0.00
3,620.32	16.90	276.56	3,566.00	46.54	-404.59	-404.71	0.00	0.00	0.00



Legacy Directional Drilling

Planning Report

Database:	EDM_WA	Local Co-ordinate Reference:	Well Jurnegan BS Fed Com 11H
Company:	Freedom Energy	TVD Reference:	GL 3333' + 26.5' KB @ 3359.50usft
Project:	Eddy County, NM NAD83	MD Reference:	GL 3333' + 26.5' KB @ 3359.50usft
Site:	Jurnegan	North Reference:	Grid
Well:	Jurnegan BS Fed Com 11H	Survey Calculation Method:	Minimum Curvature
Wellbore:	OH		
Design:	Plan 5		

Planned Survey									
Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Vertical Section (usft)	Dogleg Rate (°/100usft)	Build Rate (°/100usft)	Turn Rate (°/100usft)
BRUSHY CANYON									
3,700.00	16.90	276.56	3,642.24	49.18	-427.60	-427.73	0.00	0.00	0.00
3,800.00	16.90	276.56	3,737.92	52.51	-456.48	-456.62	0.00	0.00	0.00
3,900.00	16.90	276.56	3,833.60	55.83	-485.36	-485.51	0.00	0.00	0.00
4,000.00	16.90	276.56	3,929.28	59.15	-514.24	-514.40	0.00	0.00	0.00
4,100.00	16.90	276.56	4,024.96	62.47	-543.12	-543.29	0.00	0.00	0.00
4,200.00	16.90	276.56	4,120.64	65.79	-572.00	-572.18	0.00	0.00	0.00
4,300.00	16.90	276.56	4,216.32	69.12	-600.88	-601.07	0.00	0.00	0.00
4,400.00	16.90	276.56	4,312.01	72.44	-629.76	-629.96	0.00	0.00	0.00
4,500.00	16.90	276.56	4,407.69	75.76	-658.64	-658.85	0.00	0.00	0.00
4,600.00	16.90	276.56	4,503.37	79.08	-687.52	-687.74	0.00	0.00	0.00
4,700.00	16.90	276.56	4,599.05	82.40	-716.40	-716.63	0.00	0.00	0.00
4,800.00	16.90	276.56	4,694.73	85.73	-745.28	-745.52	0.00	0.00	0.00
4,900.00	16.90	276.56	4,790.41	89.05	-774.16	-774.41	0.00	0.00	0.00
5,000.00	16.90	276.56	4,886.09	92.37	-803.04	-803.30	0.00	0.00	0.00
5,024.59	16.90	276.56	4,909.62	93.19	-810.14	-810.40	0.00	0.00	0.00
Start Drop -2.00									
5,100.00	15.39	276.56	4,982.05	95.58	-830.98	-831.24	2.00	-2.00	0.00
5,200.00	13.39	276.56	5,078.91	98.42	-855.67	-855.94	2.00	-2.00	0.00
5,300.00	11.39	276.56	5,176.58	100.88	-876.99	-877.27	2.00	-2.00	0.00
5,385.87	9.67	276.56	5,261.00	102.67	-892.58	-892.87	2.00	-2.00	0.00
BONE SPRING LIME									
5,400.00	9.39	276.56	5,274.93	102.94	-894.91	-895.19	2.00	-2.00	0.00
5,500.00	7.39	276.56	5,373.85	104.61	-909.40	-909.69	2.00	-2.00	0.00
5,600.00	5.39	276.56	5,473.23	105.88	-920.46	-920.76	2.00	-2.00	0.00
5,700.00	3.39	276.56	5,572.93	106.75	-928.07	-928.37	2.00	-2.00	0.00
5,800.00	1.39	276.56	5,672.84	107.23	-932.22	-932.51	2.00	-2.00	0.00
5,869.61	0.00	90.16	5,742.44	107.33	-933.06	-933.35	2.00	-2.00	0.00
Vertical at 5869.61 MD									
5,900.00	0.00	0.00	5,772.83	107.33	-933.06	-933.35	0.00	0.00	0.00
6,000.00	0.00	0.00	5,872.83	107.33	-933.06	-933.35	0.00	0.00	0.00
6,069.61	0.00	0.00	5,942.44	107.33	-933.06	-933.35	0.00	0.00	0.00
KOP Start Build 12.00									
6,075.00	0.65	90.16	5,947.83	107.33	-933.03	-933.32	12.00	12.00	0.00
6,100.00	3.65	90.16	5,972.81	107.32	-932.09	-932.39	12.00	12.00	0.00
6,125.00	6.65	90.16	5,997.71	107.32	-929.85	-930.14	12.00	12.00	0.00
6,150.00	9.65	90.16	6,022.45	107.31	-926.31	-926.60	12.00	12.00	0.00
6,175.00	12.65	90.16	6,046.98	107.29	-921.47	-921.77	12.00	12.00	0.00
6,200.00	15.65	90.16	6,071.22	107.28	-915.36	-915.66	12.00	12.00	0.00
6,225.00	18.65	90.16	6,095.10	107.26	-907.99	-908.29	12.00	12.00	0.00
6,250.00	21.65	90.16	6,118.57	107.23	-899.38	-899.68	12.00	12.00	0.00
6,275.00	24.65	90.16	6,141.55	107.20	-889.56	-889.85	12.00	12.00	0.00
6,300.00	27.65	90.16	6,163.99	107.17	-878.54	-878.84	12.00	12.00	0.00
6,307.95	28.60	90.16	6,171.00	107.16	-874.80	-875.09	12.00	12.00	0.00
1ST BONE SPRING SAND									
6,325.00	30.65	90.16	6,185.82	107.14	-866.37	-866.66	12.00	12.00	0.00
6,350.00	33.65	90.16	6,206.99	107.10	-853.07	-853.36	12.00	12.00	0.00
6,361.73	35.05	90.16	6,216.67	107.08	-846.45	-846.74	12.00	12.00	0.00
FTP 6361.73MD / 6216.67TVD									
6,375.00	36.65	90.16	6,227.43	107.06	-838.68	-838.97	12.00	12.00	0.00
6,400.00	39.65	90.16	6,247.09	107.02	-823.24	-823.53	12.00	12.00	0.00
6,425.00	42.65	90.16	6,265.91	106.97	-806.79	-807.08	12.00	12.00	0.00
6,450.00	45.65	90.16	6,283.85	106.92	-789.38	-789.67	12.00	12.00	0.00



Legacy Directional Drilling

Planning Report

Database:	EDM_WA	Local Co-ordinate Reference:	Well Jurnegan BS Fed Com 11H
Company:	Freedom Energy	TVD Reference:	GL 3333' + 26.5' KB @ 3359.50usft
Project:	Eddy County, NM NAD83	MD Reference:	GL 3333' + 26.5' KB @ 3359.50usft
Site:	Jurnegan	North Reference:	Grid
Well:	Jurnegan BS Fed Com 11H	Survey Calculation Method:	Minimum Curvature
Wellbore:	OH		
Design:	Plan 5		

Planned Survey										
Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Vertical Section (usft)	Dogleg Rate (°/100usft)	Build Rate (°/100usft)	Turn Rate (°/100usft)	
6,475.00	48.65	90.16	6,300.85	106.87	-771.05	-771.35	12.00	12.00	0.00	
6,500.00	51.65	90.16	6,316.87	106.82	-751.86	-752.16	12.00	12.00	0.00	
6,525.00	54.65	90.16	6,331.86	106.76	-731.86	-732.16	12.00	12.00	0.00	
6,550.00	57.65	90.16	6,345.78	106.70	-711.10	-711.40	12.00	12.00	0.00	
6,575.00	60.65	90.16	6,358.60	106.64	-689.64	-689.94	12.00	12.00	0.00	
6,600.00	63.65	90.16	6,370.28	106.58	-667.54	-667.84	12.00	12.00	0.00	
6,601.62	63.84	90.16	6,371.00	106.57	-666.09	-666.38	12.00	12.00	0.00	
2ND BONE SPRING SHALE										
6,625.00	66.65	90.16	6,380.79	106.51	-644.86	-645.15	12.00	12.00	0.00	
6,650.00	69.65	90.16	6,390.09	106.45	-621.66	-621.95	12.00	12.00	0.00	
6,675.00	72.65	90.16	6,398.17	106.38	-598.00	-598.30	12.00	12.00	0.00	
6,700.00	75.65	90.16	6,405.00	106.32	-573.95	-574.25	12.00	12.00	0.00	
6,725.00	78.65	90.16	6,410.56	106.25	-549.58	-549.88	12.00	12.00	0.00	
6,727.26	78.92	90.16	6,411.00	106.24	-547.36	-547.66	12.00	12.00	0.00	
TARGET										
6,750.00	81.65	90.16	6,414.84	106.18	-524.96	-525.25	12.00	12.00	0.00	
6,775.00	84.65	90.16	6,417.82	106.11	-500.14	-500.43	12.00	12.00	0.00	
6,800.00	87.65	90.16	6,419.50	106.04	-475.20	-475.49	12.00	12.00	0.00	
6,808.61	88.68	90.16	6,419.78	106.01	-466.59	-466.88	12.00	12.00	0.00	
LP 88.68° at 6808.61 MD										
6,900.00	88.68	90.16	6,421.88	105.76	-375.23	-375.52	0.00	0.00	0.00	
7,000.00	88.68	90.16	6,424.18	105.47	-275.25	-275.55	0.00	0.00	0.00	
7,100.00	88.68	90.16	6,426.49	105.19	-175.28	-175.57	0.00	0.00	0.00	
7,200.00	88.68	90.16	6,428.79	104.91	-75.31	-75.60	0.00	0.00	0.00	
7,300.00	88.68	90.16	6,431.09	104.63	24.67	24.37	0.00	0.00	0.00	
7,400.00	88.68	90.16	6,433.39	104.35	124.64	124.35	0.00	0.00	0.00	
7,500.00	88.68	90.16	6,435.70	104.07	224.61	224.32	0.00	0.00	0.00	
7,600.00	88.68	90.16	6,438.00	103.79	324.59	324.29	0.00	0.00	0.00	
7,700.00	88.68	90.16	6,440.30	103.50	424.56	424.27	0.00	0.00	0.00	
7,800.00	88.68	90.16	6,442.61	103.22	524.53	524.24	0.00	0.00	0.00	
7,900.00	88.68	90.16	6,444.91	102.94	624.51	624.22	0.00	0.00	0.00	
8,000.00	88.68	90.16	6,447.21	102.66	724.48	724.19	0.00	0.00	0.00	
8,100.00	88.68	90.16	6,449.51	102.38	824.45	824.16	0.00	0.00	0.00	
8,200.00	88.68	90.16	6,451.82	102.10	924.42	924.14	0.00	0.00	0.00	
8,300.00	88.68	90.16	6,454.12	101.82	1,024.40	1,024.11	0.00	0.00	0.00	
8,400.00	88.68	90.16	6,456.42	101.54	1,124.37	1,124.08	0.00	0.00	0.00	
8,500.00	88.68	90.16	6,458.72	101.25	1,224.34	1,224.06	0.00	0.00	0.00	
8,600.00	88.68	90.16	6,461.03	100.97	1,324.32	1,324.03	0.00	0.00	0.00	
8,700.00	88.68	90.16	6,463.33	100.69	1,424.29	1,424.00	0.00	0.00	0.00	
8,800.00	88.68	90.16	6,465.63	100.41	1,524.26	1,523.98	0.00	0.00	0.00	
8,900.00	88.68	90.16	6,467.94	100.13	1,624.24	1,623.95	0.00	0.00	0.00	
9,000.00	88.68	90.16	6,470.24	99.85	1,724.21	1,723.92	0.00	0.00	0.00	
9,100.00	88.68	90.16	6,472.54	99.57	1,824.18	1,823.90	0.00	0.00	0.00	
9,200.00	88.68	90.16	6,474.84	99.28	1,924.16	1,923.87	0.00	0.00	0.00	
9,300.00	88.68	90.16	6,477.15	99.00	2,024.13	2,023.84	0.00	0.00	0.00	
9,400.00	88.68	90.16	6,479.45	98.72	2,124.10	2,123.82	0.00	0.00	0.00	
9,500.00	88.68	90.16	6,481.75	98.44	2,224.07	2,223.79	0.00	0.00	0.00	
9,600.00	88.68	90.16	6,484.06	98.16	2,324.05	2,323.76	0.00	0.00	0.00	
9,700.00	88.68	90.16	6,486.36	97.88	2,424.02	2,423.74	0.00	0.00	0.00	
9,800.00	88.68	90.16	6,488.66	97.60	2,523.99	2,523.71	0.00	0.00	0.00	
9,900.00	88.68	90.16	6,490.96	97.31	2,623.97	2,623.68	0.00	0.00	0.00	
10,000.00	88.68	90.16	6,493.27	97.03	2,723.94	2,723.66	0.00	0.00	0.00	
10,100.00	88.68	90.16	6,495.57	96.75	2,823.91	2,823.63	0.00	0.00	0.00	



Legacy Directional Drilling

Planning Report

Database:	EDM_WA	Local Co-ordinate Reference:	Well Jurnegan BS Fed Com 11H
Company:	Freedom Energy	TVD Reference:	GL 3333' + 26.5' KB @ 3359.50usft
Project:	Eddy County, NM NAD83	MD Reference:	GL 3333' + 26.5' KB @ 3359.50usft
Site:	Jurnegan	North Reference:	Grid
Well:	Jurnegan BS Fed Com 11H	Survey Calculation Method:	Minimum Curvature
Wellbore:	OH		
Design:	Plan 5		

Planned Survey									
Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Vertical Section (usft)	Dogleg Rate (°/100usft)	Build Rate (°/100usft)	Turn Rate (°/100usft)
10,200.00	88.68	90.16	6,497.87	96.47	2,923.89	2,923.61	0.00	0.00	0.00
10,300.00	88.68	90.16	6,500.18	96.19	3,023.86	3,023.58	0.00	0.00	0.00
10,400.00	88.68	90.16	6,502.48	95.91	3,123.83	3,123.55	0.00	0.00	0.00
10,500.00	88.68	90.16	6,504.78	95.63	3,223.81	3,223.53	0.00	0.00	0.00
10,600.00	88.68	90.16	6,507.08	95.34	3,323.78	3,323.50	0.00	0.00	0.00
10,700.00	88.68	90.16	6,509.39	95.06	3,423.75	3,423.47	0.00	0.00	0.00
10,800.00	88.68	90.16	6,511.69	94.78	3,523.72	3,523.45	0.00	0.00	0.00
10,900.00	88.68	90.16	6,513.99	94.50	3,623.70	3,623.42	0.00	0.00	0.00
11,000.00	88.68	90.16	6,516.29	94.22	3,723.67	3,723.39	0.00	0.00	0.00
11,100.00	88.68	90.16	6,518.60	93.94	3,823.64	3,823.37	0.00	0.00	0.00
11,200.00	88.68	90.16	6,520.90	93.66	3,923.62	3,923.34	0.00	0.00	0.00
11,300.00	88.68	90.16	6,523.20	93.38	4,023.59	4,023.31	0.00	0.00	0.00
11,400.00	88.68	90.16	6,525.51	93.09	4,123.56	4,123.29	0.00	0.00	0.00
11,500.00	88.68	90.16	6,527.81	92.81	4,223.54	4,223.26	0.00	0.00	0.00
11,600.00	88.68	90.16	6,530.11	92.53	4,323.51	4,323.23	0.00	0.00	0.00
11,651.61	88.68	90.16	6,531.30	92.39	4,375.11	4,374.83	0.00	0.00	0.00
BPP at 11651.61 MD									
11,700.00	88.68	90.16	6,532.41	92.25	4,423.48	4,423.21	0.00	0.00	0.00
11,800.00	88.68	90.16	6,534.72	91.97	4,523.46	4,523.18	0.00	0.00	0.00
11,900.00	88.68	90.16	6,537.02	91.69	4,623.43	4,623.15	0.00	0.00	0.00
12,000.00	88.68	90.16	6,539.32	91.41	4,723.40	4,723.13	0.00	0.00	0.00
12,100.00	88.68	90.16	6,541.63	91.12	4,823.37	4,823.10	0.00	0.00	0.00
12,200.00	88.68	90.16	6,543.93	90.84	4,923.35	4,923.07	0.00	0.00	0.00
12,300.00	88.68	90.16	6,546.23	90.56	5,023.32	5,023.05	0.00	0.00	0.00
12,400.00	88.68	90.16	6,548.53	90.28	5,123.29	5,123.02	0.00	0.00	0.00
12,500.00	88.68	90.16	6,550.84	90.00	5,223.27	5,223.00	0.00	0.00	0.00
12,600.00	88.68	90.16	6,553.14	89.72	5,323.24	5,322.97	0.00	0.00	0.00
12,700.00	88.68	90.16	6,555.44	89.44	5,423.21	5,422.94	0.00	0.00	0.00
12,800.00	88.68	90.16	6,557.75	89.15	5,523.19	5,522.92	0.00	0.00	0.00
12,900.00	88.68	90.16	6,560.05	88.87	5,623.16	5,622.89	0.00	0.00	0.00
13,000.00	88.68	90.16	6,562.35	88.59	5,723.13	5,722.86	0.00	0.00	0.00
13,100.00	88.68	90.16	6,564.65	88.31	5,823.11	5,822.84	0.00	0.00	0.00
13,200.00	88.68	90.16	6,566.96	88.03	5,923.08	5,922.81	0.00	0.00	0.00
13,300.00	88.68	90.16	6,569.26	87.75	6,023.05	6,022.78	0.00	0.00	0.00
13,400.00	88.68	90.16	6,571.56	87.47	6,123.02	6,122.76	0.00	0.00	0.00
13,500.00	88.68	90.16	6,573.86	87.18	6,223.00	6,222.73	0.00	0.00	0.00
13,600.00	88.68	90.16	6,576.17	86.90	6,322.97	6,322.70	0.00	0.00	0.00
13,700.00	88.68	90.16	6,578.47	86.62	6,422.94	6,422.68	0.00	0.00	0.00
13,800.00	88.68	90.16	6,580.77	86.34	6,522.92	6,522.65	0.00	0.00	0.00
13,900.00	88.68	90.16	6,583.08	86.06	6,622.89	6,622.62	0.00	0.00	0.00
14,000.00	88.68	90.16	6,585.38	85.78	6,722.86	6,722.60	0.00	0.00	0.00
14,100.00	88.68	90.16	6,587.68	85.50	6,822.84	6,822.57	0.00	0.00	0.00
14,200.00	88.68	90.16	6,589.98	85.22	6,922.81	6,922.54	0.00	0.00	0.00
14,300.00	88.68	90.16	6,592.29	84.93	7,022.78	7,022.52	0.00	0.00	0.00
14,400.00	88.68	90.16	6,594.59	84.65	7,122.76	7,122.49	0.00	0.00	0.00
14,500.00	88.68	90.16	6,596.89	84.37	7,222.73	7,222.47	0.00	0.00	0.00
14,600.00	88.68	90.16	6,599.20	84.09	7,322.70	7,322.44	0.00	0.00	0.00
14,700.00	88.68	90.16	6,601.50	83.81	7,422.68	7,422.41	0.00	0.00	0.00
14,800.00	88.68	90.16	6,603.80	83.53	7,522.65	7,522.39	0.00	0.00	0.00
14,900.00	88.68	90.16	6,606.10	83.25	7,622.62	7,622.36	0.00	0.00	0.00
15,000.00	88.68	90.16	6,608.41	82.96	7,722.59	7,722.33	0.00	0.00	0.00
15,100.00	88.68	90.16	6,610.71	82.68	7,822.57	7,822.31	0.00	0.00	0.00
15,200.00	88.68	90.16	6,613.01	82.40	7,922.54	7,922.28	0.00	0.00	0.00
15,300.00	88.68	90.16	6,615.32	82.12	8,022.51	8,022.25	0.00	0.00	0.00



Legacy Directional Drilling

Planning Report

Database:	EDM_WA	Local Co-ordinate Reference:	Well Jurnegan BS Fed Com 11H
Company:	Freedom Energy	TVD Reference:	GL 3333' + 26.5' KB @ 3359.50usft
Project:	Eddy County, NM NAD83	MD Reference:	GL 3333' + 26.5' KB @ 3359.50usft
Site:	Jurnegan	North Reference:	Grid
Well:	Jurnegan BS Fed Com 11H	Survey Calculation Method:	Minimum Curvature
Wellbore:	OH		
Design:	Plan 5		

Planned Survey										
Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Vertical Section (usft)	Dogleg Rate (°/100usft)	Build Rate (°/100usft)	Turn Rate (°/100usft)	
15,400.00	88.68	90.16	6,617.62	81.84	8,122.49	8,122.23	0.00	0.00	0.00	
15,500.00	88.68	90.16	6,619.92	81.56	8,222.46	8,222.20	0.00	0.00	0.00	
15,600.00	88.68	90.16	6,622.22	81.28	8,322.43	8,322.17	0.00	0.00	0.00	
15,700.00	88.68	90.16	6,624.53	80.99	8,422.41	8,422.15	0.00	0.00	0.00	
15,800.00	88.68	90.16	6,626.83	80.71	8,522.38	8,522.12	0.00	0.00	0.00	
15,900.00	88.68	90.16	6,629.13	80.43	8,622.35	8,622.09	0.00	0.00	0.00	
16,000.00	88.68	90.16	6,631.44	80.15	8,722.33	8,722.07	0.00	0.00	0.00	
16,100.00	88.68	90.16	6,633.74	79.87	8,822.30	8,822.04	0.00	0.00	0.00	
16,200.00	88.68	90.16	6,636.04	79.59	8,922.27	8,922.01	0.00	0.00	0.00	
16,300.00	88.68	90.16	6,638.34	79.31	9,022.24	9,021.99	0.00	0.00	0.00	
16,400.00	88.68	90.16	6,640.65	79.02	9,122.22	9,121.96	0.00	0.00	0.00	
16,500.00	88.68	90.16	6,642.95	78.74	9,222.19	9,221.93	0.00	0.00	0.00	
16,600.00	88.68	90.16	6,645.25	78.46	9,322.16	9,321.91	0.00	0.00	0.00	
16,700.00	88.68	90.16	6,647.55	78.18	9,422.14	9,421.88	0.00	0.00	0.00	
16,809.00	88.68	90.16	6,650.06	77.87	9,531.11	9,530.85	0.00	0.00	0.00	
LTP at 16809.00 MD										
16,893.04	88.68	90.16	6,652.00	77.64	9,615.13	9,614.87	0.00	0.00	0.00	
TD										
16,894.02	88.68	90.16	6,652.02	77.63	9,616.11	9,615.85	0.00	0.00	0.00	
TD at 16894.02										

Design Targets										
Target Name	Dip Angle (°)	Dip Dir. (°)	TVD (usft)	+N/-S (usft)	+E/-W (usft)	Northing (usft)	Easting (usft)	Latitude	Longitude	
KOP - Jurnegan BS Fed	0.00	0.00	5,942.00	107.39	-931.89	436,029.00	554,895.00	32.198713	-104.289503	
- plan misses target center by 1.17usft at 6069.17usft MD (5942.00 TVD, 107.33 N, -933.06 E)										
- Point										
FTP(100' FWL) - Jurneg	0.00	0.00	6,215.08	108.13	-846.45	436,029.75	554,980.45	32.198715	-104.289227	
- plan misses target center by 1.39usft at 6360.41usft MD (6215.59 TVD, 107.08 N, -847.20 E)										
- Point										
BPP - Jurnegan BS Fed	0.00	0.00	6,531.30	92.39	4,375.11	436,014.00	560,202.00	32.198665	-104.272346	
- plan hits target center										
- Point										
LTP (100' FEL) - Jurneg:	0.00	0.00	6,650.04	77.39	9,531.11	435,999.00	565,358.00	32.198615	-104.255677	
- plan misses target center by 0.49usft at 16809.00usft MD (6650.06 TVD, 77.87 N, 9531.11 E)										
- Point										
BHL(15'FEL) - Jurnegan	0.00	0.00	6,652.00	77.39	9,616.11	435,999.00	565,443.00	32.198615	-104.255402	
- plan misses target center by 0.25usft at 16894.02usft MD (6652.02 TVD, 77.63 N, 9616.11 E)										
- Point										



Legacy Directional Drilling

Planning Report

Database:	EDM_WA	Local Co-ordinate Reference:	Well Jurnegan BS Fed Com 11H
Company:	Freedom Energy	TVD Reference:	GL 3333' + 26.5' KB @ 3359.50usft
Project:	Eddy County, NM NAD83	MD Reference:	GL 3333' + 26.5' KB @ 3359.50usft
Site:	Jurnegan	North Reference:	Grid
Well:	Jurnegan BS Fed Com 11H	Survey Calculation Method:	Minimum Curvature
Wellbore:	OH		
Design:	Plan 5		

Formations						
Measured Depth (usft)	Vertical Depth (usft)	Name	Lithology	Dip (°)	Dip Direction (°)	
26.50	26.50	SALADO				
1,101.00	1,101.00	TOP SALT				
1,456.00	1,456.00	BASE SALT				
1,756.00	1,756.00	LAMAR				
1,861.00	1,861.00	BELL CANYON				
2,684.92	2,671.00	CHERRY CANYON				
3,620.32	3,566.00	BRUSHY CANYON				
5,385.87	5,261.00	BONE SPRING LIME				
6,307.95	6,171.00	1ST BONE SPRING SAND				
6,601.62	6,371.00	2ND BONE SPRING SHALE				
6,727.26	6,411.00	TARGET				
16,893.04	6,652.00	TD				

Plan Annotations					
Measured Depth (usft)	Vertical Depth (usft)	Local Coordinates			
		+N/-S (usft)	+E/-W (usft)	Comment	
1,800.00	1,800.00	0.00	0.00	Start Nudge Build 2.00	
2,645.02	2,632.82	14.14	-122.91	16.90° at 2645.02 MD	
5,024.59	4,909.62	93.19	-810.14	Start Drop -2.00	
5,869.61	5,742.44	107.33	-933.06	Vertical at 5869.61 MD	
6,069.61	5,942.44	107.33	-933.06	KOP Start Build 12.00	
6,361.73	6,216.67	107.08	-846.45	FTP 6361.73MD / 6216.67TVD	
6,808.61	6,419.78	106.01	-466.59	LP 88.68° at 6808.61 MD	
11,651.61	6,531.30	92.39	4,375.11	BPP at 11651.61 MD	
16,809.00	6,650.06	77.87	9,531.11	LTP at 16809.00 MD	
16,894.02	6,652.02	77.63	9,616.11	TD at 16894.02	



Freedom Energy

Eddy County, NM NAD83

Jurnegan

Jurnegan BS Fed Com 11H

OH

Plan 5

Anticollision Report

26 January, 2026



Legacy Directional Drilling

Anticollision Report

Company:	Freedom Energy	Local Co-ordinate Reference:	Well Jurnegan BS Fed Com 11H
Project:	Eddy County, NM NAD83	TVD Reference:	GL 3333' + 26.5' KB @ 3359.50usft
Reference Site:	Jurnegan	MD Reference:	GL 3333' + 26.5' KB @ 3359.50usft
Site Error:	0.00 usft	North Reference:	Grid
Reference Well:	Jurnegan BS Fed Com 11H	Survey Calculation Method:	Minimum Curvature
Well Error:	0.00 usft	Output errors are at	2.00 sigma
Reference Wellbore	OH	Database:	EDM_WA
Reference Design:	Plan 5	Offset TVD Reference:	Reference Datum

Reference	Plan 5		
Filter type:	GLOBAL FILTER APPLIED: All wellpaths within 200'+ 100/1000 of reference		
Interpolation Method:	MD Interval 100.00usft	Error Model:	ISCWSA
Depth Range:	Unlimited	Scan Method:	Closest Approach 3D
Results Limited by:	Maximum centre distance of 1,889.40usft	Error Surface:	Pedal Curve
Warning Levels Evaluated at:	2.00 Sigma	Casing Method:	Not applied

Survey Tool Program		Date	1/26/2026		
From (usft)	To (usft)	Survey (Wellbore)	Tool Name	Description	
0.00	16,894.02	Plan 5 (OH)	MWD	OWSG MWD - Standard	

Summary						
Site Name	Reference Measured Depth (usft)	Offset Measured Depth (usft)	Distance Between Centres (usft)	Distance Between Ellipses (usft)	Separation Factor	Warning
Offset Well - Wellbore - Design						
Jurnegan						
Jurnegan BS Fed Com 10H - OH - Plan 5	1,100.00	1,099.00	19.87	12.18	2.583	CC, ES
Jurnegan BS Fed Com 10H - OH - Plan 5	1,200.00	1,198.33	21.45	13.05	2.552	SF
Jurnegan BS Fed Com 3H - OH - Plan 4	1,700.00	1,697.00	60.22	48.23	5.024	CC, ES
Jurnegan BS Fed Com 3H - OH - Plan 4	16,894.02	17,356.96	900.34	453.29	2.014	SF
Jurnegan BS Fed Com 4H - OH - Plan 5	1,400.00	1,398.00	40.35	30.51	4.100	CC
Jurnegan BS Fed Com 4H - OH - Plan 5	1,500.00	1,497.52	40.91	30.37	3.881	ES
Jurnegan BS Fed Com 4H - OH - Plan 5	16,894.02	17,314.27	821.74	391.38	1.909	Collision Risk Procedures R

Offset Design: Jurnegan - Jurnegan BS Fed Com 10H - OH - Plan 5													Offset Site Error:	0.00 usft	
Survey Program:		0-MWD		Offset			Semi Major Axis		Offset Wellbore Centre		Rule Assigned:			Offset Well Error:	0.00 usft
Measured Depth (usft)	Vertical Depth (usft)	Measured Depth (usft)	Vertical Depth (usft)	Reference (usft)	Offset (usft)	Highside Toolface (°)	+N/-S (usft)	+E/-W (usft)	Between Centres (usft)	Between Ellipses (usft)	Minimum Separation (usft)	Separation Factor	Warning		
0.00	0.00	0.00	1.00	0.00	0.00	-53.32	11.87	-15.94	19.90						
100.00	100.00	99.00	100.00	0.26	0.26	-53.32	11.87	-15.94	19.87	19.35	0.52	37.903			
200.00	200.00	199.00	200.00	0.62	0.62	-53.32	11.87	-15.94	19.87	18.63	1.24	16.023			
300.00	300.00	299.00	300.00	0.98	0.98	-53.32	11.87	-15.94	19.87	17.92	1.96	10.154			
400.00	400.00	399.00	400.00	1.34	1.34	-53.32	11.87	-15.94	19.87	17.20	2.67	7.432			
500.00	500.00	499.00	500.00	1.70	1.69	-53.32	11.87	-15.94	19.87	16.48	3.39	5.860			
600.00	600.00	599.00	600.00	2.06	2.05	-53.32	11.87	-15.94	19.87	15.77	4.11	4.838			
700.00	700.00	699.00	700.00	2.41	2.41	-53.32	11.87	-15.94	19.87	15.05	4.83	4.119			
800.00	800.00	799.00	800.00	2.77	2.77	-53.32	11.87	-15.94	19.87	14.33	5.54	3.586			
900.00	900.00	899.00	900.00	3.13	3.13	-53.32	11.87	-15.94	19.87	13.61	6.26	3.175			
1,000.00	1,000.00	999.00	1,000.00	3.49	3.49	-53.32	11.87	-15.94	19.87	12.90	6.98	2.849			
1,100.00	1,100.00	1,099.00	1,100.00	3.85	3.84	-53.32	11.87	-15.94	19.87	12.18	7.69	2.583	CC, ES		
1,200.00	1,200.00	1,198.33	1,199.31	4.21	4.20	-51.56	13.33	-16.79	21.45	13.05	8.40	2.552	SF		
1,300.00	1,300.00	1,297.42	1,298.27	4.57	4.55	-47.53	17.74	-19.38	26.33	17.22	9.10	2.892			
1,400.00	1,400.00	1,396.04	1,396.52	4.92	4.91	-43.36	25.06	-23.66	34.64	24.85	9.79	3.538			
1,500.00	1,500.00	1,493.97	1,493.72	5.28	5.27	-40.06	35.21	-29.61	46.43	35.96	10.47	4.436			
1,600.00	1,600.00	1,590.97	1,589.57	5.64	5.63	-37.69	48.08	-37.15	61.65	50.53	11.13	5.541			
1,700.00	1,700.00	1,686.85	1,683.75	6.00	6.00	-36.02	63.56	-46.21	80.24	68.47	11.77	6.818			
1,800.00	1,800.00	1,781.42	1,776.01	6.36	6.39	-34.84	81.47	-56.70	102.12	89.72	12.40	8.238			
1,900.00	1,899.98	1,874.74	1,866.33	6.71	6.79	49.68	101.72	-68.56	126.11	113.11	13.00	9.702			
2,000.00	1,999.84	1,966.96	1,954.79	7.05	7.21	51.31	124.20	-81.74	151.18	137.60	13.58	11.134			

CC - Min centre to center distance or convergent point, SF - min separation factor, ES - min ellipse separation



Legacy Directional Drilling

Anticollision Report

Company:	Freedom Energy	Local Co-ordinate Reference:	Well Jurnegan BS Fed Com 11H
Project:	Eddy County, NM NAD83	TVD Reference:	GL 3333' + 26.5' KB @ 3359.50usft
Reference Site:	Jurnegan	MD Reference:	GL 3333' + 26.5' KB @ 3359.50usft
Site Error:	0.00 usft	North Reference:	Grid
Reference Well:	Jurnegan BS Fed Com 11H	Survey Calculation Method:	Minimum Curvature
Well Error:	0.00 usft	Output errors are at	2.00 sigma
Reference Wellbore	OH	Database:	EDM_WA
Reference Design:	Plan 5	Offset TVD Reference:	Reference Datum

Offset Design: Jurnegan - Jurnegan BS Fed Com 10H - OH - Plan 5													Offset Site Error: 0.00 usft
Survey Program: 0-MWD													Offset Well Error: 0.00 usft
Reference		Offset		Semi Major Axis		Highside Toolface (°)	Offset Wellbore Centre		Distance		Minimum Separation (usft)	Separation Factor	Warning
Measured Depth (usft)	Vertical Depth (usft)	Measured Depth (usft)	Vertical Depth (usft)	Reference (usft)	Offset (usft)		+N/-S (usft)	+E/-W (usft)	Between Centres (usft)	Between Ellipses (usft)			
2,100.00	2,099.45	2,057.99	2,041.23	7.40	7.65	53.20	148.80	-96.14	177.45	163.30	14.15	12.541	
2,200.00	2,198.70	2,147.75	2,125.55	7.76	8.11	55.18	175.36	-111.70	205.07	190.35	14.72	13.934	
2,300.00	2,297.47	2,236.18	2,207.63	8.12	8.60	57.15	203.75	-128.33	234.14	218.85	15.29	15.315	
2,400.00	2,395.62	2,323.22	2,287.39	8.50	9.11	59.06	233.81	-145.93	264.76	248.89	15.87	16.683	
2,500.00	2,493.06	2,408.82	2,364.76	8.90	9.64	60.88	265.39	-164.44	297.00	280.53	16.47	18.033	
2,600.00	2,589.64	2,500.40	2,446.72	9.31	10.25	62.82	300.65	-185.09	330.08	312.82	17.26	19.125	
2,700.00	2,685.43	2,593.81	2,530.30	9.76	10.89	65.12	336.64	-206.17	362.55	344.41	18.14	19.986	
2,800.00	2,781.11	2,687.21	2,613.87	10.21	11.55	67.32	372.64	-227.26	395.45	376.39	19.06	20.749	
2,900.00	2,876.79	2,780.62	2,697.44	10.69	12.21	69.18	408.64	-248.34	428.80	408.79	20.00	21.436	
3,000.00	2,972.47	2,874.03	2,781.02	11.18	12.89	70.78	444.64	-269.43	462.50	441.53	20.97	22.052	
3,100.00	3,068.15	2,967.44	2,864.59	11.67	13.58	72.17	480.64	-290.51	496.48	474.52	21.96	22.606	
3,200.00	3,163.83	3,060.84	2,948.16	12.18	14.28	73.37	516.63	-311.60	530.69	507.72	22.97	23.105	
3,300.00	3,259.51	3,154.25	3,031.73	12.70	14.98	74.44	552.63	-332.68	565.09	541.10	23.99	23.554	
3,400.00	3,355.19	3,247.66	3,115.31	13.22	15.69	75.38	588.63	-353.77	599.64	574.61	25.03	23.959	
3,500.00	3,450.87	3,341.06	3,198.88	13.76	16.41	76.22	624.63	-374.85	634.31	608.24	26.08	24.326	
3,600.00	3,546.56	3,434.47	3,282.45	14.29	17.13	76.98	660.63	-395.94	669.10	641.97	27.13	24.659	
3,700.00	3,642.24	3,527.88	3,366.03	14.84	17.85	77.65	696.63	-417.03	703.98	675.78	28.20	24.962	
3,800.00	3,737.92	3,621.29	3,449.60	15.38	18.58	78.27	732.62	-438.11	738.93	709.66	29.28	25.238	
3,900.00	3,833.60	3,714.69	3,533.17	15.94	19.31	78.83	768.62	-459.20	773.96	743.60	30.36	25.491	
4,000.00	3,929.28	3,808.10	3,616.75	16.49	20.04	79.34	804.62	-480.28	809.05	777.59	31.45	25.723	
4,100.00	4,024.96	3,901.51	3,700.32	17.05	20.78	79.81	840.62	-501.37	844.18	811.64	32.55	25.936	
4,200.00	4,120.64	3,994.91	3,783.89	17.61	21.51	80.25	876.62	-522.45	879.37	845.72	33.65	26.132	
4,300.00	4,216.32	4,088.32	3,867.46	18.18	22.25	80.64	912.61	-543.54	914.59	879.83	34.76	26.313	
4,400.00	4,312.01	4,181.73	3,951.04	18.75	23.00	81.01	948.61	-564.62	949.85	913.98	35.87	26.481	
4,500.00	4,407.69	4,275.14	4,034.61	19.32	23.74	81.36	984.61	-585.71	985.15	948.16	36.99	26.636	
4,600.00	4,503.37	4,368.54	4,118.18	19.89	24.49	81.68	1,020.61	-606.79	1,020.47	982.36	38.11	26.780	
4,700.00	4,599.05	4,461.95	4,201.76	20.47	25.23	81.98	1,056.61	-627.88	1,055.82	1,016.59	39.23	26.915	
4,800.00	4,694.73	4,555.36	4,285.33	21.04	25.98	82.25	1,092.61	-648.97	1,091.19	1,050.83	40.35	27.040	
4,900.00	4,790.41	4,648.76	4,368.90	21.62	26.73	82.52	1,128.60	-670.05	1,126.58	1,085.10	41.48	27.158	
5,000.00	4,886.09	4,742.17	4,452.47	22.20	27.48	82.76	1,164.60	-691.14	1,161.99	1,119.38	42.61	27.267	
5,100.00	4,982.05	4,835.57	4,536.04	22.77	28.23	83.51	1,200.60	-712.22	1,197.53	1,153.80	43.73	27.384	
5,200.00	5,078.91	4,928.90	4,619.54	23.31	28.98	84.28	1,236.57	-733.29	1,233.43	1,188.65	44.79	27.541	
5,300.00	5,176.58	5,053.27	4,731.37	23.80	29.96	84.84	1,283.53	-760.80	1,269.01	1,222.84	46.17	27.485	
5,400.00	5,274.93	5,204.66	4,870.37	24.26	31.07	85.23	1,335.25	-791.09	1,301.17	1,253.41	47.76	27.246	
5,500.00	5,373.85	5,360.42	5,016.48	24.69	32.10	85.49	1,381.77	-818.34	1,329.35	1,280.14	49.21	27.014	
5,600.00	5,473.23	5,520.20	5,169.17	25.07	33.05	85.62	1,422.30	-842.08	1,353.36	1,302.84	50.52	26.789	
5,700.00	5,572.93	5,683.52	5,327.71	25.43	33.89	85.64	1,456.08	-861.87	1,373.02	1,321.36	51.66	26.576	
5,800.00	5,672.84	5,849.85	5,491.19	25.74	34.61	85.54	1,482.41	-877.29	1,388.21	1,335.58	52.63	26.379	
5,900.00	5,772.83	6,018.56	5,658.54	26.02	35.23	1.85	1,500.70	-888.00	1,398.78	1,345.39	53.39	26.199	
6,000.00	5,872.83	6,189.10	5,828.67	26.30	35.72	1.60	1,510.53	-893.76	1,404.45	1,350.43	54.01	26.002	
6,100.00	5,972.81	6,330.71	5,970.22	26.64	36.02	-88.58	1,512.22	-893.44	1,405.43	1,350.85	54.59	25.747	
6,200.00	6,071.22	6,423.85	6,061.85	26.81	36.14	-88.57	1,512.18	-877.54	1,405.44	1,350.54	54.90	25.598	
6,300.00	6,163.99	6,517.05	6,148.71	26.88	36.18	-88.61	1,512.08	-844.16	1,405.42	1,350.39	55.02	25.542	
6,400.00	6,247.09	6,610.56	6,227.69	26.91	36.16	-88.71	1,511.95	-794.38	1,405.36	1,350.33	55.03	25.536	
6,500.00	6,316.87	6,704.62	6,295.83	26.96	36.09	-88.87	1,511.77	-729.77	1,405.28	1,350.24	55.05	25.528	
6,600.00	6,370.28	6,800.00	6,350.66	27.09	35.98	-89.07	1,511.55	-651.91	1,405.20	1,350.01	55.19	25.461	
6,700.00	6,405.00	6,895.26	6,388.91	27.34	35.85	-89.31	1,511.31	-564.84	1,405.12	1,349.56	55.56	25.289	
6,800.00	6,419.50	6,992.27	6,409.35	27.74	35.71	-89.58	1,511.05	-470.18	1,405.06	1,348.84	56.22	24.993	
6,851.40	6,421.37	7,042.83	6,412.36	28.02	35.63	-89.63	1,510.91	-419.73	1,405.05	1,348.34	56.72	24.774	
6,900.00	6,421.88	7,091.43	6,413.50	28.29	35.56	-89.66	1,510.78	-371.14	1,405.05	1,347.82	57.23	24.549	
7,000.00	6,424.18	7,191.43	6,415.83	29.05	35.45	-89.66	1,510.50	-271.17	1,405.06	1,346.40	58.65	23.955	
7,100.00	6,426.49	7,291.43	6,418.17	29.99	35.38	-89.66	1,510.22	-171.20	1,405.06	1,344.62	60.44	23.248	

CC - Min centre to center distance or convergent point, SF - min separation factor, ES - min ellipse separation



Legacy Directional Drilling

Anticollision Report

Company:	Freedom Energy	Local Co-ordinate Reference:	Well Jurnegan BS Fed Com 11H
Project:	Eddy County, NM NAD83	TVD Reference:	GL 3333' + 26.5' KB @ 3359.50usft
Reference Site:	Jurnegan	MD Reference:	GL 3333' + 26.5' KB @ 3359.50usft
Site Error:	0.00 usft	North Reference:	Grid
Reference Well:	Jurnegan BS Fed Com 11H	Survey Calculation Method:	Minimum Curvature
Well Error:	0.00 usft	Output errors are at	2.00 sigma
Reference Wellbore	OH	Database:	EDM_WA
Reference Design:	Plan 5	Offset TVD Reference:	Reference Datum

Offset Design: Jurnegan - Jurnegan BS Fed Com 10H - OH - Plan 5												Offset Site Error:	0.00 usft
Survey Program: 0-MWD												Offset Well Error:	0.00 usft
Reference	Offset	Semi Major Axis		Distance		Rule Assigned:		Warning					
Measured Depth (usft)	Vertical Depth (usft)	Measured Depth (usft)	Vertical Depth (usft)	Reference (usft)	Offset (usft)	Highside Toolface (°)	+N/-S (usft)	+E/-W (usft)	Between Centres (usft)	Between Ellipses (usft)	Minimum Separation (usft)	Separation Factor	
7,200.00	6,428.79	7,391.43	6,420.51	31.09	35.38	-89.66	1,509.95	-71.22	1,405.06	1,342.51	62.55	22.462	
7,300.00	6,431.09	7,491.43	6,422.85	32.35	35.48	-89.66	1,509.67	28.75	1,405.07	1,340.10	64.97	21.626	
7,400.00	6,433.39	7,591.43	6,425.19	33.73	35.75	-89.67	1,509.39	128.72	1,405.07	1,337.41	67.66	20.767	
7,500.00	6,435.70	7,691.43	6,427.53	35.23	36.33	-89.67	1,509.12	228.69	1,405.08	1,334.49	70.59	19.906	
7,600.00	6,438.00	7,791.43	6,429.86	36.84	37.33	-89.67	1,508.84	328.66	1,405.08	1,331.36	73.72	19.059	
7,700.00	6,440.30	7,891.43	6,432.20	38.53	38.68	-89.67	1,508.56	428.64	1,405.09	1,328.04	77.04	18.238	
7,800.00	6,442.61	7,991.43	6,434.54	40.30	40.27	-89.67	1,508.29	528.61	1,405.09	1,324.57	80.53	17.449	
7,900.00	6,444.91	8,091.43	6,436.88	42.14	42.00	-89.67	1,508.01	628.58	1,405.10	1,320.95	84.15	16.697	
8,000.00	6,447.21	8,191.43	6,439.22	44.04	43.83	-89.67	1,507.73	728.55	1,405.10	1,317.20	87.90	15.985	
8,100.00	6,449.51	8,291.43	6,441.56	45.99	45.73	-89.68	1,507.46	828.53	1,405.11	1,313.35	91.76	15.313	
8,200.00	6,451.82	8,391.43	6,443.90	47.99	47.69	-89.68	1,507.18	928.50	1,405.11	1,309.40	95.71	14.681	
8,300.00	6,454.12	8,491.43	6,446.23	50.03	49.70	-89.68	1,506.90	1,028.47	1,405.11	1,305.37	99.75	14.087	
8,400.00	6,456.42	8,591.43	6,448.57	52.10	51.75	-89.68	1,506.63	1,128.44	1,405.12	1,301.26	103.86	13.529	
8,500.00	6,458.72	8,691.43	6,450.91	54.20	53.84	-89.68	1,506.35	1,228.41	1,405.12	1,297.08	108.04	13.006	
8,600.00	6,461.03	8,791.43	6,453.25	56.34	55.95	-89.68	1,506.07	1,328.39	1,405.13	1,292.85	112.28	12.515	
8,700.00	6,463.33	8,891.43	6,455.59	58.49	58.09	-89.68	1,505.80	1,428.36	1,405.13	1,288.57	116.57	12.054	
8,800.00	6,465.63	8,991.43	6,457.93	60.68	60.26	-89.69	1,505.52	1,528.33	1,405.14	1,284.23	120.90	11.622	
8,900.00	6,467.94	9,091.43	6,460.27	62.88	62.45	-89.69	1,505.24	1,628.30	1,405.14	1,279.86	125.28	11.216	
9,000.00	6,470.24	9,191.43	6,462.60	65.09	64.65	-89.69	1,504.97	1,728.28	1,405.15	1,275.45	129.70	10.834	
9,100.00	6,472.54	9,291.43	6,464.94	67.33	66.88	-89.69	1,504.69	1,828.25	1,405.15	1,271.01	134.14	10.475	
9,200.00	6,474.84	9,391.43	6,467.28	69.58	69.11	-89.69	1,504.41	1,928.22	1,405.15	1,266.53	138.62	10.136	
9,300.00	6,477.15	9,491.43	6,469.62	71.84	71.37	-89.69	1,504.14	2,028.19	1,405.16	1,262.03	143.13	9.817	
9,400.00	6,479.45	9,591.43	6,471.96	74.11	73.63	-89.69	1,503.86	2,128.17	1,405.16	1,257.50	147.67	9.516	
9,500.00	6,481.75	9,691.43	6,474.30	76.40	75.91	-89.70	1,503.58	2,228.14	1,405.17	1,252.95	152.22	9.231	
9,600.00	6,484.06	9,791.43	6,476.64	78.69	78.19	-89.70	1,503.31	2,328.11	1,405.17	1,248.37	156.80	8.962	
9,700.00	6,486.36	9,891.43	6,478.97	81.00	80.49	-89.70	1,503.03	2,428.08	1,405.18	1,243.78	161.39	8.706	
9,800.00	6,488.66	9,991.43	6,481.31	83.31	82.79	-89.70	1,502.75	2,528.05	1,405.18	1,239.17	166.01	8.465	
9,900.00	6,490.96	10,091.43	6,483.65	85.63	85.10	-89.70	1,502.48	2,628.03	1,405.19	1,234.55	170.64	8.235	
10,000.00	6,493.27	10,191.43	6,485.99	87.96	87.42	-89.70	1,502.20	2,728.00	1,405.19	1,229.91	175.28	8.017	
10,100.00	6,495.57	10,291.43	6,488.33	90.29	89.75	-89.70	1,501.92	2,827.97	1,405.20	1,225.25	179.94	7.809	
10,200.00	6,497.87	10,391.43	6,490.67	92.63	92.08	-89.71	1,501.65	2,927.94	1,405.20	1,220.59	184.61	7.612	
10,300.00	6,500.18	10,491.43	6,493.01	94.98	94.42	-89.71	1,501.37	3,027.92	1,405.20	1,215.91	189.30	7.423	
10,400.00	6,502.48	10,591.43	6,495.34	97.33	96.77	-89.71	1,501.09	3,127.89	1,405.21	1,211.22	193.99	7.244	
10,500.00	6,504.78	10,691.43	6,497.68	99.69	99.11	-89.71	1,500.82	3,227.86	1,405.21	1,206.52	198.69	7.072	
10,600.00	6,507.08	10,791.43	6,500.02	102.05	101.47	-89.71	1,500.54	3,327.83	1,405.22	1,201.81	203.41	6.908	
10,700.00	6,509.39	10,891.43	6,502.36	104.41	103.83	-89.71	1,500.26	3,427.80	1,405.22	1,197.09	208.13	6.752	
10,800.00	6,511.69	10,991.43	6,504.70	106.78	106.19	-89.71	1,499.99	3,527.78	1,405.23	1,192.37	212.86	6.602	
10,900.00	6,513.99	11,091.43	6,507.04	109.15	108.56	-89.72	1,499.71	3,627.75	1,405.23	1,187.63	217.60	6.458	
11,000.00	6,516.29	11,191.43	6,509.37	111.53	110.93	-89.72	1,499.43	3,727.72	1,405.24	1,182.89	222.34	6.320	
11,100.00	6,518.60	11,291.43	6,511.71	113.91	113.30	-89.72	1,499.16	3,827.69	1,405.24	1,178.15	227.09	6.188	
11,200.00	6,520.90	11,391.43	6,514.05	116.29	115.68	-89.72	1,498.88	3,927.67	1,405.25	1,173.39	231.85	6.061	
11,300.00	6,523.20	11,491.43	6,516.39	118.67	118.06	-89.72	1,498.60	4,027.64	1,405.25	1,168.63	236.62	5.939	
11,400.00	6,525.51	11,591.43	6,518.73	121.06	120.44	-89.72	1,498.33	4,127.61	1,405.25	1,163.87	241.39	5.822	
11,500.00	6,527.81	11,691.43	6,521.07	123.45	122.82	-89.73	1,498.05	4,227.58	1,405.26	1,159.10	246.16	5.709	
11,600.00	6,530.11	11,791.43	6,523.41	125.84	125.21	-89.73	1,497.77	4,327.56	1,405.26	1,154.32	250.94	5.600	
11,700.00	6,532.41	11,891.43	6,525.74	128.24	127.60	-89.73	1,497.50	4,427.53	1,405.27	1,149.54	255.73	5.495	
11,800.00	6,534.72	11,991.43	6,528.08	130.63	129.99	-89.73	1,497.22	4,527.50	1,405.27	1,144.76	260.51	5.394	
11,900.00	6,537.02	12,091.43	6,530.42	133.03	132.39	-89.73	1,496.94	4,627.47	1,405.28	1,139.97	265.31	5.297	
12,000.00	6,539.32	12,191.43	6,532.76	135.43	134.78	-89.73	1,496.67	4,727.44	1,405.28	1,135.18	270.11	5.203	
12,100.00	6,541.63	12,291.43	6,535.10	137.83	137.18	-89.73	1,496.39	4,827.42	1,405.29	1,130.38	274.91	5.112	
12,200.00	6,543.93	12,391.43	6,537.44	140.24	139.58	-89.74	1,496.11	4,927.39	1,405.29	1,125.58	279.71	5.024	
12,300.00	6,546.23	12,491.43	6,539.78	142.64	141.98	-89.74	1,495.84	5,027.36	1,405.30	1,120.78	284.52	4.939	

CC - Min centre to center distance or convergent point, SF - min separation factor, ES - min ellipse separation



Legacy Directional Drilling

Anticollision Report

Company:	Freedom Energy	Local Co-ordinate Reference:	Well Jurnegan BS Fed Com 11H
Project:	Eddy County, NM NAD83	TVD Reference:	GL 3333' + 26.5' KB @ 3359.50usft
Reference Site:	Jurnegan	MD Reference:	GL 3333' + 26.5' KB @ 3359.50usft
Site Error:	0.00 usft	North Reference:	Grid
Reference Well:	Jurnegan BS Fed Com 11H	Survey Calculation Method:	Minimum Curvature
Well Error:	0.00 usft	Output errors are at	2.00 sigma
Reference Wellbore	OH	Database:	EDM_WA
Reference Design:	Plan 5	Offset TVD Reference:	Reference Datum

Offset Design: Jurnegan - Jurnegan BS Fed Com 10H - OH - Plan 5													Offset Site Error: 0.00 usft
Survey Program: 0-MWD													Offset Well Error: 0.00 usft
Reference		Offset		Semi Major Axis		Highside Toolface (°)	Offset Wellbore Centre		Distance			Separation Factor	Warning
Measured Depth (usft)	Vertical Depth (usft)	Measured Depth (usft)	Vertical Depth (usft)	Reference (usft)	Offset (usft)		+N/-S (usft)	+E/-W (usft)	Between Centres (usft)	Between Ellipses (usft)	Minimum Separation (usft)		
12,400.00	6,548.53	12,591.43	6,542.11	145.05	144.39	-89.74	1,495.56	5,127.33	1,405.30	1,115.97	289.33	4.857	
12,500.00	6,550.84	12,691.43	6,544.45	147.46	146.79	-89.74	1,495.28	5,227.31	1,405.30	1,111.16	294.14	4.778	
12,600.00	6,553.14	12,791.43	6,546.79	149.87	149.20	-89.74	1,495.01	5,327.28	1,405.31	1,106.35	298.96	4.701	
12,700.00	6,555.44	12,891.43	6,549.13	152.28	151.61	-89.74	1,494.73	5,427.25	1,405.31	1,101.53	303.78	4.626	
12,800.00	6,557.75	12,991.43	6,551.47	154.69	154.02	-89.74	1,494.45	5,527.22	1,405.32	1,096.71	308.60	4.554	
12,900.00	6,560.05	13,091.43	6,553.81	157.11	156.43	-89.75	1,494.18	5,627.19	1,405.32	1,091.89	313.43	4.484	
13,000.00	6,562.35	13,191.43	6,556.15	159.52	158.84	-89.75	1,493.90	5,727.17	1,405.33	1,087.07	318.26	4.416	
13,100.00	6,564.65	13,291.43	6,558.48	161.94	161.25	-89.75	1,493.62	5,827.14	1,405.33	1,082.25	323.09	4.350	
13,200.00	6,566.96	13,391.43	6,560.82	164.35	163.67	-89.75	1,493.35	5,927.11	1,405.34	1,077.42	327.92	4.286	
13,300.00	6,569.26	13,491.43	6,563.16	166.77	166.08	-89.75	1,493.07	6,027.08	1,405.34	1,072.59	332.75	4.223	
13,400.00	6,571.56	13,591.43	6,565.50	169.19	168.50	-89.75	1,492.79	6,127.06	1,405.35	1,067.76	337.59	4.163	
13,500.00	6,573.86	13,691.43	6,567.84	171.61	170.91	-89.75	1,492.52	6,227.03	1,405.35	1,062.93	342.42	4.104	
13,600.00	6,576.17	13,791.43	6,570.18	174.03	173.33	-89.76	1,492.24	6,327.00	1,405.35	1,058.09	347.26	4.047	
13,700.00	6,578.47	13,891.43	6,572.51	176.45	175.75	-89.76	1,491.96	6,426.97	1,405.36	1,053.25	352.11	3.991	
13,800.00	6,580.77	13,991.43	6,574.85	178.88	178.17	-89.76	1,491.69	6,526.94	1,405.36	1,048.41	356.95	3.937	
13,900.00	6,583.08	14,091.43	6,577.19	181.30	180.59	-89.76	1,491.41	6,626.92	1,405.37	1,043.57	361.79	3.884	
14,000.00	6,585.38	14,191.43	6,579.53	183.72	183.01	-89.76	1,491.13	6,726.89	1,405.37	1,038.73	366.64	3.833	
14,100.00	6,587.68	14,291.43	6,581.87	186.15	185.44	-89.76	1,490.86	6,826.86	1,405.38	1,033.89	371.49	3.783	
14,200.00	6,589.98	14,391.43	6,584.21	188.57	187.86	-89.76	1,490.58	6,926.83	1,405.38	1,029.04	376.34	3.734	
14,300.00	6,592.29	14,491.43	6,586.55	191.00	190.28	-89.77	1,490.30	7,026.81	1,405.39	1,024.20	381.19	3.687	
14,400.00	6,594.59	14,591.43	6,588.88	193.43	192.71	-89.77	1,490.03	7,126.78	1,405.39	1,019.35	386.04	3.641	
14,500.00	6,596.89	14,691.43	6,591.22	195.85	195.13	-89.77	1,489.75	7,226.75	1,405.40	1,014.50	390.89	3.595	
14,600.00	6,599.20	14,791.43	6,593.56	198.28	197.56	-89.77	1,489.47	7,326.72	1,405.40	1,009.65	395.75	3.551	
14,700.00	6,601.50	14,891.43	6,595.90	200.71	199.99	-89.77	1,489.20	7,426.70	1,405.40	1,004.80	400.60	3.508	
14,800.00	6,603.80	14,991.43	6,598.24	203.14	202.41	-89.77	1,488.92	7,526.67	1,405.41	999.95	405.46	3.466	
14,900.00	6,606.10	15,091.43	6,600.58	205.57	204.84	-89.77	1,488.64	7,626.64	1,405.41	995.10	410.32	3.425	
15,000.00	6,608.41	15,191.43	6,602.92	208.00	207.27	-89.78	1,488.37	7,726.61	1,405.42	990.24	415.18	3.385	
15,100.00	6,610.71	15,291.43	6,605.25	210.43	209.70	-89.78	1,488.09	7,826.58	1,405.42	985.39	420.04	3.346	
15,200.00	6,613.01	15,391.43	6,607.59	212.86	212.13	-89.78	1,487.81	7,926.56	1,405.43	980.53	424.90	3.308	
15,300.00	6,615.32	15,491.43	6,609.93	215.29	214.56	-89.78	1,487.54	8,026.53	1,405.43	975.67	429.76	3.270	
15,400.00	6,617.62	15,591.43	6,612.27	217.72	216.99	-89.78	1,487.26	8,126.50	1,405.44	970.81	434.62	3.234	
15,500.00	6,619.92	15,691.43	6,614.61	220.16	219.42	-89.78	1,486.98	8,226.47	1,405.44	965.95	439.49	3.198	
15,600.00	6,622.22	15,791.43	6,616.95	222.59	221.85	-89.78	1,486.71	8,326.45	1,405.45	961.09	444.35	3.163	
15,700.00	6,624.53	15,891.43	6,619.29	225.02	224.28	-89.79	1,486.43	8,426.42	1,405.45	956.23	449.22	3.129	
15,800.00	6,626.83	15,991.43	6,621.62	227.46	226.72	-89.79	1,486.15	8,526.39	1,405.45	951.37	454.08	3.095	
15,900.00	6,629.13	16,091.43	6,623.96	229.89	229.15	-89.79	1,485.88	8,626.36	1,405.46	946.51	458.95	3.062	
16,000.00	6,631.44	16,191.43	6,626.30	232.32	231.58	-89.79	1,485.60	8,726.33	1,405.46	941.64	463.82	3.030	
16,100.00	6,633.74	16,291.43	6,628.64	234.76	234.01	-89.79	1,485.32	8,826.31	1,405.47	936.78	468.69	2.999	
16,200.00	6,636.04	16,391.43	6,630.98	237.19	236.45	-89.79	1,485.05	8,926.28	1,405.47	931.92	473.56	2.968	
16,300.00	6,638.34	16,491.43	6,633.32	239.63	238.88	-89.80	1,484.77	9,026.25	1,405.48	927.05	478.43	2.938	
16,400.00	6,640.65	16,591.43	6,635.66	242.06	241.32	-89.80	1,484.49	9,126.22	1,405.48	922.18	483.30	2.908	
16,500.00	6,642.95	16,691.43	6,637.99	244.50	243.75	-89.80	1,484.22	9,226.20	1,405.49	917.32	488.17	2.879	
16,600.00	6,645.25	16,791.43	6,640.33	246.94	246.19	-89.80	1,483.94	9,326.17	1,405.49	912.45	493.04	2.851	
16,700.00	6,647.55	16,891.43	6,642.67	249.37	248.62	-89.80	1,483.66	9,426.14	1,405.50	907.58	497.91	2.823	
16,800.00	6,649.86	16,991.43	6,645.01	251.81	251.06	-89.80	1,483.39	9,526.11	1,405.50	902.71	502.79	2.795	
16,806.78	6,650.01	16,998.22	6,645.17	251.98	251.22	-89.80	1,483.37	9,532.89	1,405.50	902.38	503.12	2.794	
16,894.02	6,652.02	17,076.45	6,647.00	254.10	253.13	-89.80	1,483.15	9,611.11	1,405.53	898.35	507.19	2.771	

CC - Min centre to center distance or convergent point, SF - min separation factor, ES - min ellipse separation



Legacy Directional Drilling

Anticollision Report

Company:	Freedom Energy	Local Co-ordinate Reference:	Well Jurnegan BS Fed Com 11H
Project:	Eddy County, NM NAD83	TVD Reference:	GL 3333' + 26.5' KB @ 3359.50usft
Reference Site:	Jurnegan	MD Reference:	GL 3333' + 26.5' KB @ 3359.50usft
Site Error:	0.00 usft	North Reference:	Grid
Reference Well:	Jurnegan BS Fed Com 11H	Survey Calculation Method:	Minimum Curvature
Well Error:	0.00 usft	Output errors are at	2.00 sigma
Reference Wellbore	OH	Database:	EDM_WA
Reference Design:	Plan 5	Offset TVD Reference:	Reference Datum

Offset Design: Jurnegan - Jurnegan BS Fed Com 3H - OH - Plan 4												Offset Site Error:	0.00 usft
Survey Program: 0-MWD												Offset Well Error:	0.00 usft
Reference	Offset	Semi Major Axis	Highside	Offset Wellbore Centre	Distance	Rule Assigned:							
Measured Depth (usft)	Vertical Depth (usft)	Measured Depth (usft)	Vertical Depth (usft)	Reference (usft)	Offset (usft)	Toolface (°)	+N/-S (usft)	+E/-W (usft)	Between Centres (usft)	Between Ellipses (usft)	Minimum Separation (usft)	Separation Factor	Warning
0.00	0.00	0.00	3.00	0.00	0.00	-52.55	36.61	-47.81	60.29				
100.00	100.00	97.00	100.00	0.26	0.26	-52.55	36.61	-47.81	60.22	59.70	0.52	116.017	
200.00	200.00	197.00	200.00	0.62	0.61	-52.55	36.61	-47.81	60.22	58.99	1.23	48.834	
300.00	300.00	297.00	300.00	0.98	0.97	-52.55	36.61	-47.81	60.22	58.27	1.95	30.880	
400.00	400.00	397.00	400.00	1.34	1.33	-52.55	36.61	-47.81	60.22	57.55	2.67	22.579	
500.00	500.00	497.00	500.00	1.70	1.69	-52.55	36.61	-47.81	60.22	56.83	3.38	17.795	
600.00	600.00	597.00	600.00	2.06	2.05	-52.55	36.61	-47.81	60.22	56.12	4.10	14.684	
700.00	700.00	697.00	700.00	2.41	2.40	-52.55	36.61	-47.81	60.22	55.40	4.82	12.499	
800.00	800.00	797.00	800.00	2.77	2.76	-52.55	36.61	-47.81	60.22	54.68	5.53	10.880	
900.00	900.00	897.00	900.00	3.13	3.12	-52.55	36.61	-47.81	60.22	53.97	6.25	9.632	
1,000.00	1,000.00	997.00	1,000.00	3.49	3.48	-52.55	36.61	-47.81	60.22	53.25	6.97	8.641	
1,100.00	1,100.00	1,097.00	1,100.00	3.85	3.84	-52.55	36.61	-47.81	60.22	52.53	7.69	7.835	
1,200.00	1,200.00	1,197.00	1,200.00	4.21	4.20	-52.55	36.61	-47.81	60.22	51.82	8.40	7.167	
1,300.00	1,300.00	1,297.00	1,300.00	4.57	4.55	-52.55	36.61	-47.81	60.22	51.10	9.12	6.603	
1,400.00	1,400.00	1,397.00	1,400.00	4.92	4.91	-52.55	36.61	-47.81	60.22	50.38	9.84	6.122	
1,500.00	1,500.00	1,497.00	1,500.00	5.28	5.27	-52.55	36.61	-47.81	60.22	49.67	10.55	5.706	
1,600.00	1,600.00	1,597.00	1,600.00	5.64	5.63	-52.55	36.61	-47.81	60.22	48.95	11.27	5.343	
1,700.00	1,700.00	1,697.00	1,700.00	6.00	5.99	-52.55	36.61	-47.81	60.22	48.23	11.99	5.024 CC, ES	
1,800.00	1,800.00	1,794.98	1,797.96	6.36	6.34	-52.39	37.71	-48.94	61.82	49.13	12.69	4.872	
1,900.00	1,899.98	1,892.75	1,895.61	6.71	6.68	32.27	41.12	-52.47	65.33	51.96	13.37	4.888	
2,000.00	1,999.84	1,990.32	1,992.82	7.05	7.03	35.09	46.83	-58.38	69.39	55.37	14.02	4.949	
2,100.00	2,099.45	2,087.62	2,089.44	7.40	7.38	39.16	54.81	-66.64	74.27	59.61	14.67	5.065	
2,200.00	2,198.70	2,184.59	2,185.28	7.76	7.74	44.10	65.03	-77.21	80.35	65.05	15.30	5.251	
2,300.00	2,297.47	2,281.16	2,280.18	8.12	8.11	49.48	77.44	-90.05	87.99	72.05	15.94	5.520	
2,400.00	2,395.62	2,377.28	2,373.98	8.50	8.48	54.95	92.00	-105.10	97.51	80.92	16.59	5.877	
2,500.00	2,493.06	2,472.88	2,466.53	8.90	8.88	60.20	108.64	-122.31	109.15	91.88	17.27	6.319	
2,600.00	2,589.64	2,567.91	2,557.69	9.31	9.29	65.03	127.29	-141.61	123.04	105.05	18.00	6.838	
2,700.00	2,685.43	2,662.66	2,647.65	9.76	9.72	69.33	147.97	-163.00	139.42	120.65	18.77	7.426	
2,800.00	2,781.11	2,760.62	2,740.22	10.21	10.20	72.77	170.24	-186.04	157.46	137.77	19.70	7.995	
2,900.00	2,876.79	2,858.59	2,832.80	10.69	10.69	75.50	192.51	-209.08	175.95	155.31	20.64	8.525	
3,000.00	2,972.47	2,956.55	2,925.37	11.18	11.19	77.71	214.78	-232.12	194.75	173.14	21.61	9.014	
3,100.00	3,068.15	3,054.52	3,017.95	11.67	11.71	79.54	237.05	-255.15	213.78	191.19	22.59	9.463	
3,200.00	3,163.83	3,152.48	3,110.53	12.18	12.24	81.06	259.32	-278.19	232.98	209.39	23.59	9.875	
3,300.00	3,259.51	3,250.45	3,203.10	12.70	12.78	82.35	281.59	-301.23	252.32	227.71	24.61	10.252	
3,400.00	3,355.19	3,348.41	3,295.68	13.22	13.32	83.46	303.87	-324.27	271.77	246.12	25.64	10.597	
3,500.00	3,450.87	3,446.38	3,388.26	13.76	13.88	84.42	326.14	-347.31	291.30	264.61	26.69	10.915	
3,600.00	3,546.56	3,544.34	3,480.83	14.29	14.44	85.25	348.41	-370.35	310.90	283.15	27.74	11.206	
3,700.00	3,642.24	3,642.31	3,573.41	14.84	15.01	85.99	370.68	-393.39	330.56	301.75	28.81	11.474	
3,800.00	3,737.92	3,740.27	3,665.98	15.38	15.58	86.65	392.95	-416.42	350.26	320.37	29.88	11.720	
3,900.00	3,833.60	3,838.24	3,758.56	15.94	16.16	87.24	415.22	-439.46	370.00	339.03	30.97	11.948	
4,000.00	3,929.28	3,936.20	3,851.14	16.49	16.74	87.76	437.49	-462.50	389.78	357.72	32.06	12.159	
4,100.00	4,024.96	4,034.17	3,943.71	17.05	17.32	88.24	459.77	-485.54	409.58	376.43	33.15	12.354	
4,200.00	4,120.64	4,132.13	4,036.29	17.61	17.91	88.67	482.04	-508.58	429.41	395.16	34.26	12.536	
4,300.00	4,216.32	4,230.10	4,128.87	18.18	18.50	89.07	504.31	-531.62	449.26	413.90	35.36	12.704	
4,400.00	4,312.01	4,328.06	4,221.44	18.75	19.10	89.43	526.58	-554.66	469.13	432.66	36.48	12.862	
4,500.00	4,407.69	4,426.03	4,314.02	19.32	19.69	89.76	548.85	-577.70	489.02	451.43	37.59	13.008	
4,600.00	4,503.37	4,523.99	4,406.59	19.89	20.29	90.06	571.12	-600.73	508.92	470.21	38.71	13.145	
4,700.00	4,599.05	4,621.96	4,499.17	20.47	20.89	90.35	593.39	-623.77	528.83	488.99	39.84	13.274	
4,800.00	4,694.73	4,719.92	4,591.75	21.04	21.50	90.61	615.66	-646.81	548.76	507.79	40.97	13.395	
4,900.00	4,790.41	4,817.89	4,684.32	21.62	22.10	90.85	637.94	-669.85	568.69	526.59	42.10	13.508	
5,000.00	4,886.09	4,915.85	4,776.90	22.20	22.71	91.08	660.21	-692.89	588.64	545.40	43.24	13.615	
5,100.00	4,982.05	5,013.84	4,869.49	22.77	23.32	91.50	682.48	-715.93	608.57	564.21	44.36	13.720	

CC - Min centre to center distance or convergent point, SF - min separation factor, ES - min ellipse separation



Legacy Directional Drilling

Anticollision Report

Company:	Freedom Energy	Local Co-ordinate Reference:	Well Jurnegan BS Fed Com 11H
Project:	Eddy County, NM NAD83	TVD Reference:	GL 3333' + 26.5' KB @ 3359.50usft
Reference Site:	Jurnegan	MD Reference:	GL 3333' + 26.5' KB @ 3359.50usft
Site Error:	0.00 usft	North Reference:	Grid
Reference Well:	Jurnegan BS Fed Com 11H	Survey Calculation Method:	Minimum Curvature
Well Error:	0.00 usft	Output errors are at	2.00 sigma
Reference Wellbore	OH	Database:	EDM_WA
Reference Design:	Plan 5	Offset TVD Reference:	Reference Datum

Offset Design: Jurnegan - Jurnegan BS Fed Com 3H - OH - Plan 4												Offset Site Error: 0.00 usft
Survey Program: 0-MWD												Offset Well Error: 0.00 usft
Reference		Offset		Semi Major Axis		Highside Toolface (°)	Offset Wellbore Centre		Distance		Separation Factor	Warning
Measured Depth (usft)	Vertical Depth (usft)	Measured Depth (usft)	Vertical Depth (usft)	Reference (usft)	Offset (usft)		+N/-S (usft)	+E/-W (usft)	Between Centres (usft)	Between Ellipses (usft)		
5,200.00	5,078.91	5,111.82	4,962.08	23.31	23.93	91.70	704.76	-738.97	628.42	582.99	45.42	13.835
5,300.00	5,176.58	5,209.68	5,054.56	23.80	24.54	91.60	727.01	-761.99	648.19	601.76	46.42	13.962
5,400.00	5,274.93	5,307.31	5,146.82	24.26	25.15	91.23	749.20	-784.95	667.95	620.59	47.36	14.102
5,500.00	5,373.85	5,404.58	5,238.74	24.69	25.76	90.61	771.31	-807.82	687.80	639.57	48.24	14.259
5,600.00	5,473.23	5,513.60	5,342.13	25.07	26.42	89.67	795.36	-832.70	707.30	658.11	49.19	14.378
5,700.00	5,572.93	5,629.02	5,452.88	25.43	27.08	88.65	817.92	-856.03	724.82	674.68	50.13	14.458
5,800.00	5,672.84	5,745.90	5,566.27	25.74	27.70	87.61	837.58	-876.37	740.20	689.21	50.98	14.519
5,900.00	5,772.83	5,864.17	5,682.09	26.02	28.27	3.03	854.19	-893.56	753.40	701.66	51.73	14.564
6,000.00	5,872.83	5,984.10	5,800.44	26.30	28.79	1.93	867.63	-907.46	764.17	711.73	52.44	14.572
6,100.00	5,972.81	6,105.35	5,920.82	26.64	29.26	-88.86	877.70	-917.88	772.26	719.09	53.17	14.524
6,200.00	6,071.22	6,224.98	6,040.08	26.81	29.66	-90.19	884.16	-924.56	777.57	724.04	53.52	14.528
6,300.00	6,163.99	6,339.13	6,154.15	26.88	30.00	-93.00	887.10	-927.59	781.53	728.01	53.52	14.603
6,400.00	6,247.09	6,432.08	6,247.09	26.91	30.25	-96.02	887.39	-927.89	787.36	734.14	53.22	14.795
6,500.00	6,316.87	6,501.86	6,316.87	26.96	30.43	-98.07	887.39	-927.89	800.17	747.45	52.72	15.177
6,600.00	6,370.28	6,565.99	6,381.00	27.09	30.60	-99.17	887.38	-927.50	823.01	770.91	52.10	15.797
6,700.00	6,405.00	6,693.78	6,506.43	27.34	30.80	-103.06	887.33	-905.24	854.41	803.35	51.05	16.735
6,800.00	6,419.50	7,118.52	6,806.17	27.74	30.76	-116.71	886.57	-624.30	883.73	835.51	48.22	18.326
6,900.00	6,421.88	7,362.98	6,840.83	28.29	30.90	-118.24	885.93	-383.96	885.59	835.53	50.06	17.690
7,000.00	6,424.18	7,462.98	6,843.41	29.05	31.19	-118.26	885.67	-283.99	885.74	834.40	51.34	17.253
7,100.00	6,426.49	7,562.98	6,845.99	29.99	31.69	-118.28	885.40	-184.03	885.88	832.93	52.95	16.732
7,200.00	6,428.79	7,662.97	6,848.58	31.09	32.44	-118.29	885.13	-84.06	886.02	831.17	54.86	16.152
7,300.00	6,431.09	7,762.97	6,851.16	32.35	33.42	-118.31	884.86	15.90	886.17	829.13	57.04	15.536
7,400.00	6,433.39	7,862.97	6,853.74	33.73	34.61	-118.32	884.60	115.87	886.31	826.85	59.46	14.906
7,500.00	6,435.70	7,962.97	6,856.32	35.23	35.97	-118.34	884.33	215.84	886.46	824.36	62.10	14.275
7,600.00	6,438.00	8,062.97	6,858.90	36.84	37.46	-118.35	884.06	315.80	886.60	821.68	64.92	13.657
7,700.00	6,440.30	8,162.97	6,861.48	38.53	39.07	-118.37	883.80	415.77	886.75	818.84	67.91	13.059
7,800.00	6,442.61	8,262.97	6,864.06	40.30	40.77	-118.38	883.53	515.73	886.89	815.86	71.03	12.485
7,900.00	6,444.91	8,362.97	6,866.64	42.14	42.55	-118.40	883.26	615.70	887.04	812.75	74.29	11.941
8,000.00	6,447.21	8,462.97	6,869.23	44.04	44.40	-118.41	882.99	715.67	887.18	809.54	77.65	11.426
8,100.00	6,449.51	8,562.97	6,871.81	45.99	46.31	-118.43	882.73	815.63	887.33	806.22	81.10	10.941
8,200.00	6,451.82	8,662.97	6,874.39	47.99	48.27	-118.44	882.46	915.60	887.47	802.83	84.64	10.485
8,300.00	6,454.12	8,762.97	6,876.97	50.03	50.27	-118.46	882.19	1,015.56	887.62	799.36	88.26	10.057
8,400.00	6,456.42	8,862.97	6,879.55	52.10	52.32	-118.48	881.93	1,115.53	887.77	795.83	91.93	9.657
8,500.00	6,458.72	8,962.97	6,882.13	54.20	54.39	-118.49	881.66	1,215.50	887.91	792.25	95.67	9.281
8,600.00	6,461.03	9,062.97	6,884.71	56.34	56.50	-118.51	881.39	1,315.46	888.06	788.61	99.45	8.930
8,700.00	6,463.33	9,162.97	6,887.30	58.49	58.64	-118.52	881.12	1,415.43	888.20	784.93	103.28	8.600
8,800.00	6,465.63	9,262.97	6,889.88	60.68	60.79	-118.54	880.86	1,515.39	888.35	781.21	107.14	8.291
8,900.00	6,467.94	9,362.97	6,892.46	62.88	62.97	-118.55	880.59	1,615.36	888.49	777.45	111.04	8.001
9,000.00	6,470.24	9,462.97	6,895.04	65.09	65.17	-118.57	880.32	1,715.32	888.64	773.66	114.98	7.729
9,100.00	6,472.54	9,562.97	6,897.62	67.33	67.39	-118.58	880.06	1,815.29	888.78	769.85	118.94	7.473
9,200.00	6,474.84	9,662.97	6,900.20	69.58	69.62	-118.60	879.79	1,915.26	888.93	766.00	122.93	7.231
9,300.00	6,477.15	9,762.97	6,902.78	71.84	71.87	-118.61	879.52	2,015.22	889.08	762.14	126.94	7.004
9,400.00	6,479.45	9,862.97	6,905.37	74.11	74.12	-118.63	879.25	2,115.19	889.22	758.26	130.97	6.790
9,500.00	6,481.75	9,962.97	6,907.95	76.40	76.40	-118.64	878.99	2,215.15	889.37	754.35	135.02	6.587
9,600.00	6,484.06	10,062.97	6,910.53	78.69	78.68	-118.66	878.72	2,315.12	889.51	750.43	139.08	6.396
9,700.00	6,486.36	10,162.96	6,913.11	81.00	80.97	-118.67	878.45	2,415.09	889.66	746.50	143.16	6.214
9,800.00	6,488.66	10,262.96	6,915.69	83.31	83.27	-118.69	878.19	2,515.05	889.81	742.55	147.26	6.042
9,900.00	6,490.96	10,362.96	6,918.27	85.63	85.58	-118.71	877.92	2,615.02	889.95	738.58	151.37	5.879
10,000.00	6,493.27	10,462.96	6,920.85	87.96	87.89	-118.72	877.65	2,714.98	890.10	734.61	155.49	5.724
10,100.00	6,495.57	10,562.96	6,923.44	90.29	90.22	-118.74	877.39	2,814.95	890.25	730.62	159.62	5.577
10,200.00	6,497.87	10,662.96	6,926.02	92.63	92.55	-118.75	877.12	2,914.92	890.39	726.63	163.76	5.437
10,300.00	6,500.18	10,762.96	6,928.60	94.98	94.88	-118.77	876.85	3,014.88	890.54	722.63	167.91	5.304

CC - Min centre to center distance or convergent point, SF - min separation factor, ES - min ellipse separation



Legacy Directional Drilling

Anticollision Report

Company:	Freedom Energy	Local Co-ordinate Reference:	Well Jurnegan BS Fed Com 11H
Project:	Eddy County, NM NAD83	TVD Reference:	GL 3333' + 26.5' KB @ 3359.50usft
Reference Site:	Jurnegan	MD Reference:	GL 3333' + 26.5' KB @ 3359.50usft
Site Error:	0.00 usft	North Reference:	Grid
Reference Well:	Jurnegan BS Fed Com 11H	Survey Calculation Method:	Minimum Curvature
Well Error:	0.00 usft	Output errors are at	2.00 sigma
Reference Wellbore	OH	Database:	EDM_WA
Reference Design:	Plan 5	Offset TVD Reference:	Reference Datum

Offset Design: Jurnegan - Jurnegan BS Fed Com 3H - OH - Plan 4													Offset Site Error:	0.00 usft	
Survey Program:		0-MWD		Offset		Semi Major Axis		Offset Wellbore Centre		Rule Assigned:				Offset Well Error:	0.00 usft
Measured Depth (usft)	Reference Vertical Depth (usft)	Measured Depth (usft)	Vertical Depth (usft)	Reference (usft)	Offset (usft)	Highside Toolface (°)	+N/-S (usft)	+E/-W (usft)	Between Centres (usft)	Distance Between Ellipses (usft)	Minimum Separation (usft)	Separation Factor	Warning		
10,400.00	6,502.48	10,862.96	6,931.18	97.33	97.23	-118.78	876.58	3,114.85	890.69	718.62	172.07	5.176			
10,500.00	6,504.78	10,962.96	6,933.76	99.69	99.57	-118.80	876.32	3,214.81	890.83	714.60	176.24	5.055			
10,600.00	6,507.08	11,062.96	6,936.34	102.05	101.92	-118.81	876.05	3,314.78	890.98	710.57	180.41	4.939			
10,700.00	6,509.39	11,162.96	6,938.92	104.41	104.28	-118.83	875.78	3,414.75	891.13	706.54	184.59	4.828			
10,800.00	6,511.69	11,262.96	6,941.51	106.78	106.64	-118.84	875.52	3,514.71	891.27	702.50	188.77	4.721			
10,900.00	6,513.99	11,362.96	6,944.09	109.15	109.01	-118.86	875.25	3,614.68	891.42	698.46	192.96	4.620			
11,000.00	6,516.29	11,462.96	6,946.67	111.53	111.37	-118.87	874.98	3,714.64	891.57	694.41	197.16	4.522			
11,100.00	6,518.60	11,562.96	6,949.25	113.91	113.75	-118.89	874.71	3,814.61	891.71	690.35	201.36	4.428			
11,200.00	6,520.90	11,662.96	6,951.83	116.29	116.12	-118.90	874.45	3,914.58	891.86	686.30	205.57	4.339			
11,300.00	6,523.20	11,762.96	6,954.41	118.67	118.50	-118.92	874.18	4,014.54	892.01	682.23	209.77	4.252			
11,400.00	6,525.51	11,862.96	6,956.99	121.06	120.88	-118.93	873.91	4,114.51	892.16	678.17	213.99	4.169			
11,500.00	6,527.81	11,962.96	6,959.58	123.45	123.26	-118.95	873.65	4,214.47	892.30	674.10	218.20	4.089			
11,600.00	6,530.11	12,062.96	6,962.16	125.84	125.65	-118.96	873.38	4,314.44	892.45	670.03	222.42	4.012			
11,700.00	6,532.41	12,162.96	6,964.74	128.24	128.04	-118.98	873.11	4,414.41	892.60	665.96	226.64	3.938			
11,800.00	6,534.72	12,262.96	6,967.32	130.63	130.43	-119.00	872.84	4,514.37	892.75	661.88	230.87	3.867			
11,900.00	6,537.02	12,362.96	6,969.90	133.03	132.82	-119.01	872.58	4,614.34	892.89	657.80	235.09	3.798			
12,000.00	6,539.32	12,462.96	6,972.48	135.43	135.22	-119.03	872.31	4,714.30	893.04	653.72	239.32	3.732			
12,100.00	6,541.63	12,562.96	6,975.06	137.83	137.61	-119.04	872.04	4,814.27	893.19	649.64	243.55	3.667			
12,200.00	6,543.93	12,662.96	6,977.64	140.24	140.01	-119.06	871.78	4,914.23	893.34	645.55	247.79	3.605			
12,300.00	6,546.23	12,762.96	6,980.23	142.64	142.41	-119.07	871.51	5,014.20	893.48	641.46	252.02	3.545			
12,400.00	6,548.53	12,862.96	6,982.81	145.05	144.82	-119.09	871.24	5,114.17	893.63	637.38	256.26	3.487			
12,500.00	6,550.84	12,962.96	6,985.39	147.46	147.22	-119.10	870.97	5,214.13	893.78	633.29	260.50	3.431			
12,600.00	6,553.14	13,062.96	6,987.97	149.87	149.63	-119.12	870.71	5,314.10	893.93	629.19	264.73	3.377			
12,700.00	6,555.44	13,162.96	6,990.55	152.28	152.03	-119.13	870.44	5,414.06	894.08	625.10	268.98	3.324			
12,800.00	6,557.75	13,262.96	6,993.13	154.69	154.44	-119.15	870.17	5,514.03	894.22	621.01	273.22	3.273			
12,900.00	6,560.05	13,362.96	6,995.71	157.11	156.85	-119.16	869.91	5,614.00	894.37	616.91	277.46	3.223			
13,000.00	6,562.35	13,462.96	6,998.30	159.52	159.26	-119.18	869.64	5,713.96	894.52	612.82	281.70	3.175			
13,100.00	6,564.65	13,562.96	7,000.88	161.94	161.67	-119.19	869.37	5,813.93	894.67	608.72	285.95	3.129			
13,200.00	6,566.96	13,662.96	7,003.46	164.35	164.09	-119.21	869.11	5,913.89	894.82	604.62	290.19	3.084			
13,300.00	6,569.26	13,762.96	7,006.04	166.77	166.50	-119.22	868.84	6,013.86	894.97	600.53	294.44	3.040			
13,400.00	6,571.56	13,862.96	7,008.62	169.19	168.92	-119.24	868.57	6,113.83	895.11	596.43	298.69	2.997			
13,500.00	6,573.86	13,962.96	7,011.20	171.61	171.33	-119.25	868.30	6,213.79	895.26	592.33	302.93	2.955			
13,600.00	6,576.17	14,062.96	7,013.78	174.03	173.75	-119.27	868.04	6,313.76	895.41	588.23	307.18	2.915			
13,700.00	6,578.47	14,162.96	7,016.37	176.45	176.17	-119.28	867.77	6,413.72	895.56	584.13	311.43	2.876			
13,800.00	6,580.77	14,262.96	7,018.95	178.88	178.59	-119.30	867.50	6,513.69	895.71	580.03	315.68	2.837			
13,900.00	6,583.08	14,362.96	7,021.53	181.30	181.01	-119.31	867.24	6,613.66	895.86	575.93	319.93	2.800			
14,000.00	6,585.38	14,462.96	7,024.11	183.72	183.43	-119.33	866.97	6,713.62	896.01	571.83	324.17	2.764			
14,100.00	6,587.68	14,562.96	7,026.69	186.15	185.85	-119.34	866.70	6,813.59	896.16	567.73	328.42	2.729			
14,200.00	6,589.98	14,662.96	7,029.27	188.57	188.27	-119.36	866.43	6,913.55	896.31	563.63	332.67	2.694			
14,300.00	6,592.29	14,762.96	7,031.85	191.00	190.70	-119.37	866.17	7,013.52	896.45	559.53	336.92	2.661			
14,400.00	6,594.59	14,862.96	7,034.44	193.43	193.12	-119.39	865.90	7,113.49	896.60	555.43	341.17	2.628			
14,500.00	6,596.89	14,962.96	7,037.02	195.85	195.55	-119.40	865.63	7,213.45	896.75	551.33	345.42	2.596			
14,600.00	6,599.20	15,062.96	7,039.60	198.28	197.97	-119.42	865.37	7,313.42	896.90	547.23	349.67	2.565			
14,700.00	6,601.50	15,162.96	7,042.18	200.71	200.40	-119.43	865.10	7,413.38	897.05	543.13	353.92	2.535			
14,800.00	6,603.80	15,262.96	7,044.76	203.14	202.82	-119.45	864.83	7,513.35	897.20	539.04	358.17	2.505			
14,900.00	6,606.10	15,362.96	7,047.34	205.57	205.25	-119.46	864.56	7,613.31	897.35	534.94	362.41	2.476			
15,000.00	6,608.41	15,462.96	7,049.92	208.00	207.68	-119.48	864.30	7,713.28	897.50	530.84	366.66	2.448			
15,100.00	6,610.71	15,562.96	7,052.51	210.43	210.11	-119.49	864.03	7,813.25	897.65	526.74	370.91	2.420			
15,200.00	6,613.01	15,662.96	7,055.09	212.86	212.54	-119.51	863.76	7,913.21	897.80	522.64	375.16	2.393			
15,300.00	6,615.32	15,762.96	7,057.67	215.29	214.96	-119.52	863.50	8,013.18	897.95	518.54	379.41	2.367			
15,400.00	6,617.62	15,862.96	7,060.25	217.72	217.39	-119.54	863.23	8,113.14	898.10	514.45	383.65	2.341			
15,500.00	6,619.92	15,962.96	7,062.83	220.16	219.82	-119.55	862.96	8,213.11	898.25	510.35	387.90	2.316			

CC - Min centre to center distance or convergent point, SF - min separation factor, ES - min ellipse separation



Legacy Directional Drilling

Anticollision Report

Company:	Freedom Energy	Local Co-ordinate Reference:	Well Jurnegan BS Fed Com 11H
Project:	Eddy County, NM NAD83	TVD Reference:	GL 3333' + 26.5' KB @ 3359.50usft
Reference Site:	Jurnegan	MD Reference:	GL 3333' + 26.5' KB @ 3359.50usft
Site Error:	0.00 usft	North Reference:	Grid
Reference Well:	Jurnegan BS Fed Com 11H	Survey Calculation Method:	Minimum Curvature
Well Error:	0.00 usft	Output errors are at	2.00 sigma
Reference Wellbore	OH	Database:	EDM_WA
Reference Design:	Plan 5	Offset TVD Reference:	Reference Datum

Offset Design: Jurnegan - Jurnegan BS Fed Com 3H - OH - Plan 4													Offset Site Error: 0.00 usft
Survey Program: 0-MWD													Offset Well Error: 0.00 usft
Reference		Offset		Semi Major Axis			Offset Wellbore Centre		Distance				Warning
Measured Depth (usft)	Vertical Depth (usft)	Measured Depth (usft)	Vertical Depth (usft)	Reference (usft)	Offset (usft)	Highside Toolface (°)	+N/-S (usft)	+E/-W (usft)	Between Centres (usft)	Between Ellipses (usft)	Minimum Separation (usft)	Separation Factor	
15,600.00	6,622.22	16,062.94	7,065.41	222.59	222.26	-119.57	862.69	8,313.08	898.40	506.25	392.15	2.291	
15,700.00	6,624.53	16,162.94	7,067.99	225.02	224.69	-119.58	862.43	8,413.04	898.55	502.16	396.39	2.267	
15,800.00	6,626.83	16,262.94	7,070.58	227.46	227.12	-119.60	862.16	8,513.01	898.70	498.06	400.64	2.243	
15,900.00	6,629.13	16,362.94	7,073.16	229.89	229.55	-119.61	861.89	8,612.97	898.85	493.97	404.88	2.220	
16,000.00	6,631.44	16,462.94	7,075.74	232.32	231.98	-119.63	861.63	8,712.94	899.00	489.87	409.13	2.197	
16,100.00	6,633.74	16,562.94	7,078.32	234.76	234.41	-119.64	861.36	8,812.91	899.15	485.78	413.37	2.175	
16,200.00	6,636.04	16,662.94	7,080.90	237.19	236.85	-119.66	861.09	8,912.87	899.30	481.68	417.62	2.153	
16,300.00	6,638.34	16,762.94	7,083.48	239.63	239.28	-119.67	860.83	9,012.84	899.45	477.59	421.86	2.132	
16,400.00	6,640.65	16,862.94	7,086.06	242.06	241.71	-119.69	860.56	9,112.80	899.60	473.50	426.10	2.111	
16,500.00	6,642.95	16,962.94	7,088.64	244.50	244.15	-119.70	860.29	9,212.77	899.75	469.41	430.34	2.091	
16,600.00	6,645.25	17,062.94	7,091.23	246.94	246.58	-119.72	860.02	9,312.74	899.90	465.32	434.58	2.071	
16,700.00	6,647.55	17,162.94	7,093.81	249.37	249.02	-119.73	859.76	9,412.70	900.05	461.23	438.83	2.051	
16,800.00	6,649.86	17,262.94	7,096.39	251.81	251.45	-119.75	859.49	9,512.67	900.20	457.14	443.07	2.032	
16,894.02	6,652.02	17,356.96	7,098.82	254.10	253.74	-119.76	859.24	9,606.66	900.34	453.29	447.05	2.014 SF	

CC - Min centre to center distance or convergent point, SF - min separation factor, ES - min ellipse separation



Legacy Directional Drilling

Anticollision Report

Company:	Freedom Energy	Local Co-ordinate Reference:	Well Jurnegan BS Fed Com 11H
Project:	Eddy County, NM NAD83	TVD Reference:	GL 3333' + 26.5' KB @ 3359.50usft
Reference Site:	Jurnegan	MD Reference:	GL 3333' + 26.5' KB @ 3359.50usft
Site Error:	0.00 usft	North Reference:	Grid
Reference Well:	Jurnegan BS Fed Com 11H	Survey Calculation Method:	Minimum Curvature
Well Error:	0.00 usft	Output errors are at	2.00 sigma
Reference Wellbore	OH	Database:	EDM_WA
Reference Design:	Plan 5	Offset TVD Reference:	Reference Datum

Offset Design: Jurnegan - Jurnegan BS Fed Com 4H - OH - Plan 5												Offset Site Error:	0.00 usft
Survey Program: 0-MWD												Offset Well Error:	0.00 usft
Reference	Offset	Semi Major Axis	Highside	Offset Wellbore Centre		Distance		Minimum	Separation	Warning			
Measured Depth (usft)	Vertical Depth (usft)	Measured Depth (usft)	Vertical Depth (usft)	Reference (usft)	Offset (usft)	Toolface (°)	+N/-S (usft)	+E/-W (usft)	Between Centres (usft)	Between Ellipses (usft)	Separation Factor		
0.00	0.00	0.00	2.00	0.00	0.00	-52.18	24.74	-31.87	40.40				
100.00	100.00	98.00	100.00	0.26	0.26	-52.18	24.74	-31.87	40.35	39.83	0.52	77.342	
200.00	200.00	198.00	200.00	0.62	0.61	-52.18	24.74	-31.87	40.35	39.11	1.24	32.625	
300.00	300.00	298.00	300.00	0.98	0.97	-52.18	24.74	-31.87	40.35	38.39	1.95	20.652	
400.00	400.00	398.00	400.00	1.34	1.33	-52.18	24.74	-31.87	40.35	37.68	2.67	15.108	
500.00	500.00	498.00	500.00	1.70	1.69	-52.18	24.74	-31.87	40.35	36.96	3.39	11.911	
600.00	600.00	598.00	600.00	2.06	2.05	-52.18	24.74	-31.87	40.35	36.24	4.10	9.830	
700.00	700.00	698.00	700.00	2.41	2.41	-52.18	24.74	-31.87	40.35	35.53	4.82	8.368	
800.00	800.00	798.00	800.00	2.77	2.77	-52.18	24.74	-31.87	40.35	34.81	5.54	7.285	
900.00	900.00	898.00	900.00	3.13	3.12	-52.18	24.74	-31.87	40.35	34.09	6.26	6.450	
1,000.00	1,000.00	998.00	1,000.00	3.49	3.48	-52.18	24.74	-31.87	40.35	33.38	6.97	5.787	
1,100.00	1,100.00	1,098.00	1,100.00	3.85	3.84	-52.18	24.74	-31.87	40.35	32.66	7.69	5.247	
1,200.00	1,200.00	1,198.00	1,200.00	4.21	4.20	-52.18	24.74	-31.87	40.35	31.94	8.41	4.800	
1,300.00	1,300.00	1,298.00	1,300.00	4.57	4.56	-52.18	24.74	-31.87	40.35	31.22	9.12	4.423	
1,400.00	1,400.00	1,398.00	1,400.00	4.92	4.92	-52.18	24.74	-31.87	40.35	30.51	9.84	4.100 CC	
1,500.00	1,500.00	1,497.52	1,499.50	5.28	5.26	-54.38	23.83	-33.26	40.91	30.37	10.54	3.881 ES	
1,600.00	1,600.00	1,596.80	1,598.65	5.64	5.59	-60.74	21.01	-37.51	43.01	31.79	11.23	3.831	
1,700.00	1,700.00	1,695.61	1,697.08	6.00	5.93	-69.88	16.34	-44.58	47.57	35.66	11.91	3.995	
1,800.00	1,800.00	1,793.71	1,794.48	6.36	6.27	-79.75	9.84	-54.40	55.56	42.99	12.57	4.420	
1,900.00	1,899.98	1,891.10	1,890.70	6.71	6.62	-53.33	1.57	-66.89	65.83	52.63	13.20	4.987	
2,000.00	1,999.84	1,987.87	1,985.75	7.05	6.98	-13.42	-8.42	-82.00	76.93	63.13	13.80	5.574	
2,100.00	2,099.45	2,083.93	2,079.45	7.40	7.36	-20.77	-20.09	-99.64	89.12	74.74	14.38	6.198	
2,200.00	2,198.70	2,180.31	2,172.74	7.76	7.76	-27.50	-33.44	-119.82	102.48	87.50	14.98	6.842	
2,300.00	2,297.47	2,278.81	2,267.90	8.12	8.19	-33.69	-47.48	-141.05	114.86	99.20	15.66	7.335	
2,400.00	2,395.62	2,377.41	2,363.14	8.50	8.63	-39.59	-61.54	-162.31	125.69	109.32	16.37	7.678	
2,500.00	2,493.06	2,475.98	2,458.37	8.90	9.09	-45.51	-75.60	-183.56	135.23	118.12	17.12	7.901	
2,600.00	2,589.64	2,574.41	2,553.45	9.31	9.55	-51.64	-89.63	-204.77	143.92	126.01	17.91	8.034	
2,700.00	2,685.43	2,672.62	2,648.32	9.76	10.02	-57.97	-103.64	-225.94	152.57	133.79	18.78	8.124	
2,800.00	2,781.11	2,770.80	2,743.17	10.21	10.50	-63.75	-117.64	-247.11	162.78	143.08	19.70	8.263	
2,900.00	2,876.79	2,868.98	2,838.01	10.69	10.98	-68.81	-131.64	-268.27	174.47	153.81	20.66	8.444	
3,000.00	2,972.47	2,967.16	2,932.86	11.18	11.47	-73.22	-145.64	-289.44	187.35	165.70	21.65	8.652	
3,100.00	3,068.15	3,065.35	3,027.71	11.67	11.97	-77.06	-159.64	-310.60	201.21	178.54	22.67	8.876	
3,200.00	3,163.83	3,163.53	3,122.55	12.18	12.47	-80.39	-173.64	-331.77	215.84	192.14	23.70	9.108	
3,300.00	3,259.51	3,261.71	3,217.40	12.70	12.97	-83.30	-187.64	-352.93	231.11	206.37	24.74	9.341	
3,400.00	3,355.19	3,359.89	3,312.24	13.22	13.48	-85.85	-201.64	-374.10	246.89	221.10	25.79	9.573	
3,500.00	3,450.87	3,458.07	3,407.09	13.76	13.99	-88.09	-215.64	-395.26	263.10	236.25	26.85	9.801	
3,600.00	3,546.56	3,556.26	3,501.94	14.29	14.50	-90.07	-229.64	-416.42	279.66	251.75	27.91	10.022	
3,700.00	3,642.24	3,654.44	3,596.78	14.84	15.02	-91.82	-243.64	-437.59	296.50	267.53	28.97	10.235	
3,800.00	3,737.92	3,752.62	3,691.63	15.38	15.54	-93.39	-257.64	-458.75	313.59	283.56	30.04	10.441	
3,900.00	3,833.60	3,850.80	3,786.47	15.94	16.06	-94.80	-271.64	-479.92	330.89	299.79	31.10	10.638	
4,000.00	3,929.28	3,948.98	3,881.32	16.49	16.58	-96.07	-285.64	-501.08	348.36	316.19	32.18	10.827	
4,100.00	4,024.96	4,047.17	3,976.17	17.05	17.10	-97.22	-299.65	-522.25	365.99	332.74	33.25	11.007	
4,200.00	4,120.64	4,145.35	4,071.01	17.61	17.62	-98.26	-313.65	-543.41	383.74	349.42	34.32	11.180	
4,300.00	4,216.32	4,243.53	4,165.86	18.18	18.15	-99.21	-327.65	-564.58	401.60	366.20	35.40	11.345	
4,400.00	4,312.01	4,341.71	4,260.70	18.75	18.68	-100.08	-341.65	-585.74	419.57	383.09	36.48	11.502	
4,500.00	4,407.69	4,439.89	4,355.55	19.32	19.21	-100.87	-355.65	-606.91	437.62	400.06	37.56	11.652	
4,600.00	4,503.37	4,538.08	4,450.40	19.89	19.73	-101.61	-369.65	-628.07	455.74	417.10	38.64	11.796	
4,700.00	4,599.05	4,636.26	4,545.24	20.47	20.26	-102.29	-383.65	-649.23	473.93	434.22	39.72	11.933	
4,800.00	4,694.73	4,734.44	4,640.09	21.04	20.80	-102.91	-397.65	-670.40	492.18	451.38	40.80	12.064	
4,900.00	4,790.41	4,832.62	4,734.93	21.62	21.33	-103.50	-411.65	-691.56	510.49	468.61	41.88	12.189	
5,000.00	4,886.09	4,930.80	4,829.78	22.20	21.86	-104.04	-425.65	-712.73	528.84	485.88	42.97	12.308	
5,100.00	4,982.05	5,029.07	4,924.70	22.77	22.39	-104.71	-439.66	-733.91	546.99	502.95	44.04	12.421	

CC - Min centre to center distance or convergent point, SF - min separation factor, ES - min ellipse separation



Legacy Directional Drilling

Anticollision Report

Company:	Freedom Energy	Local Co-ordinate Reference:	Well Jurnegan BS Fed Com 11H
Project:	Eddy County, NM NAD83	TVD Reference:	GL 3333' + 26.5' KB @ 3359.50usft
Reference Site:	Jurnegan	MD Reference:	GL 3333' + 26.5' KB @ 3359.50usft
Site Error:	0.00 usft	North Reference:	Grid
Reference Well:	Jurnegan BS Fed Com 11H	Survey Calculation Method:	Minimum Curvature
Well Error:	0.00 usft	Output errors are at	2.00 sigma
Reference Wellbore	OH	Database:	EDM_WA
Reference Design:	Plan 5	Offset TVD Reference:	Reference Datum

Offset Design: Jurnegan - Jurnegan BS Fed Com 4H - OH - Plan 5													Offset Site Error:	0.00 usft
Survey Program:		0-MWD						Rule Assigned:					Offset Well Error:	0.00 usft
Reference	Offset	Semi Major Axis		Offset Wellbore Centre		Distance				Warning				
Measured Depth (usft)	Vertical Depth (usft)	Measured Depth (usft)	Vertical Depth (usft)	Reference (usft)	Offset (usft)	Highside Toolface (°)	+N/-S (usft)	+E/-W (usft)	Between Centres (usft)	Between Ellipses (usft)	Minimum Separation (usft)	Separation Factor	Warning	
5,200.00	5,078.91	5,127.55	5,019.84	23.31	22.93	-105.10	-453.71	-755.14	564.31	519.23	45.07	12.520		
5,300.00	5,176.58	5,226.14	5,115.08	23.80	23.47	-105.12	-467.76	-776.39	580.73	534.67	46.07	12.607		
5,400.00	5,274.93	5,324.73	5,210.32	24.26	24.01	-104.82	-481.82	-797.64	596.30	549.29	47.01	12.684		
5,500.00	5,373.85	5,423.18	5,305.42	24.69	24.54	-104.21	-495.86	-818.87	611.10	563.18	47.91	12.754		
5,600.00	5,473.23	5,521.38	5,400.28	25.07	25.08	-103.33	-509.86	-840.03	625.24	576.48	48.76	12.822		
5,700.00	5,572.93	5,623.26	5,498.77	25.43	25.63	-102.15	-524.25	-861.79	638.80	589.20	49.60	12.879		
5,800.00	5,672.84	5,733.27	5,605.91	25.74	26.19	-100.81	-538.02	-882.60	650.61	600.16	50.45	12.896		
5,900.00	5,772.83	5,844.42	5,715.05	26.02	26.72	177.13	-549.61	-900.12	660.30	609.09	51.21	12.895		
6,000.00	5,872.83	5,956.94	5,826.27	26.30	27.20	178.38	-558.96	-914.25	668.18	616.25	51.93	12.867		
6,100.00	5,972.81	6,070.52	5,939.14	26.64	27.64	89.04	-565.95	-924.81	674.15	621.47	52.68	12.796		
6,200.00	6,071.22	6,182.41	6,050.73	26.81	28.03	90.70	-570.41	-931.56	678.19	625.08	53.11	12.770		
6,300.00	6,163.99	6,289.18	6,157.43	26.88	28.37	93.78	-572.42	-934.60	681.94	628.71	53.23	12.812		
6,400.00	6,247.09	6,378.84	6,247.09	26.91	28.61	97.08	-572.61	-934.89	688.74	635.69	53.05	12.983		
6,500.00	6,316.87	6,448.62	6,316.87	26.96	28.80	99.39	-572.61	-934.89	703.65	651.01	52.64	13.367		
6,600.00	6,370.28	6,502.96	6,371.21	27.09	28.94	99.90	-572.61	-934.89	729.92	677.83	52.09	14.012		
6,700.00	6,405.00	6,640.15	6,506.45	27.34	29.18	105.01	-572.67	-914.84	766.50	715.45	51.05	15.015		
6,800.00	6,419.50	7,071.85	6,813.68	27.74	29.15	120.48	-573.48	-632.67	801.20	753.86	47.34	16.925		
6,900.00	6,421.88	7,320.31	6,848.99	28.29	29.46	122.14	-574.18	-388.44	803.06	754.21	48.85	16.438		
7,000.00	6,424.18	7,420.31	6,851.63	29.05	29.88	122.16	-574.46	-288.48	803.24	753.16	50.08	16.039		
7,100.00	6,426.49	7,520.31	6,854.27	29.99	30.53	122.18	-574.75	-188.51	803.43	751.80	51.62	15.563		
7,200.00	6,428.79	7,620.31	6,856.90	31.09	31.39	122.20	-575.04	-88.55	803.61	750.15	53.46	15.032		
7,300.00	6,431.09	7,720.30	6,859.54	32.35	32.46	122.22	-575.32	11.42	803.79	748.23	55.56	14.467		
7,400.00	6,433.39	7,820.30	6,862.18	33.73	33.70	122.24	-575.61	111.38	803.97	746.08	57.89	13.888		
7,500.00	6,435.70	7,920.30	6,864.82	35.23	35.08	122.26	-575.90	211.34	804.16	743.73	60.43	13.308		
7,600.00	6,438.00	8,020.30	6,867.45	36.84	36.60	122.28	-576.18	311.31	804.34	741.20	63.14	12.738		
7,700.00	6,440.30	8,120.30	6,870.09	38.53	38.22	122.30	-576.47	411.27	804.52	738.50	66.02	12.186		
7,800.00	6,442.61	8,220.30	6,872.73	40.30	39.92	122.32	-576.75	511.24	804.71	735.67	69.03	11.657		
7,900.00	6,444.91	8,320.30	6,875.37	42.14	41.71	122.34	-577.04	611.20	804.89	732.72	72.17	11.153		
8,000.00	6,447.21	8,420.30	6,878.00	44.04	43.56	122.36	-577.33	711.17	805.07	729.66	75.41	10.676		
8,100.00	6,449.51	8,520.30	6,880.64	45.99	45.47	122.38	-577.61	811.13	805.26	726.52	78.74	10.227		
8,200.00	6,451.82	8,620.30	6,883.28	47.99	47.44	122.40	-577.90	911.09	805.44	723.29	82.15	9.804		
8,300.00	6,454.12	8,720.30	6,885.91	50.03	49.44	122.42	-578.18	1,011.06	805.62	719.99	85.63	9.408		
8,400.00	6,456.42	8,820.30	6,888.55	52.10	51.49	122.44	-578.47	1,111.02	805.81	716.63	89.18	9.036		
8,500.00	6,458.72	8,920.30	6,891.19	54.20	53.57	122.46	-578.76	1,210.99	805.99	713.21	92.78	8.687		
8,600.00	6,461.03	9,020.30	6,893.83	56.34	55.68	122.48	-579.04	1,310.95	806.17	709.75	96.42	8.361		
8,700.00	6,463.33	9,120.30	6,896.46	58.49	57.81	122.50	-579.33	1,410.92	806.36	706.24	100.12	8.054		
8,800.00	6,465.63	9,220.30	6,899.10	60.68	59.98	122.52	-579.61	1,510.88	806.54	702.70	103.84	7.767		
8,900.00	6,467.94	9,320.30	6,901.74	62.88	62.16	122.54	-579.90	1,610.84	806.72	699.12	107.61	7.497		
9,000.00	6,470.24	9,420.30	6,904.38	65.09	64.36	122.56	-580.19	1,710.81	806.91	695.51	111.40	7.243		
9,100.00	6,472.54	9,520.29	6,907.01	67.33	66.58	122.58	-580.47	1,810.77	807.09	691.87	115.22	7.005		
9,200.00	6,474.84	9,620.29	6,909.65	69.58	68.81	122.60	-580.76	1,910.74	807.28	688.21	119.06	6.780		
9,300.00	6,477.15	9,720.29	6,912.29	71.84	71.06	122.62	-581.05	2,010.70	807.46	684.53	122.93	6.568		
9,400.00	6,479.45	9,820.29	6,914.93	74.11	73.33	122.64	-581.33	2,110.67	807.65	680.83	126.82	6.369		
9,500.00	6,481.75	9,920.29	6,917.56	76.40	75.60	122.66	-581.62	2,210.63	807.83	677.11	130.72	6.180		
9,600.00	6,484.06	10,020.29	6,920.20	78.69	77.89	122.68	-581.90	2,310.59	808.02	673.37	134.64	6.001		
9,700.00	6,486.36	10,120.29	6,922.84	81.00	80.18	122.70	-582.19	2,410.56	808.20	669.62	138.58	5.832		
9,800.00	6,488.66	10,220.29	6,925.48	83.31	82.48	122.72	-582.48	2,510.52	808.39	665.86	142.52	5.672		
9,900.00	6,490.96	10,320.29	6,928.11	85.63	84.80	122.74	-582.76	2,610.49	808.57	662.09	146.48	5.520		
10,000.00	6,493.27	10,420.29	6,930.75	87.96	87.12	122.76	-583.05	2,710.45	808.76	658.30	150.45	5.375		
10,100.00	6,495.57	10,520.29	6,933.39	90.29	89.44	122.78	-583.33	2,810.42	808.94	654.50	154.44	5.238		
10,200.00	6,497.87	10,620.29	6,936.03	92.63	91.77	122.80	-583.62	2,910.38	809.13	650.70	158.43	5.107		
10,300.00	6,500.18	10,720.29	6,938.66	94.98	94.11	122.82	-583.91	3,010.34	809.31	646.89	162.42	4.983		

CC - Min centre to center distance or convergent point, SF - min separation factor, ES - min ellipse separation



Legacy Directional Drilling

Anticollision Report

Company:	Freedom Energy	Local Co-ordinate Reference:	Well Jurnegan BS Fed Com 11H
Project:	Eddy County, NM NAD83	TVD Reference:	GL 3333' + 26.5' KB @ 3359.50usft
Reference Site:	Jurnegan	MD Reference:	GL 3333' + 26.5' KB @ 3359.50usft
Site Error:	0.00 usft	North Reference:	Grid
Reference Well:	Jurnegan BS Fed Com 11H	Survey Calculation Method:	Minimum Curvature
Well Error:	0.00 usft	Output errors are at	2.00 sigma
Reference Wellbore	OH	Database:	EDM_WA
Reference Design:	Plan 5	Offset TVD Reference:	Reference Datum

Offset Design: Jurnegan - Jurnegan BS Fed Com 4H - OH - Plan 5													Offset Site Error: 0.00 usft
Survey Program: 0-MWD													Offset Well Error: 0.00 usft
Reference	Offset	Semi Major Axis		Distance		Rule Assigned:		Warning					
Measured Depth (usft)	Vertical Depth (usft)	Measured Depth (usft)	Vertical Depth (usft)	Reference (usft)	Offset (usft)	Highside Toolface (°)	+N/-S (usft)	+E/-W (usft)	Between Centres (usft)	Between Ellipses (usft)	Minimum Separation (usft)	Separation Factor	
10,400.00	6,502.48	10,820.29	6,941.30	97.33	96.46	122.84	-584.19	3,110.31	809.50	643.07	166.43	4.864	
10,500.00	6,504.78	10,920.29	6,943.94	99.69	98.81	122.86	-584.48	3,210.27	809.68	639.24	170.44	4.750	
10,600.00	6,507.08	11,020.29	6,946.57	102.05	101.16	122.88	-584.77	3,310.24	809.87	635.40	174.46	4.642	
10,700.00	6,509.39	11,120.29	6,949.21	104.41	103.52	122.90	-585.05	3,410.20	810.05	631.57	178.49	4.538	
10,800.00	6,511.69	11,220.28	6,951.85	106.78	105.89	122.92	-585.34	3,510.16	810.24	627.72	182.52	4.439	
10,900.00	6,513.99	11,320.28	6,954.49	109.15	108.25	122.94	-585.62	3,610.13	810.43	623.87	186.55	4.344	
11,000.00	6,516.29	11,420.28	6,957.12	111.53	110.62	122.96	-585.91	3,710.09	810.61	620.02	190.59	4.253	
11,100.00	6,518.60	11,520.28	6,959.76	113.91	113.00	122.98	-586.20	3,810.06	810.80	616.16	194.64	4.166	
11,200.00	6,520.90	11,620.28	6,962.40	116.29	115.38	123.00	-586.48	3,910.02	810.98	612.30	198.68	4.082	
11,300.00	6,523.20	11,720.28	6,965.04	118.67	117.76	123.02	-586.77	4,009.99	811.17	608.43	202.74	4.001	
11,400.00	6,525.51	11,820.28	6,967.67	121.06	120.14	123.04	-587.05	4,109.95	811.36	604.57	206.79	3.924	
11,500.00	6,527.81	11,920.28	6,970.31	123.45	122.53	123.06	-587.34	4,209.91	811.54	600.70	210.85	3.849	
11,600.00	6,530.11	12,020.28	6,972.95	125.84	124.91	123.08	-587.63	4,309.88	811.73	596.82	214.91	3.777	
11,700.00	6,532.41	12,120.28	6,975.59	128.24	127.31	123.09	-587.91	4,409.84	811.92	592.95	218.97	3.708	
11,800.00	6,534.72	12,220.28	6,978.22	130.63	129.70	123.11	-588.20	4,509.81	812.10	589.07	223.03	3.641	
11,900.00	6,537.02	12,320.28	6,980.86	133.03	132.09	123.13	-588.48	4,609.77	812.29	585.19	227.10	3.577	
12,000.00	6,539.32	12,420.28	6,983.50	135.43	134.49	123.15	-588.77	4,709.74	812.48	581.31	231.16	3.515	
12,100.00	6,541.63	12,520.28	6,986.14	137.83	136.89	123.17	-589.06	4,809.70	812.66	577.43	235.23	3.455	
12,200.00	6,543.93	12,620.28	6,988.77	140.24	139.29	123.19	-589.34	4,909.66	812.85	573.55	239.30	3.397	
12,300.00	6,546.23	12,720.28	6,991.41	142.64	141.69	123.21	-589.63	5,009.63	813.04	569.66	243.38	3.341	
12,400.00	6,548.53	12,820.28	6,994.05	145.05	144.10	123.23	-589.92	5,109.59	813.23	565.78	247.45	3.286	
12,500.00	6,550.84	12,920.28	6,996.69	147.46	146.51	123.25	-590.20	5,209.56	813.41	561.89	251.52	3.234	
12,600.00	6,553.14	13,020.27	6,999.32	149.87	148.91	123.27	-590.49	5,309.52	813.60	558.00	255.60	3.183	
12,700.00	6,555.44	13,120.27	7,001.96	152.28	151.32	123.29	-590.77	5,409.49	813.79	554.12	259.67	3.134	
12,800.00	6,557.75	13,220.27	7,004.60	154.69	153.73	123.31	-591.06	5,509.45	813.98	550.23	263.75	3.086	
12,900.00	6,560.05	13,320.27	7,007.24	157.11	156.14	123.33	-591.35	5,609.41	814.16	546.34	267.82	3.040	
13,000.00	6,562.35	13,420.27	7,009.87	159.52	158.56	123.35	-591.63	5,709.38	814.35	542.45	271.90	2.995	
13,100.00	6,564.65	13,520.27	7,012.51	161.94	160.97	123.37	-591.92	5,809.34	814.54	538.56	275.98	2.951	
13,200.00	6,566.96	13,620.27	7,015.15	164.35	163.39	123.39	-592.20	5,909.31	814.73	534.67	280.06	2.909	
13,300.00	6,569.26	13,720.27	7,017.78	166.77	165.80	123.41	-592.49	6,009.27	814.92	530.78	284.13	2.868	
13,400.00	6,571.56	13,820.27	7,020.42	169.19	168.22	123.43	-592.78	6,109.24	815.10	526.89	288.21	2.828	
13,500.00	6,573.86	13,920.27	7,023.06	171.61	170.64	123.45	-593.06	6,209.20	815.29	523.01	292.29	2.789	
13,600.00	6,576.17	14,020.27	7,025.70	174.03	173.06	123.47	-593.35	6,309.16	815.48	519.12	296.37	2.752	
13,700.00	6,578.47	14,120.27	7,028.33	176.45	175.48	123.48	-593.64	6,409.13	815.67	515.23	300.44	2.715	
13,800.00	6,580.77	14,220.27	7,030.97	178.88	177.90	123.50	-593.92	6,509.09	815.86	511.34	304.52	2.679	
13,900.00	6,583.08	14,320.27	7,033.61	181.30	180.32	123.52	-594.21	6,609.06	816.05	507.45	308.60	2.644	
14,000.00	6,585.38	14,420.27	7,036.25	183.72	182.74	123.54	-594.49	6,709.02	816.24	503.56	312.67	2.611	
14,100.00	6,587.68	14,520.27	7,038.88	186.15	185.17	123.56	-594.78	6,808.99	816.43	499.68	316.75	2.578	
14,200.00	6,589.98	14,620.27	7,041.52	188.57	187.59	123.58	-595.07	6,908.95	816.61	495.79	320.83	2.545	
14,300.00	6,592.29	14,720.27	7,044.16	191.00	190.02	123.60	-595.35	7,008.91	816.80	491.90	324.90	2.514	
14,400.00	6,594.59	14,820.26	7,046.80	193.43	192.44	123.62	-595.64	7,108.88	816.99	488.02	328.98	2.483	
14,500.00	6,596.89	14,920.26	7,049.43	195.85	194.87	123.64	-595.92	7,208.84	817.18	484.13	333.05	2.454	
14,600.00	6,599.20	15,020.26	7,052.07	198.28	197.29	123.66	-596.21	7,308.81	817.37	480.25	337.13	2.425	
14,700.00	6,601.50	15,120.26	7,054.71	200.71	199.72	123.68	-596.50	7,408.77	817.56	476.36	341.20	2.396	
14,800.00	6,603.80	15,220.26	7,057.35	203.14	202.15	123.70	-596.78	7,508.73	817.75	472.48	345.27	2.368	
14,900.00	6,606.10	15,320.26	7,059.98	205.57	204.58	123.72	-597.07	7,608.70	817.94	468.60	349.34	2.341	
15,000.00	6,608.41	15,420.26	7,062.62	208.00	207.01	123.74	-597.36	7,708.66	818.13	464.72	353.42	2.315	
15,100.00	6,610.71	15,520.26	7,065.26	210.43	209.44	123.76	-597.64	7,808.63	818.32	460.83	357.49	2.289	
15,200.00	6,613.01	15,620.26	7,067.90	212.86	211.87	123.78	-597.93	7,908.59	818.51	456.95	361.56	2.264	
15,300.00	6,615.32	15,720.26	7,070.53	215.29	214.30	123.79	-598.21	8,008.56	818.70	453.08	365.62	2.239	
15,400.00	6,617.62	15,820.26	7,073.17	217.72	216.73	123.81	-598.50	8,108.52	818.89	449.20	369.69	2.215	
15,500.00	6,619.92	15,920.26	7,075.81	220.16	219.16	123.83	-598.79	8,208.48	819.08	445.32	373.76	2.191	

CC - Min centre to center distance or convergent point, SF - min separation factor, ES - min ellipse separation



Legacy Directional Drilling

Anticollision Report

Company:	Freedom Energy	Local Co-ordinate Reference:	Well Jurnegan BS Fed Com 11H
Project:	Eddy County, NM NAD83	TVD Reference:	GL 3333' + 26.5' KB @ 3359.50usft
Reference Site:	Jurnegan	MD Reference:	GL 3333' + 26.5' KB @ 3359.50usft
Site Error:	0.00 usft	North Reference:	Grid
Reference Well:	Jurnegan BS Fed Com 11H	Survey Calculation Method:	Minimum Curvature
Well Error:	0.00 usft	Output errors are at	2.00 sigma
Reference Wellbore	OH	Database:	EDM_WA
Reference Design:	Plan 5	Offset TVD Reference:	Reference Datum

Offset Design: Jurnegan - Jurnegan BS Fed Com 4H - OH - Plan 5													Offset Site Error: 0.00 usft
Survey Program: 0-MWD													Offset Well Error: 0.00 usft
Reference		Offset		Semi Major Axis		Highside Toolface (°)	Offset Wellbore Centre		Distance		Minimum Separation (usft)	Separation Factor	Warning
Measured Depth (usft)	Vertical Depth (usft)	Measured Depth (usft)	Vertical Depth (usft)	Reference (usft)	Offset (usft)		+N/-S (usft)	+E/-W (usft)	Between Centres (usft)	Between Ellipses (usft)			
15,600.00	6,622.22	16,020.26	7,078.44	222.59	221.59	123.85	-599.07	8,308.45	819.27	441.44	377.83	2.168	
15,700.00	6,624.53	16,120.26	7,081.08	225.02	224.02	123.87	-599.36	8,408.41	819.46	437.57	381.89	2.146	
15,800.00	6,626.83	16,220.26	7,083.72	227.46	226.46	123.89	-599.64	8,508.38	819.65	433.70	385.96	2.124	
15,900.00	6,629.13	16,320.26	7,086.36	229.89	228.89	123.91	-599.93	8,608.34	819.84	429.82	390.02	2.102	
16,000.00	6,631.44	16,420.26	7,088.99	232.32	231.32	123.93	-600.22	8,708.31	820.03	425.95	394.08	2.081	
16,100.00	6,633.74	16,520.26	7,091.63	234.76	233.76	123.95	-600.50	8,808.27	820.22	422.08	398.15	2.060	
16,200.00	6,636.04	16,620.25	7,094.27	237.19	236.19	123.97	-600.79	8,908.23	820.42	418.21	402.21	2.040	
16,300.00	6,638.34	16,720.25	7,096.91	239.63	238.63	123.99	-601.07	9,008.20	820.61	414.34	406.27	2.020	
16,400.00	6,640.65	16,820.25	7,099.54	242.06	241.06	124.01	-601.36	9,108.16	820.80	410.47	410.32	2.000	
16,500.00	6,642.95	16,920.25	7,102.18	244.50	243.50	124.03	-601.65	9,208.13	820.99	406.61	414.38	1.981 Collision Risk Procedures Req.	
16,600.00	6,645.25	17,020.25	7,104.82	246.94	245.93	124.04	-601.93	9,308.09	821.18	402.74	418.44	1.962 Collision Risk Procedures Req.	
16,700.00	6,647.55	17,120.25	7,107.46	249.37	248.37	124.06	-602.22	9,408.06	821.37	398.88	422.49	1.944 Collision Risk Procedures Req.	
16,800.00	6,649.86	17,220.25	7,110.09	251.81	250.81	124.08	-602.51	9,508.02	821.56	395.01	426.55	1.926 Collision Risk Procedures Req.	
16,894.02	6,652.02	17,314.27	7,112.57	254.10	253.10	124.10	-602.77	9,602.01	821.74	391.38	430.36	1.909 Collision Risk Procedures Req., SF	

CC - Min centre to center distance or convergent point, SF - min separation factor, ES - min ellipse separation



Legacy Directional Drilling

Anticollision Report

Company:	Freedom Energy	Local Co-ordinate Reference:	Well Jurnegan BS Fed Com 11H
Project:	Eddy County, NM NAD83	TVD Reference:	GL 3333' + 26.5' KB @ 3359.50usft
Reference Site:	Jurnegan	MD Reference:	GL 3333' + 26.5' KB @ 3359.50usft
Site Error:	0.00 usft	North Reference:	Grid
Reference Well:	Jurnegan BS Fed Com 11H	Survey Calculation Method:	Minimum Curvature
Well Error:	0.00 usft	Output errors are at	2.00 sigma
Reference Wellbore	OH	Database:	EDM_WA
Reference Design:	Plan 5	Offset TVD Reference:	Reference Datum

Reference Depths are relative to GL 3333' + 26.5' KB @ 3359.50usft

Offset Depths are relative to Offset Datum


Central Meridian is -104.333334

Coordinates are relative to: Jurnegan BS Fed Com 11H

Coordinate System is US State Plane 1983, New Mexico Eastern Zone

Grid Convergence at Surface is: 0.02°

Ladder Plot

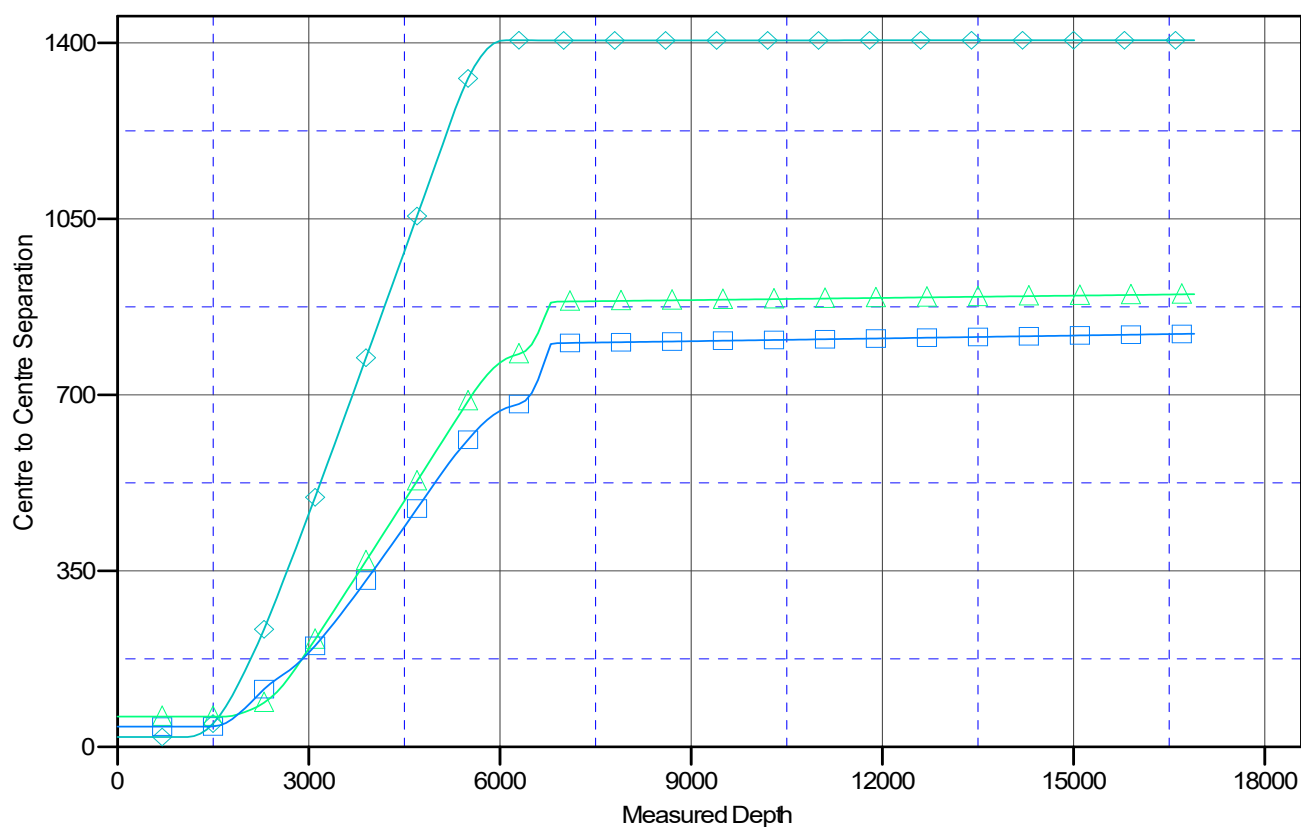

LEGEND

◆ JurneganBS Fed Com 10HDHPlan 5 VO
 ▲ JurneganBS Fed Com 3HDHPlan 4 VO
 ■ JurneganBS Fed Com 4HDHPlan 5 VO

CC - Min centre to center distance or convergent point, SF - min separation factor, ES - min ellipse separation



Legacy Directional Drilling

Anticollision Report

Company:	Freedom Energy	Local Co-ordinate Reference:	Well Jurnegan BS Fed Com 11H
Project:	Eddy County, NM NAD83	TVD Reference:	GL 3333' + 26.5' KB @ 3359.50usft
Reference Site:	Jurnegan	MD Reference:	GL 3333' + 26.5' KB @ 3359.50usft
Site Error:	0.00 usft	North Reference:	Grid
Reference Well:	Jurnegan BS Fed Com 11H	Survey Calculation Method:	Minimum Curvature
Well Error:	0.00 usft	Output errors are at	2.00 sigma
Reference Wellbore	OH	Database:	EDM_WA
Reference Design:	Plan 5	Offset TVD Reference:	Reference Datum

Reference Depths are relative to GL 3333' + 26.5' KB @ 3359.50usft

Offset Depths are relative to Offset Datum


Central Meridian is -104.333334

Coordinates are relative to: Jurnegan BS Fed Com 11H

Coordinate System is US State Plane 1983, New Mexico Eastern Zone

Grid Convergence at Surface is: 0.02°

Separation Factor Plot

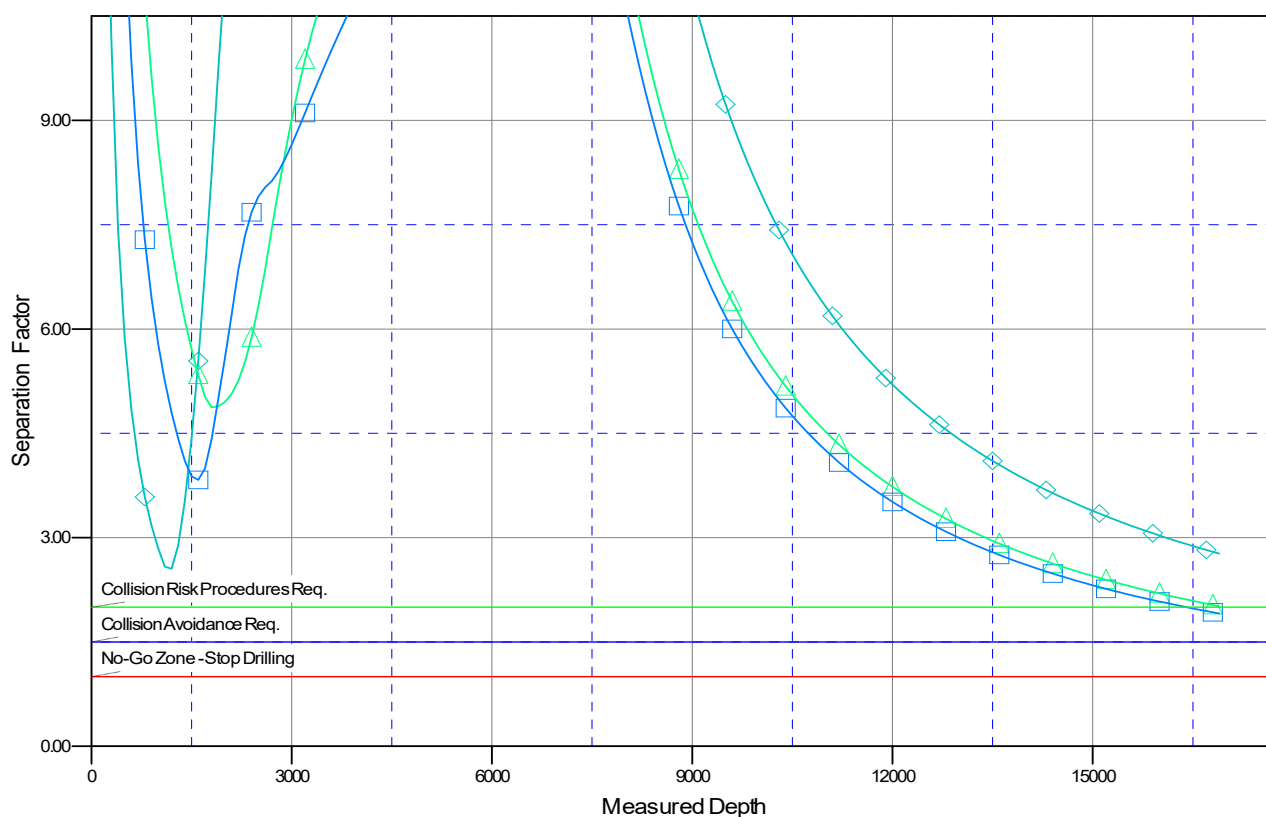

LEGEND

◆ JurneganBS Fed Com 10H-DH Plan 5 VO
 ▲ JurneganBS Fed Com 3H-DH Plan 4 VO
 ■ JurneganBS Fed Com 4H-DH Plan 5 VO

CC - Min centre to center distance or convergent point, SF - min separation factor, ES - min ellipse separation

Sante Fe Main Office
Phone: (505) 476-3441

General Information
Phone: (505) 629-6116

Online Phone Directory
<https://www.emnrd.nm.gov/ocd/contact-us>

State of New Mexico
Energy, Minerals and Natural Resources
Oil Conservation Division
1220 S. St Francis Dr.
Santa Fe, NM 87505

ACKNOWLEDGMENTS

Action 574819

ACKNOWLEDGMENTS

Operator: Flat Creek Resources, LLC 777 Main St. Fort Worth, TX 76102	OGRID: 374034
	Action Number: 574819
	Action Type: [C-101] BLM - Federal/Indian Land Lease (Form 3160-3)

ACKNOWLEDGMENTS

☒	I hereby certify that no additives containing PFAS chemicals will be added to the completion or recompletion of this well.
-------------------------------------	--

Sante Fe Main Office
Phone: (505) 476-3441

General Information
Phone: (505) 629-6116

Online Phone Directory
<https://www.emnrd.nm.gov/oed/contact-us>

State of New Mexico
Energy, Minerals and Natural Resources
Oil Conservation Division
1220 S. St Francis Dr.
Santa Fe, NM 87505

COMMENTS

Action 574819

COMMENTS

Operator: Flat Creek Resources, LLC 777 Main St. Fort Worth, TX 76102	OGRID: 374034
	Action Number: 574819
	Action Type: [C-101] BLM - Federal/Indian Land Lease (Form 3160-3)

COMMENTS

Created By	Comment	Comment Date
jeffrey.harrison	Submitted as infill to Jurnegan BS Federal Com 003H.	4/14/2026

Sante Fe Main Office
Phone: (505) 476-3441

General Information
Phone: (505) 629-6116

Online Phone Directory
<https://www.emnrd.nm.gov/ocd/contact-us>

State of New Mexico
Energy, Minerals and Natural Resources
Oil Conservation Division
1220 S. St Francis Dr.
Santa Fe, NM 87505

CONDITIONS

Action 574819

CONDITIONS

Operator: Flat Creek Resources, LLC 777 Main St. Fort Worth, TX 76102	OGRID: 374034
	Action Number: 574819
	Action Type: [C-101] BLM - Federal/Indian Land Lease (Form 3160-3)

CONDITIONS

Created By	Condition	Condition Date
permitsw	Cement is required to circulate on both surface and intermediate1 strings of casing.	4/13/2026
jeffrey.harrison	If the method of isolation was not by circulation, a CBL must be performed; if strata isolation is not achieved, then remediation will be required before further operations.	4/14/2026
jeffrey.harrison	NSP required prior to production if not included in an existing order or not an infill to an appropriate defining well in the same pool and spacing unit.	4/14/2026
jeffrey.harrison	File As Drilled C-102 and a directional Survey with C-104 completion packet.	4/14/2026
jeffrey.harrison	Notify the OCD 24 hours prior to casing & cement.	4/14/2026
jeffrey.harrison	Once the well is spud, to prevent ground water contamination through whole or partial conduits from the surface, the operator shall drill without interruption through the fresh water zone or zones and shall immediately set in cement the water protection string.	4/14/2026
jeffrey.harrison	Oil base muds are not to be used until fresh water zones are cased and cemented providing isolation from the oil or diesel. This includes synthetic oils. Oil based mud, drilling fluids and solids must be contained in a steel closed loop system.	4/14/2026