C-144

2009

District I 1625 N. French Dr., Hobbs, NM 88240 District II 1301 W. Grand Avenue, Artesia, NM 88210 District III 1000 Rio Brazos Road, Aztec, NM 87410 District IV 1220 S. St. Francis Dr., Santa Fe, NM 87505

State of New Mexico Energy Minerals and Natural Resources

Oil Conservation Division 1220 South St. Francis Dr. Santa Fe, NM 87505

Revised October 10, 2003

Form C-141

Submit 2 Copies to appropriate District Office in accordance with Rule 116 on back side of form

Release Notification and Corrective Action OPERATOR Initial Report Final Report Name of Company: Elm Ridge Exploration Contact: Amy Mackey Telephone No.: (505) 632-3476 Ext 201 Address: PO Box 156, Bloomfield, NM 87413 Facility Name: Bisti Coal 20 #1 Facility Type: Gas Well Surface Owner: Federal Mineral Owner: Lease No.: NM 25448 LOCATION OF RELEASE Feet from the North/South Line East/West Line Unit Letter Section Township Range Feet from the County 25N 12W 790 FNL 900 20 **FEL** San Juan Α **Latitude** 36.391863 **Longitude** -108.128623 NATURE OF RELEASE Type of Release: Produced Water Volume of Release: Unknown Volume Recovered: Unknown Source of Release: Earth Pit Date and Hour of Occurrence: Date and Hour of Discovery: NA Historical Was Immediate Notice Given? If YES, To Whom? ☐ Yes ☐ No ☒ Not Required By Whom? Date and Hour Was a Watercourse Reached? If YES, Volume Impacting the Watercourse. ☐ Yes ☒ No If a Watercourse was Impacted, Describe Fully.* Describe Cause of Problem and Remedial Action Taken.* Produced water from a gas well at the above mentioned location formerly discharged into an earthen pit on location. The well has been altered to no longer drain into an earthen pit, but instead into an above ground storage tank (AST). Describe Area Affected and Cleanup Action Taken.* Blow sand was removed from the earthen pit, and approximately one (1) yard of 'production sludge' was removed from the earthen pit. A De (5)-point composite sample was collected from approximately one (1) foot below the earthen pit once it was removed. The sample was analyzed in the field for total petroleum hydrocarbons (TPH) via USEPA Method 418.1, and in Envirotech's laboratory for benzene and BTEX via USEPA Method 8021 and for total chlorides via USEPA Method 4500B. The sample returned results below the 'Pit Rule' standards of 100 mg/kg TPH, 0.2 mg/kg benzene, 50 mg/kg BTEX and 250 mg/kg total chlorides, confirming that a release had not occurred. Analytical results are attached for your reference. I hereby certify that the information given above is true and complete to the best of my knowledge and understand that pursuant to NMOCD rules and regulations all operators are required to report and/or file certain release notifications and perform corrective actions for releases which may endanger public health or the environment. The acceptance of a C-141 report by the NMOCD marked as "Final Report" does not relieve the operator of liability should their operations have failed to adequately investigate and remediate contamination that pose a threat to ground water, surface water, human health or the environment. In addition, NMOCD acceptance of a C-141 report does not relieve the operator of responsibility for compliance with any other federal, state, or local laws and/or regulations. OIL CONSERVATION DIVISION Signature: Approved by District Supervisor: ls. Amy Mackey Title: Administrative Manager **Expiration Date:** Approval Date: E-mail Address: amackey1@elmridge.net Conditions of Approval: Attached

Phone: 505-632-3476 Ext 201

^{*} Attach Additional Sheets If Necessary

District I 1625 N. French Dr., Hobbs, NM 88240 District II 1301 W. Grand Avenue, Artesia, NM 88210 District III 1000 Rio Brazos Road, Aztec, NM 87410 District IV 1220 S. St. Francis Dr., Santa Fe, NM 87505

State of New Mexico **Energy Minerals and Natural Resources** Department Oil Conservation Division 1220 South St. Francis Dr. Santa Fe, NM 87505

For temporary pits, closed-loop systems, and below-grade tanks, submit to the appropriate NMOCD District Office.

For permanent pits and exceptions submit to

the Santa Fe Environmental Bureau office and provide a copy to the appropriate NMOCD District Office.

Pit, Closed-Loop System, Below-Grade Tank, or				
Proposed Alternative Method Permit or Closure Plan Application				
Type of action: Permit of a pit, closed-loop system, below-grade tank, or proposed alternative method Closure of a pit, closed-loop system, below-grade tank, or proposed alternative method Modification to an existing permit Closure plan only submitted for an existing permitted or non-permitted pit, closed-loop system, below-grade tank, or proposed alternative method				
Instructions: Please submit one application (Form C-144) per individual pit, closed-loop system, below-grade tank or alternative request				
Please be advised that approval of this request does not relieve the operator of liability should operations result in pollution of surface water, ground water or the environment. Nor does approval relieve the operator of its responsibility to comply with any other applicable governmental authority's rules, regulations or ordinances.				
Operator: Elm Ridge Exploration OGRID #: 149052				
Address: P.O. Box 156; Bloomfield, NM 87413				
Facility or well name: Bisti Coal 20-1				
API Number: 3004528382 OCD Permit Number:				
U/L or Qtr/Qtr A Section 20 Township 25N Range 12W County: San Juan				
Center of Proposed Design: Latitude 36.391863 Longitude -108.128623 NAD: ☐1927 ☐ 1983				
Surface Owner: X Federal X State Private Tribal Trust or Indian Allotment				
2. ☑ Pit: Subsection F or G of 19.15.17.11 NMAC Temporary: ☐ Drilling ☐ Workover ☑ Permanent ☐ Emergency ☐ Cavitation ☐ P&A				
☐ Lined ☐ Unlined Liner type: Thicknessmil ☐ LLDPE ☐ HDPE ☐ PVC ☐ Other				
☐ String-Reinforced				
Liner Seams: Welded Factory Other Volume: bbl Dimensions: L 12' x W 12 x D 0.5'				
3.				
Closed-loop System: Subsection H of 19.15.17.11 NMAC				
Type of Operation: P&A Drilling a new well Workover or Drilling (Applies to activities which require prior approval of a permit or notice of intent)				
Drying Pad Above Ground Steel Tanks Haul-off Bins Other				
☐ Lined ☐ Unlined Liner type: Thicknessmil ☐ LLDPE ☐ HDPE ☐ PVC ☐ Other				
Liner Seams: Welded Factory Other				
4.				
Below-grade tank: Subsection I of 19.15.17.11 NMAC				
Volume:bbl Type of fluid:				
Tank Construction material:				
Secondary containment with leak detection Visible sidewalls, liner, 6-inch lift and automatic overflow shut-off				
☐ Visible sidewalls and liner ☐ Visible sidewalls only ☐ Other				
Liner type: Thicknessmil				
5.				
Alternative Method:				

Submittal of an exception request is required. Exceptions must be submitted to the Santa Fe Environmental Bureau office for consideration of approval.

6.	
Fencing: Subsection D of 19.15.17.11 NMAC (Applies to permanent pits, temporary pits, and below-grade tanks)	
Chain link, six feet in height, two strands of barbed wire at top (Required if located within 1000 feet of a permanent residence, school, institution or church)	hospital,
☐ Four foot height, four strands of barbed wire evenly spaced between one and four feet	
Alternate. Please specify	
7.	
Netting: Subsection E of 19.15.17.11 NMAC (Applies to permanent pits and permanent open top tanks)	l
☐ Screen ☒ Netting ☐ Other	
Monthly inspections (If netting or screening is not physically feasible)	
8.	
Signs: Subsection C of 19.15.17.11 NMAC	å
☐ 12"x 24", 2" lettering, providing Operator's name, site location, and emergency telephone numbers	
⊠ Signed in compliance with 19.15.3.103 NMAC	
9. <u>Administrative Approvals and Exceptions:</u> Justifications and/or demonstrations of equivalency are required. Please refer to 19.15.17 NMAC for guidance.	
Please check a box if one or more of the following is requested, if not leave blank:	
Administrative approval(s): Requests must be submitted to the appropriate division district or the Santa Fe Environmental Bureau	office for
consideration of approval. Exception(s): Requests must be submitted to the Santa Fe Environmental Bureau office for consideration of approval.	
Siting Criteria (regarding permitting): 19.15.17.10 NMAC Instructions: The applicant must demonstrate compliance for each siting criteria below in the application. Recommendations of accept material are provided below. Requests regarding changes to certain siting criteria may require administrative approval from the appropriate or may be considered an exception which must be submitted to the Santa Fe Environmental Bureau office for consideration of a Applicant must attach justification for request. Please refer to 19.15.17.10 NMAC for guidance. Siting criteria does not apply to drying above-grade tanks associated with a closed-loop system.	priate district pproval.
Ground water is less than 50 feet below the bottom of the temporary pit, permanent pit, or below-grade tank.	☐ Yes ☐ No
- NM Office of the State Engineer - iWATERS database search; USGS; Data obtained from nearby wells	
Within 300 feet of a continuously flowing watercourse, or 200 feet of any other significant watercourse or lakebed, sinkhole, or playa lake (measured from the ordinary high-water mark).0. - Topographic map; Visual inspection (certification) of the proposed site	Yes No
Within 300 feet from a permanent residence, school, hospital, institution, or church in existence at the time of initial application. - (Applies to temporary, emergency, or cavitation pits and below-grade tanks) (☐ Yes ☐ No ☐ NA
Within 1000 feet from a permanent residence, school, hospital, institution, or church in existence at the time of initial application. (Applies to permanent pits)	
- Visual inspection (certification) of the proposed site; Aerial photo; Satellite image	☐ Yes ☐ No
Within 500 horizontal feet of a private, domestic fresh water well or spring that less than five households use for domestic or stock watering purposes, or within 1000 horizontal feet of any other fresh water well or spring, in existence at the time of initial application. NM Office of the State Engineer - iWATERS database search; Visual inspection (certification) of the proposed site	□ NA
Within incorporated municipal boundaries or within a defined municipal fresh water well field covered under a municipal ordinance adopted pursuant to NMSA 1978, Section 3-27-3, as amended.	☐ Yes ☐ No
Within 500 feet of a wetland.	
Within the area overlying a subsurface mine.	☐ Yes ☐ No
Within an unstable area. - Engineering measures incorporated into the design; NM Bureau of Geology & Mineral Resources; USGS; NM Geological Society; Topographic map	Yes No
Within a 100-year floodplain FEMA map	☐ Yes ☐ No
	☐ Yes ☐ No
	☐ Yes ☐ No

Temporary Pits, Emergency Pits, and Below-grade Tanks Permit Application Attachment Checklist: Subsection B of 19.15.17.9 NMAC Instructions: Each of the following items must be attached to the application. Please indicate, by a check mark in the box, that the documents are attached.
 ☐ Hydrogeologic Report (Below-grade Tanks) - based upon the requirements of Paragraph (4) of Subsection B of 19.15.17.9 NMAC ☐ Hydrogeologic Data (Temporary and Emergency Pits) - based upon the requirements of Paragraph (2) of Subsection B of 19.15.17.9 NMAC ☐ Siting Criteria Compliance Demonstrations - based upon the appropriate requirements of 19.15.17.10 NMAC ☐ Design Plan - based upon the appropriate requirements of 19.15.17.11 NMAC ☐ Operating and Maintenance Plan - based upon the appropriate requirements of 19.15.17.12 NMAC
Closure Plan (Please complete Boxes 14 through 18, if applicable) - based upon the appropriate requirements of Subsection C of 19.15.17.9 NMAC and 19.15.17.13 NMAC
Previously Approved Design (attach copy of design) API Number: or Permit Number:
Closed-loop Systems Permit Application Attachment Checklist: Subsection B of 19.15.17.9 NMAC Instructions: Each of the following items must be attached to the application. Please indicate, by a check mark in the box, that the documents are attached.
Geologic and Hydrogeologic Data (only for on-site closure) - based upon the requirements of Paragraph (3) of Subsection B of 19.15.17.9 Siting Criteria Compliance Demonstrations (only for on-site closure) - based upon the appropriate requirements of 19.15.17.10 NMAC Design Plan - based upon the appropriate requirements of 19.15.17.11 NMAC Operating and Maintenance Plan - based upon the appropriate requirements of 19.15.17.12 NMAC Closure Plan (Please complete Boxes 14 through 18, if applicable) - based upon the appropriate requirements of Subsection C of 19.15.17.9 NMAC and 19.15.17.13 NMAC
Previously Approved Design (attach copy of design) API Number:
Previously Approved Operating and Maintenance Plan API Number:(Applies only to closed-loop system that use above ground steel tanks or haul-off bins and propose to implement waste removal for closure)
·
Permanent Pits Permit Application Checklist: Subsection B of 19.15.17.9 NMAC Instructions: Each of the following items must be attached to the application. Please indicate, by a check mark in the box, that the documents are attached. Hydrogeologic Report - based upon the requirements of Paragraph (1) of Subsection B of 19.15.17.9 NMAC Siting Criteria Compliance Demonstrations - based upon the appropriate requirements of 19.15.17.10 NMAC Climatological Factors Assessment Certified Engineering Design Plans - based upon the appropriate requirements of 19.15.17.11 NMAC Dike Protection and Structural Integrity Design - based upon the appropriate requirements of 19.15.17.11 NMAC Leak Detection Design - based upon the appropriate requirements of 19.15.17.11 NMAC Quality Control/Quality Assessment - based upon the appropriate requirements of 19.15.17.11 NMAC Quality Control/Quality Assurance Construction and Installation Plan Operating and Maintenance Plan - based upon the appropriate requirements of 19.15.17.12 NMAC Freeboard and Overtopping Prevention Plan - based upon the appropriate requirements of 19.15.17.11 NMAC Nuisance or Hazardous Odors, including H ₂ S, Prevention Plan Emergency Response Plan Oil Field Waste Stream Characterization Monitoring and Inspection Plan Erosion Control Plan Erosion Control Plan Closure Plan - based upon the appropriate requirements of Subsection C of 19.15.17.9 NMAC and 19.15.17.13 NMAC
Instructions: Please complete the applicable boxes, Boxes 14 through 18, in regards to the proposed closure plan.
Type: Drilling Workover Emergency Cavitation P&A Permanent Pit Below-grade Tank Closed-loop System Alternative Proposed Closure Method: Waste Excavation and Removal Waste Removal (Closed-loop systems only) On-site Closure Method (Only for temporary pits and closed-loop systems) In-place Burial On-site Trench Burial Alternative Closure Method (Exceptions must be submitted to the Santa Fe Environmental Bureau for consideration)
Waste Excavation and Removal Closure Plan Checklist: (19.15.17.13 NMAC) Instructions: Each of the following items must be attached to the closure plan. Please indicate, by a check mark in the box, that the documents are attached. Protocols and Procedures - based upon the appropriate requirements of 19.15.17.13 NMAC Confirmation Sampling Plan (if applicable) - based upon the appropriate requirements of Subsection F of 19.15.17.13 NMAC Disposal Facility Name and Permit Number (for liquids, drilling fluids and drill cuttings) Soil Backfill and Cover Design Specifications - based upon the appropriate requirements of Subsection H of 19.15.17.13 NMAC Re-vegetation Plan - based upon the appropriate requirements of Subsection G of 19.15.17.13 NMAC

Waste Removal Closure For Closed-loop Systems That Utilize Above Ground Ste Instructions: Please indentify the facility or facilities for the disposal of liquids, dril facilities are required.		
Disposal Facility Name: Di	isposal Facility Permit Number:	
Disposal Facility Name: Di	isposal Facility Permit Number:	
Will any of the proposed closed-loop system operations and associated activities occur ☐ Yes (If yes, please provide the information below) ☐ No		
Required for impacted areas which will not be used for future service and operations: Soil Backfill and Cover Design Specifications based upon the appropriate regular Re-vegetation Plan - based upon the appropriate requirements of Subsection I of Site Reclamation Plan - based upon the appropriate requirements of Subsection	quirements of Subsection H of 19.15.17.13 NMAC of 19.15.17.13 NMAC	
Siting Criteria (regarding on-site closure methods only): 19.15.17.10 NMAC Instructions: Each siting criteria requires a demonstration of compliance in the clo provided below. Requests regarding changes to certain siting criteria may require a considered an exception which must be submitted to the Santa Fe Environmental Budemonstrations of equivalency are required. Please refer to 19.15.17.10 NMAC for	dministrative approval from the appropriate districureau office for consideration of approval. Justific	ct office or may be
Ground water is less than 50 feet below the bottom of the buried waste. - NM Office of the State Engineer - iWATERS database search; USGS; Data of		☐ Yes ☐ No ☐ NA
Ground water is between 50 and 100 feet below the bottom of the buried waste - NM Office of the State Engineer - iWATERS database search; USGS; Data of		☐ Yes ☐ No ☐ NA
Ground water is more than 100 feet below the bottom of the buried waste. - NM Office of the State Engineer - iWATERS database search; USGS; Data of		☐ Yes ☐ No ☐ NA
Within 300 feet of a continuously flowing watercourse, or 200 feet of any other significance (measured from the ordinary high-water mark). - Topographic map; Visual inspection (certification) of the proposed site	icant watercourse or lakebed, sinkhole, or playa	☐ Yes ☐ No
Within 300 feet from a permanent residence, school, hospital, institution, or church in Visual inspection (certification) of the proposed site; Aerial photo; Satellite in		Yes No
Within 500 horizontal feet of a private, domestic fresh water well or spring that less th watering purposes, or within 1000 horizontal feet of any other fresh water well or spri NM Office of the State Engineer - iWATERS database; Visual inspection (cer	ng, in existence at the time of initial application.	☐ Yes ☐ No
Within incorporated municipal boundaries or within a defined municipal fresh water valopted pursuant to NMSA 1978, Section 3-27-3, as amended. - Written confirmation or verification from the municipality; Written approval		Yes No
Within 500 feet of a wetland. - US Fish and Wildlife Wetland Identification map; Topographic map; Visual in	nspection (certification) of the proposed site	☐ Yes ☐ No
Within the area overlying a subsurface mine. - Written confirmation or verification or map from the NM EMNRD-Mining are	nd Mineral Division	☐ Yes ☐ No
 Within an unstable area. Engineering measures incorporated into the design; NM Bureau of Geology & Society; Topographic map 	t Mineral Resources; USGS; NM Geological	☐ Yes ☐ No
Within a 100-year floodplain FEMA map		☐ Yes ☐ No
On-Site Closure Plan Checklist: (19.15.17.13 NMAC) Instructions: Each of the faby a check mark in the box, that the documents are attached. Siting Criteria Compliance Demonstrations - based upon the appropriate requirements of Succession Plan of Burial Trench (if applicable) based upon the appropriate requirements of Succession Plan of Temporary Pit (for in-place burial of a drying pad) Protocols and Procedures - based upon the appropriate requirements of 19.15.11 Confirmation Sampling Plan (if applicable) - based upon the appropriate requirements of Succession Plan - based upon the appropriate requirements of Succession Plan - based upon the appropriate requirements of Subsection Plan - based upon the appropriate requirements of Subsection I of Site Reclamation Plan - based upon the appropriate requirements of Subsection I of Site Reclamation Plan - based upon the appropriate requirements of Subsection I of Site Reclamation Plan - based upon the appropriate requirements of Subsection I of Site Reclamation Plan - based upon the appropriate requirements of Subsection I of Site Reclamation Plan - based upon the appropriate requirements of Subsection I of Site Reclamation Plan - based upon the appropriate requirements of Subsection I of Site Reclamation Plan - based upon the appropriate requirements of Subsection I of Site Reclamation Plan - based upon the appropriate requirements of Subsection I of Site Reclamation Plan - based upon the appropriate requirements of Subsection I of Site Reclamation Plan - based upon the appropriate requirements of Subsection I of Site Reclamation Plan - based upon the appropriate requirements of Subsection I of Site Reclamation Plan - based upon the appropriate requirements of Subsection I of Site Reclamation Plan - based upon the appropriate requirements of Subsection I of Site Reclamation Plan - based upon the appropriate requirements of Subsection I of Site Reclamation Plan - based upon the appropriate requirements of Subsection I of Site Reclamation Plan - based upon the appro	ements of 19.15.17.10 NMAC ubsection F of 19.15.17.13 NMAC opriate requirements of 19.15.17.11 NMAC) - based upon the appropriate requirements of 19.15 7.13 NMAC ments of Subsection F of 19.15.17.13 NMAC ubsection F of 19.15.17.13 NMAC 1 cuttings or in case on-site closure standards cannot of 19.15.17.13 NMAC	5.17.11 NMAC

Operator Application Certificat	•	•		and belief.
Name (Print):		Γitle:		
Signature:		Date:		<u>.</u>
E-mail address:	Telep	hone:		
OCD Approval: Permit App	lication (including closure plan)	Closure Plan (only)	OCD Conditions (see attachm	nent)
OCD Representative Signature:			Approval Date: _	
Title:		OCD Permit	Number:	
21. Closure Report (required within Instructions: Operators are required to	n 60 days of closure completion): ired to obtain an approved closure be submitted to the division within oved closure plan has been obtained	Subsection K of 19.15.17.1 plan prior to implementing 60 days of the completion of	g any closure activities and su of the closure activities. Pleas	
		⊠ Closure	Completion Date: 8/3/09	
22. Closure Method: Waste Excavation and Remov ☐ If different from approved pla	ral On-Site Closure Method n, please explain.	☐ Alternative Closure M	ethod	Closed-loop systems only)
Instructions: Please indentify the two facilities were utilized. Disposal Facility Name:	Installation Rates and Seeding Technique ecklist: Instructions: Each of the just are attached. Inface owner and division) See Attached for on-site closure; res and temporary pits) alytical Results (if applicable) See Analytical Results (required for on-site Permit Number Envirotech Land Installation See Attached Rates and Seeding Technique See A	Disposal Faci Disposal Faci Disposal Faci Disposal Fac ormed on or in areas that we had no operations: following items must be attached	drill cuttings were disposed. It is permit Number: NM ility Permit Number: It is ill not be used for future service.	Use attachment if more than 1-01-0011 ee and operations?
On-site Closure Location:	Latitude	Longitude	NAD:	□1927 □ 1983
Operator Closure Certification: I hereby certify that the information belief. I also certify that the closure	on and attachments submitted with the complies with all applicable close	his closure report is true, ac ure requirements and condi	curate and complete to the bestions specified in the approved	et of my knowledge and closure plan.
Name (Print): Ms. Amy	Mackey		Administrative Manager	
Signature:	~ ~ ~	Date:		
E-mail address: amack	ey1@elmridge.net	Telepho	ne: (505) 632-3476 ext. 2	.01

Telephone: (505) 632-3476 ext. 201

Earthen Pit Closure Checklist

- 1) Elm Ridge Exploration, or a contractor acting on behalf of Elm Ridge Exploration, will close all former earthen pits prior to the closure date agreed upon by the New Mexico Oil Conservation Division (NMOCD) of December 31, 2009.

 Closure date for the earth pit located at the Bisti Coal 20-1 well site is August 3, 2009.
- 2) In accordance with Subsection A of 19.15.17.13 NMAC, Elm Ridge Exploration, or a contractor acting on behalf of Elm Ridge Exploration, will close any earthen pits at a date the division requires because of imminent danger to fresh water, public health or the environment.

None of the earthen pits to be closed by Elm Ridge Exploration are deemed an imminent risk to the environment, public health, or to fresh or public water.

- 3) Elm Ridge Exploration, or a contractor acting on behalf of Elm Ridge Exploration, will close earthen pits first which seem to pose a greater risk to fresh water, public health, or the environment. This will be determined by the locations proximately to surface water sources and distance to groundwater.
 - None of the earthen pits to be closed by Elm Ridge Exploration are deemed an imminent risk to the environment, public health, or to fresh or public water.
- 4) No less than 60 days prior to any earthen pit closure activities, Elm Ridge Exploration, or a contractor acting on behalf of Elm Ridge Exploration, will provide written notification to the Santa Fe NMOCD office as well as a schedule of on-site activities, as in accordance with 19.15.17.13 Subsection J Paragraph (3) NMAC.

 Notification was provided to Mr. Brad Jones of the NMOCD Santa Fe Office on July 15, 2009 along with a schedule of on-site activities; see attached Notification Letter.
- 5) No less than 24 hours and no greater than one (1) week prior to earthen pit removal, Elm Ridge Exploration, or a contractor acting on behalf of Elm Ridge Exploration, will provide written notification to the appropriate surface owner as well as a schedule of onsite activities, as in accordance with 19.15.17.13 Subsection J Paragraph (1) NMAC. Elm Ridge Exploration, or a contractor acting on behalf of Elm Ridge Exploration, will notify the surface owner by certified mail, return receipt requested, that the operator plans to close an earthen pit. The return receipt will be used to ensure that the surface owner has received written notification no less than 24 hours and no greater than one (1) week prior to the beginning of BGT closure activities. Evidence of mailing of the notice to the address of the surface owner shown in the county tax records is sufficient to demonstrate compliance with this requirement. Closure activities that will take place on tribal land will have notifications sent by certified mail, return receipt requested, to the appropriate tribal office. Elm Ridge Exploration, or a contractor acting on behalf of Elm Ridge Exploration, will notify the Bureau of Land Management (BLM) of closure activities for wells located on federal land per a Sundry Notice, as in accordance with 19.15.17.13 Subsection J Paragraph (1) NMAC. All notices will be sent in such a way that the surface owner received notice at least 24 hours prior to the beginning of closure

Notification was provided to the Bureau of Land Management on July 29, 2009; see attached Sundry Notice and Return Receipt.

- 6) Elm Ridge Exploration, or a contractor acting on behalf of Elm Ridge Exploration, will remove all liquids and/or sludge, to visual extents, prior to closure sampling. Material will be disposed of at Envirotech's Landfarm #2, Permit # NM-01-0011, TNT Environmental Inc. Landfarm, Permit # NM-01-0008, Industrial Ecosystems Inc. (IEI) Landfarm, Permit # NM-01-0010B or Basin Disposal, Permit # NM-01-0005, depending on the consistence of the material removed, as in accordance with 19.15.17.13 Subsection C Paragraph (1) NMAC.
 - On July 27, 2009, approximately one (1) cubic yard of production sludge was removed from the earthen pit and disposed of at Envirotech's NMOCD permitted soil remediation facility, Landfarm #2, Permit # NM-01-0011; see attached *Bill of Lading*.
- 7) Elm Ridge Exploration, or a contractor acting on behalf of Elm Ridge Exploration, will remove all on-site equipment associated with this earthen pit unless it is required for some other purpose, as in accordance with 19.15.17.13 Subsection C Paragraph (2) NMAC. The equipment that meets the requirements of 19.15.9.712 Subsection A NMAC and 19.15.9.712 Subsection D Paragraph (1) will be disposed of at San Juan County Regional Landfill. Waste that is classified by 19.15.9.712 Subsection D Paragraph (2) will be sampled accordingly to determine acceptance of this material at the San Juan County Regional Landfill. Waste that is unable to be accepted at the San Juan County Regional Landfill will be submitted to the OCD on a case-by-case basis in accordance with Paragraph (3) of Subsection D of 19.15.9.712.
 - All on-site equipment will be used for the continued operation of the Bisti Coal 20-1 well site; see *Field Sheet* and *Site Photos*.
- 8) Once the earthen pit is removed to visual extents of contamination, a five (5)-point composite sample will be collected from directly below the liner(s) or at native soil. Additional discrete samples will be collected from any area that is wet, discolored or show other evidence of a release. All samples being collected will be analyzed for benzene and total BTEX via USEPA Method 8021B, TPH via USEPA Method 418.1, and chlorides via USEPA 300.1, as in accordance with 19.15.17.13 Subsection C Paragraph (3) NMAC.

A five (5)-point composite sample was collected of native soil beneath the earthen pit and analyzed in the field for total petroleum hydrocarbons (TPH) via USEPA Method 418.1, and analyzed in the laboratory for benzene and BTEX via USEPA Method 8021B, and for total chlorides via USEPA Method 4500B. The sample returned results below the 100 mg/kg TPH standard, the 0.2 mg/kg benzene standard, the 50 mg/kg BTEX standard and the 250 mg/kg total chloride standard, confirming that a release did NOT occur.

NAME		Benzene	BTEX	Chlorides	ТРН
Pit	Rule	0.2 mg/kg	50 mg/kg	250 mg/kg	100 mg/kg
Standard					
1' Floor		< 0.0009 mg/kg	0.0144 mg/kg	5 mg/kg	52 mg/kg

- 9) Depending on soil sample results the area will be either backfilled or the area will be excavated
 - 1) If soil samples do not exceed the regulatory standards of 0.2 mg/kg benzene, 50 mg/kg BTEX, 100 mg/kg TPH, and 250 mg/kg or background concentration of chlorides, as in accordance with 19.15.17.13 Subsection C Paragraph (3) NMAC.

i. Elm Ridge Exploration, or a contractor acting on behalf of Elm Ridge Exploration, shall submit a Form C-141 with the laboratory results so that the division may review the results to determine if additional delineation is required in accordance with Paragraph (4) of Subsection C of 19.15.17.13 NMAC.

Completed Form C-141 is attached for your review.

ii. Elm Ridge Exploration, or a contractor acting on behalf of Elm Ridge Exploration, will backfill the excavation or impacted area with non-waste containing, earthen material, in accordance with 19.15.17.13 Subsection E Paragraph (6) NMAC. A soil cover shall be installed for all backfilled excavations consisting of the background thickness of topsoil or one (1) foot of suitable material to establish vegetation at the site, whichever is greater in accordance with Subsections H of 19.15.17.13 NMAC. The operator shall construct the soil cover to the site's existing grade and prevent ponding of water and erosion of the cover material.

Elm Ridge Exploration has backfilled the excavated area with non-waste containing earthen material, and installed a soil cover of at least one (1) foot thick of suitable material to establish vegetation at this site. The soil cover has been graded in such a way that it conforms to the grade of the natural surroundings, and will prevent ponding of water and erosion of the cover material; see Site Photos.

iii. All areas of the well site that are no longer utilized on a day to day basis for the production of oil and/or gas, Elm Ridge Exploration, or a contractor acting on behalf of Elm Ridge Exploration, will substantially restore, recontour and re-vegetate the areas, in accordance with 19.15.17.13 Subsections G and I NMAC. The operator shall notify the division when it has re-seed and when it has achieved successful re-vegetation.

Elm Ridge Exploration has restored, recontoured and re-seeded the excavated area in accordance with BLM standards as outlined in the Memorandum of Understanding (MOU).

2) If soil samples exceed the regulatory standards stated above.

i. Elm Ridge Exploration, or a contractor acting on behalf of Elm Ridge Exploration, shall submit a Form C-141 with the laboratory results so that the division may review the results to determine if additional delineation is required in accordance with Paragraph (4) of Subsection C of 19.15.17.13 NMAC.

The five (5)-point composite sample of native soil beneath the earthen pit returned results below the 100 mg/kg TPH standard, the 0.2 mg/kg benzene standard, the 50 mg/kg BTEX standard and the 250 mg/kg total chloride standard, confirming that a release did NOT occur.

Elm Ridge Exploration
Bisti Coal 20-1
Earth Pit Closure
03056-0167
Closure Date: 8/3/09

10) Elm Ridge Exploration will submit a closure report within 60 days following the earthen pit closure. The closure report will consist of a form C-144 with all supporting data and a form C-141 with all supporting data. The supporting data will include proof of closure notice to the surface owner and the OCD, confirmation sampling analytical results, a site diagram, soil backfilling and cover installation, re-vegetation rates, re-seeding techniques, and site reclamation photo documentation if applicable, along with all other information related to the onsite activities.

See attached C-144 Closure Form and attached Form C-141 Release Notification Form. Closure report has been submitted prior to October 3, 2009.



July 8, 2009

Project No. 03056-0241

Mr. Brad Jones New Mexico Oil Conservation Division 1220 South St. Francis Street Santa Fe, New Mexico 87505

Phone (505) 476-3487

RE: EARTH PIT CLOSURE DOCUMENTATION

Dear Mr. Jones.

Envirotech, Inc, on the behalf of Elm Ridge Exploration, would like to submit this notification to disregard the C-141 Forms concerning the Earthen Pit Release Notifications previously submitted to your office in May of 2009. These C-141 documents were submitted with contamination assessment sampling results, and do not reflect any closure activities occurring on site. To date, closure activities have not begun on any earthen pit owned by Elm Ridge Exploration. A list of the earthen pit C-141 soil assessment documents submitted to your office are as follows:

BISTI COAL 12 001	BISTI COAL 4 001 PIT 1	JETER COM 002
BISTI COAL 16 001	BISTI COAL 4 001 PIT 2	JICARILLA APACHE I 011
BISTI COAL 16 002	BISTI COAL 4 COM 002	NORTH BISTI COAL 31 001
BISTI COAL 17 COM 001	BISTI COAL 5 COM 001	NORTH BISTI COAL 32M COM 002
BISTI COAL 18 001	BISTI COAL 5K COM 002	PETE MORROW 001
BISTI COAL 18 002	BISTI COAL 6 001	PETE MORROW 002
BISTI COAL 19 001	BISTI COAL 6 002	SAM JACKSON STATE COM 001
BISTI COAL 2 001	BISTI COAL 7 001	SHEILA HIXON 001
BISTI COAL 2 002	BISTI COAL 7 COM 002	WEST BISTÍ COAL 10 002
BISTI COAL 20 001	BISTI COAL 8 COM 001	WEST BISTI COAL 11 002
BISTI COAL 20 002	BISTI COAL 8L COM 002	WEST BISTI COAL 11 COM F 001
BISTI COAL 21 001	BISTI COAL 9 001	WEST BISTI COAL 12 001
BISTI COAL 21 COM 002	BISTI COAL 9 COM 002	WEST BISTI COAL 13 001
BISTI COAL 22 002	BUENA SUERTE 3 G COM 001	WEST BISTI COAL 14 COM 001
BISTI COAL 28 001	BUENA SUERTE 3 L COM 001	WEST BISTI COAL 15 001
BISTI COAL 29 001	BUENA SUERTE 32 G COM 001	WEST BISTI COAL 15 002
BISTI COAL 29 002	BUENA SUERTE 4 L COM 001	WEST BISTI COAL 22 002
BISTI COAL 30 COM 001	CARSON 10 332	WEST BISTI COAL 22 COM 001
BISTI COAL 31 001	CARSON UNIT 15 COM 323	WEST BISTI COAL 23 001
WEST BISTI COAL 25 001	CARSON UNIT 206	WEST BISTI COAL 24 001
WEST BISTI COAL 25 002Y	EAST BISTI COAL 6 001	WEST BISTI COAL 24 COM 002
CARSON UNIT 313		

We appreciate the opportunity to be of service. Should you have any questions or require additional information, please contact our office at (505) 632-0615.

Respectfully Submitted,

ENVIROTEEH

ELM RIDGE EXPLORATION

James McDaniel


Project Scientist

medaniel@environech-inc.com

Amy Mackey

Administrative Manager

himsekey ladelinrioge not



Home | Help | Sign In

FAQs Track & Confirm Track & Confirm Search Results Label/Receipt Number: 7007 1490 0000 5398 9268 Track & Confirm Service(s): Certified Mail " Status: Delivered Enter Label/Receipt Number Your item was delivered at 10:07 AM on July 29, 2009 in FARMINGTON, NM 87401. 60 > Notification Options Track & Confirm by email ũ Get current event information or updates for your 40 539 Certified Fee 80 Site Map Gov't Services estricted Delivery Fee dorsement Required Copyright@ 2009 USPS. All Rights Reserved. No FEAR Act EEO 90 \$ 6.32 Total Postage & Fees 03056-0167 Mr. Mark Kelly 03056-0163 Bureau of Land Management Street, Apt. No.; or PO Box No. 1235 La Plata Hwy., Ste. A 03056-0166 Farmington, NM 87401 SENDER: COMPLETE THIS SECTION COMPLETE THIS SECTION ON DELIVERY Complete items 1, 2, and 3. Also complete item 4 if Restricted Delivery is desired. Addressee Print your name and address on the reverse so that we can return the card to you. C. Date of Delivery Attach this card to the back of the mailpiece, or on the front if space permits. 1. Article Addressed to: If YES, enter delivery address below: Mr. Mark Kelly Bureau of Land Management 1235 La Plata Hwy., Ste. A Farmington, NM 87401 Service Type Certified Mail Registered Return Receipt for Merchandise ☐ C.O.D. ☐ Insured Mail 4. Restricted Delivery? (Extra Fee) ☐ Yes Article Number 7007 1490 0000 5398 9268 (Transfer from service label)

Domestic Return Receipt

PS Form 3811, February 2004

102595-02-M-1540



103056-0767 -0163



Mr. Mark Kelly Bureau of Land Management 1235 La Plata Highway, Ste. A Farmington, NM 87401 12/2 = 63856 (pre=25)



July 27, 2009

Project No. 03056-0167

Mr. Mark Kelly Bureau of Land Management 1235 La Plata Highway, Suite A Farmington, New Mexico 87401

Phone: (505) 599-8900

RE: BISTI COAL 20-1 EARTH PIT CLOSURE NOTIFICATION

Dear Mr. Kelly,

Please accept this letter and attached Sundry Notice as the necessary surface owner notification for earthen pit closure activities at the Bisti Coal 20-1 well site, owned and operated by Elm Ridge Exploration. The Bisti Coal 20-1 well site is located in Unit A, Section 20, Township 25N, Range 12W, San Juan County, New Mexico. Closure activities are scheduled to begin on August 3, 2009 and continue through August 7, 2009.

We appreciate the opportunity to be of service. If you have any questions or require additional information, please contact our office at (505) 632-0615.

Respectfully Submitted,

Envirotech In

James McDaniel Project Scientist

imcdaniel@envirotech-inc.com

Enclosure:

Sundry Notice

Cc:

Client File No. 03056

Form 3160-5 (August 2007)

UNITED STATES DEPARTMENT OF THE INTERIOR BUREAU OF LAND MANAGEMENT

FOR	M A	PPRC	VED
OMB	No.	1004	-0131
Evoire	a. I.	.1., 21	201

5. Lease Serial No. NMSF-25448

				144101 -20-1-10	
SUNDRY NOTICES AND REPORTS ON WELLS Do not use this form for proposals to drill or to re-enter an abandoned well. Use Form 3160-3 (APD) for such proposals.			6. If Indian, Allottee	or Tribe Name	
SUBMIT	T IN TRIPLICATE Other is	nstructions on page	9 2.	7. If Unit of CA/Agre	ement, Name and/or No.
1. Type of Well	 				
Oil Well Gas W	Veil			8. Well Name and No Bisti Coal 20-1).
Name of Operator Elm Ridge Exploration				9. API Well No. 30-045-28382	
3a. Address PO Box 156 Bloomfield, NM 87413	1	3b. Phone No. (include) (505) 632-3476	de area code)	10. Field and Pool or	Exploratory Area
4. Location of Well (Footage, Sec., 7., 790 FNL 900 FEL, A-20-25N-12W, Lat. 38.391	R.,M., or Survey Description) 76 long108.12887			11. Country or Parish San Juan County, I	
12. CHEC	K THE APPROPRIATE BOX	K(ES) TO INDICATI	E NATURE OF NOTION	CE, REPORT OR OTH	IER DATA
TYPE OF SUBMISSION			TYPE OF ACT	NOF	
✓ Notice of Intent	Acidize	Deepen	Proc	luction (Start/Resume)	Water Shut-Off
•	Alter Casing	Fracture Tre	eat Recl	amation	Well Integrity
Subsequent Report	Casing Repair	New Constr	uction 🔲 Reco	omplete	Other Closure of an Earth
The state of the s	Change Plans	Plug and Ab	= =	porarily Abandon	Pit
Final Abandonment Notice	Convert to Injection	Plug Back	L] Wat	er Disposal	
Eim Ridge Exploration plans to beging Closure activities are scheduled to be activities.	in closure activities for an e being on Monday, August 3	arthen pit located a , 2009 and last thro	it the above mention ough August 7, 2009.	ed site. All formal no	difications have been made.
14. I hereby certify that the foregoing is t	rue andCorrect. Name (Printed	(Typed)			
Ms. Army Mackey Title Administrative Mana		nager			
Signature Date 07/27/2009					
	THIS SPACE F	OR FEDERAL	OR STATE OF	FICE USE	
Approved by					
			Title		Date
Conditions of approval, if any, are attached that the applicant holds legal or equitable the entitle the applicant to conduct operations	title to those rights in the subject		Office		

Title 18 U.S.C. Section 1001 and Title 43 U.S.C. Section 1212, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

(Instructions on page 2)

GENERAL INSTRUCTIONS

This form is designed for submitting proposals to perform certain well operations and reports of such operations when completed as indicated on Federal and Indian lands pursuant to applicable Federal law and regulations. Any necessary special instructions concerning the use of this form and the number of copies to be submitted, particularly with regard to local area or regional procedures and practices, are either shown below, will be issued by or may be obtained from the local Federal office.

SPECIFIC INSTRUCTIONS

Item 4 - Locations on Federal or Indian land should be described in accordance with Federal requirements. Consult the local Federal office for specific instructions.

Item 13 - Proposals to abandon a well and subsequent reports of abandonment should include such special information as is required by the local Federal office. In addition, such proposals and reports should include reasons for the abandonment; data on any former or present productive zones or other zones with present significant fluid contents not sealed off by cement or otherwise; depths (top and bottom) and method of placement of cement plugs; mud or other material placed below, between and above plugs; amount, size, method of parting of any casing, liner or tubing pulled and the depth to the top of any tubing left in the hole; method of closing top of well and date well site conditioned for final inspection looking for approval of the abandonment.

NOTICES

The Privacy Act of 1974 and the regulation in 43 CFR 2.48(d) provide that you be furnished the following information in connection with information required by this application.

AUTHORITY: 30 U.S.C. 181 et seq., 351 et seq., 25 U.S.C. 396; 43 CFR 3160.

PRINCIPAL PURPOSE: The information is used to: (1) Evaluate, when appropriate, approve applications, and report completion of subsequent well operations, on a Federal or Indian lease; and (2) document for administrative use, information for the management, disposal and use of National Resource lands and resources, such as: (a) evaluating the equipment and procedures to be used during a proposed subsequent well operation and reviewing the completed well operations for compliance with the approved plan; (b) requesting and grantingapproval to perform those actions covered by 43 CFR 3162.3-2, 3162.3-3, and 3162.3-4; (c) reporting the beginning or resumption of production, as required by 43 CFR 3162.4-1(c)and (d) analyzing future applications to drill or modify operations in light of data obtained and methods used.

ROUTINE USES: Information from the record and/or the record will be transferred to appropriate Federal, State, local or foreign agencies, when relevant to civil, criminal or regulatory investigations or prosecutions in connection with congressional inquiries or to consumer reporting agencies to facilitate collection of debts owed the Government.

EFFECT OF NOT PROVIDING THE INFORMATION: Filing of this notice and report and disclosure of the information is mandatory for those subsequent well operations specified in 43 CFR 3162.3-2, 3162.3-4.

The Paperwork Reduction Act of 1995 requires us to inform you that:

The BLM collects this information to evaluate proposed and/or completed subsequent well operations on Federal or Indian oil and gas leases.

Response to this request is mandatory.

The BLM would like you to know that you do not have to respond to this or any other Federal agency-sponsored information collection unless it displays a currently valid OMB control number.

BURDEN HOURS STATEMENT: Public reporting burden for this form is estimated to average 8 hours per response, including the time for reviewing instructions, gathering and maintaining data, and completing and reviewing the form. Direct comments regarding the burden estimate or any other aspect of this form to U.S. Department of the Interior, Bureau of Land Management (1004-0137), Bureau Information Collection Clearance Officer (WO-630), 1849 C St., N.W., Mail Stop 401 LS, Washington, D.C. 20240

ELM RIDGE EXPLORATION
BISTI COAL 20-1
SEC. 20, TWN 25N, RGE 12W
PROJECT NO. 03056-0167

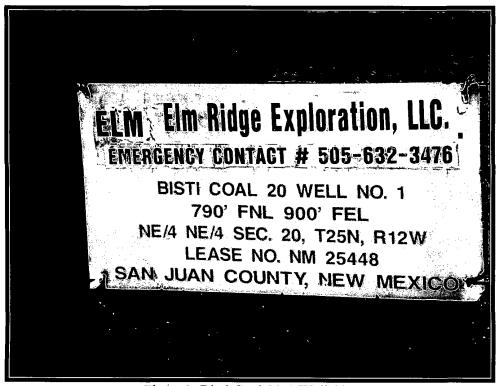


Photo 1: Bisti Coal 20-1 Well Site

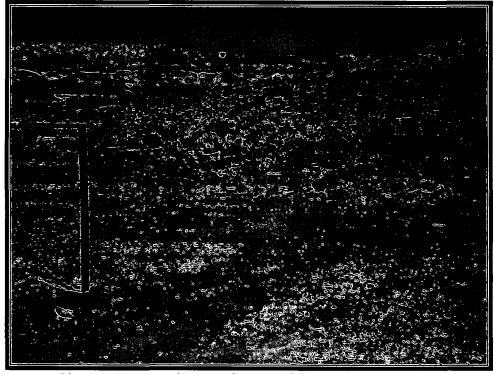


Photo 2: Excavated Area After Backfilling and Recontouring



EPA METHOD 418.1 TOTAL PETROLEUM HYDROCARBONS

Client:

Elm Ridge Exploration

Project #:

03056-0167

Sample No.:

1

Date Reported:

8/13/2009

Sample ID:

1' Floor

Date Sampled:

8/3/2009

Sample Matrix:

Soil

Date Analyzed:

8/3/2009

Preservative:

Cool

Analysis Needed:

TPH-418.1

Condition:

Cool and Intact

		Det.
	Concentration	Limit
Parameter	(mg/kg)	(mg/kg)

Total Petroleum Hydrocarbons

52

5.0

ND = Parameter not detected at the stated detection limit.

References:

Method 418.1, Petroleum Hydrocarbons, Total Recoverable, Chemical Analysis

of Water and Waste, USEPA Storet No. 4551, 1978.

Comments:

Bisti Coal 20-1

Instrument calibrated to 200 ppm standard. Zeroed before each sample

Analyst

Joshua M. Kirchner

Printed

James McDaniel

Printed



CONTINUOUS CALIBRATION EPA METHOD 418.1 TOTAL PETROLEUM HYDROCARBONS

Cal. Date:

3-Aug-09

Parameter	Standard Concentration mg/L	Concentration Reading mg/L	
TPH	100		
	200	201	
	500	•	
	1000		

The accepted percent relative deviation (%RSD) of the calibration factor is less than 20% over the working range.

Analyst

13- Aug-2009

Joshua M Kirchner

Print Name

Review

Date

James McDaniel

Print Name



EPA METHOD 8021 AROMATIC VOLATILE ORGANICS

		•	
Client:	Elmridge	Project #:	03056-0167
Sample ID:	Floor	Date Reported:	08-07-09
Laboratory Number:	51093	Date Sampled:	08-03-09
Chain of Custody:	7600	Date Received:	08-05-09
Sample Matrix:	Soil	Date Analyzed:	08-06-09
Preservative:	Cool	Date Extracted:	08-05-09
Condition:	Intact	Analysis Requested:	BTEX

		Det.		
Parameter	Concentration (ug/Kg)	Limit (ug/Kg)		
Benzene	ND	0.9		
Toluene	3.6	1.0		
Ethylbenzene	4.8	1.0		
p,m-Xylene	3.1	1.2		
o-Xylene	2.9	0.9		
Total BTEX	14.4			

ND - Parameter not detected at the stated detection limit.

Surrogate Recoveries:	Parameter	Percent Recovery
	Fluorobenzene	96.0 %
	1,4-difluorobenzene	96.0 %
	Bromochlorobenzene	96.0 %

References:

Method 5030B, Purge-and-Trap, Test Methods for Evaluating Solid Waste, SW-846, USEPA,

December 1996.

Method 8021B, Aromatic Volatile Organics, Test Methods for Evaluating Solid Waste, SW-846,

USEPA, December 1996.

Comments:

Bisti Coal 20-1

Analyst

Review



EPA METHOD 8021 AROMATIC VOLATILE ORGANICS

Client:	N/A	Project #:	N/A
Sample ID:	08-08-BT QA/QC	Date Reported:	08-07-09
Laboratory Number:	51068	Date Sampled:	N/A
Sample Matrix:	Soil	Date Received:	N/A
Preservative:	N/A	Date Analyzed:	08-06-09
Condition:	N/A	Analysis:	BTEX

Calibration and Detection Limits (ug/L)	I-Cal RF	C-Cal RF Accept Rang	%Diff. ie 0 - 15%	Blank, Conc	Detect. Limit
Benzene	4.1514E+006	4.1597E+006	0.2%	ND	0.1
Toluene	3.8098E+006	3.8174E+006	0.2%	ND	0.1
Ethylbenzene	3.3197E+006	3.3264E+006	0.2%	ND	0.1
p,m-Xylene	8.5594E+006	8.5766E+006	0.2%	ND	0.1
o-Xylene	3.1771E+006	3.1835E+006	0.2%	ND	0.1

Duplicate Conc. (ug/Kg)	Sample Du	uplicate	%Diff	Accept Range	Detect Limit
Benzene	10.1	10.3	2.0%	0 - 30%	0.9
Toluene	24.1	25.2	4.6%	0 - 30%	1.0
Ethylbenzene	30.6	31.2	2.0%	0 - 30%	1.0
p,m-Xylene	62.3	63.2	1.4%	0 - 30%	1.2
o-Xylene	135	141	4.2%	0 - 30%	0.9

Spike Conc. (ug/Kg)	Sample Amo	ount Spiked Spik	ed Sample	% Recovery	Accept Range
Benzene	10.1	50.0	59.0	98.2%	39 - 150
Toluene	24.1	50.0	72.9	98.4%	46 - 148
Ethylbenzene	30.6	50.0	77.3	95.9%	32 - 160
p,m-Xylene	62.3	100	159	98.0%	46 - 148
o-Xylene	135	50.0	183	98.5%	46 - 148

ND - Parameter not detected at the stated detection limit.

References:

Method 5030B, Purge-and-Trap, Test Methods for Evaluating Solid Waste, SW-846, USEPA,

December 1996.

Method 8021B, Aromatic and Halogenated Volatiles by Gas Chromatography Using

Photoionization and/or Electrolytic Conductivity Detectors, SW-846, USEPA December 1996.

Comments:

QA/QC for Samples 51068 - 51070, 51080, 51081, and 51090 - 51094.

Analyst

Ph (505) 632-0615 Fr (800) 362-1879 Fx (505) 632-1865 lab@envirotech-inc.com envirotech-inc.com



Chloride

Client: Elmridge Project #: 03056-0167 Sample ID: Floor Date Reported: 08-07-09 Lab ID#: 51093 Date Sampled: 08-03-09 Sample Matrix: Soil 08-05-09 Date Received: Preservative: Cool Date Analyzed: 08-06-09 Condition: Intact Chain of Custody: 7600

Parameter

Concentration (mg/Kg)

Total Chloride

5

Reference:

U.S.E.P.A., 4500B, "Methods for Chemical Analysis of Water and Wastes", 1983. Standard Methods For The Examination of Water And Waste Water", 18th ed., 1992.

Comments:

Bisti Coal 20-1.

Analyst

Mistum Walter Review

CHAIN OF CUSTODY RECORD

7600

Client: Project Name / Location: Bisticolar 20-(Client Address: Sampler Name:								•		,	ANAL	YSIS	/ PAR	AMET	ERS								
Client Address:		S	Sampler Name:	<u> </u>	00				10	5	6								7				
			OK INC.	ner					801	d 80	826	<u>s</u>	_		_								
Client Phone No.:		C	Olient No.:	6	016	57			TPH (Method 8015)	BTEX (Method 8021)	VOC (Method 8260)	RCRA 8 Metals	Cation / Anion		TCLP with H/P		TPH (418.1)	RIDE				Sample Cool	Sample Intact
Sample No./ Identification	Sample Date	Sample Time	Lab No.	l s	ample Matrix	No./Volume of Containers			TPH ()	ВТЕХ	Noc	RCRA	Cation	22	TCLP	PAH	тРН (CHLORIDE				Sampl	Sampl
Floor	839	135	51093	Solid	Sludge Aqueous	402		100		8								X	1				<u> </u>
····				Soil Solid	Sludge Aqueous			(-														
				Soil Solid	Sludge Aqueous																		
				Soil Solid	Sludge Aqueous																		
				Soil Solid	Sludge Aqueous													ļ					
				Soil Solid	Sludge Aqueous																		
				Soil Solid	Sludge Aqueous																		
				Soil Solid	Sludge Aqueous																		
				Soil Solid	Sludge Aqueous																		
				Soil Solid	Sludge Aqueous																		
Relinquished by: (Sign	nature)	•			Date 8-59	Time	R	eceive	ed by:	(Signa	aturje)			3	_					Da	te -/59	Tir 87	
Relinquished by: (Sign	nature)	,			0 11	 	R	eceive	ed by:	(Signa	atyle)					2	>			3/5	7- 1		
Relinquished by: (Sign	nature)						R	eceive	d by:	(Signa	ature)												
						en	Ø 10				<u> </u>			_									
								J) tico															

5796 US Highway 64 • Farmington, NM 87401 • 505-632-0615 • lab@envirotech-inc.com

process of the second second second second	Street, A. C. C.			s				
(ishen.					
PAGE NO: OF /			anciantal A	mwir	mhael	<i>5</i> 9	ENVIRON	MENTAL SPECIALIST:
			A.50°				1 DK	Char
DATE STARTED: 2~3-9		VO.			i (800) 362-18 armington, NM 8		LAT: 36	
DATE FINISHED: 6-3-5		-	3/80	u.s. may 04, r	Simingrom, 14m o	7401		108.1288
	FIELD R	EPORT:	BGT/P	IT CLOS	SURE VE	RIFICAT	TION	•
LOCATION: NAME: B	usti (c	AC	WELL#:		TEMP PIT:	PERMAN	ENT PIT:	BGT:
LEGAL ADD: UNIT: NE/		SEC: 20		TWP: 25	n	RNG: 12	u	PM:
QTR/FOOTAGE:			CNTY:	San Jun	m.	ST: nee	· nex	<i>i</i> co
CYCLULATION ADDROX		DVF X		TVE V		ET DEED	CIDICA	pp.cr 1
EXCAVATION APPROX:		FT. X	0	FT. X		FT. DEEP		KDAGE: /
DISPOSAL FACILITY:	<u> En</u>	1101866	4 D.F		TION METHO			
LAND OWNER:	- ·) 1 045 .2		BGT / PIT V		,
CONSTRUCTION MATERIA		<u> </u>			WITH LEAK I	DETECTION	:	
LOCATION APPROXIMATE		110	FT.	360°	FROM WELL	HEAD		
DEPTH TO GROUNDWATE			1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1					
TEMPORARY PIT - GR						,		,
BENZENE ≤ 0.2 mg/kg, B	ΓEX ≤ 50 mg/k	g, GRO & DRO	O FRACTIO	$N(8015) \le 50$	00 mg/kg, TPH (418.1) ≤ 2500	mg/kg, CHL	ORIDES ≤ 500 mg/kg
TEMPORARY PIT - GR	OLIMOWATI	ER >100 FEE'	T DEED					:
BENZENE ≤ 0.2 mg/kg, BT				VI (8015) ~ 50	O malka TDU (/	119 11 / 2500	malka CUI (DDIDES < 1000 mg/kg
		g, ONO & DNC	FRACTIO	v (o∩13) ≥ 30	o mg/kg, 1FH (-	+10.1) \(\sigma \beta \)	mg/kg, Cric	OKIDES Z 1000 IIIg/kg
✓ PERMANENT PIT OR I								
BENZENE $\leq 0.2 \text{ mg/kg, B}^2$	$TEX \le 50 \text{ mg/k}$	g, TPH (418.1)) ≤ 100 mg/kg	g, CHLORIDI	$ES \le 250 \text{ mg/kg}$			• •
l		4		FIEL	D 418.1 ANAL	YSIS		,
	TIME	SAMPLE I.D.	LAB NO.	WEIGHT (g		DILUTION	READING	CALC. (mg/kg)
		200 STD		-	_	-	29	
		1 Floor	1	_5	20	4	13	52
		Call San Carlot	2				· · · · · · · · · · · · · · · · · · ·	
,			3 4			;	•	
		1. 10 mm. 2. 1. 1. 1. 1. 1. 1. 1. 1. 1. 1. 1. 1. 1.	5	g in the second	1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1	35		- 1 - 1 - 1 - 1 - 1 - 1 - 1 - 1 - 1 - 1
			6	-	1			
PERIME	ETER		FIELD C	HLORIDE	S RESULTS		PRO	OFILE
				T	r o tutto a			
;			SAMPLE	READING	CALC.			
1			ID	4.1	(mg/kg) と 2つ	1		
ļ Ų					201			•
Ar .			· ·			1		
Of DEPOLATOR	•							
105 m		*						
		\(\Phi\)		DE PERM				
				PID RESUI		[
(AST)			SAMI	PLE ID	RESULTS			
			心	<u></u> ۵	(ppm) 91.7	1		
				1	00	1		
1								
		` !						
		'				4		
TADOALANTA		MOTEG: -	<u> </u>		<u> </u>			
LAB SAMPLES		NOTES: \mathcal{G}	XCANA	nn 4,	FOUR	Fal 12		
SAMPLE ID ANALYSIS BENZENE	RESULTS		717	- 4	1001	, 557		
BTEX								
GRO & DRO	<u> </u>							
CHLORIDES		-						•
7					÷	1.,	•	
		WORKORDE	R #		WHO ORDER	ED		

enthis .



Bill of Lading

MANIFEST #______

PHONI	E: (505) 632-061	5 • 57	96 U.S. HIGHWAY	64 • FARMINGTO	ON, NEW M	EXICO 87	401	DATE \$ 4.	09	JOB# <u>_</u> _	03056-0161		
LOAD		CON	IPLETE DESCR	IPTION OF SHIF	PMENT			TRANSPORTING COMPANY					
NO.	POINT OF ORK		DESTINATION	MATERIAL	GRID	YDS	BBLS	COMPANY	TRK#	TIME	DRIVER SIGNATURE		
}	ELMRige Bisticool 2	0#1	LFI	Conitsoil	H 14	1		4-4	T78	740	John Muris		
		<u> </u>						·					
				·		/							
			·										
						,							
								÷					
RESULT			LANDFARM	Cay Ro	resse	<i>y</i> ~		NOTES: EN	ERED	AUG	0 7 2009		
4298	PAINT FILTER TEST	/	EMPLOYEE:		0 -		040	}			. 2009		
'I certify that no a		from the	e above location ha en added."					ne material received	from the	above r	mentioned Generator, and		
NAME _	John me	Kim	e/	COMPANY	Four	- Low		SIG	NATURE	No.	Moleung		
COMPA	NY CONTACT	1 ACK	,	PHONE	327-	27//		DAŤ	NATURE E_S	4-	09		

_
1

State of New Mexico
Energy Minerals and Natural Resources
Department
Oil Conservation Division
1220 South St. Francis Dr.
Santa Fe. NM 87505

For temporary pits, closed-loop systems, and below-grade tanks, submit to the appropriate NMOCD District Office.

For permanent pits and exceptions submit to the Santa Fe Environmental Bureau office and provide a copy to the appropriate NMOCD


1220 S. St. Francisco Dr., Santa De, Ny 187505	Santa Fe, NM 87505	provide a copy to the appropriate NMOCD District Office.
	-Loop System, Below-Gr ve Method Permit or Clos	
☐ Closure of a p☐ Modification	pit, closed-loop system, below-grade to an existing permit only submitted for an existing perm	tank, or proposed alternative method e tank, or proposed alternative method itted or non-permitted pit, closed-loop system,
Instructions: Please submit one application (Fo	orm C-144) per individual pit, closed-lo	oop system, below-grade tank or alternative request
Please be advised that approval of this request does not relieve environment. Nor does approval relieve the operator of its res		s result in pollution of surface water, ground water or the icable governmental authority's rules, regulations or ordinances.
Operator: Elm Ridge Exploration	0	GRID #: <u>149052</u>
Address: P.O. Box 156; Bloomfield, NM 87413		
Facility or well name: Bisti Coal 20-1		
API Number: <u>3004528382</u>	OCD Permit Number:	
U/L or Qtr/Qtr A Section 20 Townsh	nip <u>25N</u> Range <u>12W</u>	County: San Juan
Center of Proposed Design: Latitude <u>36.391863</u>	Longitude108.128623 NA	D: □1927 🖾 1983
Surface Owner: ☑ Federal ☐ State ☐ Private ☐ Triba	l Trust or Indian Allotment	
2. ☑ Pit: Subsection F or G of 19.15.17.11 NMAC	C	eased operation in October 2008
Temporary: Drilling Workover		cased operation in October 2000
· · ·		
M Permanent Emergency Cavitation D&A		
☐ Permanent ☐ Emergency ☐ Cavitation ☐ P&A	mil CIIDDEC HDDECDV	C Cother
☐ Lined ☑ Unlined Liner type: Thickness	mil	C 🔲 Other
☐ Lined ☑ Unlined Liner type: Thickness ☐ String-Reinforced	_	
☐ Lined ☑ Unlined Liner type: Thickness ☐ String-Reinforced Liner Seams: ☐ Welded ☐ Factory ☐ Other	_	C ☐ Other bbl Dimensions: L_12' x W_12 x D0.5'
☐ Lined ☑ Unlined Liner type: Thickness ☐ String-Reinforced	Volume:	
☐ Lined ☑ Unlined Liner type: Thickness String-Reinforced Liner Seams: ☐ Welded ☐ Factory ☐ Other 3.	Volume: NMAC	bbl Dimensions: L_12' x W_12 x D_0.5'
□ Lined ☑ Unlined Liner type: Thickness □ String-Reinforced Liner Seams: □ Welded □ Factory □ Other 3. □ Closed-loop System: Subsection H of 19.15.17.111 Type of Operation: □ P&A □ Drilling a new well □ intent) □ Drying Pad □ Above Ground Steel Tanks □ Hat	NMAC Workover or Drilling (Applies to actival-off Bins Other	bbl Dimensions: L_12'x W_12x D0.5' ities which require prior approval of a permit or notice of
☐ Lined ☑ Unlined Liner type: Thickness ☐ String-Reinforced Liner Seams: ☐ Welded ☐ Factory ☐ Other ☐ 3. ☐ Closed-loop System: Subsection H of 19.15.17.1111 Type of Operation: ☐ P&A ☐ Drilling a new well ☐ intent)	NMAC Workover or Drilling (Applies to actival-off Bins Other	bbl Dimensions: L_12'x W_12x D0.5' ities which require prior approval of a permit or notice of
□ Lined ☑ Unlined Liner type: Thickness □ String-Reinforced Liner Seams: □ Welded □ Factory □ Other 3. □ Closed-loop System: Subsection H of 19.15.17.111 Type of Operation: □ P&A □ Drilling a new well □ intent) □ Drying Pad □ Above Ground Steel Tanks □ Hat	NMAC Workover or Drilling (Applies to actival-off Bins Other HDPE HDPE	bbl Dimensions: L_12'x W_12x D0.5' ities which require prior approval of a permit or notice of
□ Lined ☑ Unlined Liner type: Thickness □ String-Reinforced Liner Seams: □ Welded □ Factory □ Other 3. □ Closed-loop System: Subsection H of 19.15.17.11 1 Type of Operation: □ P&A □ Drilling a new well □ intent) □ Drying Pad □ Above Ground Steel Tanks □ Hau □ Lined □ Unlined Liner type: Thickness □ Liner Seams: □ Welded □ Factory □ Other □ 4.	Volume: NMAC Workover or Drilling (Applies to active al-off Bins	bbl Dimensions: L_12'x W_12x D0.5' ities which require prior approval of a permit or notice of
□ Lined ☑ Unlined Liner type: Thickness □ String-Reinforced Liner Seams: □ Welded □ Factory □ Other 3. □ Closed-loop System: Subsection H of 19.15.17.11 Type of Operation: □ P&A □ Drilling a new well □ intent) □ Drying Pad □ Above Ground Steel Tanks □ Hau □ Lined □ Unlined Liner type: Thickness □ Liner Seams: □ Welded □ Factory □ Other 4. □ Below-grade tank: Subsection I of 19.15.17.11 NN	Volume: NMAC Workover or Drilling (Applies to active al-off Bins	bbl Dimensions: L_12'x W_12x D0.5' ities which require prior approval of a permit or notice of
□ Lined ☑ Unlined Liner type: Thickness □ String-Reinforced Liner Seams: □ Welded □ Factory □ Other 3. □ Closed-loop System: Subsection H of 19.15.17.11 1 Type of Operation: □ P&A □ Drilling a new well □ intent) □ Drying Pad □ Above Ground Steel Tanks □ Hau □ Lined □ Unlined Liner type: Thickness Liner Seams: □ Welded □ Factory □ Other 4. □ Below-grade tank: Subsection I of 19.15.17.11 NN Volume:bbl Type of fluid:	Volume: NMAC Workover or Drilling (Applies to active al-off Bins	bbl Dimensions: L_12'x W_12x D0.5' ities which require prior approval of a permit or notice of
□ Lined ☑ Unlined Liner type: Thickness □ String-Reinforced Liner Seams: □ Welded □ Factory □ Other 3. □ Closed-loop System: Subsection H of 19.15.17.11 Type of Operation: □ P&A □ Drilling a new well □ intent) □ Drying Pad □ Above Ground Steel Tanks □ Hau □ Lined □ Unlined Liner type: Thickness Liner Seams: □ Welded □ Factory □ Other 4. □ Below-grade tank: Subsection I of 19.15.17.11 NN Volume:bbl Type of fluid: Tank Construction material:	Volume:	bbl Dimensions: L_12'x W_12x D_0.5' ities which require prior approval of a permit or notice of PVC Other
□ Lined ☑ Unlined Liner type: Thickness □ String-Reinforced Liner Seams: □ Welded □ Factory □ Other 3. □ Closed-loop System: Subsection H of 19.15.17.11 1 Type of Operation: □ P&A □ Drilling a new well □ intent) □ Drying Pad □ Above Ground Steel Tanks □ Hau □ Lined □ Unlined Liner type: Thickness Liner Seams: □ Welded □ Factory □ Other 4. □ Below-grade tank: Subsection I of 19.15.17.11 NN Volume: □ bbl Type of fluid: Tank Construction material: □ Secondary containment with leak detection □ Visi	NMAC Workover or Drilling (Applies to active al-off Bins	bbl Dimensions: L_12'x W_12x D_0.5' ities which require prior approval of a permit or notice of PVC Other
□ Lined ☑ Unlined Liner type: Thickness □ String-Reinforced Liner Seams: □ Welded □ Factory □ Other 3. □ Closed-loop System: Subsection H of 19.15.17.11 Type of Operation: □ P&A □ Drilling a new well □ intent) □ Drying Pad □ Above Ground Steel Tanks □ Hau □ Lined □ Unlined Liner type: Thickness □ Liner Seams: □ Welded □ Factory □ Other □ 4. □ Below-grade tank: Subsection I of 19.15.17.11 NN Volume: □ bbl Type of fluid: Tank Construction material: □ Secondary containment with leak detection □ Visi □ Visible sidewalls and liner □ Visible sidewalls only the sidewall	NMAC Workover or Drilling (Applies to activital-off Bins	bbl Dimensions: L_12'x W_12x D_0.5' ities which require prior approval of a permit or notice of PVC Other matic overflow shut-off
□ Lined ☑ Unlined Liner type: Thickness □ String-Reinforced Liner Seams: □ Welded □ Factory □ Other 3. □ Closed-loop System: Subsection H of 19.15.17.11 1 Type of Operation: □ P&A □ Drilling a new well □ intent) □ Drying Pad □ Above Ground Steel Tanks □ Hau □ Lined □ Unlined Liner type: Thickness Liner Seams: □ Welded □ Factory □ Other 4. □ Below-grade tank: Subsection I of 19.15.17.11 NN Volume: □ bbl Type of fluid: Tank Construction material: □ Secondary containment with leak detection □ Visi	NMAC Workover or Drilling (Applies to activital-off Bins	bbl Dimensions: L_12'x W_12x D_0.5' ities which require prior approval of a permit or notice of PVC Other matic overflow shut-off
□ Lined ☑ Unlined Liner type: Thickness □ String-Reinforced Liner Seams: □ Welded □ Factory □ Other 3. □ Closed-loop System: Subsection H of 19.15.17.11 1 Type of Operation: □ P&A □ Drilling a new well □ intent) □ Drying Pad □ Above Ground Steel Tanks □ Hau □ Lined □ Unlined Liner type: Thickness Liner Seams: □ Welded □ Factory □ Other 4. □ Below-grade tank: Subsection I of 19.15.17.11 NN Volume: □ bbl Type of fluid: Tank Construction material: □ Secondary containment with leak detection □ Visi □ Visible sidewalls and liner □ Visible sidewalls onl Liner type: Thickness	NMAC Workover or Drilling (Applies to activital-off Bins	bbl Dimensions: L_12'x W_12x D_0.5' ities which require prior approval of a permit or notice of PVC Other matic overflow shut-off
□ Lined ☑ Unlined Liner type: Thickness □ String-Reinforced Liner Seams: □ Welded □ Factory □ Other 3. □ Closed-loop System: Subsection H of 19.15.17.11 1 Type of Operation: □ P&A □ Drilling a new well □ intent) □ Drying Pad □ Above Ground Steel Tanks □ Hau □ Lined □ Unlined Liner type: Thickness Liner Seams: □ Welded □ Factory □ Other 4. □ Below-grade tank: Subsection I of 19.15.17.11 NN Volume: □ bbl Type of fluid: Tank Construction material: □ Secondary containment with leak detection □ Visi □ Visible sidewalls and liner □ Visible sidewalls onl Liner type: Thickness	NMAC Workover or Drilling (Applies to active all-off Bins	bbl Dimensions: L_12' x W_12 x D0.5' ities which require prior approval of a permit or notice of PVC

Fencing: Subsection D of 19.15.17.11 NMAC (Applies to permanent pits, temporary pits, and below-grade tanks) Chain link, six feet in height, two strands of barbed wire at top (Required if located within 1000 feet of a permanent residence, school, institution or church) Four foot height, four strands of barbed wire evenly spaced between one and four feet Alternate. Please specify 4' tall hogwire fencing with pipe railing	hospital,
Netting: Subsection E of 19.15.17.11 NMAC (Applies to permanent pits and permanent open top tanks) Screen Netting Other Monthly inspections (If netting or screening is not physically feasible)	
8. Signs: Subsection C of 19.15.17.11 NMAC ☐ 12"x 24", 2" lettering, providing Operator's name, site location, and emergency telephone numbers ☐ Signed in compliance with 19.15.3.103 NMAC	
Administrative Approvals and Exceptions: Justifications and/or demonstrations of equivalency are required. Please refer to 19.15.17 NMAC for guidance. Please check a box if one or more of the following is requested, if not leave blank: Administrative approval(s): Requests must be submitted to the appropriate division district or the Santa Fe Environmental Bureau of consideration of approval. Exception(s): Requests must be submitted to the Santa Fe Environmental Bureau office for consideration of approval.	office for
Siting Criteria (regarding permitting): 19.15.17.10 NMAC Instructions: The applicant must demonstrate compliance for each siting criteria below in the application. Recommendations of accept material are provided below. Requests regarding changes to certain siting criteria may require administrative approval from the appropriate or may be considered an exception which must be submitted to the Santa Fe Environmental Bureau office for consideration of a Applicant must attach justification for request. Please refer to 19.15.17.10 NMAC for guidance. Siting criteria does not apply to drying above-grade tanks associated with a closed-loop system.	priate district pproval.
Ground water is less than 50 feet below the bottom of the temporary pit, permanent pit, or below-grade tank. - `NM Office of the State Engineer - iWATERS database search; USGS; Data obtained from nearby wells	☐ Yes ☐ No
Within 300 feet of a continuously flowing watercourse, or 200 feet of any other significant watercourse or lakebed, sinkhole, or playa lake (measured from the ordinary high-water mark).0. - Topographic map; Visual inspection (certification) of the proposed site	_ res_ no
Within 300 feet from a permanent residence, school, hospital, institution, or church in existence at the time of initial application. - (Applies to temporary, emergency, or cavitation pits and below-grade tanks) (☐ Yes ☐ No ☐ NA
Within 1000 feet from a permanent residence, school, hospital, institution, or church in existence at the time of initial application. (Applies to permanent pits) Visual inspection (certification) of the proposed site; Aerial photo; Satellite image	
Within 500 horizontal feet of a private, domestic fresh water well or spring that less than five households use for domestic or stock watering purposes, or within 1000 horizontal feet of any other fresh water well or spring, in existence at the time of initial application. NM Office of the State Engineer - iWATERS database search; Visual inspection (certification) of the proposed site	☐ Yes ☐ No ☐ NA
Within incorporated municipal boundaries or within a defined municipal fresh water well field covered under a municipal ordinance adopted pursuant to NMSA 1978, Section 3-27-3, as amended.	☐ Yes ☐ No
Within 500 feet of a wetland.	
Within the area overlying a subsurface mine.	☐ Yes ☐ No
Within an unstable area. - Engineering measures incorporated into the design; NM Bureau of Geology & Mineral Resources; USGS; NM Geological Society; Topographic map	☐ Yes ☐ No
Within a 100-year floodplain FEMA map	☐ Yes ☐ No
	☐ Yes ☐ No
	☐ Yes ☐ No

11. Temporary Pits, Emergency Pits, and Below-grade Tanks Permit Application Attachment Checklist: Subsection B of 19.15.17.9 NMAC
Instructions: Each of the following items must be attached to the application. Please indicate, by a check mark in the box, that the documents are
attached. Hydrogeologic Report (Below-grade Tanks) - based upon the requirements of Paragraph (4) of Subsection B of 19.15.17.9 NMAC Hydrogeologic Data (Temporary and Emergency Pits) - based upon the requirements of Paragraph (2) of Subsection B of 19.15.17.9 NMAC Siting Criteria Compliance Demonstrations - based upon the appropriate requirements of 19.15.17.10 NMAC Design Plan - based upon the appropriate requirements of 19.15.17.11 NMAC Operating and Maintenance Plan - based upon the appropriate requirements of 19.15.17.12 NMAC Closure Plan (Please complete Boxes 14 through 18, if applicable) - based upon the appropriate requirements of Subsection C of 19.15.17.9 NMAC
and 19.15.17.13 NMAC
Previously Approved Design (attach copy of design) API Number: or Permit Number:
Closed-loop Systems Permit Application Attachment Checklist: Subsection B of 19.15.17.9 NMAC Instructions: Each of the following items must be attached to the application. Please indicate, by a check mark in the box, that the documents are attached. Geologic and Hydrogeologic Data (only for on-site closure) - based upon the requirements of Paragraph (3) of Subsection B of 19.15.17.9 Siting Criteria Compliance Demonstrations (only for on-site closure) - based upon the appropriate requirements of 19.15.17.10 NMAC Design Plan - based upon the appropriate requirements of 19.15.17.11 NMAC Operating and Maintenance Plan - based upon the appropriate requirements of 19.15.17.12 NMAC Closure Plan (Please complete Boxes 14 through 18, if applicable) - based upon the appropriate requirements of Subsection C of 19.15.17.9 NMAC and 19.15.17.13 NMAC
Previously Approved Design (attach copy of design) API Number:
Previously Approved Operating and Maintenance Plan API Number: (Applies only to closed-loop system that use
above ground steel tanks or haul-off bins and propose to implement waste removal for closure)
Permanent Pits Permit Application Checklist: Subsection B of 19.15.17.9 NMAC Instructions: Each of the following items must be attached to the application. Please indicate, by a check mark in the box, that the documents are attached. Hydrogeologic Report - based upon the requirements of Paragraph (1) of Subsection B of 19.15.17.9 NMAC Siting Criteria Compliance Demonstrations - based upon the appropriate requirements of 19.15.17.10 NMAC Climatological Factors Assessment Certified Engineering Design Plans - based upon the appropriate requirements of 19.15.17.11 NMAC Dike Protection and Structural Integrity Design - based upon the appropriate requirements of 19.15.17.11 NMAC Leak Detection Design - based upon the appropriate requirements of 19.15.17.11 NMAC Liner Specifications and Compatibility Assessment - based upon the appropriate requirements of 19.15.17.11 NMAC Quality Control/Quality Assurance Construction and Installation Plan Operating and Maintenance Plan - based upon the appropriate requirements of 19.15.17.12 NMAC Freeboard and Overtopping Prevention Plan - based upon the appropriate requirements of 19.15.17.11 NMAC Nuisance or Hazardous Odors, including H ₂ S, Prevention Plan Emergency Response Plan Oil Field Waste Stream Characterization Monitoring and Inspection Plan Erosion Control Plan Closure Plan - based upon the appropriate requirements of Subsection C of 19.15.17.9 NMAC and 19.15.17.13 NMAC
Proposed Closure: 19.15.17.13 NMAC Instructions: Please complete the applicable boxes, Boxes 14 through 18, in regards to the proposed closure plan.
Type: Drilling Workover Emergency Cavitation P&A Permanent Pit Below-grade Tank Closed-loop System Alternative Proposed Closure Method: Waste Excavation and Removal Waste Removal (Closed-loop systems only) On-site Closure Method (Only for temporary pits and closed-loop systems) In-place Burial On-site Trench Burial Alternative Closure Method (Exceptions must be submitted to the Santa Fe Environmental Bureau for consideration)
15.
Waste Excavation and Removal Closure Plan Checklist: (19.15.17.13 NMAC) Instructions: Each of the following items must be attached to the closure plan. Please indicate, by a check mark in the box, that the documents are attached. ☐ Protocols and Procedures - based upon the appropriate requirements of 19.15.17.13 NMAC ☐ Confirmation Sampling Plan (if applicable) - based upon the appropriate requirements of Subsection F of 19.15.17.13 NMAC ☐ Disposal Facility Name and Permit Number (for liquids, drilling fluids and drill cuttings) ☐ Soil Backfill and Cover Design Specifications - based upon the appropriate requirements of Subsection H of 19.15.17.13 NMAC ☐ Re-vegetation Plan - based upon the appropriate requirements of Subsection G of 19.15.17.13 NMAC

Waste Removal Closure For Closed-loop Systems That Utilize Above Ground S Instructions: Please indentify the facility or facilities for the disposal of liquids, a facilities are required.				
Disposal Facility Name:	Disposal Facility Permit Number:			
Disposal Facility Name:	Disposal Facility Permit Number:			
Will any of the proposed closed-loop system operations and associated activities oc ☐ Yes (If yes, please provide the information below) ☐ No				
Required for impacted areas which will not be used for future service and operations: Soil Backfill and Cover Design Specifications based upon the appropriate requirements of Subsection H of 19.15.17.13 NMAC Re-vegetation Plan - based upon the appropriate requirements of Subsection I of 19.15.17.13 NMAC Site Reclamation Plan - based upon the appropriate requirements of Subsection G of 19.15.17.13 NMAC				
Siting Criteria (regarding on-site closure methods only): 19.15.17.10 NMAC Instructions: Each siting criteria requires a demonstration of compliance in the closure plan. Recommendations of acceptable source material are provided below. Requests regarding changes to certain siting criteria may require administrative approval from the appropriate district office or may be considered an exception which must be submitted to the Santa Fe Environmental Bureau office for consideration of approval. Justifications and/or demonstrations of equivalency are required. Please refer to 19.15.17.10 NMAC for guidance.				
Ground water is less than 50 feet below the bottom of the buried waste. - NM Office of the State Engineer - iWATERS database search; USGS; Data	obtained from nearby wells	☐ Yes ☐ No ☐ NA		
Ground water is between 50 and 100 feet below the bottom of the buried waste - NM Office of the State Engineer - iWATERS database search; USGS; Data	obtained from nearby wells	☐ Yes ☐ No ☐ NA		
Ground water is more than 100 feet below the bottom of the buried waste. - NM Office of the State Engineer - iWATERS database search; USGS; Data	obtained from nearby wells	☐ Yes ☐ No ☐ NA		
Within 300 feet of a continuously flowing watercourse, or 200 feet of any other sign lake (measured from the ordinary high-water mark). - Topographic map; Visual inspection (certification) of the proposed site	nificant watercourse or lakebed, sinkhole, or playa	☐ Yes ☐ No		
Within 300 feet from a permanent residence, school, hospital, institution, or church - Visual inspection (certification) of the proposed site; Aerial photo; Satellite	in existence at the time of initial application. image	☐ Yes ☐ No		
Within 500 horizontal feet of a private, domestic fresh water well or spring that less watering purposes, or within 1000 horizontal feet of any other fresh water well or sp NM Office of the State Engineer - iWATERS database; Visual inspection (or	oring, in existence at the time of initial application.	☐ Yes ☐ No		
Within incorporated municipal boundaries or within a defined municipal fresh wate adopted pursuant to NMSA 1978, Section 3-27-3, as amended. - Written confirmation or verification from the municipality; Written approve	•	☐ Yes ☐ No		
Within 500 feet of a wetland US Fish and Wildlife Wetland Identification map; Topographic map; Visua	l inspection (certification) of the proposed site	☐ Yes ☐ No		
Within the area overlying a subsurface mine. - Written confirmation or verification or map from the NM EMNRD-Mining	and Mineral Division	☐ Yes ☐ No		
Within an unstable area. - Engineering measures incorporated into the design; NM Bureau of Geology Society; Topographic map	& Mineral Resources; USGS; NM Geological	☐ Yes ☐ No		
Within a 100-year floodplain FEMA map		☐ Yes ☐ No		
On-Site Closure Plan Checklist: (19.15.17.13 NMAC) Instructions: Each of the following items must be attached to the closure plan. Please indicate, by a check mark in the box, that the documents are attached. Siting Criteria Compliance Demonstrations - based upon the appropriate requirements of 19.15.17.10 NMAC Proof of Surface Owner Notice - based upon the appropriate requirements of Subsection F of 19.15.17.13 NMAC Construction/Design Plan of Burial Trench (if applicable) based upon the appropriate requirements of 19.15.17.11 NMAC Construction/Design Plan of Temporary Pit (for in-place burial of a drying pad) - based upon the appropriate requirements of 19.15.17.13 NMAC Protocols and Procedures - based upon the appropriate requirements of 19.15.17.13 NMAC Confirmation Sampling Plan (if applicable) - based upon the appropriate requirements of Subsection F of 19.15.17.13 NMAC Waste Material Sampling Plan - based upon the appropriate requirements of Subsection F of 19.15.17.13 NMAC Soil Cover Design - based upon the appropriate requirements of Subsection H of 19.15.17.13 NMAC Re-vegetation Plan - based upon the appropriate requirements of Subsection I of 19.15.17.13 NMAC				

Operator Application Certification:			
I hereby certify that the information submitted with this application is true, accurate	e and complete to the best of my knowledge and belief.		
Name (Print): Ms. Amy/Mackey	Title: Administrative Manager		
Signature:	Date: 1-28-09		
E-mail address: amackey1@elmridge.net	Telephone:(505)632-3476 Ext. 201		
OCD Approval: Permit Application (including closure plan) Closure Plan	n (only) OCD Conditions (see attachment)		
OCD Representative Signature: (all J. Chavez	Approval Date: 2/19/2609		
OCD Representative Signature: Carly, Chaves Title: Environmental Engineer	OCD Permit Number:		
Closure Report (required within 60 days of closure completion): Subsection K of 19.15.17.13 NMAC Instructions: Operators are required to obtain an approved closure plan prior to implementing any closure activities and submitting the closure report. The closure report is required to be submitted to the division within 60 days of the completion of the closure activities. Please do not complete this section of the form until an approved closure plan has been obtained and the closure activities have been completed. Closure Completion Date:			
Closure Method: Waste Excavation and Removal On-Site Closure Method Alternati If different from approved plan, please explain.	ve Closure Method Waste Removal (Closed-loop systems only)		
Closure Penert Degarding Waste Pemeral Closure For Closed Ican Sustams T	Chat Litiliza Abova Cround Stool Tanks or Haul off Pins Only		
Closure Report Regarding Waste Removal Closure For Closed-loop Systems T Instructions: Please indentify the facility or facilities for where the liquids, drilling			
two facilities were utilized.			
Disposal Facility Name:	Disposal Facility Permit Number:		
Disposal Facility Name:	Disposal Facility Permit Number:		
Were the closed-loop system operations and associated activities performed on or in Yes (If yes, please demonstrate compliance to the items below) \(\subseteq \) No	n areas that will not be used for future service and operations?		
Required for impacted areas which will not be used for future service and operation	ns:		
Site Reclamation (Photo Documentation)			
☐ Soil Backfilling and Cover Installation ☐ Re-vegetation Application Rates and Seeding Technique			
24.			
Closure Report Attachment Checklist: Instructions: Each of the following item	ns must be attached to the closure report. Please indicate, by a check		
mark in the box, that the documents are attached.			
☐ Proof of Closure Notice (surface owner and division) ☐ Proof of Deed Notice (required for on-site closure)			
Plot Plan (for on-site closures and temporary pits)			
☐ Confirmation Sampling Analytical Results (if applicable)	•		
Waste Material Sampling Analytical Results (required for on-site closure)			
☐ Disposal Facility Name and Permit Number ☐ Soil Backfilling and Cover Installation			
Re-vegetation Application Rates and Seeding Technique			
Site Reclamation (Photo Documentation)			
On-site Closure Location: Latitude Longitude	de NAD: 🗌 1927 🔲 1983		
25.			
Operator Closure Certification: I hereby certify that the information and attachments submitted with this closure report is true, accurate and complete to the best of my knowledge and belief. I also certify that the closure complies with all applicable closure requirements and conditions specified in the approved closure plan.			
Name (Print):	Title:		
Signature:			
E-mail address:	Telephone:		

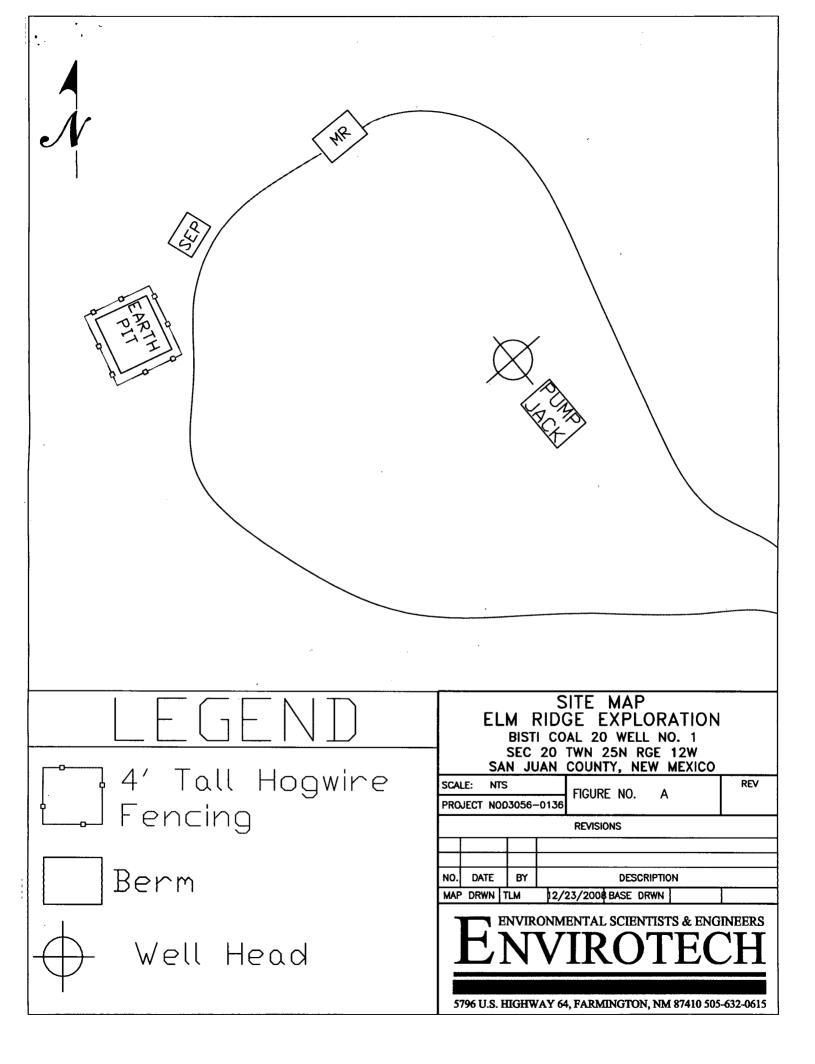

EARTHEN PIT CLOSURE PLAN

SITE NAME:

BISTI COAL 20-1
UNIT LETTER A, SECTION 20, TOWNSHIP 25N, RANGE 12W
SAN JUAN COUNTY, NEW MEXICO
LATITUDE 36.391863 LONGITUDE -108.128623

SUBMITTED TO:

MR. WAYNE PRICE
NEW MEXICO OIL CONSERVATION DIVISION
1220 SOUTH ST. FRANCIS DRIVE
SANTA FE, NEW MEXICO 87505
(505) 476-3490

SUBMITTED BY:

MS. AMY MACKEY
ELM RIDGE EXPLORATION
P.O. BOX 156
BLOOMFIELD, NEW MEXICO 87413
(505) 632-3476 EXT. 201

JANUARY 2009

EARTHEN PIT CLOSURE PLAN ELM RIDGE EXPLORATION BISTI COAL 20-1 SAN JUAN COUNTY, NEW MEXICO

TABLE OF CONTENTS

INTRODUCTION	. 1
SCOPE OF CLOSURE ACTIVITIES	. 1
REPORTING.	. 3

INTRODUCTION

Elm Ridge Exploration would like to submit a closure plan for the earthen pit at the Bisti Coal 20-1 well site located in the NE ¼ NE ¼ of Section 20, Township 25N, Range 12W, San Juan County, New Mexico. This closure plan has been prepared in conformance with the closure requirements of 19.15.17.13 NMAC.

SCOPE OF CLOSURE ACTIVITIES

The purpose of this closure plan is to provide the details of activities involved in the closure of the permanent unlined pit at the Bisti Coal 20-1 well site. The following scope of closure activities has been designed to meet this objective:

- 1) Elm Ridge Exploration, or a contractor acting on behalf of Elm Ridge Exploration, will close all former earthen pits prior to the closure date agreed upon by the New Mexico Oil Conservation Division of December 31, 2009.
- 2) In accordance with of Subsection A of 19.15.17.13 NMAC, Elm Ridge Exploration, or a contractor acting on behalf of Elm Ridge Exploration, will close any earthen pits at a date the division requires because of imminent danger to fresh water, public health or the environment.
- 3) Elm Ridge Exploration, or a contractor acting on behalf of Elm Ridge Exploration, will close earthen pits first which seem to pose a greater risk to fresh water, public health, or the environment. This will be determined by the locations proximity to surface water sources and distance to groundwater.
- 4) No less than 60 days prior to any earthen pit closure activities, Elm Ridge Exploration, or a contractor acting on behalf of Elm Ridge Exploration, will provide written notification to the Santa Fe NMOCD office as well as a schedule of on-site activities, as in accordance with 19.15.17.13 Subsection J Paragraph (3) NMAC.
- 5) No less than 24 hours and no greater than one (1) week prior to earthen pit removal Elm Ridge Exploration, or a contractor acting on behalf of Elm Ridge Exploration, will provide written notification to the appropriate surface owner as well as a schedule of on-site activities, as in accordance with 19.15.17.13 Subsection J Paragraph (1) NMAC. Elm Ridge Exploration, or a contractor acting on behalf of Elm Ridge Exploration, will notify the surface owner by certified mail, return receipt requested, that the operator plans to close a earthen pit. The return receipt will be used to ensure that the surface owner has received written notification no less than 24 hours and no greater than one (1) week prior to the beginning of BGT closure activities. Evidence of mailing of the notice to the address of the surface owner shown in the county tax records is sufficient to demonstrate compliance with this Closure activities that will take place on tribal land will have requirement. notifications sent by certified mail, return receipt requested, to the appropriate tribal Elm Ridge Exploration, or a contractor acting on behalf of Elm Ridge Exploration, will notify the Bureau of Land Management (BLM) of closure activities for wells located on federal land per a Sundry Notice, as in accordance with 19.15.17.13 Subsection J Paragraph (1) NMAC. All notices will be sent in such a way that the surface owner received notice at least 24 hours prior to the beginning of

closure activities.

- 6) Elm Ridge Exploration, or a contractor acting on behalf of Elm Ridge Exploration, will remove all liquids, and/or sludge, to visual extents, prior to closure sampling. Material will be disposed of at Envirotech's Landfarm #2, Permit # NM-01-0011, TNT Environmental Inc. Landfarm, Permit # NM-01-0008, Industrial Ecosystems Inc. (IEI) Landfarm, Permit # NM-01-0010B or Basin Disposal, Permit # NM-01-0005, depending on the consistence of the material removed, as in accordance with 19.15.17.13 Subsection C Paragraph (1) NMAC.
- 7) Elm Ridge Exploration, or a contractor acting on behalf of Elm Ridge Exploration, will remove all on-site equipment associated with this earthen pit unless it is required for some other purpose, as in accordance with 19.15.17.13 Subsection C Paragraph (2) NMAC. The equipment that meets the requirements of 19.15.9.712 Subsection A NMAC and 19.15.9.712 Subsection D Paragraph (1) will be disposed of at San Juan County Regional Landfill. Waste that is classified by 19.15.9.712 Subsection D Paragraph (2) will be sampled accordingly to determine acceptance of this material at the San Juan County Regional Landfill. Waste that is unable to be accepted at the San Juan County Regional Landfill will be submitted to the OCD on a case-by-case basis in accordance with Paragraph (3) of Subsection D of 19.15.9.712.
- 8) Once the earthen pit is removed to visual extents of contamination, a five (5)-point composite sample will be collected from directly below the liner(s) or at native soil. Additional discrete samples will be collected from any area that is wet, discolored or show other evidence of a release. All samples being collected will be analyzed for benzene, and total BTEX via USEPA Method 8021B, TPH via USEPA Method 418.1, and chlorides via USEPA 300.1, as in accordance with 19.15.17.13 Subsection C Paragraph (3) NMAC.
- 9) Depending on soil sample results the area will be either backfilled or the area will be excavated.
 - a. If soil samples do not exceed the regulatory standards of 0.2 mg/kg benzene, 50 mg/kg BTEX, 100 mg/kg TPH, and 250 mg/kg or background concentration of chlorides, as in accordance with 19.15.17.13 Subsection C Paragraph (3) NMAC.
 - i. Elm Ridge Exploration, or a contractor acting on behalf of Elm Ridge Exploration, shall submit a Form C-141 with the laboratory results so that the division may review the results to determine if additional delineation is required in accordance with Paragraph (4) of Subsection C of 19.15.17.13 NMAC.
 - ii. Elm Ridge Exploration, or a contractor acting on behalf of Elm Ridge Exploration, will backfill the excavation or impacted area with non-waste containing, earthen material, in accordance with 19.15.17.13 Subsection E Paragraph (6) NMAC. A soil cover shall be installed for all backfilled excavations consisting of the background thickness of topsoil or one foot of suitable material to establish vegetation at the site, whichever is greater in accordance with Subsections H of 19.15.17.13 NMAC. The operator shall construct the soil cover to the site's existing grade and prevent ponding of water and erosion of the cover material.
 - iii. All areas of the well site that are no longer utilized on a day to day basis for the production of oil and/or gas, Elm Ridge Exploration, or a

contractor acting on behalf of Elm Ridge Exploration, will substantially restore, re-contour and re-vegetate the areas, in accordance with 19.15.17.13 Subsections G and I NMAC. The operator shall notify the division when it has been re-seeded and when it has achieved successful re-vegetation. For re-vegetation methods, please see attached re-vegetation plan.

b. If soil samples exceed the regulatory standards stated above.

- i. Elm Ridge Exploration, or a contractor acting on behalf of Elm Ridge Exploration, shall submit a Form C-141 with the laboratory results so that the division may review the results to determine if additional delineation is required in accordance with Paragraph (4) of Subsection C of 19.15.17.13 NMAC.
- ii. Activities beyond this point will be in accordance with 19.15.3.116 NMAC and 19.15.11.19 NMAC.

REPORTING

Elm Ridge Exploration will submit a closure report within 60 days following the earthen pit closure. The closure report will consist of a form C-144 with all supporting data and a form C-141 with all supporting data. The supporting data will include proof of closure notice to the surface owner and the OCD, confirmation sampling analytical results, a site diagram, soil backfilling and cover installation, re-vegetation rates, re-seeding techniques and site reclamation photo documentation if applicable, along with all other information related to the onsite activities.

We appreciate the opportunity to be of service. If you have any questions or require further information, please do not hesitate to contact our office at (505) 632-3476 Ext. 201.

Respectfully Submitted:

Elm Ridge Exploration

Amy Mackey

Elm Ridge Exploration

Elm Ridge Exploration

Re-Seeding Techniques and Seed Mixture Ratios

These applied practices by Elm Ridge Exploration will at a minimum comply with the New Mexico Oil Conservation Divisions rule 19.15.17.13, Subsection I NMAC Elm Ridge Exploration has adopted these re-seeding application techniques, ratios and mixtures as their standard operating procedures.

- 1. The first growing season after closure of a below grade tank or pit, all areas of the well site not utilized for the production of oil and/or gas on a daily basis will be re-seeded with the specified seed mixture.
- 2. The seed mixture used will be certified with no primary or secondary noxious weeds in seed mixtures. The seed labels from each bag shall be available for inspection while seed is being sown.
- 3. The operator shall accomplish seeding by drilling on the contour whenever practical or by other division-approved methods. The operator shall obtain vegetative cover that equals 70% of the native perennial vegetative cover (un-impacted by overgrazing, fire or other intrusion damaging to native vegetation) consisting of at least three native plant species, including at least one grass, but not including noxious weeds, and maintain that cover through two successive growing seasons. During the two growing seasons that prove viability, there shall be no artificial irrigation of the vegetation.
- 4. Hand seeding with hydro-mulch, excelsior netting or mulch with netting is required on the cut/fill slopes. Mulch will be spread at a rate of 2,000-3,000 pounds per acre.
- 5. Compacted areas determined by visual inspection will be ripped to a depth of twelve (12) inches below ground surface and disked to a depth of six (6) inches before seeding. Seeding shall be done with a disk type drill with two (2) boxes for various seed sizes. The drill rows shall be eight (8) to ten (10) inches apart. Seed shall be planted at no less than one-half (1/2) inch deep or more than one (1) inch deep. The seeder shall be followed with a drag, packer, or roller to ensure uniform coverage of the seed and adequate compaction. Drilling shall be done on the contour where possible, but not up and down the slope.
- 6. Where slopes are too steep for contour drilling a hand seeder shall be used. Seed shall be covered to the depth stated above by whatever means is practical. If the seed is unable to be covered by the means listed above, the prescribed seed mixture amount will be doubled.

- 7. Elm Ridge Exploration shall repeat seeding or planting until it successfully achieves the required vegetative cover of 70% of the native perennial vegetation cover.
- 8. Upon abandonment of a well site, if the retention of the access road is not considered necessary for the management and multiple uses of the natural resources, or by the surface owner, it will be ripped a minimum of twelve (12) inches in depth. After ripping, water bars will be installed. All ripped surfaces are to be protected from vehicular travel by construction of a dead end ditch and earthen barricade at the entrance to these ripped areas. Re-seeding of areas affected by the ditch and barriers will be re-seeded if necessary.
- 9. Elm Ridge Exploration, or a contractor acting on behalf of Elm Ridge Exploration, will inform the division once successful re-vegetation has occurred.