## State of New Mexico Energy, Minerals & Natural Resources

District I 1625 N. French Dr., Hobbs, NM 88240 District II 1301 W. Grand Avenue, Artesia, NM 88210 District III 1000 Rio Brazos Rd., Aztec, NM 87410 District IV

Oil Conservation Divsiion 1220 S. St. Francis Dr.

Submit to appropriate District Office

1220 S. St. Francis Dr., Santa Fe, NM 87505 Santa Fe, NM 87505 AMENDED REPORT													
APPLICATION FOR PERMIT TO DRILL, RE-ENTER, DEEPEN, PLUGBACK, OR ADD A ZONE													
Operator Name and Address 2 OGRID Number 16696										•			
OXY USA Inc.									<sup>3</sup> API Number				
P.O. Box 50250 Midland, TX 79710-0250									30- 059-				
<sup>4</sup> Property Code 27111				Br	<sup>5</sup> Property Name ravo Dome Carbon Dioxide Gas Unit 2				6Well No.				
<sup>9</sup> Proposed Pool 1									10 Proposed Pool 2				
Bravo Dome Carbon Dioxide Gas 640 96010													
<sup>7</sup> Surface Location													
UL or lot no.	l l		Range	Lot. ldn	Feet from t		North/South Line	Feet from the	East/West line	County			
<u> </u>	8	7.0	20 N 34 E			165		South	1650	East	Union		
8 Proposed Bottom Hole Location If Different From Surface													
UL or lot no.	Section	Tov	vnship	Range	Lot. Idn Feet f		the North/South Line		Feet from the	East/West line	County		
Additional Well Location													
11 Work Type Code N			Well Type Code			13 Cable/Rotary 14 Le			e Type Code	1	15 Ground Level Elevation		
<sup>16</sup> Multi	ple		17	Proposed Depti	h	1			ontractor	<sup>20</sup> Sp	<sup>20</sup> Spud Date		
No.				2600'	D	Tubb			N/A				
Depth to ground water   Distance from nearest fresh   >100'							water well Distance from nearest surface water >1000'						
Pit: Liner: Synthetic X 12 mils thick Clay Pit Volume 4000 bbls Drilling Method:													
Closed-Loop System Diesel/Oil-based Gas/Air													
<sup>21</sup> Proposed Casing and Cement Program													
Hole S	ize		Casin	g Size		weight/foot	4	etting Depth Sacks of Cement		nt E	Estimated TOC		
12-1/4"			8-5	/8"	24#			700'	300sx		Surface		
7-7/8"			5-1	/2"	5.9#FG/15.5#			2600'	300sx	Surface			
							ļ				····		
					L		<u> </u>		<del></del>				
							K, giv	e the data on the pre	sent productive zor	ne and proposed	new productive zone.		
Describe the blowout prevention program, if any. Use additional sheets if necessary.													
See Attachment													
1													
										<b>_</b>			
<sup>23</sup> I hereby certify that the information given above is true and complete to the best of								ØIL CONSERVATION DIVISION					
my knowledge and belief. I further certify that the drilling pit will be constructed according to NMOCD guidelines \( \oldsymbol{X} \) a general permit \( \oldsymbol{\oldsymbol{\oldsymbol{NMOCD}} \), or													
an (attached) alternative OCD-approved plan . Signature:							Approved by: A Shirt						
Printed name: David Stewart							Title: DISTRICT SUPERVISOR						
Title: Sr. Regulatory Analyst								oval Date: <i>3/13</i>		piration Date:	3/13/07		
E-mail Address: david_stewart@oxy.com													
Date: Phone:					Conditions of Approval:								
3/3/06				432 - 685 - 5717			Attached						

## ATTACHMENT C-101 BDCDGU

PROPOSED TD: 2600' TVD

BOP PROGRAM: 0-700' None

700-2600' 8" 2M annular hydril preventer.

CASING: Surface: 8-5/8" OD 24# J55 8rd ST&C new casing set at 700'

12-1/4" hole

Centralizers from TD-Surf, every fourth joint

Production: 5-1/2" OD new casing from 0-2600'

300'~15.5# J55 8rd LTC 2300'~5.9# 10rd FG

7-7/8" hole - 5 centralizers

\*This well will have fiberglass casing from surface to the productive interval (Tubb). Steel casing will be used across the Tubb. The fiberglass casing must penetrate the Cimarron at a minimum. The optimum point for setting the fiberglass casing is at the midpoint of the Cimarron formation.

CEMENT: Surface - Circulate cement with 300sx Premium Plus with 2% CaCl<sub>2</sub> + .25#/sx Poly E Flake, (WT-14.8ppg, Yld-1.34cf/sx, FW-6.3g/sx)

Production - Cement with 150sx Premium Plus with 3%  $CaCl_2 + .25\#/sx$  Poly E Flake, (WT-11.1ppg, Yld-3.27cf/sx, FW-20.47g/sx) followed by 150sx Premium Plus with 3%  $CaCl_2 + .25\#/sx$  Poly E

Flake, (WT-13.2ppg, Yld-1.86cf/sx, FW-9.93g/sx)

MUD: 0-700' Fresh water/native mud.

Wt 8.6-9.2ppg, Vis 32-36sec

700-2600' Fresh water/Starch/Gel

pH control as needed.

Wt 9.0-9.2ppg, Vis 28-29sec

District I 1625 N. French Dr., Hobbs, NM 88240 District II 811 South First, Artesia, NM 88210

District III 1000 Rio Brazos Rd., Aztec, NM 87410


District IV 2040 South Pacheco, Santa Fe, NM 87505 State of New Mexico Energy, Minerals & Natural Resources Department

OIL CONSERVATION DIVISION 2040 South Pacheco Santa Fe, NM 87505 Form C-102
Revised October 18, 1994
Instructions on back
Submit to Appropriate District Office
State Lease - 4 Copies
Fee Lease - 3 Copies


\_\_ AMENDED REPORT

## WELL LOCATION AND ACREAGE DEDICATION PLAT

WELL LOCATION AND ACREAGE DEDICA									AI			
		Pool Cod		Pool Name								
30-059-				96010	)		BRAVO DOME CARBON DIOXIDE GAS					
Property Code					Pro	operty	Name		Well Num		Well Number	
27111 BRAVO			<u>0 DO</u>	ME CA	RBON	DIC	DXIDE GAS	UNIT 20.	VIT 2034   082		082	
OGRID No.					-		Name		Elevation			
16696			OXY USA INC.						4779.8			
Surface Location												
UL or lot no.	no. Section Township		Range	Løt Idn.	Feet from the		North/South line	Feet from the	from the East/West			
J	8	20 N	34 E		1650'		SOUTH	1650'	EAST		UNION	
Bottom Hole Location If Different From Surface												
UL or lot no.	Section	Township	Range	Lot Idn.	Feet from	the	North/South line	Feet from the	East/West	line	County	
	[ 	<u> </u>	<u> </u>		<u> </u>		<u> </u>				<u> </u>	
Dedicated Acre	es Joint	or Infill (	Consolidation	Code C	order No.							
640	WARTE	WILL DE	ACCIONT		ne actor	) Tirera	ON TINETT ATT	Dimension :	141777 7577	TENT OO	NICOL IN LOSE	
NO ALLOWABLE WILL BE ASSIGNED TO THIS COMPLETION UNTIL ALL INTERESTS HAVE BEEN CONSOLIDATED OR A NON-STANDARD UNIT HAS BEEN APPROVED BY THE DIVISION												
8			<u> </u>	1	<del></del>					CEDT	IEICATION	
						į		- 17			IFICATION   Ontained herein is	
#						}					nowledge and belief.	
	i			}				<b>}</b>				
	,					}						
<b>\</b>	ļ			}		í			2			
₩	· '			-}				Simon	· - 15	7		
<b>}</b> }	)			}		í		Signature	David	d Stev	wart	
ii	İ	1.				į		Printed Nam	e		·	
						}		Tide	Regula	tory	Analyst	
		2363		à_		į		The	3/3/06			
<b> </b>	,		, ,			Í		Date		<del></del>		
					E NAD27 - 35° 58'37	14"		SURVI	FYOR	CERT	IFICATION	
\\	j				- 103° 20'3			11			shown on this plat	
1	İ					j		was plotted fr	om field no	otes of actua	d surveys made by	
	Ì			{		,		- II a	. i	1 77 6	at the same is true	
<b>}</b>	j			1	<b>\</b>	2	1650'	∥ Fe	broan	1 24	<b>20</b> 06	
				]	]	j		Date of Surve	1	MEX	13%	
}}				}		-		Signature an	Seal of Pro	fessional (5)	ur eyor	
					-,0!	ļ		Date of Surve		5079)	WE'Y	
	}				. 1650	İ				17.1	15	
[]	1					Į			V 2.~		, rus	
}}	+			}	}	1			- I SKI	30101X	<i></i>	
				1				Certificate Nu	mber 15	079		

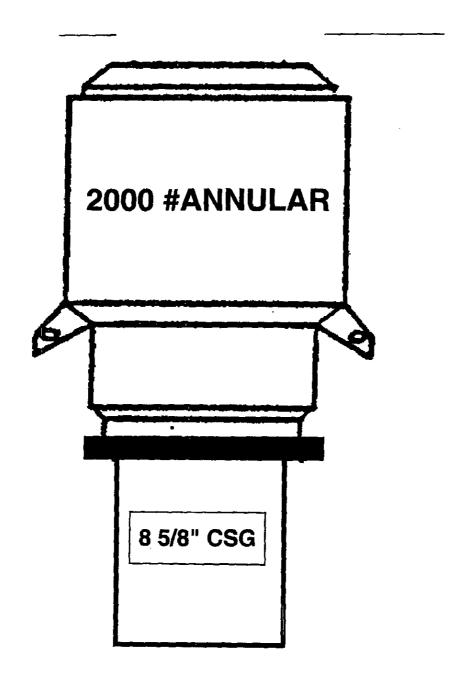

**BRAVO DOME 2003 DRILLING PROJECT BOP DIAGRAM** 

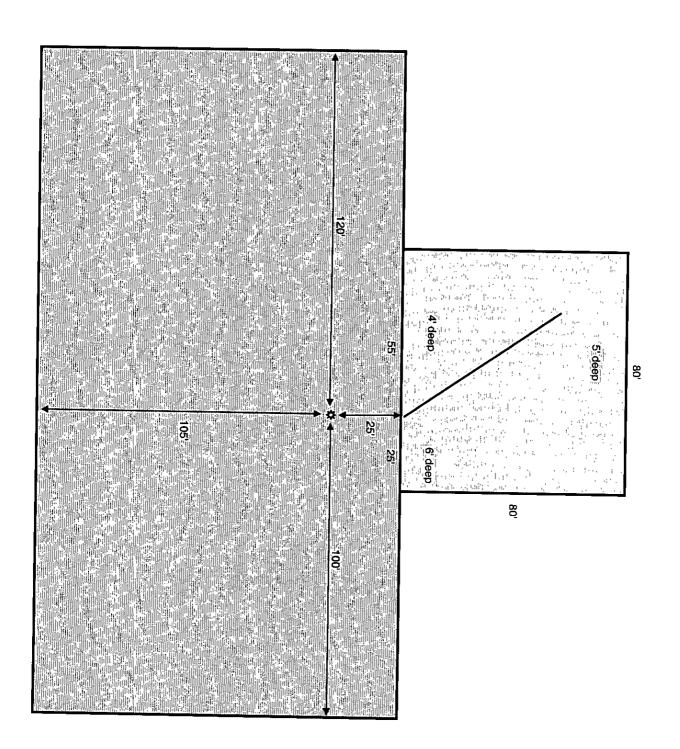

## Bravo Dome Unit Location and Pit Design Cheyenne Rig 8