

RECEIVED: 10/03/2017	REVIEWER:	TYPE: SWD	APP NO: PMAM1727758052
-------------------------	-----------	--------------	---------------------------

ABOVE THIS TABLE FOR OCD DIVISION USE ONLY

**NEW MEXICO OIL CONSERVATION DIVISION**  
 - Geological & Engineering Bureau -  
 1220 South St. Francis Drive, Santa Fe, NM 87505



**ADMINISTRATIVE APPLICATION CHECKLIST**

THIS CHECKLIST IS MANDATORY FOR ALL ADMINISTRATIVE APPLICATIONS FOR EXCEPTIONS TO DIVISION RULES AND REGULATIONS WHICH REQUIRE PROCESSING AT THE DIVISION LEVEL IN SANTA FE

Applicant: LIME ROCK RESOURCES II-A, L.P. OGRID Number: 277558  
 Well Name: FEDERAL T SWD #1 API: 30-015-26404  
 Pool: SWD: WOLFCAMP-CISCO Pool Code: 96136

**SUBMIT ACCURATE AND COMPLETE INFORMATION REQUIRED TO PROCESS THE TYPE OF APPLICATION INDICATED BELOW**

- 1) **TYPE OF APPLICATION:** Check those which apply for [A]  
 A. Location - Spacing Unit - Simultaneous Dedication  
 NSL       NSP (PROJECT AREA)       NSP (PRORATION UNIT)       SD
- B. Check one only for [I] or [II]  
 [I] Commingling - Storage - Measurement  
 DHC    CTB    PLC    PC    OLS    OLM
- [II] Injection - Disposal - Pressure Increase - Enhanced Oil Recovery  
 WFX    PMX    SWD    IPI    EOR    PPR

OCT - 3 P 1:32  
RECEIVED OCD

- 2) **NOTIFICATION REQUIRED TO:** Check those which apply.
- A.  Offset operators or lease holders
  - B.  Royalty, overriding royalty owners, revenue owners
  - C.  Application requires published notice
  - D.  Notification and/or concurrent approval by SLO
  - E.  Notification and/or concurrent approval by BLM
  - F.  Surface owner
  - G.  For all of the above, proof of notification or publication is attached, and/or,
  - H.  No notice required

FOR OCD ONLY	
<input type="checkbox"/>	Notice Complete
<input type="checkbox"/>	Application Content Complete

3) **CERTIFICATION:** I hereby certify that the information submitted with this application for administrative approval is **accurate** and **complete** to the best of my knowledge. I also understand that **no action** will be taken on this application until the required information and notifications are submitted to the Division.

**Note: Statement must be completed by an individual with managerial and/or supervisory capacity.**

Mike Pippin

Print or Type Name

Signature

Date 10/1/17

505-327-4573

Phone Number

e-mail Address mike@pippinllc.com

LIME ROCK RESOURCES II-A, L.P.  
Mike Pippin PE  
3104 N. Sullivan Avenue  
Farmington, NM 87401  
505-327-4573 (phone) mike@pippinllc.com

September 30, 2017

Phil Goetze  
NMOCD  
1220 South St. Francis Drive  
Santa Fe, NM 87505

**RE: C-108, SWD APPLICATION**  
**FEDERAL T SWD #1– API#: 30-015-26404**  
**Unit Letter "A" Section 12 T18S R27E**  
**Eddy County, New Mexico**

Dear Mr. Goetze,

LIME ROCK RESOURCES II-A, L.P. as operator of the above-referenced well, is submitting this application to permit the referenced well for produced water disposal in the Lower Wolfcamp and Cisco (96136).

It was recently discovered that errors in Devon's original SWD application caused the State to exclude the Lower Wolfcamp perms at 6868'-7360' in their subsequent order, SWD-1135. Approval of this application will rectify the problem.

This well is currently open and disposing of produced water in the Lower Wolfcamp 6868'-7360' and Cisco 7685'-8060'. All wells in the area of review that penetrated the proposed disposal interval (2 wells) have good cement throughout.

The Bureau of Land Management BLM as the surface owner and all offsetting operators have been notified.

Attached is the necessary C-108 information, data, maps, and proof of notices for the application.

Should you have any questions, please contact me at 505-327-4573.

Very truly yours,



Mike Pippin

Petroleum Engineer

**APPLICATION FOR AUTHORIZATION TO INJECT**

I. PURPOSE: \_\_\_\_\_ Secondary Recovery \_\_\_\_\_ Pressure Maintenance X Disposal \_\_\_\_\_ Storage  
Application qualifies for administrative approval? X Yes \_\_\_\_\_ No

II. OPERATOR: LIME ROCK RESOURCES II-A, L.P.

ADDRESS: 1111 Bagby Street, Houston, TX 77002

CONTACT PARTY: Mike Pippin PHONE: 505-327-4573

III. WELL DATA: Complete the data required on the reverse side of this form for each well proposed for injection.  
Additional sheets may be attached if necessary.

IV. Is this an expansion of an existing project? X Yes \_\_\_\_\_ No  
If yes, give the Division order number authorizing the project: SWD-1135

V. Attach a map that identifies all wells and leases within two miles of any proposed injection well with a one-half mile radius circle drawn around each proposed injection well. This circle identifies the well's area of review. **SEE ATTACHED**

VI. Attach a tabulation of data on all wells of public record within the area of review which penetrate the proposed injection zone. Such data shall include a description of each well's type, construction, date drilled, location, depth, record of completion, and a schematic of any plugged well illustrating all plugging detail. **SEE ATTACHED**

VII. Attach data on the proposed operation, including: **SEE ATTACHED**

1. Proposed average and maximum daily rate and volume of fluids to be injected;
2. Whether the system is open or closed;
3. Proposed average and maximum injection pressure;
4. Sources and an appropriate analysis of injection fluid and compatibility with the receiving formation if other than reinjected produced water; and,
5. If injection is for disposal purposes into a zone not productive of oil or gas at or within one mile of the proposed well, attach a chemical analysis of the disposal zone formation water (may be measured or inferred from existing literature, studies, nearby wells, etc.).

\*VIII. Attach appropriate geologic data on the injection zone including appropriate lithologic detail, geologic name, thickness, and depth. Give the geologic name, and depth to bottom of all underground sources of drinking water (aquifers containing waters with total dissolved solids concentrations of 10,000 mg/l or less) overlying the proposed injection zone as well as any such sources known to be immediately underlying the injection interval. **SEE ATTACHED**

IX. Describe the proposed stimulation program, if any. **NONE**

\*X. Attach appropriate logging and test data on the well. (If well logs have been filed with the Division, they need not be resubmitted).

\*XI. Attach a chemical analysis of fresh water from two or more fresh water wells (if available and producing) within one mile of any injection or disposal well showing location of wells and dates samples were taken. **SEE ATTACHED**

XII. Applicants for disposal wells must make an affirmative statement that they have examined available geologic and engineering data and find no evidence of open faults or any other hydrologic connection between the disposal zone and any underground sources of drinking water. **SEE ATTACHED**

XIII. Applicants must complete the "Proof of Notice" section on the reverse side of this form.

XIV. Certification: I hereby certify that the information submitted with this application is true and correct to the best of my knowledge and belief.

NAME: Mike Pippin TITLE: Petroleum Engineer

SIGNATURE:  DATE: 9/30/17

E-MAIL ADDRESS: mike@pippinllc.com

\* If the information required under Sections VI, VIII, X, and XI above has been previously submitted, it need not be resubmitted. Please show the date and circumstances of the earlier submittal: \_\_\_\_\_

### III. WELL DATA

A. The following well data must be submitted for each injection well covered by this application. The data must be both in tabular and schematic form and shall include:

- (1) Lease name; Well No.; Location by Section, Township and Range; and footage location within the section.
- (2) Each casing string used with its size, setting depth, sacks of cement used, hole size, top of cement, and how such top was determined.
- (3) A description of the tubing to be used including its size, lining material, and setting depth.
- (4) The name, model, and setting depth of the packer used or a description of any other seal system or assembly used.

*Division District Offices have supplies of Well Data Sheets which may be used or which may be used as models for this purpose. Applicants for several identical wells may submit a "typical data sheet" rather than submitting the data for each well.*

B. The following must be submitted for each injection well covered by this application. All items must be addressed for the initial well. Responses for additional wells need be shown only when different. Information shown on schematics need not be repeated.

- (1) The name of the injection formation and, if applicable, the field or pool name.
- (2) The injection interval and whether it is perforated or open-hole.
- (3) State if the well was drilled for injection or, if not, the original purpose of the well.
- (4) Give the depths of any other perforated intervals and detail on the sacks of cement or bridge plugs used to seal off such perforations.
- (5) Give the depth to and the name of the next higher and next lower oil or gas zone in the area of the well, if any.

### XIV. PROOF OF NOTICE

All applicants must furnish proof that a copy of the application has been furnished, by certified or registered mail, to the owner of the surface of the land on which the well is to be located and to each leasehold operator within one-half mile of the well location.

Where an application is subject to administrative approval, a proof of publication must be submitted. Such proof shall consist of a copy of the legal advertisement which was published in the county in which the well is located. The contents of such advertisement must include:

- (1) The name, address, phone number, and contact party for the applicant;
- (2) The intended purpose of the injection well; with the exact location of single wells or the Section, Township, and Range location of multiple wells;
- (3) The formation name and depth with expected maximum injection rates and pressures; and,
- (4) A notation that interested parties must file objections or requests for hearing with the Oil Conservation Division, 1220 South St. Francis Dr., Santa Fe, New Mexico 87505, within 15 days.

**NO ACTION WILL BE TAKEN ON THE APPLICATION UNTIL PROPER PROOF OF NOTICE HAS BEEN SUBMITTED.**

---

**NOTICE: Surface owners or offset operators must file any objections or requests for hearing of administrative applications within 15 days from the date this application was mailed to them.**

### INJECTION WELL DATA SHEET

OPERATOR: LIME ROCK RESOURCES II-A, L.P.

WELL NAME & NUMBER: FEDERAL T SWD #1

WELL LOCATION: 660' FNL 990' FEL      A      12      T18S      R27E  
FOOTAGE LOCATION      UNIT LETTER      SECTION      TOWNSHIP      RANGE

WELBORE SCHEMATIC (SEE ATTACHED)

#### WELL CONSTRUCTION DATA

##### Surface Casing

Hole Size: 17-1/2"      Casing Size: 13-3/8"  
Cemented with: 450 sx.      or \_\_\_\_\_ ft<sup>3</sup>  
Top of Cement: SURFACE      Method Determined: Observation

##### Intermediate Casing

Hole Size: 12-1/4"      Casing Size: 8-5/8"  
Cemented with: 900 sx.      or \_\_\_\_\_ ft<sup>3</sup>  
Top of Cement: SURFACE      Method Determined: Observation

##### Production Casing

Hole Size: 7-7/8"      Casing Size: 5-1/2"  
Cemented with: 430 sx.      or \_\_\_\_\_ ft<sup>3</sup>  
Top of Cement: \_\_\_\_\_ Method Determined: \_\_\_\_\_  
4342'

Total Depth: 10,414'

##### Injection Interval Perforations

6868' feet to 8060'

(Perforated or Open Hole; indicate which)

**INJECTION WELL DATA SHEET**

Tubing Size: 3-1/2" 9.3# Lining Material: IPC

Type of Packer: 5-1/2" IPC

Packer Setting Depth: 6789'

Other Type of Tubing/Casing Seal (if applicable): \_\_\_\_\_

**Additional Data**

1. Is this a new well drilled for injection? \_\_\_\_\_ Yes \_\_\_\_\_ **No**

If no, for what purpose was the well originally drilled? North Illinois Camp Morrow Gas Well

2. Name of the Injection Formation: Lower Wolfcamp & Cisco

3. Name of Field or Pool (if applicable): \_\_\_\_\_

4. Has the well ever been perforated in any other zone(s)? List all such perforated intervals and give plugging detail, i.e. sacks of cement or plug(s) used. \_\_\_\_\_

Morrow 10,008'-10,054' (perfs under CIBP @ 7595' w/35' cmt on top)

Cisco 7760'-8060' (perfs SQ w/100 sx cmt)

Cisco 8055'-8060' (perfs SQ w/100 sx cmt)

Cisco 7832'-7840' (perfs SQ w/100 sx cmt)

Cisco 7790'-7798' (perfs SQ w/100 sx cmt)

Cisco 7760'-7768' (perfs SQ w/100 sx cmt)

5. Give the name and depths of any oil or gas zones underlying or overlying the proposed injection zone in this area: \_\_\_\_\_

Morrow at 9600'-10,250'

Atoka at 9230'-9700'

Upper Wolfcamp at 6475'-6800'

Abo at 6015'-6200'

Yeso at 3300'-3900'

San Andres at 2072'-2800'

Queen at 1218'-1650'

**LIME ROCK RESOURCES II-A, L.P.**

Well Name: <b>FEDERAL T SWD #1</b>		Field: <b>Lower Wolfcamp &amp; Cisco</b>	
Location: <b>660' FNL 990' FEL, SEC 12, T18S R27E</b>		County: <b>Eddie</b>	State: <b>New Mexico</b>
Elevation: <b>3634'KB; 3618' GL</b>		Spud Date: <b>6/18/90</b>	Completion Date: <b>9/13/90</b>
API#: <b>30-015-26404</b>	Prepared by: <b>M. Pippin</b>	Date: <b>9/30/17</b>	

*Current Schematic  
L. Wolfcamp and Cisco SWD*

<b>FORMATION TOPS</b>	
QUEEN	1218'
SAN ANDRES	2072'
ABO	6016'
WOLFCAMP	6475'
CISCO	7670'
STRAWN	9513'

17-1/2" Hole  
13-3/8", 688', LTC, @ 472'  
Cmt'd w/450 Sx. Circ to surface

12-1/4" Hole  
8-5/8", J55, 328', STC, @ 2,689'  
Cmt'd w/900 Sx. Circ to surface

WOLFCAMP (8/21/93)  
6,868' - 7,038'

WOLFCAMP (8/18/93)  
7,092' - 7,097'; 7,120' - 7,146'

WOLFCAMP (8/16/93)  
7,330' - 7,340'; 7,350' - 7,360'

SWD Perforations:  
CISCO (8/1/93)  
7,685' - 7,695'

CISCO (8/14/08)  
7758'-7840' (228 holes)


CISCO (8/13/08)  
7893'-8060' (140 holes)

4" Liner top @ 9,055'

7-7/8" Hole  
5-1/2", N80, 178', LTC, @ 9,473'  
Cmt'd w/430 Sx

MORROW (9/14/90)  
10,008' - 10,014'  
10,038' - 10,064'

4-3/4" Hole  
4" 10.468, L80 Liner @ 9,055' - 10,141'  
Cmt'd w/80 Sx

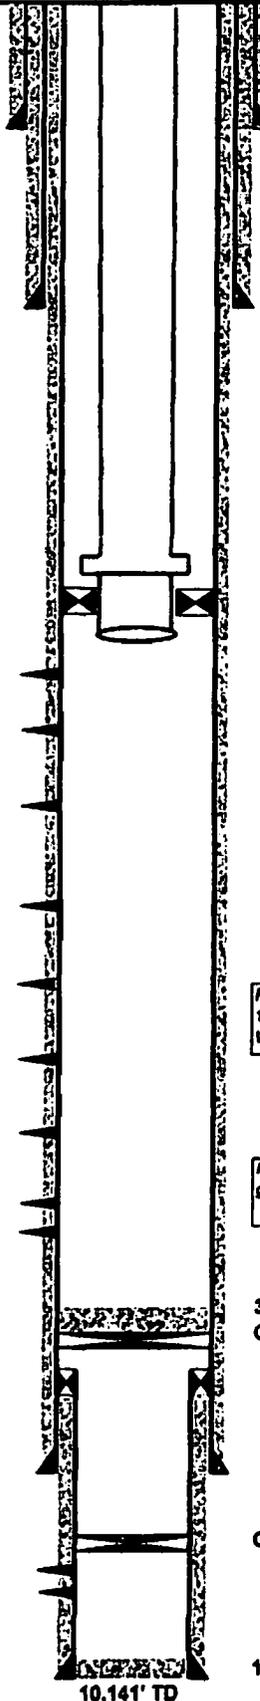

**3-1/2", 9.3 #, N80, Injection tubing @ 6789'**

**5-1/2" IPC Packer @ 6,789'**

*Frac 7758'-7840' with 4500 gals 15% Spearhead acid and 119,253 gals Spectra Star 2500 + 108,750 g 100% 20/40 White sand.*


*Frac 7893'-8060' with 5040 gals 15% HCl acid and 120,372 gals Spectra Star 2500 + 167,552 g 100% 20/40 White sand.*

**35' cement, 9,005' PBD  
CIBP @ 9,040' (7/21/93)**

**CIBP @ 9,950' (7/19/93)**

**10,100' PBD**

**10,141' TD**

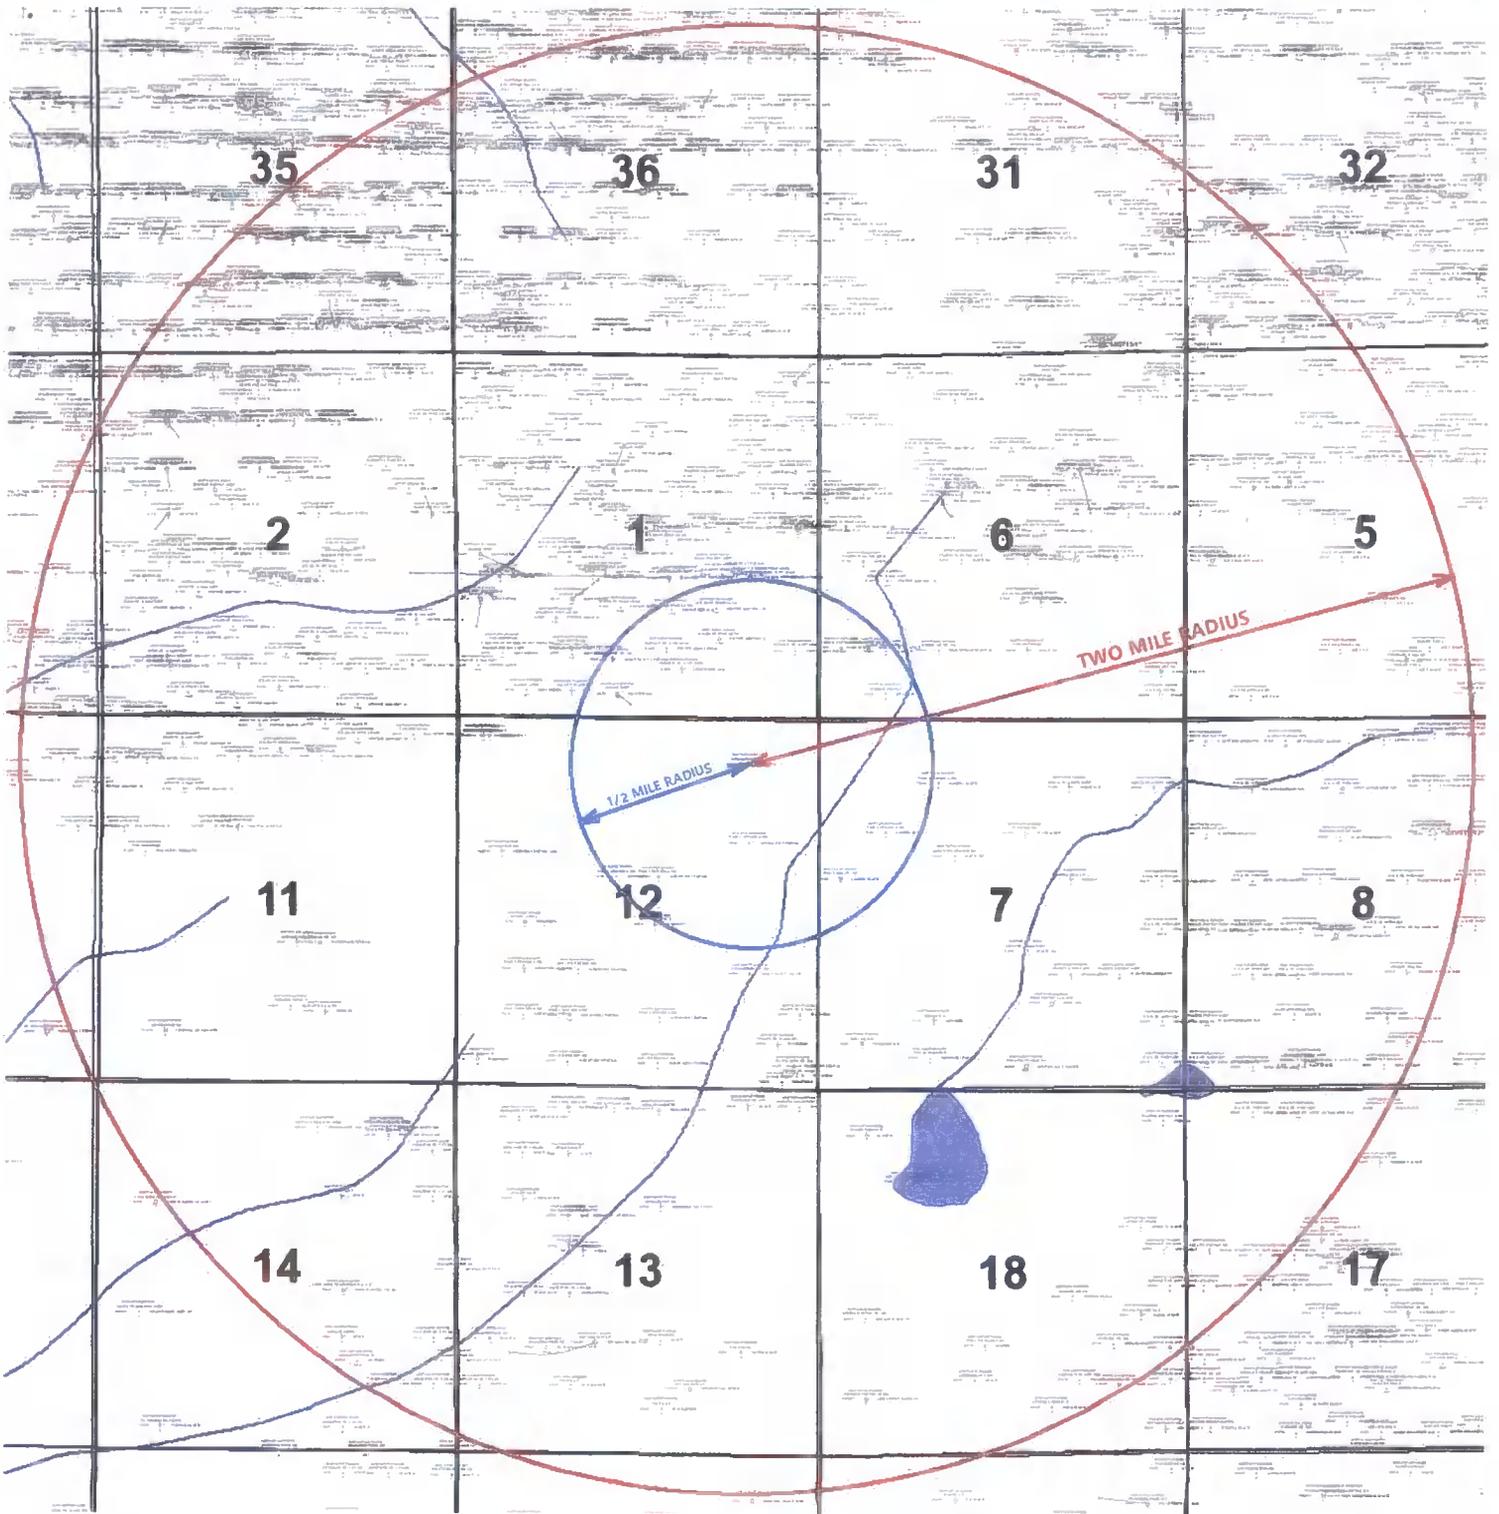

1 inch = 2640 feet




**LIME ROCK  
RESOURCES**

**EAST ARTESIA AREA  
FEDERAL "T" #1 RADIUS MAP**

Author:  
<name>

Scale:  
<scale>


Date:  
11 September, 2017

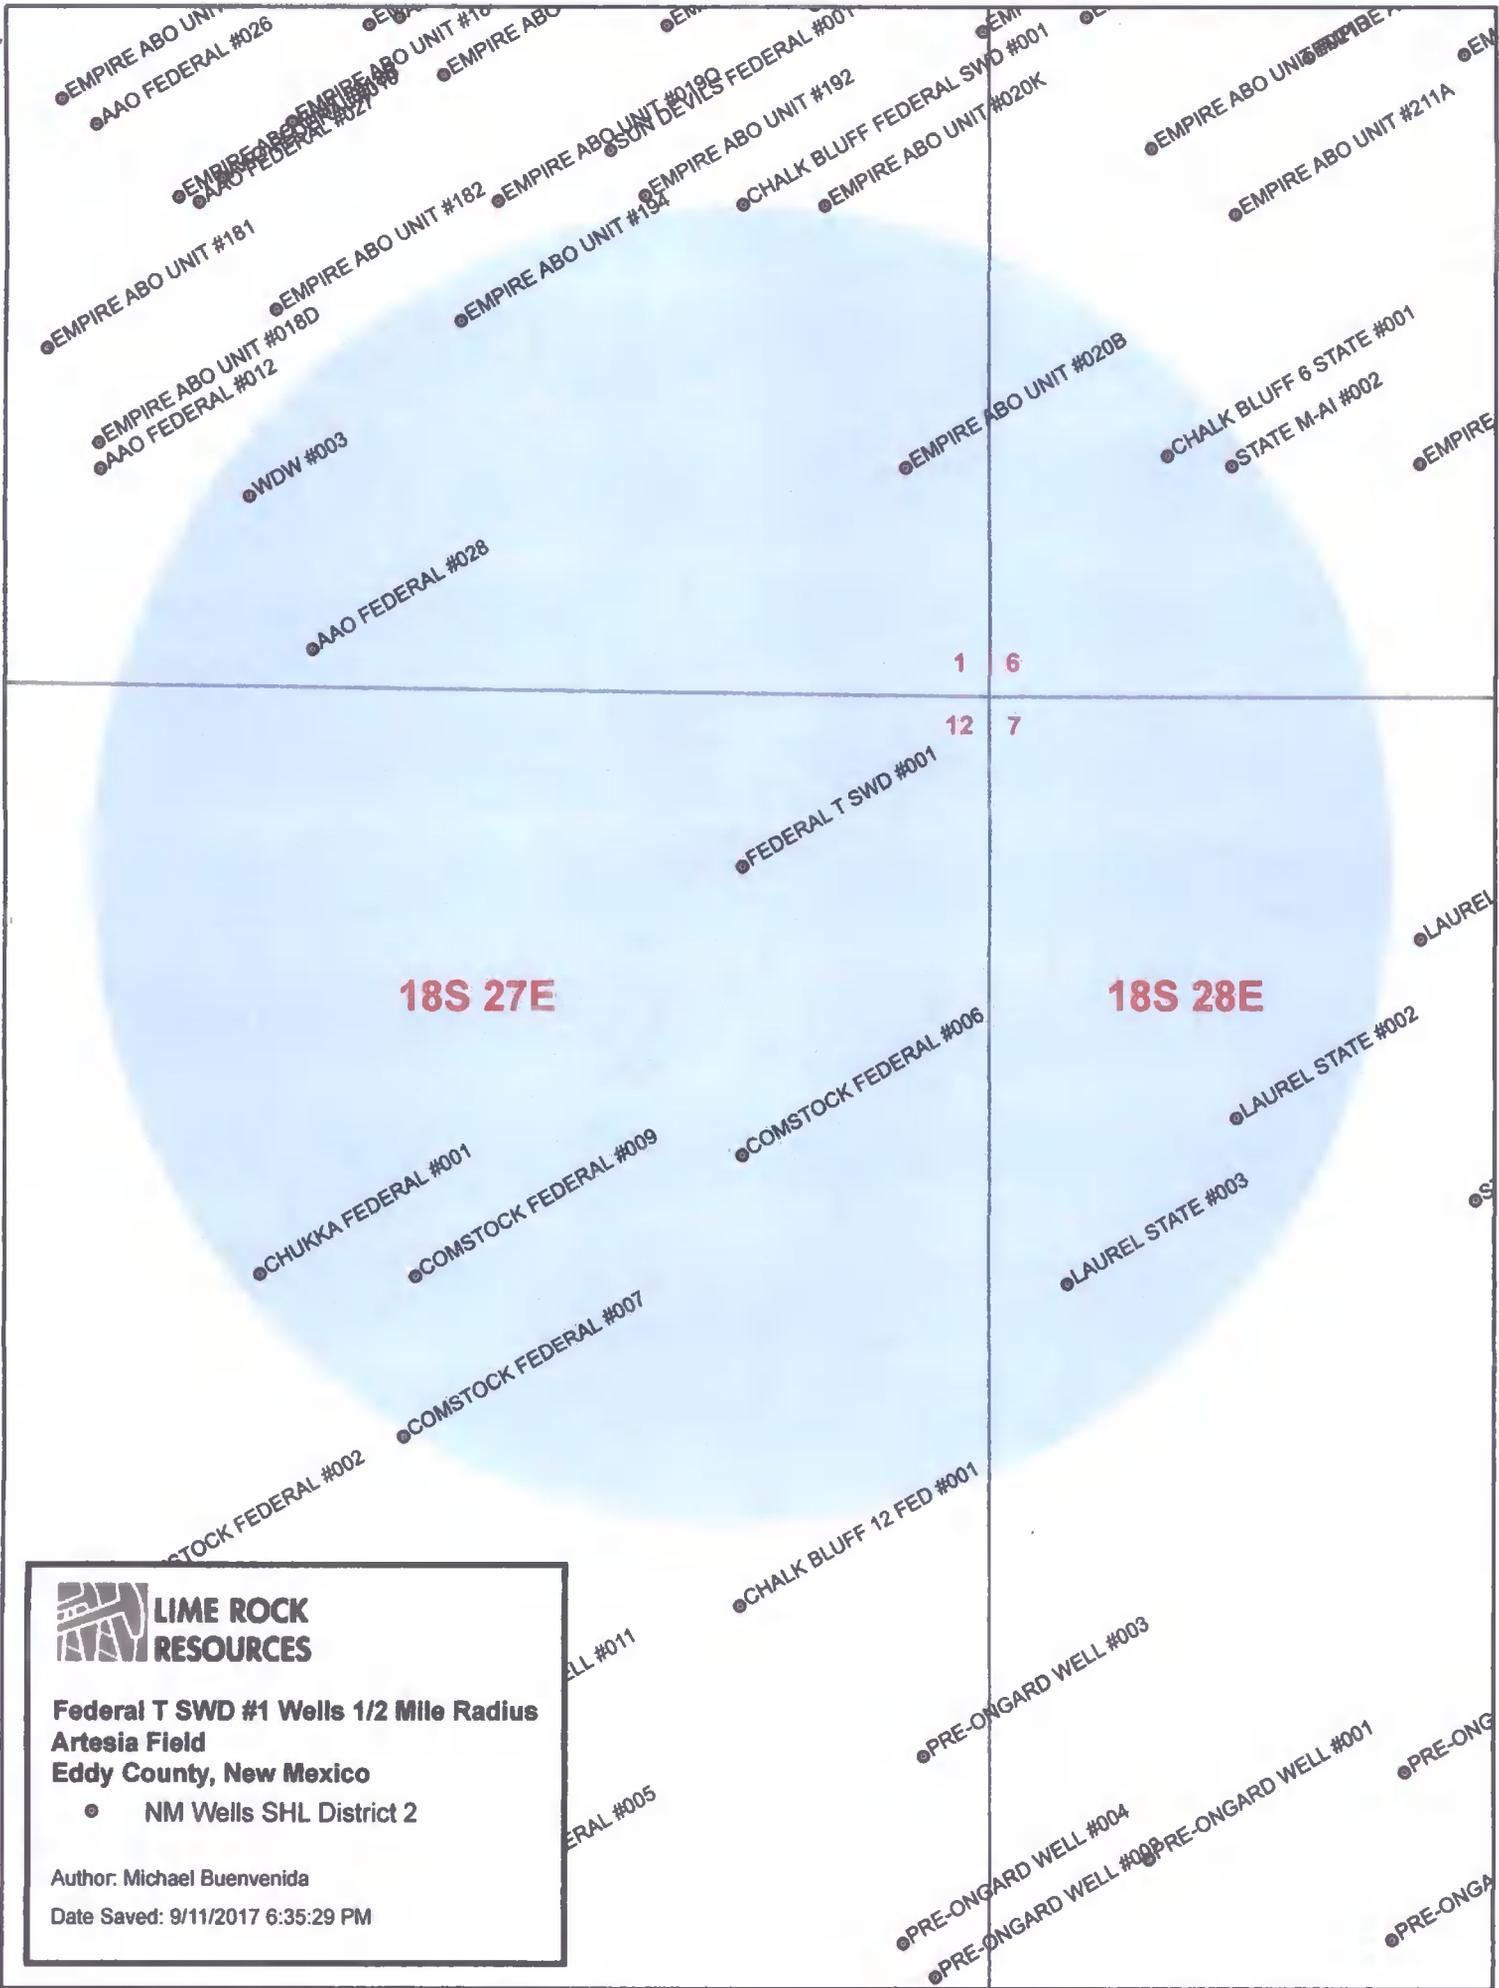

**Federal T SWD #1 Wells 1/2 Mile Radius  
Artesia Field  
Eddy County, New Mexico**

- NM Wells SHL District 2

Author: Michael Buenvenida  
Date Saved: 9/11/2017 6:35:29 PM

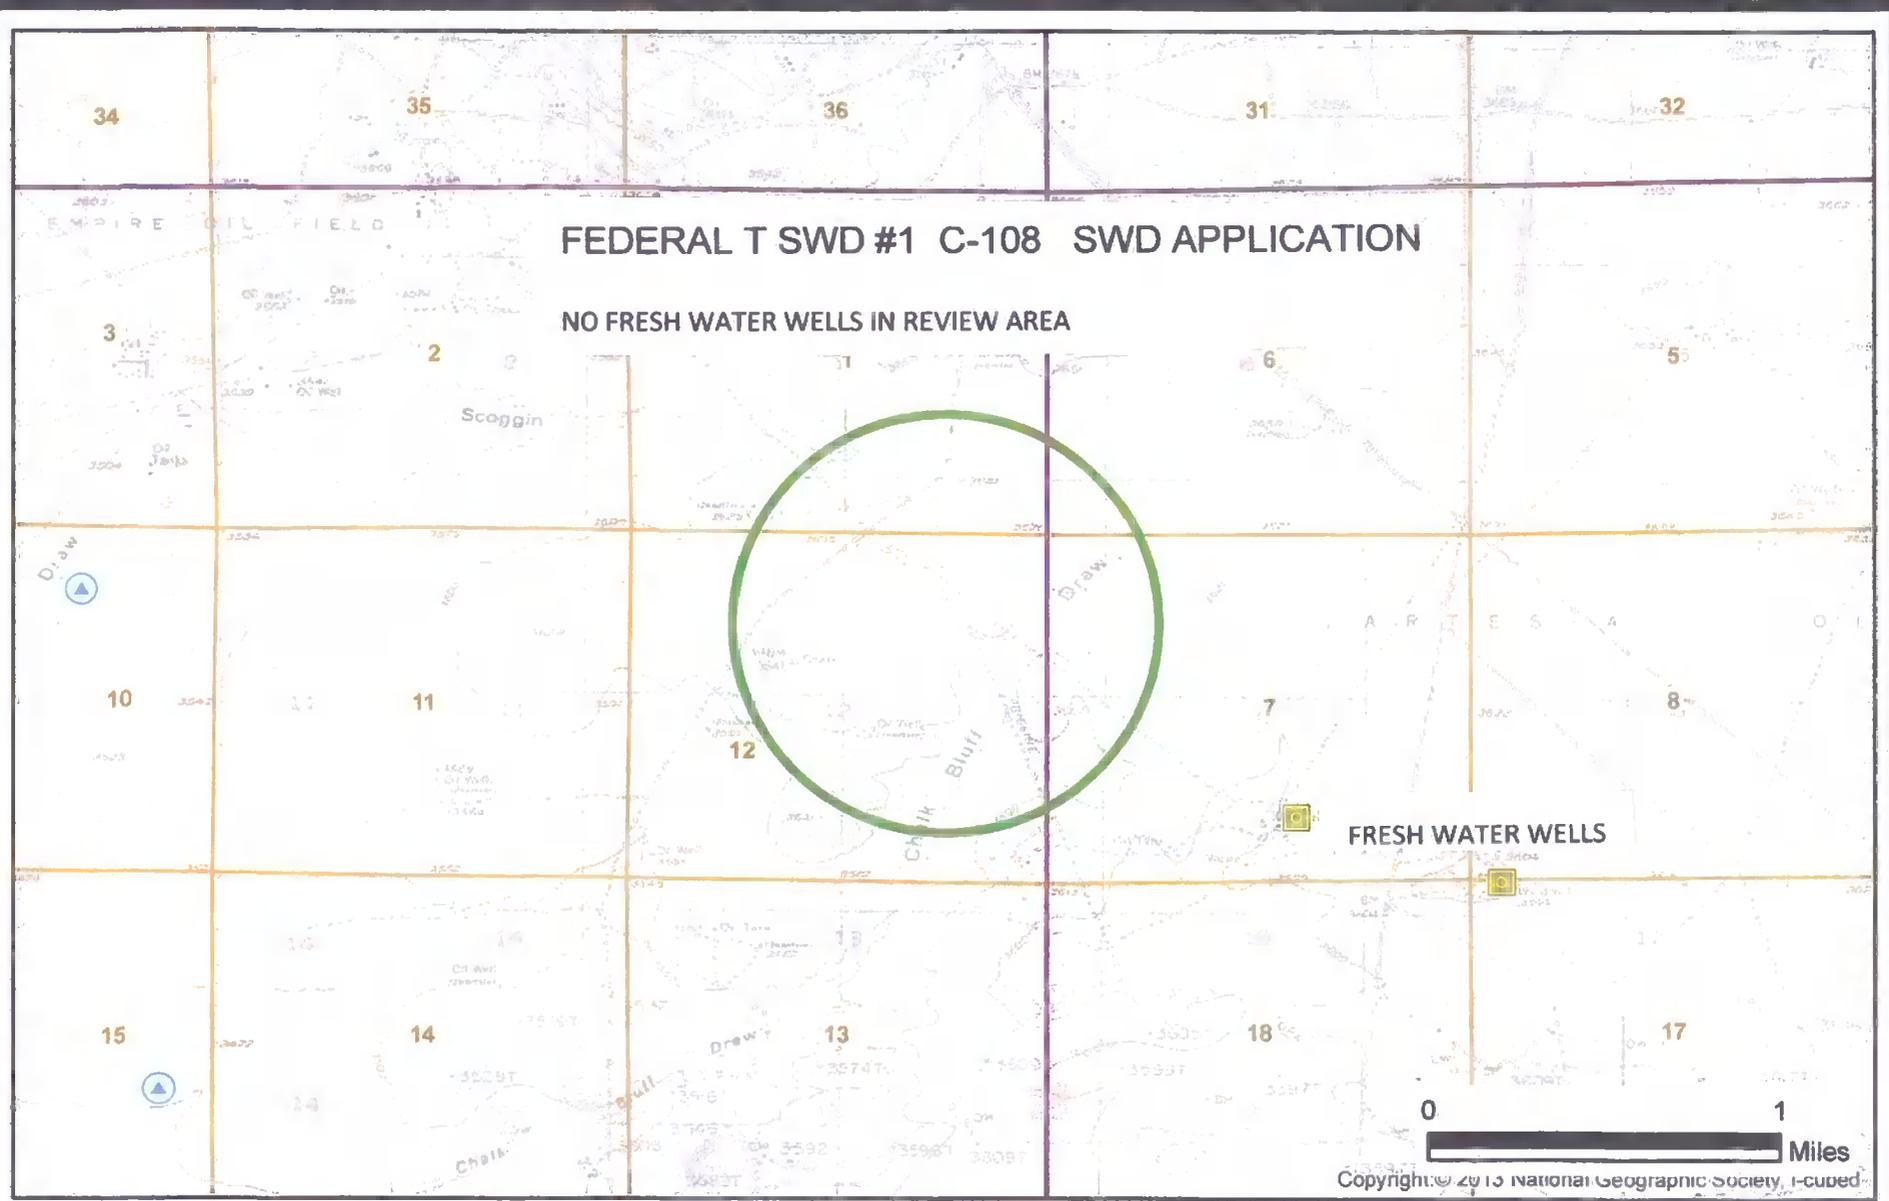

<b>R.T. Hicks Consultants, Ltd</b> 901 Rio Grande Blvd NW Suite F-142 Albuquerque, NM 87104 Ph: 505.266.5004	<b>Water Wells</b>	<b>Draft OG</b>
	<b>Lime Rock</b>	<b>March 2017</b>

C-108 Item VI - Well Tabulation Penetrating Injection Zone in Review Area  
 Lime Rock Resources II-A, L.P.  
 Proposed Disposal Well Federal T #1

Operator	Well Name	API #	Cty	Footage	Sec	Tw	Rnge	Type	Status	Spud Date	Comp Date	TD	PBTD	Comp Zone	Comp Interval-Ft	Casing Program	Cement /TOC
Mewbourne Oil Co.	Chalk Bluff 6 State 1	30-015-26943	Eddy	730' FWL 990' FSL	6	18S	28E	Gas	Active	2/17/92	4/16/92	10,200'	10,151'	North Illinois Camp Morrow	10,044-64' 10,084-10,092'	13-3/8" 48# & 68# @ 400' 9-5/8" 24# @ 2,600' 7" 26# @ 9,445' 4-1/2" Liner @ 10,198'	500 sx Circ 1100 sx Circ 1895 sx Circ 1st string 175 sx
Navajo Refining Co.	WDW3	30-015-26575	Eddy	790' FSL 2250' FWL	1	18S	27E	Oil	Active	12/22/90	1/29/91	10,119'	9,022'	Cisco Canyon	7660' - 8620'	13-3/8" 54.5# @ 400' 9-5/8" 36# @ 2,604' 7" 29# & 26# @ 9,450' 4-1/2" Liner @ 10,119'	425 sx Circ 1025 sx Circ 1350 sx Circ 175 sx TOL @ 9051'

**FEDERAL T SWD # 1  
APPLICATION FOR INJECTION  
Form C-108 Section III**

**III Well Data-On Injection Well**

**A. Injection Well Information**

- (1) Lease Federal T SWD  
Well No #1  
Location 660' FNL & 990' FEL  
Sec.Twn.Rnge Sec 12, T18S-R27E, Unit Letter A  
Cnty. State Eddy County, New Mexico
- (2) Casing 13-3/8", 68#, LTC @ 472' in 17-1/2" hole. Cmt'd w/ 450 sx  
TOC @ surface. Cement circulated.
- 8-5/8", 32#, J-55 @ 2,589'. Cmt'd w/ 900 sx.  
TOC @ surface. Cement circulated.
- 5-1/2", 17#, N-80 @ 9,473'. Cmt'd w/430 sx
- 4", 10.46#, L-80 Liner @ 9,055'-10,141'. Cmt'd w/80 sx.
- (3) Injection Tubing 3-1/2", 9.3#, N80 IPC coated tubing at 6789'.
- (4) Packer 5-1/2" IPC Packer set at 6,789'

**B. Other Well Information**

- (1) Injection Formation: Lower Wolfcamp and Cisco  
Field Name: SWD; WOLFCAMP-CISCO (96136)
- (2) Injection Interval: 6868' - 8060'
- (3) Original Purpose of Wellbore: Morrow Production 10,008'-10,054',

The Federal T #1 was spud June 28, 1990 and completed as a producer in the North Illinois Camp Morrow zones from 10,008' to 10,054'. Total cumulative production is 137,315 BO, 2,614 BW, and 41,403 MCF. The well was recompleted to the Lower Wolfcamp & Cisco on 9/17/08 as a SWD well using State order SWD-1135.

- (4) Other Perforated intervals:  
Only open perforated zones are:  
Wolfcamp from 6,868-7,038'; 7,092'-7,097'; 7,120'-7,146'; 7,330-7,340'; 7,350-7,360'  
Cisco from 7,685'-7,695'; 7758'-7840', 7893'-8060'
- (5) Give the depth to and the name of the next higher and next lower oil or gas zone in the area of the well if any.  
The top of the Atoka zone is noted at 9,230'-9,700'. The depths listed below represent the variation in production depths over a fairly large (3+ mile radius) area with a notable dip. The next lower oil zone top is the Abo at 6015'. The Federal T # 1 was productive in the North Illinois Camp Morrow from 10,008' to 10,054'. The next lower productive oil zone is in the Yeso from 3,300' to 3,900'.

Morrow 9,600-10,250'  
Atoka 9,230-9,700'  
Upper Wolfcamp 6475'-6800'  
Abo 6015'-6,200'  
Yeso 3,300'-3,900'  
San Andres 2072'-2,800'  
Queen 1,218'-1,650'

**FEDERAL T SWD # 1**  
**APPLICATION FOR PRODUCED WATER DISPOSAL**  
FormC-108 Section VII to XII

**VII Attach data on the proposed operation, including:**

- (1) Proposed average injection rate: 8355 BWPD  
Proposed maximum injection rate: 12,000 BWPD
- (2) The system will be a closed system.
- 3) Proposed average injection pressure: 1444 psi  
Proposed max injection pressure: 1550 psi (Current Max. Pressure of offset well WDW-3 30-015-26575)
- (4) The proposed injection fluid is produced water from the San Andres and Yeso that will be re-injected into the Lower Wolfcamp and Cisco perms (6868'-8060'). Attached is a water analysis of San Andres and Yeso produced water going into this SWD well. No water compatibility issues have occurred since the well initiated SWD operations in 2008.
- (5) No disposal zone formation water is submitted since the well has been an active SWD well for 9 years.

**VIII Geologic Injection Zone Data**

The proposed injection zones are the Lower Wolfcamp perms (6868'-7360') and Cisco perms (7685'-8060') formations. The Lower Wolfcamp and Cisco are porous carbonates. The proposed injection interval is 1192' thick. See the attached wellbore diagram.

The proposed saltwater disposal zone, the non-productive Cisco/ Lower Wolfcamp Formations, are present between the vertical depths of 6475' (Top Wolfcamp) and 9170' (base Cisco) in the subject well. The Top of the Cisco is at 7670'. The Cisco/Wolfcamp consists primarily of dolomites with some limestones and occasional shales interspersed. The targeted disposal zones are basically all dolomitic porosity with porosities ranging from 4%-12% on a dolomite matrix scaling.

No sources of underground drinking water exist below the Cisco Formation and the deepest potential sources of underground drinking water above the Wolfcamp are less than 450' deep.

The top of the Wolfcamp Formation is approximately 6000' below the lowest possible source of underground drinking water and is separated from that potential underground sources of drinking water by thousands of feet of interbedded shales, sandstones, anhydrites, salts, limestones, and dolomites.

The average depth of water report notes aquifers at an average depth of 90'. Surface casing is set at 472' and cemented to surface in the Federal T #1.

**IX Proposed Stimulation**

None

**X Log Data**

Well logs have previously been submitted to the OCD.

**XI Fresh Water Analysis**

No fresh water wells were indicated within one mile of proposed injection well per New Mexico office of the State Engineer website

**XII Geologic / Engineering Statement**

An examination of this area has determined there are no open faults or other hydrologic connection between the disposal zone and any underground drinking water. SEE ATTACHED SIGNED AFFIRMATION

**XIII Proof of Notice**

Proof of notice to surface owner, leasehold operators, and public legal notification is attached



PERMIAN BASIN AREA LABORATORY  
2101 MARKET STREET,  
MIDLAND, TEXAS 79703

REPORT DATE: 9/28/2017

**PARTIAL WATER ANALYSIS REPORT**

<b>CUSTOMER:</b>	LIMEROCK RESOURCES	<b>ACCOUNT REP:</b>	GENE ROGERS
<b>DISTRICT:</b>	NEW MEXICO	<b>SAMPLE ID:</b>	201701048509
<b>LEASE/AREA:</b>	SENM	<b>SAMPLE DATE:</b>	9/12/2017
<b>SAMPLE POINT NAME:</b>	FEDERAL T SWD 1	<b>ANALYSIS DATE:</b>	9/25/2017
<b>SITE TYPE:</b>	FACILITY	<b>ANALYST:</b>	SVP
<b>SAMPLE POINT DESCRIPTION:</b>	H PUMP		

**LIMEROCK RESOURCES, SENM, FEDERAL T SWD 1**

ANALYSIS OF SAMPLE								
	ANIONS:			mg/L	meq/L	CATIONS:		
						mg/L	meq/L	
Initial Temperature (°F):	250	Chloride (Cl <sup>-</sup> ):	108921.9	3068.2	Sodium (Na <sup>+</sup> ):	65961.5	2880.4	
Final Temperature (°F):	80	Sulfate (SO <sub>4</sub> <sup>2-</sup> ):	4149.7	86.4	Potassium (K <sup>+</sup> ):	450.0	11.5	
Initial Pressure (psi):	100	Borate (H <sub>2</sub> BO <sub>3</sub> ):	52.0	0.8	Magnesium (Mg <sup>2+</sup> ):	564.6	46.5	
Final Pressure (psi):	15	Fluoride (F <sup>-</sup> ):	ND		Calcium (Ca <sup>2+</sup> ):	2750.3	137.2	
		Bromide (Br <sup>-</sup> ):	ND		Strontium (Sr <sup>2+</sup> ):	58.6	1.3	
pH:		Nitrite (NO <sub>2</sub> <sup>-</sup> ):	ND		Barium (Ba <sup>2+</sup> ):	0.0	0.0	
pH at time of sampling:	6.1	Nitrate (NO <sub>3</sub> <sup>-</sup> ):	ND		Iron (Fe <sup>2+</sup> ):	3.6	0.1	
		Phosphate (PO <sub>4</sub> <sup>3-</sup> ):	ND		Manganese (Mn <sup>2+</sup> ):	0.0	0.0	
Scale Residual:	ChemUsed	Resid. PPM	Silica (SiO <sub>2</sub> ):	ND	Lead (Pb <sup>2+</sup> ):	0.0	0.0	
	Total PO4				Zinc (Zn <sup>2+</sup> ):	0.0	0.0	
Alkalinity by Titration:	mg/L	meq/L			Aluminum (Al <sup>3+</sup> ):	0.0	0.0	
Bicarbonate (HCO <sub>3</sub> <sup>-</sup> ):	537.0	8.8			Chromium (Cr <sup>3+</sup> ):	ND		
Carbonate (CO <sub>3</sub> <sup>2-</sup> ):	ND				Cobalt (Co <sup>2+</sup> ):	ND		
Hydroxide (OH <sup>-</sup> ):	ND				Copper (Cu <sup>2+</sup> ):	0.0	0.0	
			Organic Acids:	mg/L	meq/L	Molybdenum (Mo <sup>2+</sup> ):	0.0	0.0
aqueous CO <sub>2</sub> (ppm):	60.0	Formic Acid:	ND		Nickel (Ni <sup>2+</sup> ):	ND		
aqueous H <sub>2</sub> S (ppm):	680.0	Acetic Acid:	ND		Tin (Sn <sup>2+</sup> ):	ND		
aqueous O <sub>2</sub> (ppb):	ND	Propionic Acid:	ND		Titanium (Ti <sup>2+</sup> ):	ND		
		Butyric Acid:	ND		Vanadium (V <sup>2+</sup> ):	ND		
		Valeric Acid:	ND		Zirconium (Zr <sup>2+</sup> ):	ND		
Calculated TDS (mg/L):	183449				Total Hardness:	9269		
Measured Density/Specific Gravity	1.1248							
Conductivity (mmhos):	ND							

Anion/Cation Ratio: 1.03 ND = NOT DETERMINED

Comments: PRODUCED WATER GOING TO SWD.

XII

**Statement of Affirmation**

I, *Stan Bishop*, affirm that Lime Rock Resources has examined available geologic and engineering data, and find no evidence of open faults or any other hydrologic connection between disposal zones and any underground sources of drinking water.

Signed: \_\_\_\_\_

*Stan Bishop*

Date: \_\_\_\_\_

*9/28/2017*

**LIME ROCK RESOURCES II-A, L.P.**

c/o Mike Pippin LLC  
505-327-4573 (phone)  
Email: mike@pippinllc.com

**LEGAL NOTICE**

**FEDERAL T SWD #1 -- SWD Application -- Form C-108**

LIME ROCK RESOURCES II-A, L.P., 1111 Bagby St, Suite 4600, Houston, TX 77002, contact: Mike Pippin 505-327-4573 is seeking administrative approval from the NMOCD for produced water disposal: FEDERAL T SWD #1 is located in Sec 12, T18S, R27E, 660' FNL & 990' FEL, Eddy County, NM. Proposed injection interval is the Lower Wolfcamp and Cisco formations with perforations from about 6868'-8060' with an estimated maximum daily injection volume of produced formation water of 12,000 bbls per day and a maximum injection pressure of 1550 psi. Any objections regarding this application must file their objections or request for hearing with the NMOCD, 1220 South St. Frances Drive, Santa Fe, NM 87505 within 15 days.

### Legal Notice

FEDERAL T SWD #1 -- SWD Application - Form C-108

LIME ROCK RESOURCES II-A, L.P., 1111 Bagby St, Suite 4600, Houston, TX 77002, contact: Mike Pippin 505-327-4573 is seeking administrative approval from the NMOCD for produced water disposal: FEDERAL T SWD #1 is located in Sec 12, T18S, R27E, 660' FNL & 990' FEL, Eddy County, NM. Proposed injection interval is the Lower Wolfcamp and Cisco formations with perforations from about 6868'-8060' with an estimated maximum daily injection volume of produced formation water of 12,000 bbls per day and a maximum injection pressure of 1550 psi. Any objections regarding this application must file their objections or request for hearing with the NMOCD, 1220 South St. Frances Drive, Santa Fe, NM 87505 within 15 days.

Published in the Artesia Daily Press, Artesia, N.M., Oct. 3, 2017 Legal No. 24440.

LIME ROCK RESOURCES II-A, L.P.  
Mike Pippin  
3104 N. Sullivan Avenue  
Farmington, NM 87401  
505-327-4573 (phone) mike@pippinllc.com

September 30, 2017

**RE: C-108 Application for SWD Well**  
FEDERAL T SWD #1- API#: 30-015-26404  
Unit Letter A Section 12 T18S R27E  
Eddy County, New Mexico

VIA CERTIFIED MAIL  
To all Interest Owners:

In accordance with the New Mexico Oil Conservation Division Rule 19.15.26 governing water disposal wells, you are hereby notified that LIME ROCK RESOURCES II-A, L.P. as operator of the above-referenced well, has submitted an application to permit the referenced well for produced water disposal in the Lower Wolfcamp and Cisco.

It was recently discovered that errors in previous operator's original SWD application dated June 10, 2008 caused the State to exclude the Lower Wolfcamp perms at 6868'-7360' in their subsequent order, SWD-1135. Approval of this application will rectify the problem.

This well is currently open and disposing of produced water in the Lower Wolfcamp 6868'-7360' and Cisco 7685'-8060'. All wells in the area of review that penetrated the proposed disposal interval (2 wells) have good cement throughout.

Any objections or requests that a hearing be held regarding this application must be submitted within 15 days to the NMOCD at 1220 South St. Frances Drive, Santa Fe, NM 87505.

Should you have any questions or concerns, please contact me at 505-327-4573 and/or the NMOCD at 505-476-3467.

Sincerely,  
LIME ROCK RESOURCES II-A, L.P.



Mike Pippin PE  
Petroleum Engineer

Enclosures

**FEDERAL T SWD #1 APPLICATION FOR SWD OFFSET OPERATORS**  
**SURFACE OWNER IS THE BUREAU OF LAND MANAGEMENT**

**T18S-R27E-Section 1**

AAO Federal #28 API: 30-015-42358  
Empire Abo Unit #20B API: 30-015-00699  
Empire Abo Unit #194 API: 30-015-22658  
Apache Corporation  
2000 Post Oak BLVD, Suite 100  
Houston, TX 77056-4400

WDW #3 API: 30-015-26575  
Navajo Refining Company, LLC  
501 E. Main  
Artesia, NM 88210

Chalk Bluff Federal SWD #1 API: 30-015-27163  
Lime Rock Resources II-A, LP  
1111 Bagby Street, Suite 4600  
Houston, TX 77002

**T18S-R27E-Section 12**

Comstock Federal #6 API: 30-015-25099  
Comstock Federal #9 API: 30-015-25738  
Harlow Enterprises LLC  
#26 Chalk Bluff Road  
Artesia, NM 88210

Chukka Federal #1 API: 30-015-25270  
Bill L. Miller  
PO Box 3396  
Evergreen, CO 80437

**T18S-R28E-Section 6**

Chalk Bluff 6 State #1 API: 30-015-26943  
Mewbourne Oil Company  
PO Box 7698  
Tyler, TX 75711

State M-AI #2 API: 30-015-02627  
Ruth Oil Company, LLC  
PO Box 1212  
Eunice, NM 88231

**T18S-R28E-Section 7**

Laurel State #2 API: 30-015-25675  
Laurel State #3 API: 30-015-31319  
M&M Oil, LLC  
1902 West Hermosa Drive  
Artesia, NM 88210

U.S. Postal Service  
**CERTIFIED MAIL® RECEIPT**  
 Domestic Mail Only

For delivery information, visit our website at [www.usps.com](http://www.usps.com)®.

**OFFICIAL USE**

Certified Mail Fee  
 \$

Extra Services & Fees (check box, add fee as appropriate)

<input type="checkbox"/> Return Receipt (hardcopy)	\$
<input type="checkbox"/> Return Receipt (electronic)	\$
<input type="checkbox"/> Certified Mail Restricted Delivery	\$
<input type="checkbox"/> Adult Signature Required	\$
<input type="checkbox"/> Adult Signature Restricted Delivery	\$

Postage  
 \$

Total Postage and Fees  
 \$

Sent To *Apache Corp.*  
 Street and Apt. No. or PO Box No. *2000 Post Oak Blvd Ste 100*  
 City, State, ZIP+4® *Houston TX 77056-4400*

PS Form 3800, April 2015 PSN 7530-02-000-9047 See Reverse for Instructions

9075 9922 1000 0760 9702

U.S. Postal Service  
**CERTIFIED MAIL® RECEIPT**  
 Domestic Mail Only

For delivery information, visit our website at [www.usps.com](http://www.usps.com)®.

**OFFICIAL USE**

Certified Mail Fee  
 \$

Extra Services & Fees (check box, add fee as appropriate)

<input type="checkbox"/> Return Receipt (hardcopy)	\$
<input type="checkbox"/> Return Receipt (electronic)	\$
<input type="checkbox"/> Certified Mail Restricted Delivery	\$
<input type="checkbox"/> Adult Signature Required	\$
<input type="checkbox"/> Adult Signature Restricted Delivery	\$

Postage  
 \$

Total Postage and Fees  
 \$

Sent To *Bill L. Miller*  
 Street and Apt. No. or PO Box No. *PO Box 3396*  
 City, State, ZIP+4® *Evergreen CO 80437*

PS Form 3800, April 2015 PSN 7530-02-000-9047 See Reverse for Instructions

9075 9922 1000 0760 9702

U.S. Postal Service™  
**CERTIFIED MAIL® RECEIPT**  
 Domestic Mail Only

For delivery information, visit our website at [www.usps.com](http://www.usps.com)®.

**OFFICIAL USE**

Certified Mail Fee  
 \$

Extra Services & Fees (check box, add fee as appropriate)

<input type="checkbox"/> Return Receipt (hardcopy)	\$
<input type="checkbox"/> Return Receipt (electronic)	\$
<input type="checkbox"/> Certified Mail Restricted Delivery	\$
<input type="checkbox"/> Adult Signature Required	\$
<input type="checkbox"/> Adult Signature Restricted Delivery	\$

Postage  
 \$

Total Postage and Fees  
 \$

Sent To *Navajo Refining Co*  
 Street and Apt. No. or PO Box No. *501 E. Main*  
 City, State, ZIP+4® *Artesia NM 88210*

PS Form 3800, April 2015 PSN 7530-02-000-9047 See Reverse for Instructions

9475 9922 1000 0760 9702

U.S. Postal Service™  
**CERTIFIED MAIL® RECEIPT**  
 Domestic Mail Only

For delivery information, visit our website at [www.usps.com](http://www.usps.com)®.

**OFFICIAL USE**

Certified Mail Fee  
 \$

Extra Services & Fees (check box, add fee as appropriate)

<input type="checkbox"/> Return Receipt (hardcopy)	\$
<input type="checkbox"/> Return Receipt (electronic)	\$
<input type="checkbox"/> Certified Mail Restricted Delivery	\$
<input type="checkbox"/> Adult Signature Required	\$
<input type="checkbox"/> Adult Signature Restricted Delivery	\$

Postage  
 \$

Total Postage and Fees  
 \$

Sent To *Newbourne Oil Co.*  
 Street and Apt. No. or PO Box No. *PO Box 7698*  
 City, State, ZIP+4® *Fuler TX 75711*

PS Form 3800, April 2015 PSN 7530-02-000-9047 See Reverse for Instructions

9475 9922 1000 0760 9702

U.S. Postal Service™  
**CERTIFIED MAIL® RECEIPT**  
 Domestic Mail Only

For delivery information, visit our website at [www.usps.com](http://www.usps.com)®.

**OFFICIAL USE**

Certified Mail Fee  
 \$

Extra Services & Fees (check box, add fee as appropriate)

<input type="checkbox"/> Return Receipt (hardcopy)	\$
<input type="checkbox"/> Return Receipt (electronic)	\$
<input type="checkbox"/> Certified Mail Restricted Delivery	\$
<input type="checkbox"/> Adult Signature Required	\$
<input type="checkbox"/> Adult Signature Restricted Delivery	\$

Postage  
 \$

Total Postage and Fees  
 \$

Sent To *Harlow Enterprises*  
 Street and Apt. No. or PO Box No. *736 Chalk Bluff Rd*  
 City, State, ZIP+4® *Artesia NM 88210*

PS Form 3800, April 2015 PSN 7530-02-000-9047 See Reverse for Instructions

9475 9922 1000 0760 9702

U.S. Postal Service™  
**CERTIFIED MAIL® RECEIPT**  
 Domestic Mail Only

For delivery information, visit our website at [www.usps.com](http://www.usps.com)®.

**OFFICIAL USE**

Certified Mail Fee  
 \$

Extra Services & Fees (check box, add fee as appropriate)

<input type="checkbox"/> Return Receipt (hardcopy)	\$
<input type="checkbox"/> Return Receipt (electronic)	\$
<input type="checkbox"/> Certified Mail Restricted Delivery	\$
<input type="checkbox"/> Adult Signature Required	\$
<input type="checkbox"/> Adult Signature Restricted Delivery	\$

Postage  
 \$

Total Postage and Fees  
 \$

Sent To *Ruth Oil Co.*  
 Street and Apt. No. or PO Box No. *PO Box 1212*  
 City, State, ZIP+4® *Sunrise NM 88231*

PS Form 3800, April 2015 PSN 7530-02-000-9047 See Reverse for Instructions

9475 9922 1000 0760 9702

**U.S. Postal Service™**  
**CERTIFIED MAIL® RECEIPT**  
 Domestic Mail Only

For delivery information, visit our website at [www.usps.com](http://www.usps.com)®

**OFFICIAL USE**

Certified Mail Fee \$

Extra Services & Fees (check box, add fee as appropriate)

Return Receipt (hardcopy) \$

Return Receipt (electronic) \$

Certified Mail Restricted Delivery \$

Adult Signature Required \$

Adult Signature Restricted Delivery \$

Postage \$


Total Postage and Fees \$

Sent To **BLM**

Street and Apt. No., or PO Box No. **620 E. Green St. USPS**

City, State, ZIP+4® **Carlsbad NM 88220**

PS Form 3800, April 2015 PSN 7530-02-000-9047 See Reverse for Instructions



7016 0910 0001 2366 5177

**U.S. Postal Service™**  
**CERTIFIED MAIL® RECEIPT**  
 Domestic Mail Only

For delivery information, visit our website at [www.usps.com](http://www.usps.com)®

**OFFICIAL USE**

Certified Mail Fee \$

Extra Services & Fees (check box, add fee as appropriate)

Return Receipt (hardcopy) \$

Return Receipt (electronic) \$

Certified Mail Restricted Delivery \$

Adult Signature Required \$

Adult Signature Restricted Delivery \$

Postage \$


Total Postage and Fees \$

Sent To **M & M Oil LLC**

Street and Apt. No. or PO Box No. **1902 W. Hermosa Dr**

City, State, ZIP+4® **Artesia NM 88210**

PS Form 3800, April 2015 PSN 7530-02-000-9047 See Reverse for Instructions



7016 0910 0001 2366 5160

## **McMillan, Michael, EMNRD**

---

**From:** McMillan, Michael, EMNRD  
**Sent:** Wednesday, October 4, 2017 4:16 PM  
**To:** Mike Pippin  
**Cc:** Goetze, Phillip, EMNRD  
**Subject:** Administrative application: Lime Rock Resources II\_A, L.P. Federal T SWD Well No. 1

Mike:  
I received the administrative application for the Lime Rock Resources II\_A, L.P. Federal T SWD Well No. 1 on October 3, 2017

I need the following information:

- Clarification of the surface owner.
- Affidavit of publication

Your application has been suspended until the OCD receives this information. If the information is not received within 10-days, your application will be cancelled.

Thanks

Mike

Michael McMillan  
1220 South St. Francis  
Santa Fe, New Mexico  
505-476-3448  
Michael.mcmillan@state.nm.us

# Affidavit of Publication

No. 24440

State of New Mexico

County of Eddy:

Danny Scott

being duly sworn says: that she is the Publisher

of the Artesia Daily Press, a daily newspaper of General circulation, published in English at Artesia, said county and state, and that the hereto attached

### Legal Ad

was published in a regular and entire issue of the said Artesia Daily Press, a daily newspaper duly qualified for that purpose within the meaning of Chapter 167 of the 1937 Session Laws of the state of New Mexico for

1 Consecutive weeks/day on the same

day as follows:

First Publication October 3, 2017

Second Publication \_\_\_\_\_

Third Publication \_\_\_\_\_

Fourth Publication \_\_\_\_\_

Fifth Publication \_\_\_\_\_

Sixth Publication \_\_\_\_\_

Seventh Publication \_\_\_\_\_

Subscribed and sworn before me this

4th day of October 2017



OFFICIAL SEAL  
Latisha Romine  
NOTARY PUBLIC-STATE OF NEW MEXICO

My commission expires: 5/12/2019

Latisha Romine

Notary Public, Eddy County, New Mexico

# Copy of Publication:

## Legal Notice

FEDERAL T SWD #1 -- SWD Application - Form C-108

LIME ROCK RESOURCES II-A, L.P., 1111 Bagby St, Suite 4600, Houston, TX 77002, contact: Mike Pippin 505-327-4573 is seeking administrative approval from the NMOCD for produced water disposal: FEDERAL T SWD #1 is located in Sec 12, T18S, R27E, 660' FNL & 990' FEL, Eddy County, NM. Proposed injection interval is the Lower Wolfcamp and Cisco formations with perforations from about 6868'-8060' with an estimated maximum daily injection volume of produced formation water of 12,000 bbls per day and a maximum injection pressure of 1550 psi. Any objections regarding this application must file their objections or request for hearing with the NMOCD, 1220 South St. Frances Drive, Santa Fe, NM 87505 within 15 days.

Published in the Artesia Daily Press, Artesia, N.M., Oct. 3, 2017 Legal No. 24440.



New Mexico Energy, Minerals and Natural Resources Department

**Bill Richardson**  
Governor

**Joanna Prukop**  
Cabinet Secretary  
**Reese Fullerton**  
Deputy Cabinet Secretary

**Mark Fesmire**  
Division Director  
Oil Conservation Division



**Administrative Order SWD-1135**  
**July 16, 2008**

**APPLICATION OF DEVON ENERGY PRODUCTION COMPANY, L.P. FOR  
PRODUCED WATER DISPOSAL, EDDY COUNTY, NEW MEXICO**

**ADMINISTRATIVE ORDER  
OF THE OIL CONSERVATION DIVISION**

Under the provisions of Rule 701(B), Devon Energy Production Company, L.P. (OGRID No. 6137) made application to the New Mexico Oil Conservation Division for permission to utilize for produced water disposal its Federal T Well No. 1 (API No. 30-015-26404) located 660 feet from the North line and 990 feet from the East line of Section 12, Township 18 South, Range 27 East, NMPM, Eddy County, New Mexico.

**THE DIVISION DIRECTOR FINDS THAT:**

The application has been duly filed under the provisions of Rule 701(B) of the Division Rules. Satisfactory information has been provided that all offset operators and surface owners have been duly notified. The applicant has presented satisfactory evidence that all requirements prescribed in Rule 701 will be met and no objections have been received within the waiting period prescribed by said rule. The applicant is in compliance with Rule 40.

**IT IS THEREFORE ORDERED THAT:**

Devon Energy Production Company, L.P. ("operator") is hereby authorized to utilize its Federal T Well No. 1 (API No. 30-015-26404) located 660 feet from the North line and 990 feet from the East line of Section 12, Township 18 South, Range 27 East, NMPM, Eddy County, New Mexico, in such manner as to permit the injection of produced water for disposal purposes into the Lower Wolfcamp formation and the Cisco formation through perforations from 7,400 feet to 8,200 feet and through plastic-lined tubing set in a packer located within 100 feet of the top of the injection interval.

**IT IS FURTHER ORDERED THAT:**

Oil Conservation Division \* 1220 South St. Francis Drive  
\* Santa Fe, New Mexico 87505

\* Phone: (505) 476-3440 \* Fax (505) 476-3462\* <http://www.emnrd.state.nm.us>



The operator shall take all steps necessary to ensure that the injected water enters only the proposed injection interval and is not permitted to escape to other formations or onto the surface.

After installing injection tubing, the casing shall be pressure tested from the surface to the packer setting depth to assure the integrity of said casing.

The casing-tubing annulus shall be loaded with an inert fluid and equipped with a pressure gauge or an approved *leak detection device* in order to determine leakage in the casing, tubing, or packer.

The injection well or system shall be equipped with a *pressure limiting device* in workable condition which shall, at all times, limit surface injection pressure to the maximum allowable pressure for this well. The wellhead injection pressure on the well shall be limited to **no more than 1480 psi**.

The Director of the Division may authorize an increase in the maximum injection pressure upon a proper showing by the operator that such higher pressure would not result in migration of the injected fluid from the injection formation. Such proper showing should be supported by a valid step rate test run in accordance with procedures acceptable to the Division.

The operator shall notify the supervisor of the Artesia district office of the Division of the date and time of the installation of disposal equipment and of any mechanical integrity test so that the same may be inspected and witnessed.

The operator shall immediately notify the supervisor of the Artesia district office of the Division of the failure of the tubing, casing, or packer in said well and shall take such steps as may be timely and necessary to correct such failure or leakage.

**PROVIDED FURTHER THAT**, jurisdiction is retained by the Division for the entry of such further orders as may be necessary for the prevention of waste and/or protection of correlative rights or upon failure of the operator to conduct operations (1) to protect fresh water or (2) consistent with the requirements in this order, whereupon the Division may, after notice and hearing, or without notice and hearing in event of an emergency subject to NMSA 1978 Section 70-2-23, terminate the injection authority granted herein.

The operator shall provide written notice of the date of commencement of injection and the initial reservoir pressure to the Artesia district office of the Division.

The operator shall submit monthly reports of the disposal operations on Division Form C-115, in accordance with Division Rules 706 and 1120.

The injection authority granted herein shall terminate one year after the effective date of this order if the operator has not commenced injection operations into the subject well, provided however, the Division, upon written request by the operator

mailed prior to the expiration date, may grant an extension thereof for good cause shown.

This order does not relieve the operator of responsibility should its operations cause any actual damage or threat of damage to protectable fresh water, human health or the environment; nor does it relieve the operator of responsibility for complying with applicable Division rules or other state, federal, or local laws or regulations.

  
MARK E. FESMIRE, P.E.  
Director

MEF/wvjj

cc: Oil Conservation Division – Artesia  
Bureau of Land Management – Carlsbad

## Goetze, Phillip, EMNRD

---

**From:** Goetze, Phillip, EMNRD  
**Sent:** Wednesday, July 5, 2017 10:51 AM  
**To:** Mike Pippin (mike@pippinllc.com)  
**Cc:** Jones, William V, EMNRD; McMillan, Michael, EMNRD; Lowe, Leonard, EMNRD  
**Subject:** Response Provided by HollyFrontier to Limerock's IPI Application  
**Attachments:** 2017-06-27 Lime Rock Pressure Application Protest with attachments.pdf

RE: Federal T SWD No. 1 (API 30-015-26404) SWD-1135

Mr. Pippin:

As per our discussion, the attached document is HollyFrontier's written response regarding the IPI application for the referenced well. HollyFrontier has requested that the application be denied. The Division is currently considering the report submitted by HollyFrontier and will provide a decision in this matter shortly. Please contact me with any additional questions concerning this subject. PRG

**Phillip Goetze, PG**

Engineering Bureau, Oil Conservation Division  
New Mexico Energy, Minerals and Natural Resources Department  
1220 South St. Francis Drive, Santa Fe, NM 87505  
Direct: 505.476.3466  
E-mail: [phillip.goetze@state.nm.us](mailto:phillip.goetze@state.nm.us)





# HOLLYFRONTIER.

June 27, 2017

Mr. David Catanach  
Division Director  
NMOCD  
1220 South St. Francis Drive  
Santa Fe, NM 87501

Via Email and Federal Express

RE: REQUEST BY HOLLYFRONTIER TO DENY LIME ROCK'S REQUEST TO INCREASE  
INJECTION PRESSURES AT FEDERAL T SWD#1 (API # 30-015-26404)

Dear Director Catanach,

On May 8, 2017 Lime Rock Resources II-A L.P. (Lime Rock) requested from the New Mexico Oil Conservation Department (NMOCD) an injection pressure increase for their existing permitted (Order SWD-1135, approved July 16, 2008) salt water disposal well (Federal T SWD #1; API # 3001526404). Their request asks for an increase from the original maximum allowable operating pressure (MAOP) of 1,480 psig to 2,681 psig. Lime Rock's injection pressure increase (IPI) request is based on and relies on the results of a step rate test performed on this well on May 3, 2017. For the reasons detailed below, HollyFrontier Navajo Refining LLC (HFNR) objects to the requested pressure increase and respectfully requests that NMOCD deny Lime Rock's request.

## **BACKGROUND**

On June 23, 2004 Navajo Refining Company (now HFNR) received from the NMOCD their Approval for Discharge Permit UIC-CLI-008-3 for a Class I non-hazardous waste disposal well (WDW-3; API # 3001526575) to dispose of wastewater from the Navajo Refinery in Artesia, New Mexico. This well is located 790 FSL and 2250 FWL of Section 1, T18S, R27E in Eddy County, New Mexico.

As seen in Figure 1, there are only approximately 2,500 feet separating HFNR's WDW-3 from Lime Rock's Federal T SWD #1, and both wells have completions in the same Cisco zone. The Federal T SWD #1 perforations in the Cisco Formation range from 7,685' to 8,060', and the WDW-3 Cisco perforations run from 7,666' to 8,620'. This overlap allows pressure fronts (and fluids) to migrate from the Lime Rock SWD to HFNR's WDW-3, potentially impairing the function of WDW-3.

HFNR's permit has a maximum allowable operational pressure (MAOP) of 1,550 psig, with no specific limit on the amounts of wastewater injected. From 2008 to 2016, the well (WDW-3; API# 3001526575) has injected an average of approximately 152,000 barrels of wastewater per month. The WDW-3 well is a group of three Class I wells operated by HFNR (WDW-1; API # 3001527592 and WDW-2; API # 3001520894) that also receive non-hazardous wastewater from the HFNR Refinery.

**HollyFrontier Navajo Refining LLC**  
501 East Main • Artesia, NM 88210  
(575) 748-3311 • <http://www.hollyfrontier.com>

Mr. David Catanach  
June 27, 2017  
Page 2

These three wells are the Refinery's approved method of disposing their non-hazardous wastewaters, and if reservoir capacity is reached, or pressures exceed MAOPs, HFNR would face significant curtailment of its operations at the plant or a possible shut down.

### **BASIS OF OBJECTIONS**

#### **1: The May 2017 Step Rate Test (SRT) is Not Valid and Cannot Serve as Justification for the Requested IPI Because the Injection Zone in This Well was Extensively Hydrofractured in August 2008**

NMOCD records show that on August 13, 2008 the zone from 7,893' to 8,060' was fractured with 5,040 gallons of 15% HCl, 120,372 gallons of Spectra Star 2500, and 167,552 pounds of propan (sand). On August 16, the zone from 7,758' to 8,060' was fractured with 4,500 gallons of 15% HCl, 119,255 gallons of Spectra Star 2500, and 106,750 pounds of sand (see Attachment A).

These fracture jobs are also noted in the well diagram submitted as part of Lime Rock's May 2017 pressure increase application (see Attachment B).

It is clear that the reason that Lime Rock observed that "The formation pressure did not break at a maximum surface pressure of 2681 psi (bottom hole pressure of 4140 psi)..." during their SRT is that the formation had already been broken during the hydrofracturing work done in 2008. For these reasons the step rate test results and conclusions are invalid and cannot form a defensible technical basis for Lime Rock's IPI request.

#### **2: HFNR Has Priority of use of this Shared Injection Zone in the Cisco Reservoir**

Well WDW-3 was approved in June 2004 as a Class I non-hazardous well and began operations in January 2008. The well was originally spudded in December 1990 by Mewbourne Oil Company and was advanced to 10,120 feet and completed as a Morrow gas well. For economical reasons Mewbourne temporarily shut in the well in 1993. In September 2000 the wellbore was purchased by Navajo Refining as a potential disposal well. Following the 2004 approval of their Class I injection application, Navajo re-completed the well in October 2006 as an injection well, and commenced injection in January 2008. By the end of 2008, Navajo had injected approximately 2,021,000 barrels, and in 2009 over 2,385,000 barrels.

The Devon Federal T SWD #1 was approved as a SWD well in July 2008, over 4 years after the approval of WDW-3. This well was first spudded in June of 1990 Mewbourne Oil Company and was advanced to 10,141 feet and completed as a Morrow gas well. For economical reasons Mewbourne temporarily shut in this well in 1994. The well was acquired by Devon Energy Production in April of 2008, was approved as an SWD in Order SWD-1135 in July of 2008, and re-completed by Devon in August of 2008. Throughout 2008 Devon only injected a total of 190 barrels and in 2009 did not operate the well until September, and only injected 513,281 barrels in that year.

It is clear from this history that Navajo (now HFNR) received NMOCD approval to inject in the Wolfcamp, Cisco and Canyon zones in 2004, four years prior to the Devon (now Lime Rock) 2008 application. Further, HFNR commenced significant injection rates and volumes in January 2008, while Devon only began significant injection in September 2009, 20 months later.

**3: Significantly Higher Effort and Expense by the Regulators and the Operator are Required to Permit a Class I Non-Hazardous Well versus a Standard Class II SWD Well**

The NMOCD, USEPA Region 6, and HFNR spent significant technical effort, professional time, and costs to perform the analyses required to permit this Class I non-hazardous injection well. This level of investment far exceeds the efforts required to permit a SWD such as Federal T SWD#1.

**4: WDW-3 Is Critical to the HFNR Refinery Operations**

HFNR operates, in addition to WDW-3, two additional Class I disposal wells (WDW-1 and WDW-2), all permitted under the NMOCD UIC program. These wells accept non-exempt, non-hazardous wastewaters from the Refinery, at average total amounts of approximately 15,000 barrels per day, roughly equally distributed among the 3 wells. HFNR has no other current options for disposing of this wastewater, and loss of service of even one of these wells would severely reduce refinery throughput leading to losses of jobs, and diminished revenues for HFNR, contracted operators, and the State.

**5: Both the Lime Rock and HFNR Injection Wells Share the Same, Continuous Reservoir**

Figure 2 is a cross-section showing the geology of injection zones of WDW-3 and Federal T SWD#1. There is clearly an overlap of the injection zones in the Cisco Formation, the lithologies of the Cisco are very similar, and it is clear that there are no stratigraphic or structural barriers between the wells. This direct connection will ensure that increased injection pressure in the Federal T SWD #1 will result in the migration of a pressure wave to WDW-3 that will negatively affect HFNR's ability to stay within their approved MAOP of 1,550 psig surface.

**6: Increased Injection Pressure by Lime Rock will Raise Reservoir Pressure at WDW-3**

Lime Rock proposes to increase the MAOP of their Federal T SWD #1 from 1,480 to 2,681 psig, an increase of approximately 1,200 psig, or over 180% of the current limit. Currently, the HFNR well WDW-3 has seen an annual injection average of 1,315 psig, only 235 psig below their MAOP of 1,550 psig. Only approximately 20% of Lime Rock's requested increase would push reservoir pressures above HFNR's MAOP, making WDW-3 inoperable. If the requested pressure increase is approved, the overlapping perforations in the Cisco Formation, 7,685' to 8,060' in the Federal T SWD #1, and 7,666' to 8,620' in the WDW-3, will allow pressure fronts (and fluids) to migrate from the Lime Rock SWD to HFNR's WDW-3, impairing or precluding successful injection in the WDW-3.

**CONCLUSIONS**

In summary, HFNR respectfully requests the NMOCD deny Lime Rock's application for an injection pressure increase for their Federal T SWD #1 for the reasons detailed above. However, should NMOCD see fit to grant this pressure increase, HFNR requests that a corresponding pressure increase be immediately granted to wells WDW-1, WDW-2, and WDW-3, that are completed in the same injection zone.

Mr. David Catanach  
June 27, 2017  
Page 4

If you have any questions or require additional information regarding our request to deny Lime Rock's application please contact me at 575-746-5487 or our technical consultants on this matter Alberto Gutierrez, RG & James C. Hunter, RG at 505-842-8000.

Sincerely,




Scott M. Denton  
Environmental Manager  
HollyFrontier Navajo Refining LLC

cc: NMOCD – P. Goetze  
Geolex – A. Gutierrez  
HFNR – R. Dade

## FIGURES

Figure 1:


HollyFrontier Class 1 Wells: Active Disposal Wells Within One-Mile AORs (All three Class 1 wells)

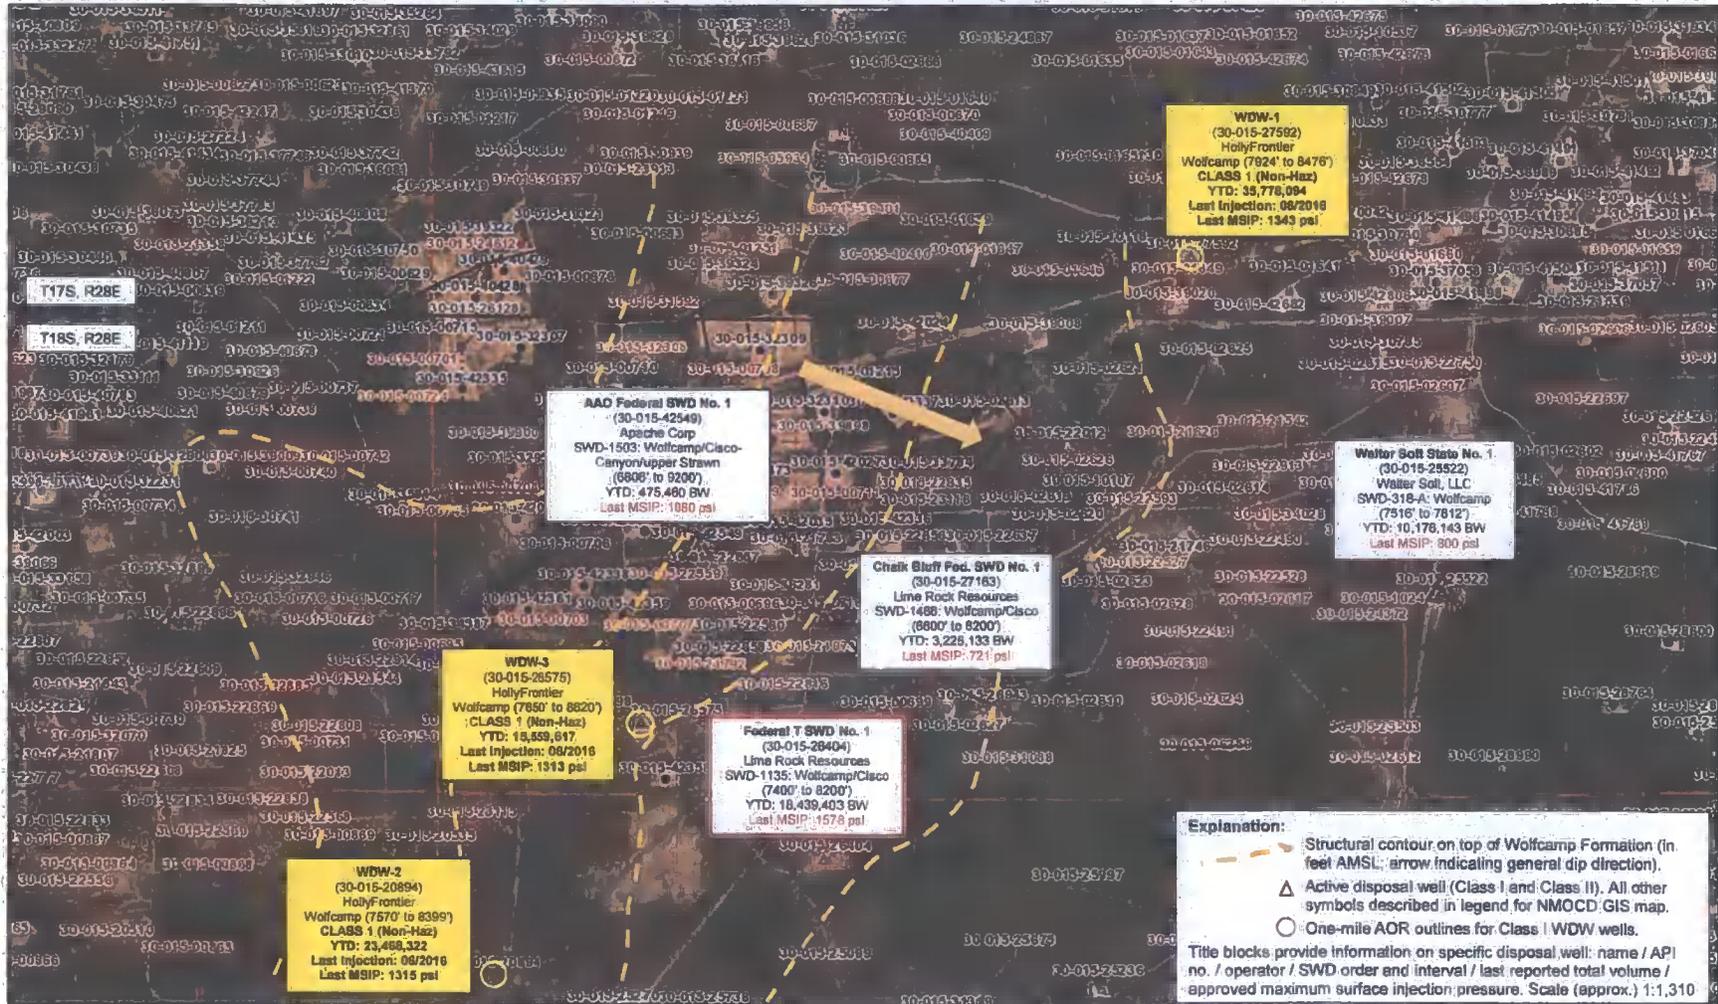

**Figure 2: Cross Section between WDW-3 and Federal T SWD #1**

NW

SE

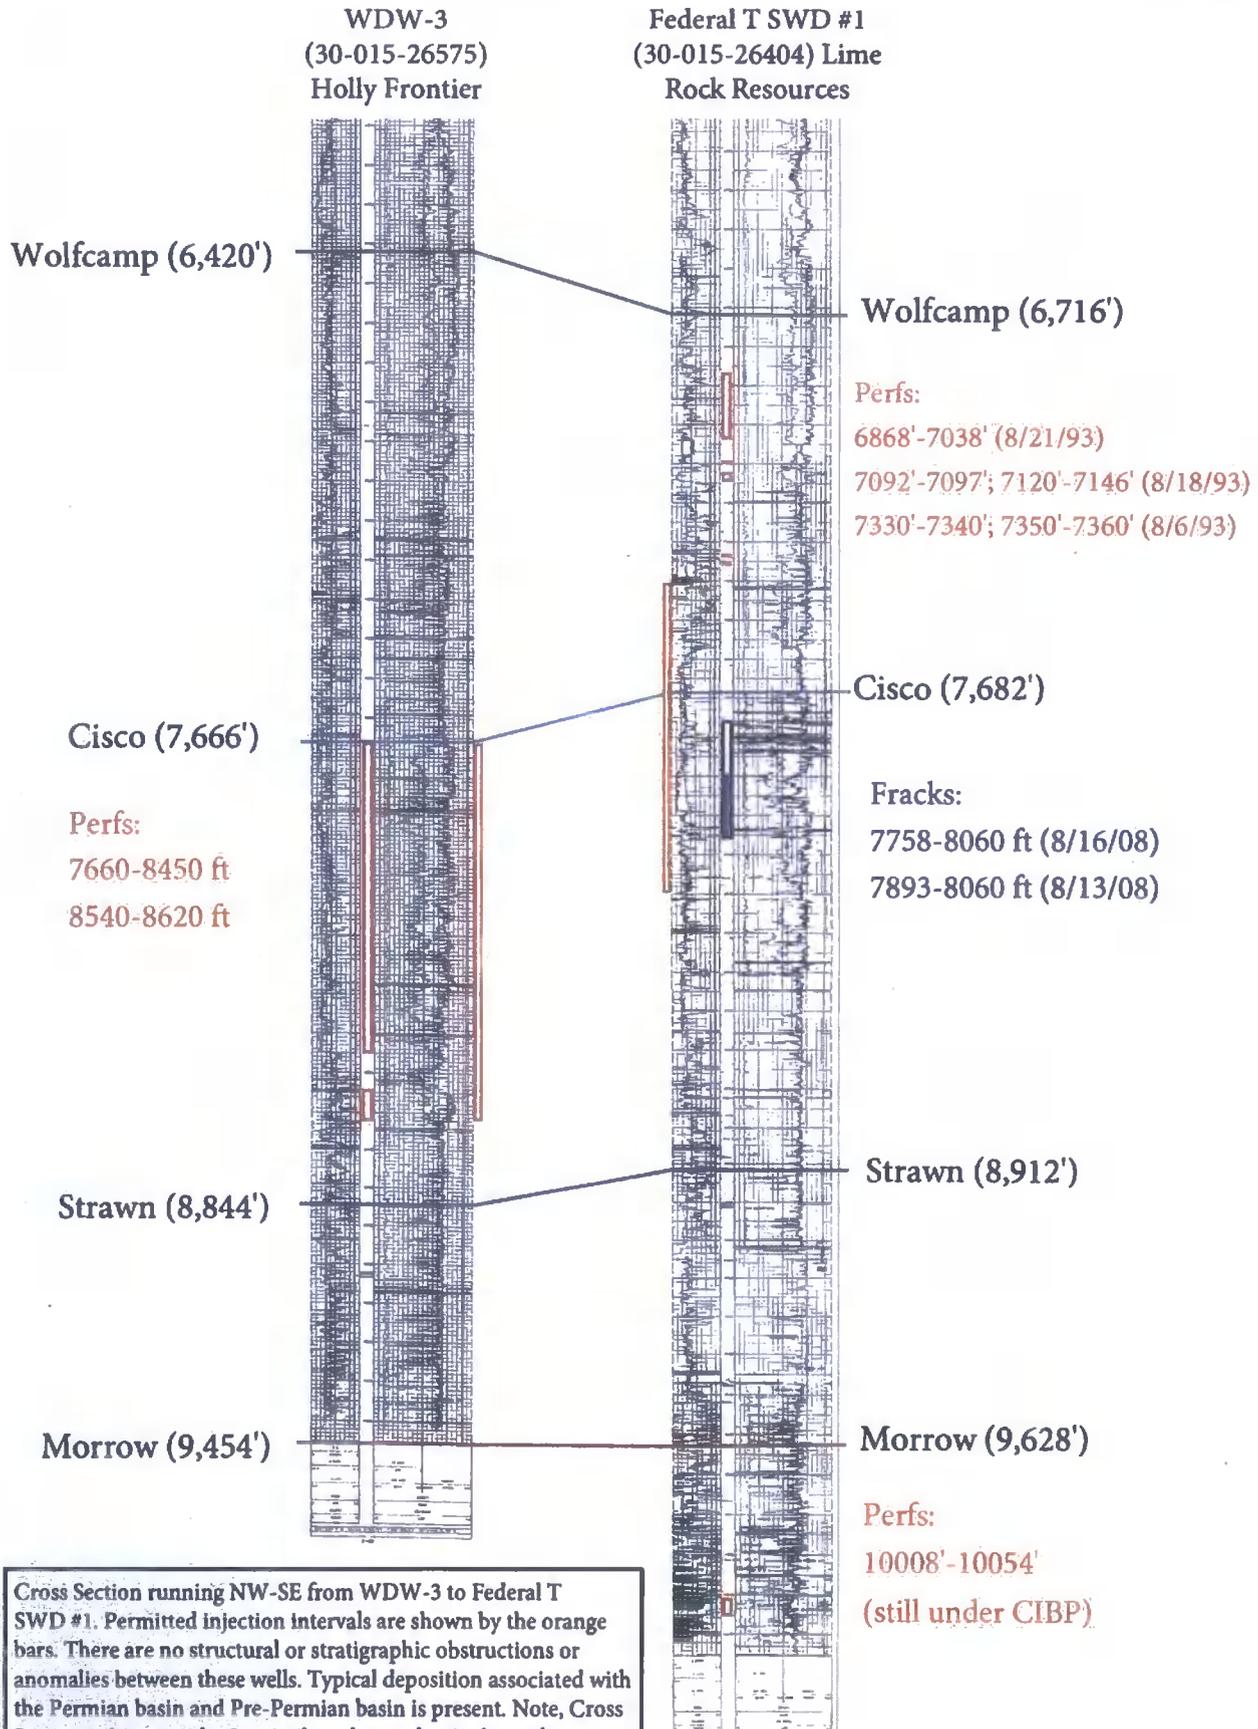

Cross Section running NW-SE from WDW-3 to Federal T SWD #1. Permitted injection intervals are shown by the orange bars. There are no structural or stratigraphic obstructions or anomalies between these wells. Typical deposition associated with the Permian basin and Pre-Permian basin is present. Note, Cross Section is hung on the San Andres above what is shown here.

ATTACHMENT A

BLM FORM 3160-5 REPORTING THE RECOMPLETION AND  
HYDROFRACTURING OF FEDERAL T SWD#1

**SUNDRY NOTICES AND REPORTS ON WELLS**

Do not use this form for proposals to drill or to re-enter an abandoned well. Use Form 3160-3 (APD) for such proposals

SUBMIT IN TRIPLICATE - Other instructions on page 2

1. Type of Well <input type="checkbox"/> Oil Well <input type="checkbox"/> Gas Well <input checked="" type="checkbox"/> Other SWD conversion. Admin Order SWD-1135		5. Lease Serial No <b>NM-42410</b>
2. Name of Operator <b>DEVON ENERGY PRODUCTION COMPANY, LP</b>		6. If Indian, Allottee or Tribe Name
3a. Address <b>20 North Broadway, Oklahoma City, OK 73102</b>		7. Unit or CA Agreement Name and No.
3b. Phone No. (include area code) <b>405-552-8198</b>		8. Well Name and No <b>Federal T 1</b>
4. Location of Well (Footage, Sec., T., R., M. or Survey Description) <b>660 FNL 990 FEL A 12 18S 27E</b>		9. API Well No <b>30-015-26404</b>
		10. Field and Pool, or Exploratory Area <b>L.Wolfcamp and Cisco</b>
		11. County or Parish, State <b>Eddy NM</b>

**12. CHECK APPROPRIATE BOX(es) TO INDICATE NATURE OF NOTICE, REPORT OR OTHER DATA**

TYPE OF SUBMISSION	TYPE OF ACTION			
<input type="checkbox"/> Notice of Intent	<input type="checkbox"/> Addize	<input type="checkbox"/> Deepen	<input type="checkbox"/> Production (Start/Resume)	<input type="checkbox"/> Water Shut-Off
<input checked="" type="checkbox"/> Subsequent Report	<input type="checkbox"/> Alter Casing	<input type="checkbox"/> Fracture Treat	<input type="checkbox"/> Reclamation	<input type="checkbox"/> Well Integrity
<input type="checkbox"/> Final Abandonment Notice	<input type="checkbox"/> Casing Repair	<input type="checkbox"/> New Construction	<input type="checkbox"/> Recomplete	<input type="checkbox"/> Other
	<input type="checkbox"/> Change Plans	<input type="checkbox"/> Plug and Abandon	<input type="checkbox"/> Temporarily Abandon	
	<input checked="" type="checkbox"/> Convert to Injection	<input type="checkbox"/> Plug Back	<input type="checkbox"/> Water Disposal	

13 Describe Proposed or Completed Operations (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work and approximate duration thereof. If the proposal deepens directionally or recompletes horizontally, give subsurface location and measured and true vertical depths of all pertinent markers and zones. Attach the Bond under which the work will be performed or provide the Bond No. on file with BLM/BIA. Required subsequent reports shall be filed within 30 days following completion of the involved operations. If the operation results in a multiple completion or recompletion in a new interval, a Form 3160-4 shall be filed once testing has been completed. Final Abandonment Notices shall be filed only after all requirements, including reclamation, have been completed, and the operator has determined that the site is ready for final inspection)

Converted to SWD. Administrative Order SWD-1135  
 8/04/08 RU unit. ND wellhead and NU BOP. TIH with bit and drill collars.  
 8/05/08 Drill CIBP at 8800' and 7078'.  
 8/06/08 Drilled through cement at 7525', CIBP at 7300' and cement at 7560' and CIBP at 7595'.  
 8/07/08 Ran step rate test; pumped 50 bbls at 1/2 bbl/min - 0# psi, pumped 50 bbls at 1 bbl/min - 20# psi, pumped 50 bbls at 2 bbls/min - 75# psi, pumped 50 bbls at 3 bbls/min - 170# psi, pumped 50 bbls at 4 bbls/min - 250 psi.  
 8/08/08 Trucked in and established Injection in the Wolfcamp at 150 BWPD at 170 psi.  
 8/11/08 Drilled cement retainers at 7745', and 7780'.  
 8/12/08 Drilled cement retainer at 7820' and 8000'. Circulate hole and TOH with tubing and bit.  
 8/13/08 Perforate Cisco from 7893' - 8060', total 140 holes. TIH and set packer at 7888'. Frac with 5,040 gals 15% HCl + 120,372 gals Spectra Star 2500 + 167,552 # 20/40 White sand.  
 8/14/08 TIH with retrievable tool and latch onto packer. Release packer and TOOH with packer and tubing. RU wireline and perforate Cisco from 7758'-7840'; 228 total holes  
 8/15/08 TIH with packer and set at 7582'. NU frac valve.  
 8/18/08 Frac 7758'-8060' with 4500 gals 15% Spearhead acid + 119,255 gals Spectra 2500 + 108,750 # 20/40 100% White sand. RD.  
 8/18/08 Release packer. TOOH with packer and tubing  
 8/20/08 TIH with bailer and bailed sand. Bailed sand to 8460'. TOOH with tubing. ND BOP and NU flange. Waiting on tubing.  
 9/15/08 TIH with packer and tubing. Set packer at 8789'. ND BOP and NU tree. Ran MIT test to 500 # for 30 minutes - ok, notified Mike Bratcher with OCD  
 TOOH with tubing. RIH with 3 1/2" IPC tubing and set at 6789'. Injection line installation in progress.

14. I hereby certify that the foregoing is true and correct  
 Name: **Norella Adams** Title: **Sr. Staff Engineering Technician**  
 Signature:  Date: **9/17/2008**

ACCEPTED FOR RECORDS SPACE FOR FEDERAL OR STATE OFFICE USE

Approved by: **/S/ DAVID R. GLASS** Title: \_\_\_\_\_ Date: \_\_\_\_\_  
**SEP 29 2008**

Conditions of approval, if any are attached. Approval of this notice does not warrant or certify that the applicant holds legal or equitable title to those lands in the subject lease which would entitle the applicant to conduct operations thereon.

Office

Accepted for records  
NMOCD

**ATTACHMENT B**

**WELL COMPLETION DIAGRAM PROVIDED IN LIME ROCK'S REQUEST  
FOR PRESSURE INCREASE SHOWING ZONES OF HYDROFRACTURING  
IN FEDERAL T SWD#1**

**DEVON ENERGY PRODUCTION COMPANY LP**

Well Name: FEDERAL T #1		Field: NORTH ILLINOIS CAMP MORROW	
Location: 660' FNL & 990' FEL; SEC 12-T18S-R27E		County: EDDY	State: NM
Elevation: 3634' KB; 3618' GL		Spud Date: 6/28/90	Compl Date: 9/13/90
API#: 30-015-26404	Prepared by: Norvella Adams	Date: 9/17/08	Rev.

**Current Schematic  
L. Wolfcamp and Cisco SWD**

**Formation Tops**

Morrow 9,600'-10,250'  
 Atoka 9,230'- 9,700'  
 Upper Wolfcamp 6,400' - 7,200'  
 Abo 5,600' - 6,200'  
 Yeso 3,300' - 3,900'  
 San Andres 2,000' - 2,800'  
 Queen 1,450' - 1,650'

17-1/2" Hole  
13-3/8" 688, LTC, @ 472'  
 Cmt'd w/450 Sx Circ to surface

12-1/4" Hole  
8-3/8" J65, 328, STC, @ 2,689'  
 Cmt'd w/900 Sx Circ to surface

3-1/2", 9.3 #, N80, Injection tubing @ 6,789'

5-1/2" IPC Packer @ 6,789'

WOLFCAMP (8/21/93)  
 6,869' - 7,038'

WOLFCAMP (8/18/93)  
 7,092' - 7,097'; 7,120' - 7,146'

WOLFCAMP (8/16/93)  
 7,330' - 7,340'; 7,350' - 7,360'

SWD Perforations:  
CISCO (8/1/93)  
 7,585' - 7,695'

From 7758'-7840' with 4000 gals 15% Spectrol acid and 178,250 gals Spectro Star ES500 - 100,750 @ 100% 20-40 White sand.

CISCO (8/14/08)  
 7758'-7840' (228 holes)

From 7893'-8080' with 3000 gals 15% HCl acid and 150,312 gals Spectro Star ES500 - 147,692 @ 100% 20-40 White sand.

CISCO (8/13/08)  
 7893'-8080' (140 holes)

35' cement 9,005' PBD  
 CIBP @ 8,040' (7/21/93)

4" Liner top @ 9,055'

7-7/8" Hole  
5-1/2" N80, 178, LTC, @ 9,473'  
 Cmt'd w/430 Sx

CIBP @ 9,950' (7/19/93)

MORROW (9/14/90)  
 10,005' - 10,014'  
 10,038' - 10,054'

4-3/4" Hole  
 4" 10.48# L80 Liner @ 9,085' - 10,141'  
 Cmt'd w/80 Sx

10,100' PBD

10,141' TD



## **Goetze, Phillip, EMNRD**

---

**From:** Goetze, Phillip, EMNRD  
**Sent:** Friday, May 19, 2017 11:33 AM  
**To:** Dade, Lewis (Randy)  
**Cc:** Chavez, Carl J, EMNRD; Mike Pippin (mike@pippinllc.com); Jones, William V, EMNRD; McMillan, Michael, EMNRD  
**Subject:** Lime Rock's IPI Application for the Federal T SWD No. 1  
**Attachments:** HollyFrontier Class I Renewals V2.pdf; Lime Rock IPI Appl\_Fed T SWD #1.pdf

RE: Federal T SWD No. 1 (API 30-015-26404) SWD-1135

Greetings Mr. Dade:

Hope all is well with you. The Division is forwarding an application for injection pressure increase submitted by Lime Rock for its Federal T SWD No. 1. A copy of the application is attached. Lime Rock is requesting an increase of the surface injection to 2681 psi. The Division has not completed its evaluation of the test data; however, the Division is providing the opportunity for input by HollyFrontier regarding the application for this disposal well and the operation of HollyFrontier's Class I wells that are in proximity to the Federal T. The Division has identified the closest well as being the WDW-3 that is approximately 2,510 feet northwest of the Federal T.

This request is based on the injection interval being common between the HollyFrontier's WDW wells and the federal T SWD No. 1. Additionally, since HollyFrontier's wells are classified as Class I (Non-Haz), the Division must consider the potential of an approval for a pressure increase and the limitations for Class I wells as stipulated in 40 CFR 146.13. Please submit these documents to your technical staff for consideration and comment. Please contact me with any questions regarding this matter. Thank you. PRG

**Phillip Goetze, PG**  
Engineering Bureau, Oil Conservation Division  
New Mexico Energy, Minerals and Natural Resources Department  
1220 South St. Francis Drive, Santa Fe, NM 87505  
Direct 505.476.3466  
E-mail: [phillip.goetze@state.nm.us](mailto:phillip.goetze@state.nm.us)



DATE: 5/11/2017	SUBSENER	ENGINEER	LOGGED IN: SLP-1	TYPE: ZOI	APP NO.: PMAH1713256A7
-----------------	----------	----------	------------------	-----------	------------------------

ABOVE THIS LINE FOR DIVISION USE ONLY

**NEW MEXICO OIL CONSERVATION DIVISION**  
 - Engineering Bureau -  
 1220 South St. Francis Drive, Santa Fe, NM 87505



FEDERAL T SWD #1 Order: SWD-1135

**ADMINISTRATIVE APPLICATION CHECKLIST**

THIS CHECKLIST IS MANDATORY FOR ALL ADMINISTRATIVE APPLICATIONS FOR EXCEPTIONS TO DIVISION RULES AND REGULATIONS WHICH REQUIRE PROCESSING AT THE DIVISION LEVEL IN SANTA FE

**Application Acronyms:**

- [NSL-Non-Standard Location] [NSP-Non-Standard Proration Unit] [SD-Simultaneous Dedication]
- [DHC-Downhole Commingling] [CTB-Lease Commingling] [PLC-Pool/Lease Commingling]
- [PC-Pool Commingling] [OLS - Off-Lease Storage] [OLM-Off-Lease Measurement]
- [WFX-Waterflood Expansion] [PMX-Pressure Maintenance Expansion]
- [SWD-Salt Water Disposal] [IPI-Injection Pressure Increase]
- [EOR-Qualified Enhanced Oil Recovery Certification] [PPR-Positive Production Response]

[1] **TYPE OF APPLICATION - Check Those Which Apply for [A]**

- [A] Location - Spacing Unit - Simultaneous Dedication  
 NSL  NSP  SD

Check One Only for [B] or [C]

- [B] Commingling - Storage - Measurement  
 DHC  CTB  PLC  PC  OLS  OLM

- [C] Injection - Disposal - Pressure Increase - Enhanced Oil Recovery  
 WFX  PMX  SWD  IPI  EOR  PPR

[D] Other: Specify \_\_\_\_\_

*LITHOLOGY RESOURCES*  
*IL-M, LP*  
*277554*  
*WEX*  
*Federal TSWD #1*  
*30-015-26404*  
*ZOI*

[2] **NOTIFICATION REQUIRED TO: - Check Those Which Apply, or  Does Not Apply**

- [A]  Working, Royalty or Overriding Royalty Interest Owners
- [B]  Offset Operators, Leaseholders or Surface Owner
- [C]  Application is One Which Requires Published Legal Notice
- [D]  Notification and/or Concurrent Approval by BLM or SLO  
U.S. Bureau of Land Management - Commissioner of Public Lands, State Land Office
- [E]  For all of the above, Proof of Notification or Publication is Attached, and/or,
- [F]  Waivers are Attached

*Pool*  
*SWD, WOLFcamp*  
*CISCO*  
*46136*

[3] **SUBMIT ACCURATE AND COMPLETE INFORMATION REQUIRED TO PROCESS THE TYPE OF APPLICATION INDICATED ABOVE.**

[4] **CERTIFICATION:** I hereby certify that the information submitted with this application for administrative approval is accurate and complete to the best of my knowledge. I also understand that no action will be taken on this application until the required information and notifications are submitted to the Division.

Note: Statement must be completed by an individual with managerial and/or supervisory capacity.

Mike Pippin *Mike Pippin* Petroleum Engineer ev 8, 2017  
 Print or Type Name Signature Title Date  
 mike@pippinllc.com e-mail Address

LIME ROCK RESOURCES II-A, L.P.  
Mike Pippin  
3104 N. Sullivan Avenue  
Farmington, NM 87401  
505-327-4573 (phone) mike@pippinllc.com

May 8, 2017

Phil Goetze  
New Mexico Oil Conservation Division  
1220 South St. Francis Drive  
Santa Fe, NM 87505

**RE: Injection Pressure Increase Request**  
Administrative Order SWD-1135  
FEDERAL T SWD #1  
API#: 30-015-26404  
Unit Letter "A" Section 12 T18S R27E  
Eddy County, New Mexico

Dear Mr. Goetze,

By administrative order SWD-1135, dated July 16, 2008, the NMOCD authorized water injection into Federal T SWD #1 (API No. 30-015-26404) for the disposal of produced water. The order provides for a wellhead injection pressure of "no more than 1480 psi". On 9/16/08, this well was converted to SWD & soon started produced water injection. Lime Rock believes that this maximum pressure of 1480 psi is significantly below the formation frac pressure.

The disposal formation in this well is extremely tight. On 5/3/17, a step rate test was run to determine the actual formation frac pressure. The formation pressure did not break at a maximum surface pressure of 2681 psi (bottom hole pressure of 4140 psi), which indicates that the formation frac pressure was not exceeded at that point. Therefore, the actual formation frac pressure is higher than a surface pressure of 2681 psi. A summary of the step rate test data from Renegade Services is attached along with a wellbore diagram.

Lime Rock Resources therefore requests that the maximum wellhead injection pressure be increased to at least 2681 psi.

Please contact me at 505-327-4573 should you have any questions.


Very truly yours,



Mike Pippin P.E.  
Petroleum Engineer

Enclosures

Pressure vs Rate

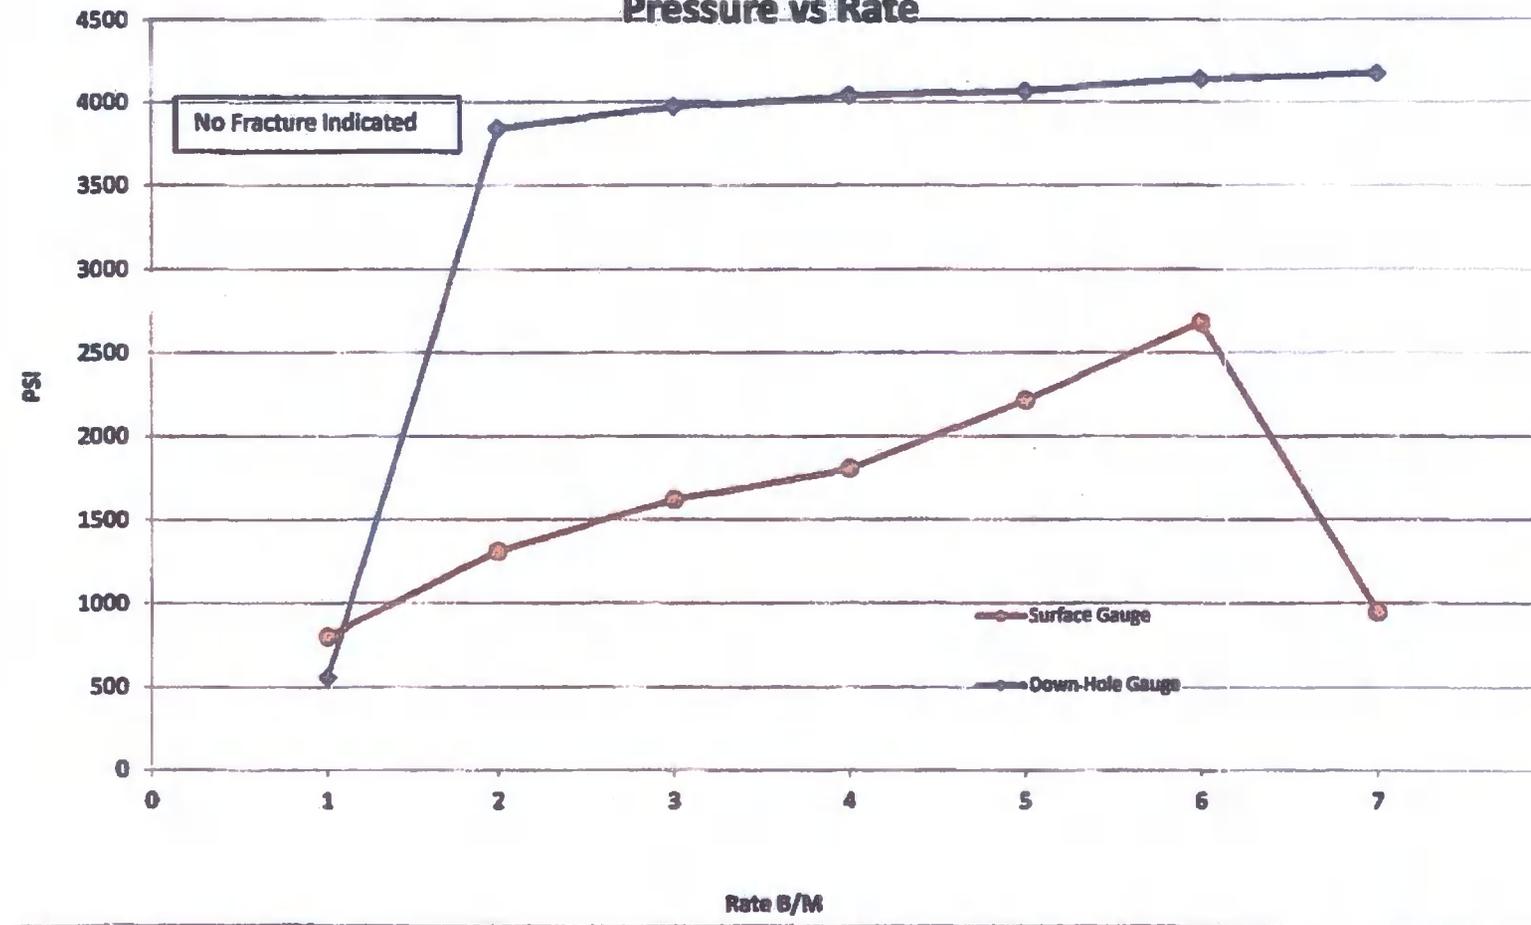




STEP RATE TEST

	RATE B/D	Date	Time	BH PRESS	SURF. PRESS	Comments
Step 1	1	5/3/2017	11:20 AM	558.57	801.96	
Step 2	2	5/3/2017	12:01 PM	3842.09	1311.16	
Step 3	3	5/3/2017	1:09 PM	3970.7	1619.11	
Step 4	4	5/3/2017	1:37 PM	4035.19	1803.03	
Step 5	5	5/3/2017	1:56 PM	4066.6	2219.85	
Step 6	6	5/3/2017	2:13 PM	4140.96	2681.72	
Fall Off	Fall Off	5/3/2017	2:32 PM	4169.81	944.2	
Company: Lime Rock Resources				Recorded By: J. Gable		
Well: Federal T #001 SWD						
Field: LLU				Truck Number: 113		
County: Eddy, County				District: Loveland		
State: New Mexico						
Seat Nipple Depth: N/A						
Perforations:						
Plug Back Depth: N/A						


## JOB INFORMATION SHEET

Company Information		
Company Name:	Lime Rock Resources	
Well Information		
Well Name:	Federal T #001 SWD	
Location:	Eddy County, NM	
Field - Pool:	Federal T	
Status:	SWD	
Test Information		
Type of Test:	Step Rate Test	
Gauge Depth:	6750 ft	
Temperature @ Run Depth:	100.03 degF	
Surface Temperature:	68.51 degF	
Gauge Information		
Serial Number:	Top Recorder 79810	Bottom Recorder
Calibration Date:	10/21/16	
Pressure Range:	10000 psi	
Comments		

Pressure vs. Rate  
Federal T-001 SWD

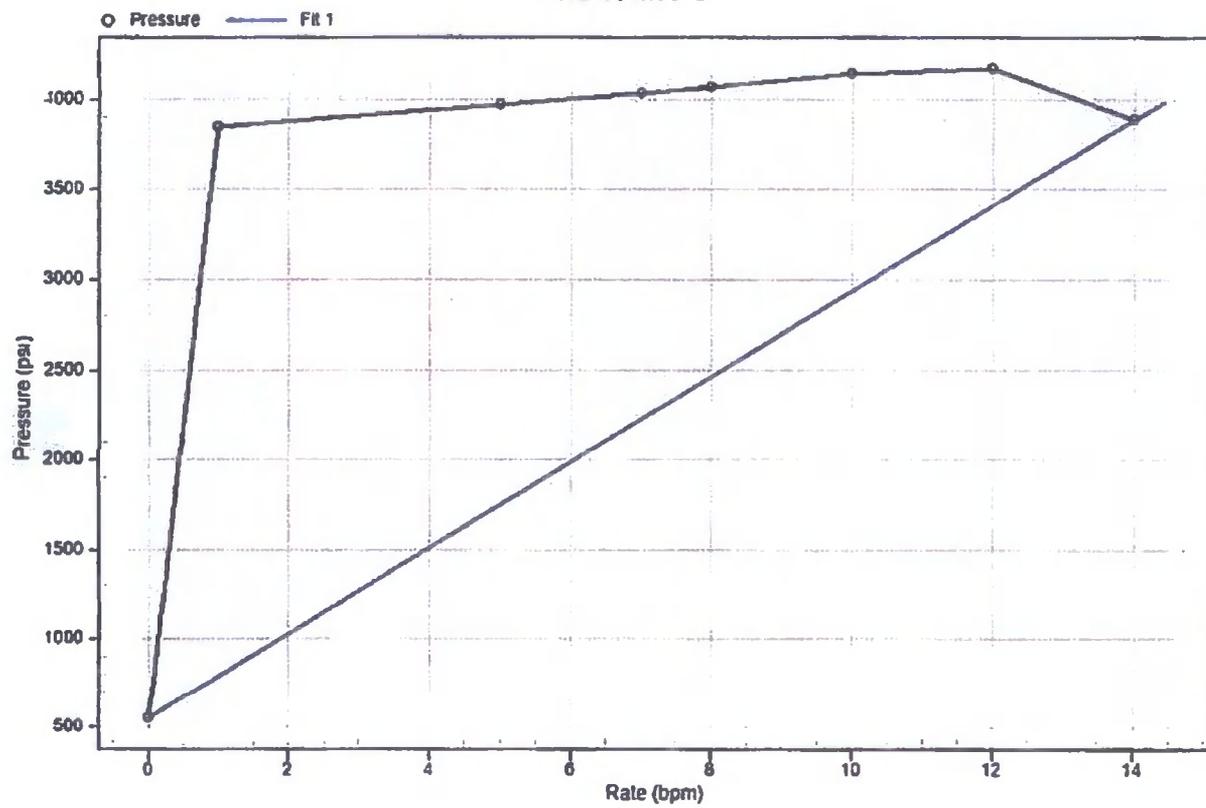

Federal T #001 SWD  
Surface

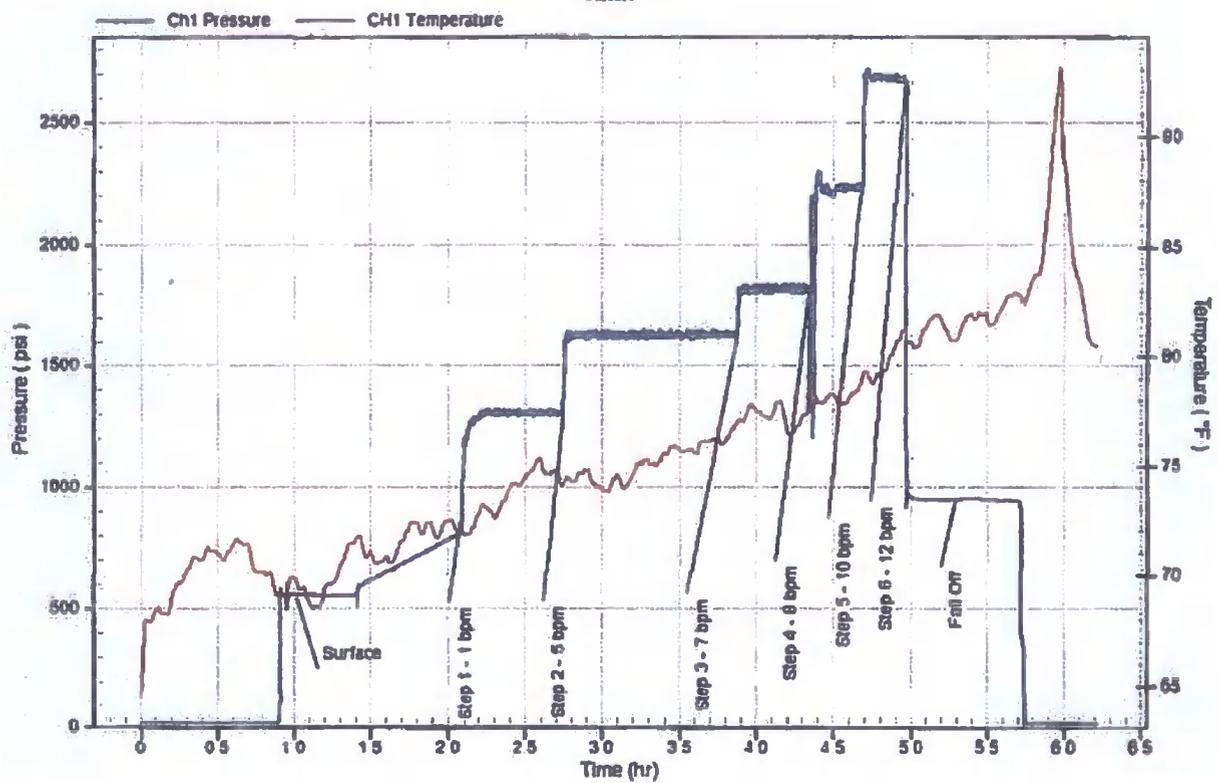

**DEVON ENERGY PRODUCTION COMPANY LP**

Well Name FEDERAL T #1		Field NORTH ILLINOIS CAMP MORROW	
Location 660' FNL & 990' FEL SEC 12-T18S-R27E		County EDDY	State NM
Elevation 3634' KB; 3618' GL		Spud Date 6/28/90	Compl Date 9/13/90
API# 30-015-26404	Prepared by Norvella Adams	Date 9/17/08	Rev

*Current Schematic  
L. Wolfcamp and Cisco SWD*

Formation Tops
Morrow 9,600'-10,250'
Atoka 9,230'-9,700'
Upper Wolfcamp 6,400'-7,200'
Abo 5,600'-6,200'
Yeso 3,300'-3,900'
San Andres 2,000'-2,800'
Queen 1,450'-1,650'

10"-2" Hole  
13-3/8" 68# LTC @ 472'  
Cmtd w/450 Sx Circ to surface

12-1/4" Hole  
8-5/8" J55 32# STC @ 2,589'  
Cmtd w/900 Sx Circ to surface

3-1/2" 9.3 # N80 Injection tubing @ 6789'

5-1/2" IPC Packer @ 6,789'

WOLFCAMP (8/21/93)  
6,868' - 7,038'

WOLFCAMP (8/18/93)  
7,092' - 7,097'; 7,120' - 7,146'

WOLFCAMP (8/16/93)  
7,330' - 7,340'; 7,350' - 7,380'

SWD Perforations:  
CISCO (8/1/93)  
7,685' - 7,695'

CISCO (8/14/08)  
7758'-7840' (228 holes)

CISCO (8/13/08)  
7893'-8060' (140 holes)

Frac 7758'-7840' with 4500 gals 15% Spearhead acid and 119,255 gals Spectra Star 2500 - 106,750 @ 100% 20/40 White sand.

Frac 7893'-8060' with 3040 gals 15% HCl acid and 120,372 gals Spectra Star 2500 - 107,562 @ 100% 20/40 White sand

35' cement 9,005' PBD  
CIBP @ 9,040' (7/21/93)

4" Liner top @ 9,055'

7-7/8" Hole  
5-1/2" N80 17# LTC @ 9,473'  
Cmtd w/430 Sx


CIBP @ 9,950' (7/19/93)

MORROW (9/14/90)  
10,008' - 10,014'  
10,038' - 10,054'


4-3/4" Hole  
4" 10.46# L80 Liner @ 9,055' - 10,141'  
Cmtd w/80 Sx

10,100' PBD

10,141' TD

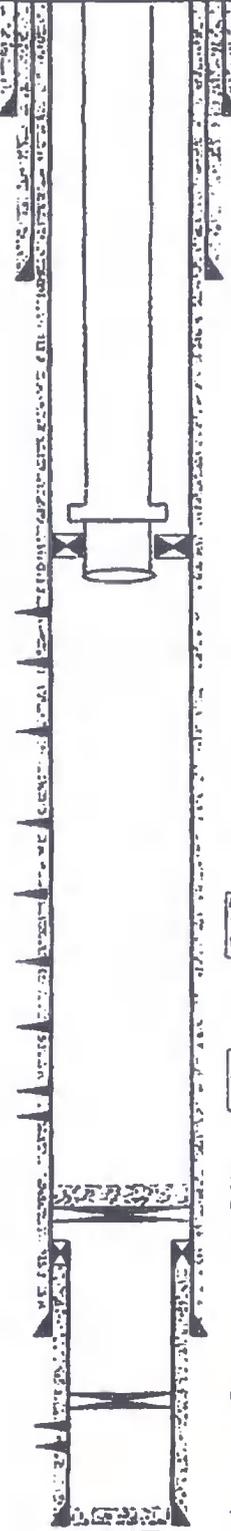

HollyFrontier Class 1 Wells: Active Disposal Wells Within One-Mile AORs (All three Class 1 wells)

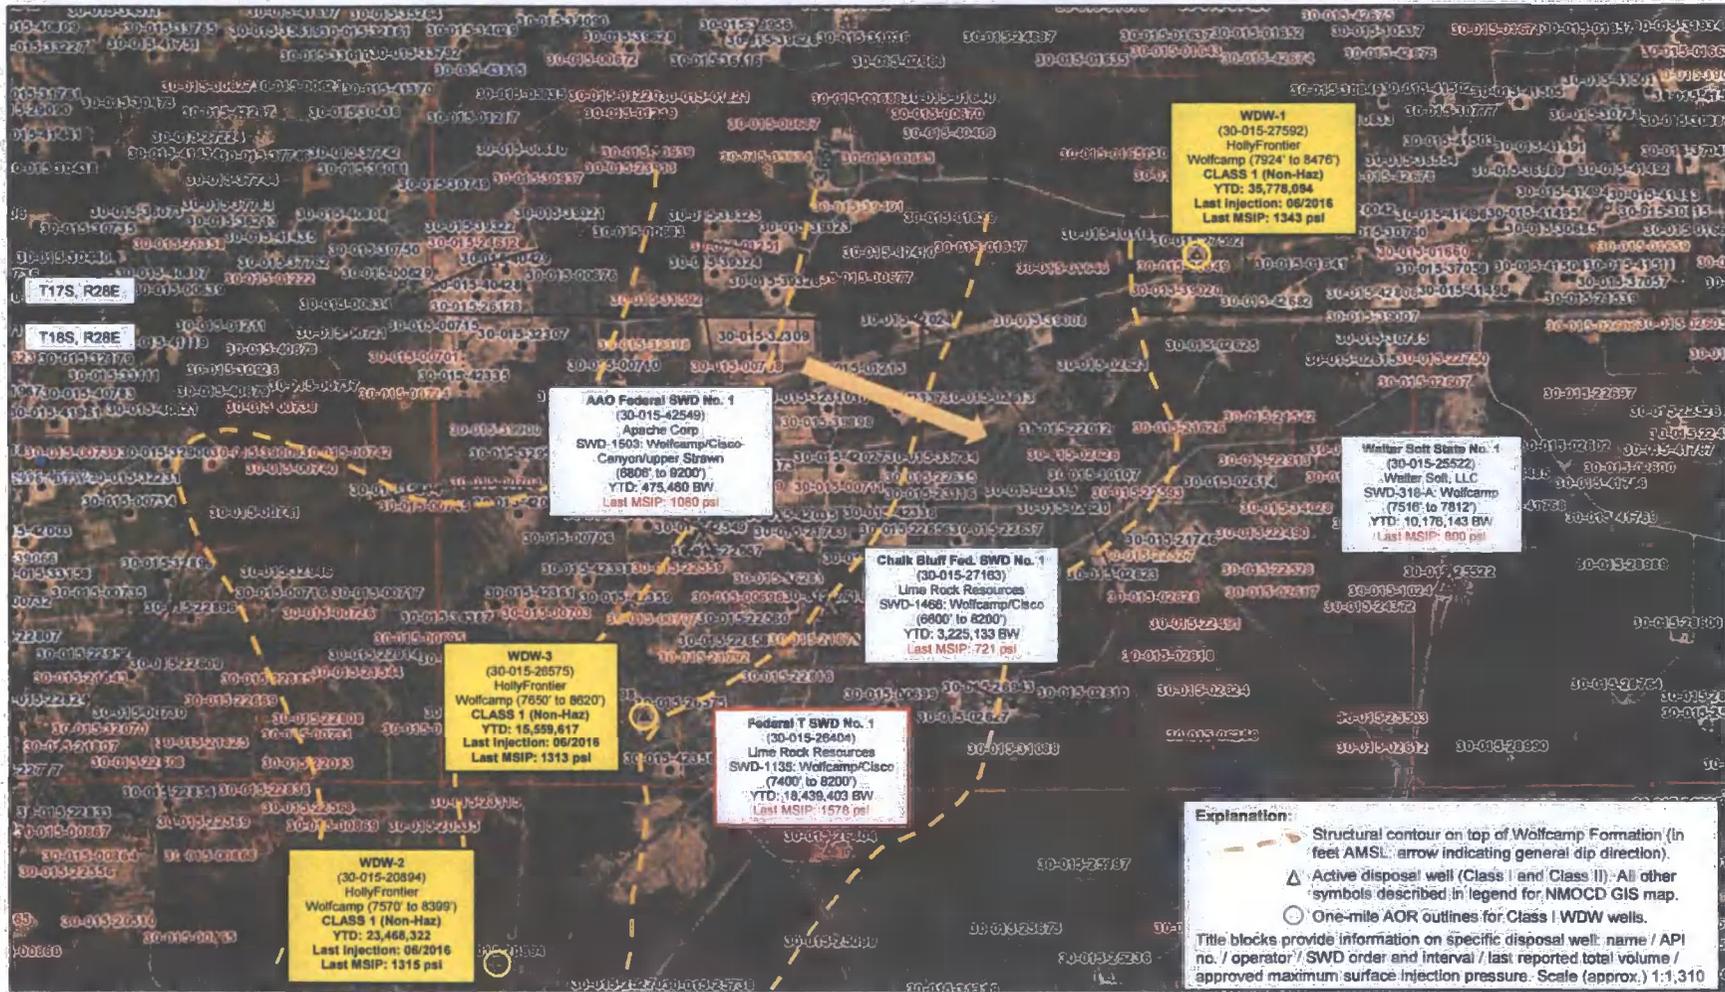

**Production Summary Report**  
**API: 30-015-26404**  
**FEDERAL T SWD #001**  
**Printed On: Tuesday, October 17 2017**

Year	Pool	Month	Injection				Pressure
			Water(BBLS)	Co2(MCF)	Gas(MCF)	Other	
2009	[96136] SWD;WOLFCAMP-CISCO	Sep	82362	0	0	0	0
2009	[96136] SWD;WOLFCAMP-CISCO	Oct	154457	0	0	0	0
2009	[96136] SWD;WOLFCAMP-CISCO	Nov	137461	0	0	0	0
2009	[96136] SWD;WOLFCAMP-CISCO	Dec	139001	0	0	0	0
2010	[96136] SWD;WOLFCAMP-CISCO	Jan	147326	0	0	0	313
2010	[96136] SWD;WOLFCAMP-CISCO	Feb	173848	0	0	0	311
2010	[96136] SWD;WOLFCAMP-CISCO	Mar	205917	0	0	0	1276
2010	[96136] SWD;WOLFCAMP-CISCO	Apr	190801	0	0	0	341
2010	[96136] SWD;WOLFCAMP-CISCO	May	224642	0	0	0	306
2010	[96136] SWD;WOLFCAMP-CISCO	Jun	166685	0	0	0	316
2010	[96136] SWD;WOLFCAMP-CISCO	Jul	178497	0	0	0	334
2010	[96136] SWD;WOLFCAMP-CISCO	Aug	154510	0	0	0	325
2010	[96136] SWD;WOLFCAMP-CISCO	Sep	148819	0	0	0	591
2010	[96136] SWD;WOLFCAMP-CISCO	Oct	172602	0	0	0	1184
2010	[96136] SWD;WOLFCAMP-CISCO	Nov	165728	0	0	0	1090
2010	[96136] SWD;WOLFCAMP-CISCO	Dec	217786	0	0	0	769
2011	[96136] SWD;WOLFCAMP-CISCO	Jan	188150	0	0	0	430
2011	[96136] SWD;WOLFCAMP-CISCO	Feb	160397	0	0	0	445
2011	[96136] SWD;WOLFCAMP-CISCO	Mar	192533	0	0	0	455
2011	[96136] SWD;WOLFCAMP-CISCO	Apr	155472	0	0	0	458
2011	[96136] SWD;WOLFCAMP-CISCO	May	129030	0	0	0	447
2011	[96136] SWD;WOLFCAMP-CISCO	Jun	139745	0	0	0	428
2011	[96136] SWD;WOLFCAMP-CISCO	Jul	185458	0	0	0	430
2011	[96136] SWD;WOLFCAMP-CISCO	Aug	235508	0	0	0	416
2011	[96136] SWD;WOLFCAMP-CISCO	Sep	201430	0	0	0	382
2011	[96136] SWD;WOLFCAMP-CISCO	Oct	218665	0	0	0	434
2011	[96136] SWD;WOLFCAMP-CISCO	Nov	239865	0	0	0	384
2011	[96136] SWD;WOLFCAMP-CISCO	Dec	256091	0	0	0	412
2012	[96136] SWD;WOLFCAMP-CISCO	Jan	257691	0	0	0	568
2012	[96136] SWD;WOLFCAMP-CISCO	Feb	191896	0	0	0	352
2012	[96136] SWD;WOLFCAMP-CISCO	Mar	240162	0	0	0	590
2012	[96136] SWD;WOLFCAMP-CISCO	Apr	256040	0	0	0	632
2012	[96136] SWD;WOLFCAMP-CISCO	May	267408	0	0	0	535
2012	[96136] SWD;WOLFCAMP-CISCO	Jun	305094	0	0	0	721
2012	[96136] SWD;WOLFCAMP-CISCO	Jul	325231	0	0	0	683
2012	[96136] SWD;WOLFCAMP-CISCO	Aug	301696	0	0	0	694
2012	[96136] SWD;WOLFCAMP-CISCO	Sep	253450	0	0	0	508
2012	[96136] SWD;WOLFCAMP-CISCO	Oct	268407	0	0	0	640
2012	[96136] SWD;WOLFCAMP-CISCO	Nov	246472	0	0	0	607
2012	[96136] SWD;WOLFCAMP-CISCO	Dec	279136	0	0	0	571
2013	[96136] SWD;WOLFCAMP-CISCO	Jan	274106	0	0	0	569
2013	[96136] SWD;WOLFCAMP-CISCO	Feb	188190	0	0	0	418
2013	[96136] SWD;WOLFCAMP-CISCO	Mar	225696	0	0	0	476
2013	[96136] SWD;WOLFCAMP-CISCO	Apr	209247	0	0	0	563
2013	[96136] SWD;WOLFCAMP-CISCO	May	225753	0	0	0	592
2013	[96136] SWD;WOLFCAMP-CISCO	Jun	184408	0	0	0	523
2013	[96136] SWD;WOLFCAMP-CISCO	Jul	185290	0	0	0	528
2013	[96136] SWD;WOLFCAMP-CISCO	Aug	205872	0	0	0	638
2013	[96136] SWD;WOLFCAMP-CISCO	Sep	182394	0	0	0	567
2013	[96136] SWD;WOLFCAMP-CISCO	Oct	205535	0	0	0	531
2013	[96136] SWD;WOLFCAMP-CISCO	Nov	207976	0	0	0	807
2013	[96136] SWD;WOLFCAMP-CISCO	Dec	205656	0	0	0	813

2014	[96136] SWD;WOLFCAMP-CISCO	Jan	231433	0	0	0	857
2014	[96136] SWD;WOLFCAMP-CISCO	Feb	243705	0	0	0	975
2014	[96136] SWD;WOLFCAMP-CISCO	Mar	267235	0	0	0	1047
2014	[96136] SWD;WOLFCAMP-CISCO	Apr	259985	0	0	0	1074
2014	[96136] SWD;WOLFCAMP-CISCO	May	208023	0	0	0	977
2014	[96136] SWD;WOLFCAMP-CISCO	Jun	187435	0	0	0	967
2014	[96136] SWD;WOLFCAMP-CISCO	Jul	183979	0	0	0	899
2014	[96136] SWD;WOLFCAMP-CISCO	Aug	205361	0	0	0	973
2014	[96136] SWD;WOLFCAMP-CISCO	Sep	210251	0	0	0	1135
2014	[96136] SWD;WOLFCAMP-CISCO	Oct	221273	0	0	0	1131
2014	[96136] SWD;WOLFCAMP-CISCO	Nov	220387	0	0	0	1020
2014	[96136] SWD;WOLFCAMP-CISCO	Dec	237600	0	0	0	1074
2015	[96136] SWD;WOLFCAMP-CISCO	Jan	186478	0	0	0	1060
2015	[96136] SWD;WOLFCAMP-CISCO	Feb	180651	0	0	0	1125
2015	[96136] SWD;WOLFCAMP-CISCO	Mar	202660	0	0	0	843
2015	[96136] SWD;WOLFCAMP-CISCO	Apr	123646	0	0	0	780
2015	[96136] SWD;WOLFCAMP-CISCO	May	104932	0	0	0	676
2015	[96136] SWD;WOLFCAMP-CISCO	Jun	198714	0	0	0	882
2015	[96136] SWD;WOLFCAMP-CISCO	Jul	162213	0	0	0	1250
2015	[96136] SWD;WOLFCAMP-CISCO	Aug	212833	0	0	0	1327
2015	[96136] SWD;WOLFCAMP-CISCO	Sep	213207	0	0	0	1357
2015	[96136] SWD;WOLFCAMP-CISCO	Oct	192638	0	0	0	1184
2015	[96136] SWD;WOLFCAMP-CISCO	Nov	217175	0	0	0	1337
2015	[96136] SWD;WOLFCAMP-CISCO	Dec	178755	0	0	0	1231
2016	[96136] SWD;WOLFCAMP-CISCO	Jan	172994	0	0	0	1204
2016	[96136] SWD;WOLFCAMP-CISCO	Feb	187651	0	0	0	1162
2016	[96136] SWD;WOLFCAMP-CISCO	Mar	186013	0	0	0	1229
2016	[96136] SWD;WOLFCAMP-CISCO	Apr	174776	0	0	0	1290
2016	[96136] SWD;WOLFCAMP-CISCO	May	164483	0	0	0	1161
2016	[96136] SWD;WOLFCAMP-CISCO	Jun	172498	0	0	0	1057
2016	[96136] SWD;WOLFCAMP-CISCO	Jul	164632	0	0	0	1206
2016	[96136] SWD;WOLFCAMP-CISCO	Aug	184308	0	0	0	1347
2016	[96136] SWD;WOLFCAMP-CISCO	Sep	169500	0	0	0	1273
2016	[96136] SWD;WOLFCAMP-CISCO	Oct	244343	0	0	0	1571
2016	[96136] SWD;WOLFCAMP-CISCO	Nov	306997	0	0	0	1650
2016	[96136] SWD;WOLFCAMP-CISCO	Dec	272054	0	0	0	1621
2017	[96136] SWD;WOLFCAMP-CISCO	Jan	283754	0	0	0	1495
2017	[96136] SWD;WOLFCAMP-CISCO	Feb	249049	0	0	0	1578
2017	[96136] SWD;WOLFCAMP-CISCO	Mar	307938	0	0	0	1537
2017	[96136] SWD;WOLFCAMP-CISCO	Apr	303742	0	0	0	1510
2017	[96136] SWD;WOLFCAMP-CISCO	May	280058	0	0	0	1313
2017	[96136] SWD;WOLFCAMP-CISCO	Jun	270448	0	0	0	1288
2017	[96136] SWD;WOLFCAMP-CISCO	Jul	177360	0	0	0	1145
2017	[96136] SWD;WOLFCAMP-CISCO	Aug	307109	0	0	0	1400

## **Goetze, Phillip, EMNRD**

---

**From:** Goetze, Phillip, EMNRD  
**Sent:** Friday, September 1, 2017 4:09 PM  
**To:** Mike Pippin (mike@pippinllc.com)  
**Cc:** Jones, William V, EMNRD; Chavez, Carl J, EMNRD; Sanchez, Daniel J., EMNRD; Inge, Richard, EMNRD; Dade, Lewis (Randy); Griswold, Jim, EMNRD; McMillan, Michael, EMNRD  
**Subject:** IPI Request for the Federal T SWD No. 1  
**Attachments:** Federal T SWD # 1 WD.PDF; Federal T SWD #1 BLM completion.pdf; SWD-1135.pdf

RE: Federal T SWD No. 1 (API 30-015-26404); SWD-1135

Mr. Pippin:

The Division has considered Limerock's alternative proposal for a limited pressure increase following consideration of the report prepared by HollyFrontier for the IPI application. The Division will not approve any partial increase in the maximum surface injection pressure without hearing due to the requirements of the UIC Program for the operation of Class I (Non-haz) wells. Additionally, the well file and associated administrative orders were reviewed for this decision and to satisfy the requirements of the Division's Primacy Agreement. This review identified issues that also supported the denial and possible noncompliance of the well's operation under its injection authority.

The review of the well file finds evidence that the perforations in the Wolfcamp from 6868 feet to 7360 feet are not within the improved injection interval (7400 feet to 8200 feet) and were not squeezed off prior to the commencement of injection [see attached well diagram]. The current well file information available to OCD shows the completion of this interval in 1993, followed by a TA status with the CIBP placed at 6800 feet. The re-entry effort by Devon for the conversion to a disposal well in 2008 makes no mention of these perforations except that they are open as described in the submittal of the 3160-4 Well Completion Form (dated September 29, 2008) to the BLM [see attached copy]. Additionally, there is no exception in the order record for the packer setting depth currently at 6789 feet. Therefore, the Division is requesting that Limerock review their sources that may show these perforations to be sealed off. If Limerock cannot provide sufficient evidence that these perforations are not accepting injection fluids, then this well will be in noncompliance of the order and will be recommended for an enforcement action.

Please contact me with any questions regarding this matter. PRG

**Phillip Goetze, PG**  
Engineering Bureau, Oil Conservation Division  
New Mexico Energy, Minerals and Natural Resources Department  
1220 South St. Francis Drive, Santa Fe, NM 87505  
Direct: 505.476.3466  
E-mail: [phillip.goetze@state.nm.us](mailto:phillip.goetze@state.nm.us)



**DEVON ENERGY PRODUCTION COMPANY LP**

Well Name: FEDERAL T #1		Field: NORTH ILLINOIS CAMP MORROW	
Location: 660' FNL & 990' FEL; SEC 12-T18S-R27E		County: EDDY	State: NM
Elevation: 3634' KB; 3618' GL		Spud Date: 6/28/90	Compl Date: 9/13/90
API#: 30-015-26404	Prepared by: Norvella Adams	Date: 9/17/08	Rev:

**Current Schematic**  
L. Wolfcamp and Cisco SWD

**Formation Tops**

Morrow 8,600-10,260'  
 Atoka 8,230'- 9,700'  
 Upper Wolfcamp 8,400' - 7,200'  
 Abo 6,600' - 6,200'  
 Yeso 3,300' 0 3,900'  
 San Andres 2,000' - 2,800'  
 Queen 1,450' - 1,650'

17-1/2" Hole  
 13-3/8", 888, LTC, @ 472'  
 Cmt'd w/450 Sx. Circ to surface

12-1/4" Hole  
 8-9/8", J65, 329, STC, @ 2,589'  
 Cmt'd w/800 Sx. Circ to surface

SWD-1135 approved an injection zone from 7400 feet to 8200 feet with a packer located within 100 feet of the top of the injection interval

3-1/2", 9.3 #, N80, Injection tubing @ 6789'

5-1/2" IPC Packer @ 6,789'

WOLF CAMP (8/21/93)  
6,868' - 7,038'

WOLF CAMP (8/18/93)  
7,092' - 7,097'; 7,120' - 7,146'

WOLF CAMP (8/16/93)  
7,330' - 7,340'; 7,350' - 7,360'

Following their addition in 1993 when the well was assessed for production; there is no record of these perforations being squeezed off.

SWD Perforations:

CISCO (8/1/93)  
7,695' - 7,695'

CISCO (7/30/93)  
7,760' - 7,768'

CISCO (7/28/93)  
7,780' - 7,788'

CISCO (7/25/93)  
7,832' - 7,840'

CISCO (7/22/93)  
8,034' - 8,042'  
8,035' - 8,050'

Frac 7788'-7840' with 4500 gals 15% Spearhead acid and 110,258 gals Spectra Star 2500 + 108,750 @ 100% 20/40 White sand.

Frac 7893'-8060' with 5040 gals 15% HCl acid and 120,372 gals Spectra Star 2500 + 187,552 @ 100% 20/40 White sand.

35' cement, 9,008' PBD  
 CIBP @ 9,040' (7/21/93)

4" Liner top @ 9,055'


7-7/8" Hole  
 6-1/2", N80, 178, LTC, @ 9,473'  
 Cmt'd w/430 Sx

CIBP @ 9,980' (7/19/93)

MORROW (9/14/90)  
10,008' - 10,014'  
10,038' - 10,064'

4-3/4" Hole  
 4" 10.469, L80 Liner @ 9,055' - 10,141'  
 Cmt'd w/80 Sx

10,100' PBD

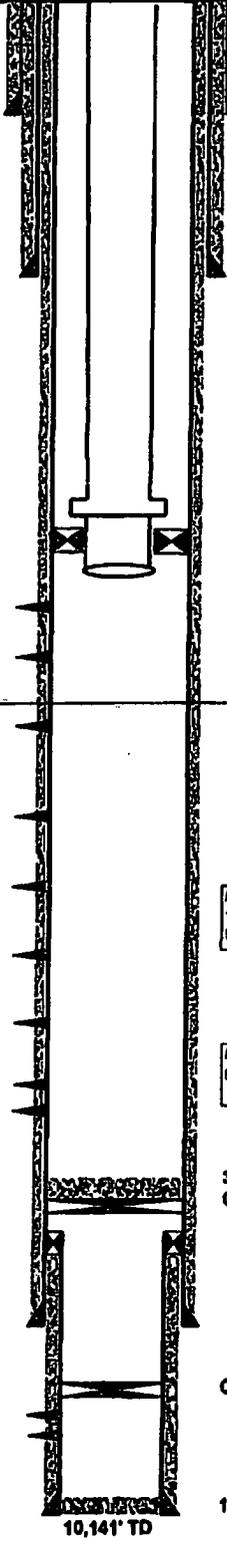

10,141' TD



OCT 06 2008  
OCD-ARTESIA

WELL COMPLETION OR RECOMPLETION REPORT AND LOG

1a. Type of Well  Oil Well  Gas Well  Dry  Other SWD- Order 1135  
 b. Type of Completion  New Well  Work Over  Deepen  Plug Back  Diff. Resrv.,  
 Other

2. Name of Operator: **DEVON ENERGY PRODUCTION COMPANY, LP**

3. Address: **20 North Broadway, Oklahoma City, OK 73102-8260**  
 3a. Phone No (include area code): **405-552-8198**

4. Location of Well (Report location clearly and in accordance with Federal requirements)  
 At Surface: **660 FNL 990 FEL**  
 At top prod. interval reported below  
 At total Depth

5. Lease Serial No: **NM-42410**  
 6. If Indian, Allottee or Tribe Name  
 7. Unit or CA Agreement Name and No  
 8. Lease Name and Well No: **Federal T 1**  
 9. API Well No: **30-015-26404-0052**

10. Field and Pool, or Exploratory: **L. Wolfcamp and Cisco 96136**  
 11. Sec. T, R, M, on Block and Survey or Area: **12 18S 27E**  
 12. County or Parish: **Eddy** 13. State: **NM**

14. Date Spudded: **6/28/1990** 15. Date T D Reached: **8/25/1990** 16. Date Completed: **9/15/08 - SWD 9/13/90 orig empl**  
 D & A  Ready to Prod. 17. Elevations (DR, RKB, RT, GL): **3634' KB; 3618' GL**

18. Total Depth: MD **7800'** 19. Plug Back T D: MD **6142'** 20. Depth Bridge Plug Set: MD **6177'**  
 TVD TVI

21. Type Electric & Other Mechanical Logs Run (Submit copy of each)  
 22. Was well cored?  No  Yes (Submit analysis)  
 Was DST run?  No  Yes (Submit report)  
 Directional Survey?  No  Yes (Submit copy)

OLL-MGRD, SDL, DSN (original logs)

23. Casing and Liner Record (Report all strings set in well)

Hole Size	Size/Grade	Wt (#/R)	Top (MD)	Bottom (MD)	Stage Cementer Depth	No of Sks & Type Cement	Slurry Vol (BBL)	Cement Top*	Amount Pulled
17-1/2"	13-3/8"LT&C	68		472'		450 Sx		Surf	
12 1/4"	8-5/8"J55	32		2589'		900 Sx		Surf	
7-7/8"	5-1/2"LT&C	17		9473'		430 Sx		Surf	
4 3/4"	4" / L60	10.46		10,141'		80 Sx		9055'	

24. Tubing Record

Size	Depth Set (MD)	Packer Depth (MD)	Size	Depth Set (MD)	Packer Depth (MD)	Size	Depth Set (MD)	Packer Depth (MD)
3 1/2" IPC	6789'	6789'						

25. Producing Intervals

Formation	Top		Bottom		Perforated Interval	Size	No. Holes	Perf Status
	Top	Bottom	Top	Bottom				
Wolfcamp	6888'	7360'	6888'	7360'	6888'-7360'		140	Open for SWD
Cisco	7893'	7840'	7893'	7840'	7893'-7840'		228	Open for SWD
Morrow	10,008'	10,054'	10,008'	10,054'	10,008'-10,054'			Abandoned

27. Acid, Fracture, Treatment, Cement Squeeze, Etc.

Depth Interval	Amount and Type of Material
7893-8060'	Frac - 6040 gals 15% HCl acid and 120,372 gals Spectra Star 2500 + 167,552 # 100% White 20/40 sand.
7758-7840'	Frac - 4500 gals 15% Spearhead acid and 119,255 gals Spectra Star 2500 + 108,760 # 100% White 20/40 sand.

28. Production - Interval A

Date First Produced	Test Date	Hours Tested	Test Production	Oil BBL	Gas MCF	Water BBL	Oil Gravity Corr. API	Gas Gravity	Production Method
NA		24	→						
Choke Size	Tbg Press Flwg SI	Csg Press	24 Hr Rate	Oil BBL	Gas MCF	Water BBL	Gas · Oil Ratio	Well Status	
			→				#DIV/0!		

28a. Production - Interval B

Date First Produced	Test Date	Hours Tested	Test Production	Oil BBL	Gas MCF	Water BBL	Oil Gravity Corr. API	Gas Gravity	Production Method

ACCEPTED FOR RECORD  
 /S/ DAVID R. GLASS  
 SEP 29 2008  
 DAVID R. GLASS  
 PETROLEUM ENGINEER

Choke Size	Tbg. Press Flwg SI	Csg Press	24 Hr Rate	Oil BBL	Gas MCF	Water BBL	Gas : Oil Ratio	Well Status
------------	--------------------	-----------	------------	---------	---------	-----------	-----------------	-------------

(See instructions and spaces for additional data on reverse side)

28b Production - Interval C

Date First Produced	Test Date	Hours Tested	Test Production	Oil BBL	Gas MCF	Water BBL	Oil Gravity Corr. API	Gas Gravity	Production Method
Choke Size	Tbg. Press. Flwg SI	Csg Press	24 Hr Rate	Oil BBL	Gas MCF	Water BBL	Gas : Oil Ratio	Well Status	

28c Production - Interval D

Date First Produced	Test Date	Hours Tested	Test Production	Oil BBL	Gas MCF	Water BBL	Oil Gravity Corr. API	Gas Gravity	Production Method
Choke Size	Tbg. Press. Flwg SI	Csg Press	24 Hr. Rate	Oil BBL	Gas MCF	Water BBL	Gas : Oil Ratio	Well Status	

(See instructions and spaces for additional data on reverse side)

29. Disposition of Gas (Sold, used for fuel, vented, etc)

30 Summary of Porous Zones (Include Aquifers).

Show all important zones of porosity and contents thereof, Cored intervals and all drill-stem tests, including depth interval tested, cushion used, time tool open, flowing and shut-in pressures and recoveries.

31 Formation (Log) Markers

Formation	Top	Bottom	Descriptions, Contents, etc	Name	Top
					Meas Depth
				Yates	476'
				Queen	1218'
				Grayburg	1572'
				San Andres	2072'
				Tubb	4824'
				Abo	6016'
				Wolfcamp	7682'
				Cisco	8912'
				Strawn	9513'
				Atoka	9828'
				Morrow	9928'
				Morrow Clastics	9965'
				Lower Morrow	10104'


32. Additional remarks (include plugging procedure).

33 Indicate which items have been attached by placing a check in the appropriate box

- Electrical/Mechanical Logs (1 full set req'd)    
 Geologic Report    
 DST Report    
 Directional Survey  
 Sundry Notice for plugging and cement verification    
 Core Analysis    
 Other    
Wellbore Schematic

34. I hereby certify that the foregoing and attached information is complete and correct as determined from all available records (see attached instructions)

Name (Please print) Norvella Adams Title Sr. Staff Engineering Technician

Signature  Date 8/17/2008

Title 18 U.S.C Section 1001 and Title 49 U.S.C. Section 1212, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

UNITED STATES  
DEPARTMENT OF THE INTERIOR  
BUREAU OF LAND MANAGEMENT

FORM APPROVED  
OMB NO. 1004-0137  
EXPIRES: March 31, 2007

SUNDRY NOTICES AND REPORTS ON WELLS

Do not use this form for proposals to drill or to re-enter an abandoned well. Use Form 3160-J (APD) for such proposals

SUBMIT IN TRIPLICATE - Other instructions on page 2

1. Type of Well <input type="checkbox"/> Oil Well <input type="checkbox"/> Gas Well <input checked="" type="checkbox"/> Other SWD conversion. Admin Order SWD-1135		5. Lease Serial No NM-42410
2. Name of Operator DEVON ENERGY PRODUCTION COMPANY, LP		6. If Indian, Alutias or Tribe Name
3a. Address 20 North Broadway, Oklahoma City, OK 73102	3b. Phone No. (include area code) 405-652-8198	7. Unit or CA Agreement Name and No.
4. Location of Well (Footage, Sec., T., R., M., or Survey Description) 660 FNL 990 FEL A 12 18S 27E		8. Well Name and No Federal T 1
		9. API Well No 30-016-26404
		10. Field and Pool, or Exploratory Area L Wolfcamp and Cisco
		11. County or Parish, State Eddy NM

12. CHECK APPROPRIATE BOX(es) TO INDICATE NATURE OF NOTICE, REPORT OR OTHER DATA

TYPE OF SUBMISSION	TYPE OF ACTION			
<input type="checkbox"/> Notice of Intent	<input type="checkbox"/> Addize	<input type="checkbox"/> Deepen	<input type="checkbox"/> Production (Start/Resume)	<input type="checkbox"/> Water Shut-Off
<input checked="" type="checkbox"/> Subsequent Report	<input type="checkbox"/> Alter Casing	<input type="checkbox"/> Fracture Treat	<input type="checkbox"/> Reclamation	<input type="checkbox"/> Well Integrity
<input type="checkbox"/> Final Abandonment Notice	<input type="checkbox"/> Casing Repair	<input type="checkbox"/> New Construction	<input type="checkbox"/> Recomplete	<input type="checkbox"/> Other
	<input type="checkbox"/> Change Plans	<input type="checkbox"/> Plug and Abandon	<input type="checkbox"/> Temporarily Abandon	
	<input checked="" type="checkbox"/> Convert to Injection	<input type="checkbox"/> Plug Back	<input type="checkbox"/> Water Disposal	

13 Describe Proposed or Completed Operations (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work and approximate duration thereof. If the proposal deepens directionally or recompletes horizontally, give subsurface location and measured and true vertical depths of all pertinent markers and zones. Attach the Bond under which the work will be performed or provide the Bond No. on file with BLM/BIA. Required subsequent reports shall be filed within 30 days following completion of the involved operations. If the operation results in a multiple completion or recompletion in a new interval, a Form 3160-4 shall be filed once testing has been completed. Final Abandonment Notices shall be filed only after all requirements, including reclamation, have been completed, and the operator has determined that the site is ready for final inspection.)

Converted to SWD. Administrative Order SWD-1135  
 8/04/08 RU unit. ND wellhead and NU BOP. TIH with bit and drill collars.  
 8/05/08 Drill CIBP at 6800' and 7078'.  
 8/08/08 Drilled through cement at 7525', CIBP at 7300' and cement at 7560' and CIBP at 7595'.  
 8/07/08 Ran step rate test; pumped 50 bbls at 1/2 bbl/min - 0# psi, pumped 50 bbls at 1 bbl/min - 20# psi, pumped 50 bbls at 2 bbls/min - 75# psi, pumped 50 bbls at 3 bbls/min - 170# psi, pumped 50 bbls at 4 bbls/min - 250 psi.  
 8/08/08 Trucked in and established injection in the Wolfcamp at 160 BWPD at 170 psi.  
 8/11/08 Drilled cement retainers at 7745', and 7780'.  
 8/12/08 Drilled cement retainer at 7820' and 8000'. Circulate hole and TOH with tubing and bit.  
 8/13/08 Perforate Cisco from 7883' - 8060', total 140 holes. TIH and set packer at 7888'. Frac with 5,040 gals 15% HCl + 120,372 gals Spectra Star 2500 + 167,552 # 20/40 White sand.  
 8/14/08 TIH with retrievable tool and latch onto packer. Release packer and TOOH with packer and tubing. RU wireline and perforate Cisco from 7758'-7840'; 228 total holes  
 8/15/08 TIH with packer and set at 7582'. NU frac valve.  
 8/18/08 Frac 7758'-8080' with 4500 gals 15% Spearhead acid + 119,255 gals Spectra 2500 + 108,750 # 20/40 100% White sand. RD.  
 8/18/08 Release packer. TOOH with packer and tubing  
 8/20/08 TIH with baller and bailed sand. Bailed sand to 8480'. TOOH with tubing. ND BOP and NU flange. Waiting on tubing.  
 8/15/08 TIH with packer and tubing. Set packer at 6789'. ND BOP and NU tree. Ran MIT test to 500 # for 30 minutes - ok, notified Mike Bralcher with OCD TOOH with tubing. RIH with 3 1/4" IPC tubing and set at 6789'. Injection line installation in progress.

14. I hereby certify that the foregoing is true and correct  
 Name: Norveta Adams Title: Sr. Staff Engineering Technician  
 Signature: [Signature] Date: 8/17/2008

ACCEPTED FOR RECORDS SPACE FOR FEDERAL OR STATE OFFICE USE

Approved by: /S/ DAVID R. GLASS Title: [Blank] Date: [Blank]  
 SEP 29 2008  
 Conditions of approval, if any are attached. Approval of this notice does not warrant or certify that the applicant holds legal or equitable title to those lands in the public lands lease which would entitle the applicant to conduct operations thereon.  
 DAVID R. GLASS  
 PETROLEUM ENGINEER  
 Office: [Blank]

**DEVON ENERGY PRODUCTION COMPANY LP**

Well Name: FEDERAL T #1		Field: NORTH ILLINOIS CAMP MORROW	
Location: 660' FNL & 990' FEL; SEC 12-T18S-R27E		County: EDDY	State: NM
Elevation: 3634' KB; 3618' GL		Spud Date: 6/28/90	Compl Date: 9/13/90
API#: 30-015-26404	Prepared by: Norvella Adams	Date: 9/17/08	Rev:

**Current Schematic  
L. Wolfcamp and Cisco SWD**

Formation Tops
Morrow 9,600-10,250'
Atoka 9,230' - 9,700'
Upper Wolfcamp 6,400' - 7,200'
Abo 6,600' - 6,200'
Yeso 3,300' - 3,600'
San Andres 2,000' - 2,800'
Queen 1,450' - 1,650'

17-1/2" Hole  
8-5/8" J55, 325, LTC @ 472'  
 Cmt'd w/450 Sx. Circ to surface

12-1/4" Hole  
8-5/8" J55, 325, STC @ 2,689'  
 Cmt'd w/900 Sx. Circ to surface

**3-1/2", 8.3 #, N80, Injection tubing @ 6789'**

**5-1/2" IPC Packer @ 6,789'**

**WOLFCAMP (8/21/93)**  
 6,889' - 7,038'

**WOLFCAMP (8/18/93)**  
 7,092' - 7,097'; 7,120' - 7,146'

**WOLFCAMP (8/16/93)**  
 7,330' - 7,340'; 7,350' - 7,360'

**SWD Perforations:**  
**CISCO (8/1/93)**  
 7,685' - 7,695'

**CISCO (7/30/93)**  
 7,760' - 7,768'

**CISCO (7/28/93)**  
 7,790' - 7,798'

**CISCO (7/25/93)**  
 7,932' - 7,940'

**CISCO (7/22/93)**  
 8,034' - 8,042'  
 8,055' - 8,060'

**Frac 7765'-7940' with 4500 gals 15% Spearhead acid and 118,285 gals Spectra Star 2500 + 108,750 @ 100% 20/40 White sand.**

**Frac 7693'-8060' with 6040 gals 15% HCl acid and 120,372 gals Spectra Star 2500 + 107,632 @ 100% 20/40 White sand.**

**4" Liner top @ 9,065'**

7-7/8" Hole  
5-1/2", N80, 175, LTC @ 9,473'  
 Cmt'd w/430 Sx


**35' cement. 9,006' PBD  
 CIBP @ 9,040' (7/21/93)**

**MORROW (8/14/90)**  
 10,008' - 10,014'  
 10,038' - 10,064'

**CIBP @ 9,060' (7/19/93)**

4-3/4" Hole  
**4" 10.465, L80 Liner @ 9,065' - 10,141'**  
 Cmt'd w/80 Sx

**10,100' PBD**

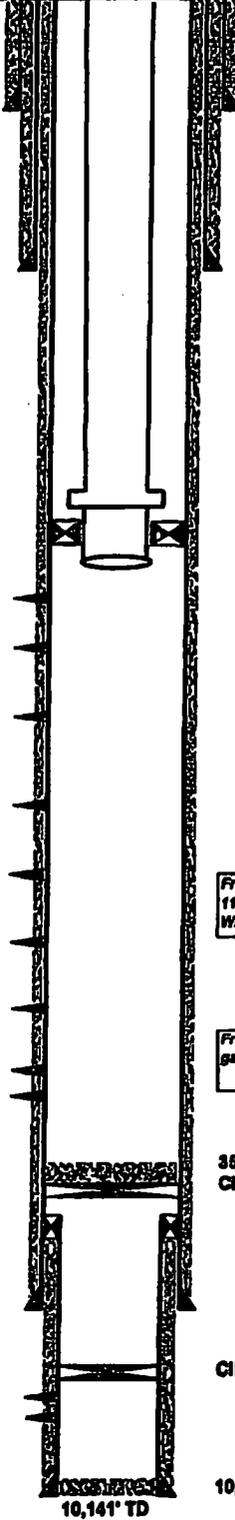

10,141' TD



**C-108 Review Checklist:** Received \_\_\_\_\_ Add. Request: \_\_\_\_\_ Reply Date: \_\_\_\_\_ Suspended: \_\_\_\_\_ [Ver 15]

**ORDER TYPE:** WFX / PMX / SWD Number: \_\_\_\_\_ Order Date: \_\_\_\_\_ Legacy Permits/Orders: \_\_\_\_\_

Well No. 1 Well Name(s): Federal T SWD

API: 30-0 15-26404 Spud Date: 6/29/1950 New or Old: N (UIC Class II Primacy 03/07/1982)

Footages 660 FNL  
990 FEL Lot \_\_\_\_\_ or Unit A Sec 12 Tsp 18S Rge 27E County Edgy

General Location: 2.9 miles East/Antesra Pool: SWJWOLFAMP -  
LIME ROCK Pool No.: 96136

BLM 100K Map: Antesra Operator: RESOURCES II - A OGRID: 277554 Contact: Mike Pippin's Agent

COMPLIANCE RULE 5.9: Total Wells: 570 Inactive: 9 Fincl Assur: OK Compl. Order? N/A IS 5.9 OK? Y Date: 10-20-2017

WELL FILE REVIEWED  Current Status: Active (Updating Permit to match Perforations)

WELL DIAGRAMS: NEW: Proposed  or RE-ENTER: Before Conv.  After Conv.  Logs in Imaging: \_\_\_\_\_

Planned Rehab Work to Well: \_\_\_\_\_

Well Construction Details		Sizes (in) Borehole / Pipe	Setting Depths (ft)	Stage Tool	Cement Sx of Ct	Cement Top and Determination Method
Planned ___ or Existing ___ Surface		<u>17 1/2 / 13 7/8</u>	<u>472'</u>		<u>450</u>	<u>SURFACE / VISUAL</u>
Planned ___ or Existing ___ Interm/Prod		<u>12 1/2 / 8 5/8</u>	<u>2589'</u>		<u>900</u>	<u>SURFACE / VISUAL</u>
Planned ___ or Existing ___ Interm/Prod		<u>7 7/8 / 6 1/2</u>	<u>9473'</u>		<u>430</u>	<u>SURFACE / VISUAL</u>
Planned ___ or Existing ___ Prod/Liner						
Planned ___ or Existing ___ Liner						
Planned ___ or Existing ___ OH / PERF		<u>6868'</u>				
<b>Injection Lithostratigraphic Units:</b>				<b>Completion/Operation Details:</b>		
Adjacent Unit: Litho. Struc. Por.	Depths (ft)	Injection or Confining Units	Tops	Drilled TD	<u>10141' PBD 9005'</u>	
Confining Unit: Litho. Struc. Por.		<u>WC (647)</u>	<u>6776</u>	NEW TD	NEW PBTD _____	
Proposed Inj Interval TOP:		<u>CS (6260)</u>	<u>7682</u>	NEW Open Hole <input type="radio"/> or NEW Perfs <input checked="" type="radio"/>	Tubing Size <u>3 1/2</u> in. Inter Coated? <u>X</u>	
Proposed Inj Interval BOTTOM:				Proposed Packer Depth	<u>6768</u> ft	
Confining Unit: Litho. Struc. Por.				Min. Packer Depth	<u>6768</u> (100-ft limit)	
Adjacent Unit: Litho. Struc. Por.				Proposed Max. Surface Press.	<u>1550</u> psi	
<b>AOR: Hydrologic and Geologic Information</b>				Admin. Inj. Press.	<u>1374</u> (0.2 psi per ft)	
<b>POTASH:</b> R-111-P _____ Noticed? _____ BLM Sec Ord <input type="radio"/> WIPP <input type="radio"/> Noticed? _____ Salt/Salado T: _____ B: _____ <b>NW:</b> Cliff House fm _____						
<b>FRESH WATER:</b> Aquifer _____ Max Depth _____ <b>HYDRO AFFIRM STATEMENT By Qualified Person</b> <input checked="" type="radio"/>						
NMOSE Basin: _____ CAPITAN REEF: thru adj NA No. Wells within 1-Mile Radius? _____ FW Analysis _____						
Disposal Fluid: Formation Source(s) <u>SAN ANTONIO</u> Analysis? <u>Y</u> On Lease <input type="radio"/> Operator Only <input checked="" type="radio"/> or Commercial <input type="radio"/>						
Disposal Int: Inject Rate (Avg/Max BWPD): <u>4.3554/124</u> Protectable Waters? <u>N/A</u> Source: _____ System: Closed or Open _____						
<b>HC Potential:</b> Producing Interval? <u>N/A</u> Formerly Producing? <u>Y</u> Method: Logs/DST/P&A/Other <u>Production test</u> 2-Mile Radius Pool Map <input type="radio"/>						
<b>AOR Wells:</b> 1/2-M Radius Map? <u>Y</u> Well List? <u>Y</u> Total No. Wells Penetrating Interval: <u>2</u> Horizontals? <u>N/A</u>						
Penetrating Wells: No. Active Wells <u>2</u> Num Repairs? _____ on which well(s)? _____ Diagrams? _____						
Penetrating Wells: No. P&A Wells <u>0</u> Num Repairs? _____ on which well(s)? _____ Diagrams? _____						
<b>NOTICE:</b> Newspaper Date <u>October 3, 2017</u> Mineral Owner <u>BLM</u> Surface Owner <u>BLM</u> N. Date <u>October 3, 2017</u>						
<b>RULE 26.7(A):</b> Identified Tracts? <u>Y</u> Affected Persons: <u>Apache, mcsurhughes@gmail.com</u> N. Date <u>October 3, 2017</u>						

Order Conditions: Issues: \_\_\_\_\_

Add Order Cond: \_\_\_\_\_