


Kodaik Energy Inc.

CASING & CEMENTING REPORT

Type of String: Production Date: 3/11/2008
Well Name: Kodak Sofia #2 30-059-20486
Location: 36-26N-29E Make of Casing: IPSCO
Size: 4 1/2" Wt.: 10.50 Grade: J55 Thread: LT&C Cplg.: Rge.: 0

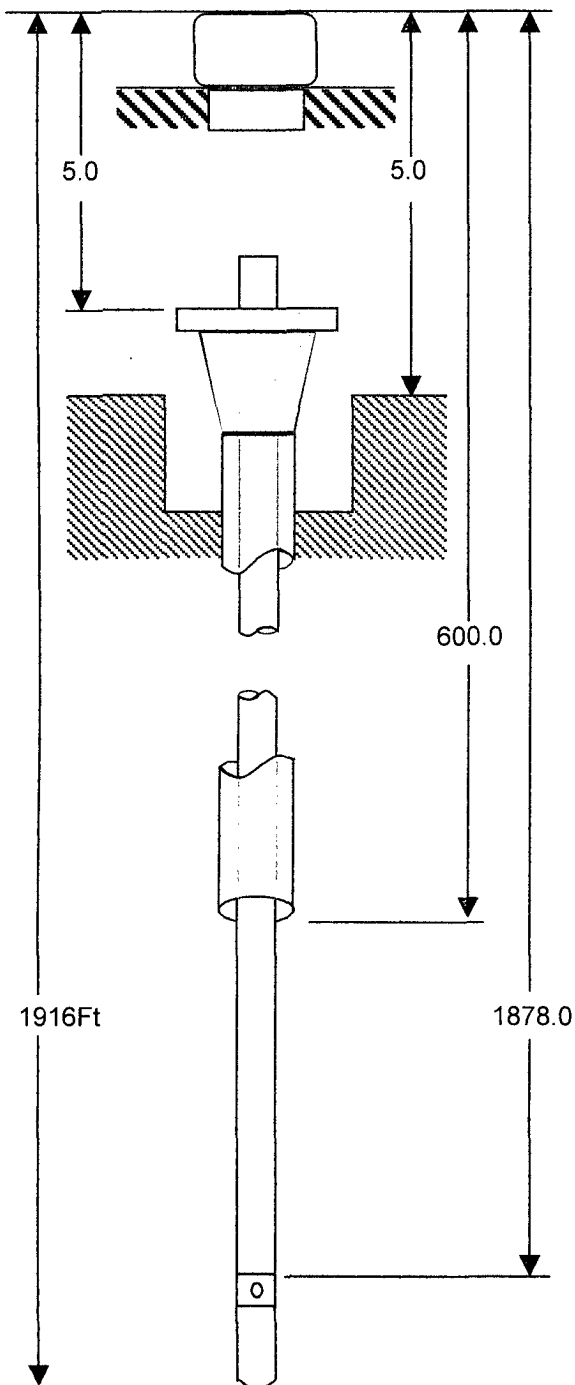


Kelly Bushing Elevation: 5.0 ft
Corrected ground Elevation: 6178Ft ft
Actual Total Depth: 1915Ft ft
Plug Back Depth: 1878.0 ft
Casing Set Depth: 1916Ft ft
Casing Bowl Type: LM70,7"x4 1/2" 2000#
(mm X mm / WP): 0
Float Shoe: 1916
Float Collar: 1878
Guide Shoe:
Baffle Collar:
No. of Centralizers: 0
No. of Scratchers: 0
Joints Welded:
Joints Thread Locked: 3
Time Started Cementing: 540pm
Time Plug on Bottom: 640pm
Bump Pressure: 180
Power Tong Company: San Jaun Service,LLC

Cementing Company: Halliburton
Cementer: Bob Letkeman
Tonnes of Cement Used: 200 sacks,
Type of Cement: Tuned Light [tm] WG-17-GELLING
AGENT POLY-E-FLAKE GILSONITE CI
Additives:
Top fill cement : 21.5 bbl,100sacks.

Remarks: Pump 120% over hole size,

Signed by: Ed Scott

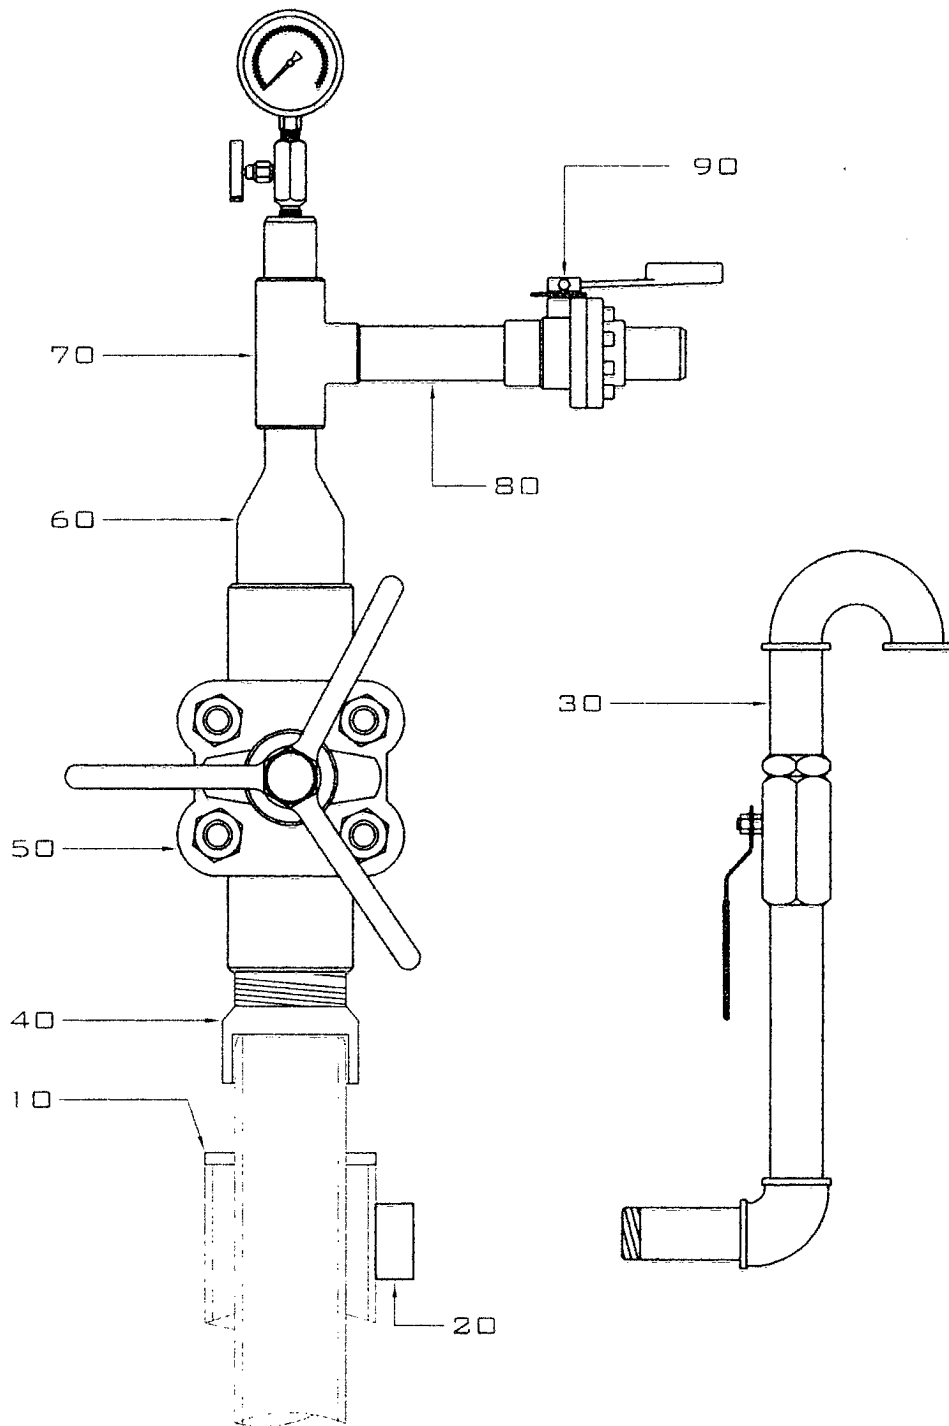

	DO NOT SCALE		SHEET		A01		Wood Group Pressure Control Canada Inc	
DRAWN BY	DATE		1 OF 1		0		Suite 300, 1015 - 4th Street SW	
Allan Andringa		03/18/08					Calgary, Alberta T2R 1J4	
QUOTE NUMBER							KODIAK PETROLEUM	
3526								
REFERENCE								