District I 1625 N. French Dr., Hobbs, NM 88240 District II 1361 W. Grand Avenue, Artesia, NM 88210 District III

1000 Rio Brazos Road, Aztec, NM 87410

District IV

March 3, 2011

State of New Mexico Energy Minerals and Natural Resources

Form C-101 June 16, 2008

Oil Conservation Division 1220 South St. Francis Dr. Santa Fe. NM 87505 Submit to appropriate District Office

☐ AMENDED REPORT

1220 S. St. Fr	rancis Dr., S	Santa Fe, NM	87505			Santa	Fe, N	M 875	05				•
AP	PLICA'	TION FO	OR PERM	IT TO	DRII	LL, RE	E-EN	ΓER,	DEEPI	EN, PLUGB	ACK,	OR A	DD A ZONE
		,	Operator Name	and Addre	SS					180514	² OGRÍD	Number	
1001 Louisiar Houston, Texa	El Paso E&P Company, L.P. 1001 Louisiana, Room 9.028TP Houston, Texas 77002							30 - 607 - 2098 7					7
					3	Property 1 VPR E	Name E		7.20.	100 - 27			l No.
	24648 2	.7521					_			10 D	1 D12		
	_	· P	roposed Pool 1							·· Prope	osed Pool 2	_	
					7	Surfac	e Loc	ation					
UL or lot no.	Section	Township	Range	Lot le	dn	Feet fro		North/S	outh line	Feet from the	East/We	st line	County
A	5	T31N	R19E	A		200			orth	157	Eas	t j	Colfax
III on let no	Castian	Township		posed Bo		Hole Lo Feet fro			rent Fron	n Surface	Fort/W/o	at line	County
UL or lot no.	Section	Township	Range	Lori	uii	reet 110	in the	Noruvs	oun ine	Feet from the	East/We	stime	County
					Addit	ional V		ıforma					
	Type Code N	1	12 Well Type Co	de		13 Cable Rotar	-		14	Lease Type Code		15 Grou	nd Level Elevation 8521'
	fultiple		17 Proposed Dep	th		18 Form				19 Contractor		2	⁰ Spud Date
Y	es		2740'	21	R	aton-V	/erme	io		Pence		Marc	ch 10, 2011
		T		²¹ Prop	osed	Casing	g and	Cemer	nt Progr	am			
Hole S	ize	Casir	ng Size	Casing	weight	/foot	Setting Depth		Sacks of Ce	ment	nt Estimated TOC		
11'			525"		2.4			330	"	100		0	
7.87	5"	5	5"		15.5			2740		370		0	
											and and		
													1
²² Describe t	he proposed	d program. If	this application ram, if any. Us	is to DEEF	PEN or I	PLUG BA	CK, giv	e the dat	a on the pr	esent productive z	one and pr	oposed 1	new productive zone.
. Describe the	blowout pr	evention prog	iaiii, ii aiiy. Os	c additiona	i silects	II IICCCSS	uy.) pri me minus	Branch and
												IJ	
See attac	hed pro	cedure.										ŗ,	(J)
												ran Nati	بر تَ
											. ;	N.	
23			 								·		
best of my kn			given above is	true and cor	mplete t	to the			OIL C	ONSERVAT	TON D	ivisi	ON
	~ ·												
Signature: Maria D. Dones					Approved by:								
Printed name:					Title:		Ale	TOINE OF	IPFR'	vier	G/		
Maria S. Gon							,	i.		oiriui di	jper	AIGL	/N
Title:							Appro	val Date:	/	E	xpiration I	Date:	
Sr. Regulator	y Analyst							3/4/	2011		3/	4/2	0/3
E-mail Addre	ss:							/			/	-1	
maria.gomez(@elpaso.co	m											
Date:			Phone:				Condit	ions of A	pproval Att	ached			

713-420-5038/832-683-0361 cell

DRILLING PROGRAM

CASING PROGRAM

•								
	SIZE	INTERVAL	WT.	GR:	, CPLG.	BURST	COLLAPSE	TENSION
		The state of the s						
CONDUCTOR	13-3/8"	0' - 20	48	H-40	LTC	1730	770	541K
		and the second s					and the second	
SURFACE	8-5/8"	0' - 330	24.00	J-55	LTC	2950	1370	244K
				,				and the second second
PRODUCTION	5-1/2"	0' - TD	15.50	J-55	LTC	4810	4040	248K

CEMENT PROGRAM	FT: OF FILL	DESCRIPTION	SÁCKS	EXCESS	WEIGHT	YIELD
SURFACE	330	CBMCEM & FW	100	40%	14.0 ppg	1.62
PRODUCTION	TD to Surf	Trinidad Hot Blend + LGC-35 CBMI +	370	20%	12.50	2.12
	8 3	Poly-E-Flake + Barazan + Fresh Water				react and the second of the second
				The state of the s	The Reserved	A CONTRACTOR OF THE CONTRACTOR

FLOAT EQUIPMENT & CENTRALIZERS

SURFACE	One centralizer every joint to surface.
PRODUCTION	Texas pattern float shoe and float collar. Two centralizers per joint for first 5 joints, then one every other joint to surface casing.


PROJECT ENGINEER: Mike Granger

CASED HOLE SUPERVISOR: Bryan Olmstead

OPERATIONS MANAGER: Mike Vennes



Drilling Schematic

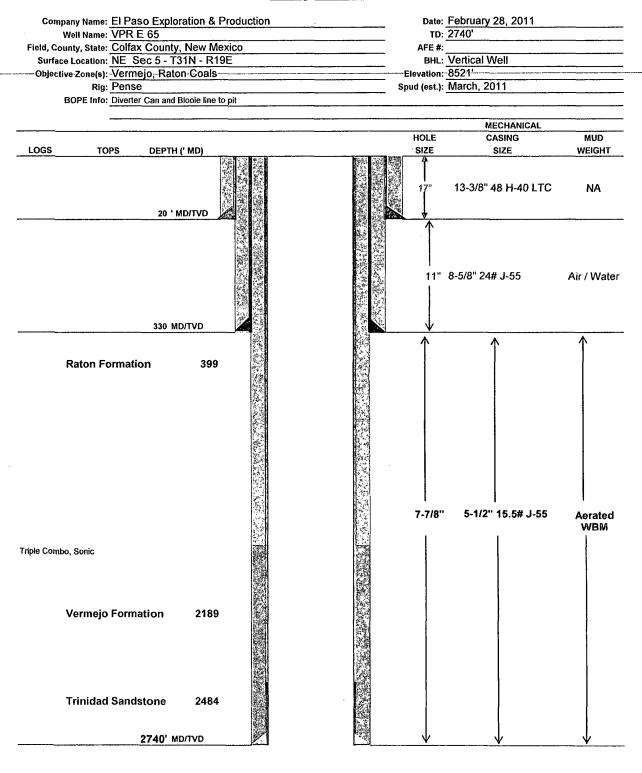

CASING:

	Hole Size (in)	Csg Size (in)	Wt (ppf)	Grade	Coupling
<u>+</u> 330	11"	8-5/8"	24	J-55	STC
<u>+</u> 2740	7-7/8"	5-1/2"	15.5	J-55/N-80	LTC

CEMENT:

Surface:

			CEMENT DESIG	N		
Slurry	Weight (ppg)	TOC (ft)) BOC (ft) Slurr		Cmt Req'd	Comment
Lead	13.5	. 0	230	25.4 bbls	90 sks	Incl excess
Tail	14.0	230	330	13.5 bbls	50 sks	Bottom 100'
			Lead/Tail Slurn	У		
Lead/T CBMCEM (Trinidad Blend) - Lead CBMCEM (Trinidad Blend) - Tail Mix water				Fr	90 sks 50 sks esh water	

Production:

		(CEMENT DESIG	N				
Slurry	Weight (ppg)	TOC (ft)	BOC (ft)	OC (ft) Slurry Vol Cmt Reg'd Comment				
Lead/Tail	12.5	0	<u>+</u> 2740	139.1 bbls	370 sks	Circ to surf		
	Lead/Tail Slurry							
Trinidad Hot	Trinidad Hot Blend 370 sks							
LGC-35 CBMI (Gelling agent)				0.2 gal/bbl				
Poly-E-Flake (Lost circulation additive)				1.25 lbm/bbl				
Barazan D (Viscosifier)				0.62 lbm/bbl				
Mix water				Fresh water				

Proposed Summary of Operations VPR E 65

- 1. Drill 11" hole to +/-330' with air.
- 2. Set 8-5/8" surface casing and cement to surface with 100 sks of cement.
- 3. Drill 7-7/8" hole to 2,740' with air. Run open hole logs.
- 4. Set 5 ½" production casing to TD and cement to surface. Cement volumes calculated from open hole logs.
- 5. Perforate and stimulate the Vermejo and/or Raton Coals. Clean out wellbore and run production equipment.

District I 1625 N. French Dr., Hobbs, NM 88240 District II

State of New Mexico Energy, Minerals & Natural Resources Department

OIL CONSERVATION DIVISION

1220 South St. Francis Dr. Santa Fe, NM 87505

Form C-102 Revised July 16, 2010 Submit one copy to appropriate District Office

☐ AMENDED REPORT

1301 W. Grand Avenue, Artesia, NM 88210 District III 1000 Rio Brazos Rd., Aztec, NM 87410 District IV

1220 S. St. Francis Dr., Santa Fe, NM 87505

WEL	L LOCATION AND A	CREAGE DEDICATION PLAT				
¹ API Number	² Pool Code	³ Pool Name				
07-20987	96970	STUBBLEFIELD CANYON RATON - VERMEJO GAS				
y Code	⁵ Prope	rty Name	⁶ Well Number			
21	VERMEJO PARK RANCH VPR E 65					
		· · · · · · · · · · · · · · · · · · ·	9-1			

30-00 Property Cod 27521 OGRID No. Operator Name Elevation 180514 EL PASO E&P Company, L.P. 8521' ¹⁰ Surface Location North/South line UL or lot no. Lot Idn Feet from the Feet from the East/West line County Section Township Range NORTH 200 COLFAX T 31 N R 19 E 157 EAST A 11 Bottom Hole Location If Different From Surface Lot Idn Feet from the North/South line UL or lot no. Range Feet from the East/West line County Section Township ¹³ Joint or Infill 14 Consolidation Code 15 Order No. 12 Dedicated Acres

No allowable will be assigned to this completion until all interests have been consolidated or a non-standard unit has been approved by the division.

			1
16		200'	17 OPERATOR CERTIFICATION
		9/1	I hereby certify that the information contained herein is true and complete to the
	•	157'	best of my knowledge and belief, and that this organization either owns a working
		1.7.1.7	interest or unleased mineral interest in the land including the proposed bottom
	8		hole location or has a right to drill this well at this location pursuant to a contract
			with an owner of such a mineral or working interest, or to a voluntary pooling
		9	agreement or a compulsory pooling order heretofore entered by the division.
			Stray 10 A Boner 13/11/11
			Sparia J. 190 nez 03/01/11 Signature Date
	1	8	NA
			Maria S. Gomez Printed Name
	•		Printed Name
			Printed Name MOUTA GOVER C PL PASO COM E-mail Address
	!		E-mail Address
			19
			¹⁸ SURVEYOR CERTIFICATION
			I hereby certify that the well location shown on this plat was
LAT/LONG NAD83 (DMS)			plotted from field notes of actual surveys made by me or under
N 36°57'26.6"			my supervision, and that the same is true and correct to the
W 104°56'11.7"			
			best of my belief.
			December 9, 2010
			Date of Survey
			Signature and Seal of Professional Surveyor:
			s +1:11
			Bu Shilds
			Certificate Number NM LS NO. 5103

District I
1625 N. French Dr., Hobbs, NM 88240
District II
1301 W. Grand Avenue, Artesia, NM 88210
District III
1000 Rio Brazos Road, Aztec, NM 87410
District IV
1220 S. St. Francis Dr., Santa Fe, NM 87505

State of New Mexico Energy Minerals and Natural Resources Department Oil Conservation Division 1220 South St. Francis Dr. Santa Fe, NM 87505

For temporary pits, closed-loop systems, and below-grade tanks, submit to the appropriate NMOCD District Office.

For permanent pits and exceptions submit to the Santa Fe Environmental Bureau office and provide a copy to the appropriate NMOCD District Office.

Pit, Closed-Loop System, Below-Grade Tank, or Proposed Alternative Method Permit or Closure Plan Application

1 Toposta / Internative internet 1 of the of
Type of action: Permit of a pit, closed-loop system, below-grade tank, or proposed alternative method Closure of a pit, closed-loop system, below-grade tank, or proposed alternative method Modification to an existing permit Closure plan only submitted for an existing permitted or non-permitted pit, closed-loop system, below-grade tank, or proposed alternative method
Instructions: Please submit one application (Form C-144) per individual pit, closed-loop system, below-grade tank or alternative request
lease be advised that approval of this request does not relieve the operator of liability should operations result in pollution of surface water, ground water or the nvironment. Nor does approval relieve the operator of its responsibility to comply with any other applicable governmental authority's rules, regulations or ordinances.
1. OCDW // 100514
Operator: El Paso E&P Company, L.P. OGRID #: 180514
Address: 1001 Louisiana, Rm 2730D, Houston, Texas 77002
Facility or well name: VPR E-65
API Number: 30 - 00 7 - 20 98 7 OCD Permit Number:
U/L or Qtr/Qtr NENE Section 05 Township 31N Range 19E County: Colfax
Center of Proposed Design: Latitude36 57 26.6
Surface Owner: Federal State Private Tribal Trust or Indian Allotment
Temporary: Drilling Workover Permanent Emergency Cavitation P&A Lined Unlined Liner type: Thickness 20 mil LLDPE HDPE PVC Other String-Reinforced Liner Seams: Welded Factory Other Volume: bbl Dimensions: L x W x D Closed-loop System: Subsection H of 19.15.17.11 NMAC Type of Operation: P&A Drilling a new well Workover or Drilling (Applies to activities which require prior approval of a permit or notice of
intent) Drying Pad
Below-grade tank: Subsection I of 19.15.17.11 NMAC Volume: bbl Type of fluid: Tank Construction material: Secondary containment with leak detection Visible sidewalls, liner, 6-inch lift and automatic overflow shut-off Visible sidewalls and liner Visible sidewalls only Other Liner type: Thickness mil HDPE PVC Other
5. Alternative Method:

Submittal of an exception request is required. Exceptions must be submitted to the Santa Fe Environmental Bureau office for consideration of approval.

Fencing: Subsection D of 19.15.17.11 NMAC (Applies to permanent pits, temporary pits, and below-grade tanks) Chain link, six feet in height, two strands of barbed wire at top (Required if located within 1000 feet of a permanent residence, school, institution or church) Four foot height, four strands of barbed wire evenly spaced between one and four feet Alternate. Please specify	ospital,
Netting: Subsection E of 19.15.17.11 NMAC (Applies to permanent pits and permanent open top tanks) Screen Netting Other Monthly inspections (If netting or screening is not physically feasible)	
8. Signs: Subsection C of 19.15.17.11 NMAC 12"x 24", 2" lettering, providing Operator's name, site location, and emergency telephone numbers Signed in compliance with 19.15.3.103 NMAC	
Administrative Approvals and Exceptions: Justifications and/or demonstrations of equivalency are required. Please refer to 19.15.17 NMAC for guidance. Please check a box if one or more of the following is requested, if not leave blank: Administrative approval(s): Requests must be submitted to the appropriate division district or the Santa Fe Environmental Bureau consideration of approval. Exception(s): Requests must be submitted to the Santa Fe Environmental Bureau office for consideration of approval.	office for
Siting Criteria (regarding permitting): 19.15.17.10 NMAC Instructions: The applicant must demonstrate compliance for each siting criteria below in the application. Recommendations of accept material are provided below. Requests regarding changes to certain siting criteria may require administrative approval from the appropriate or may be considered an exception which must be submitted to the Santa Fe Environmental Bureau office for consideration of a Applicant must attach justification for request. Please refer to 19.15.17.10 NMAC for guidance. Siting criteria does not apply to drying above-grade tanks associated with a closed-loop system.	priate district pproval.
Ground water is less than 50 feet below the bottom of the temporary pit, permanent pit, or below-grade tank. - NM Office of the State Engineer - iWATERS database search; USGS; Data obtained from nearby wells	☐ Yes ☒ No
Within 300 feet of a continuously flowing watercourse, or 200 feet of any other significant watercourse or lakebed, sinkhole, or playa lake (measured from the ordinary high-water mark). - Topographic map; Visual inspection (certification) of the proposed site	☐ Yes ⊠ No
Within 300 feet from a permanent residence, school, hospital, institution, or church in existence at the time of initial application. (Applies to temporary, emergency, or cavitation pits and below-grade tanks) - Visual inspection (certification) of the proposed site; Aerial photo; Satellite image	☐ Yes ☑ No ☐ NA
Within 1000 feet from a permanent residence, school, hospital, institution, or church in existence at the time of initial application. (Applies to permanent pits) - Visual inspection (certification) of the proposed site; Aerial photo; Satellite image	☐ Yes ☑ No ☐ NA .
Within 500 horizontal feet of a private, domestic fresh water well or spring that less than five households use for domestic or stock watering purposes, or within 1000 horizontal feet of any other fresh water well or spring, in existence at the time of initial application. - NM Office of the State Engineer - iWATERS database search; Visual inspection (certification) of the proposed site	☐ Yes ☒ No
Within incorporated municipal boundaries or within a defined municipal fresh water well field covered under a municipal ordinance adopted pursuant to NMSA 1978, Section 3-27-3, as amended. - Written confirmation or verification from the municipality; Written approval obtained from the municipality	☐ Yes ⊠ No
Within 500 feet of a wetland. - US Fish and Wildlife Wetland Identification map; Topographic map; Visual inspection (certification) of the proposed site	☐ Yes ⊠ No
Within the area overlying a subsurface mine Written confirmation or verification or map from the NM EMNRD-Mining and Mineral Division	☐ Yes ⊠ No
Within an unstable area. - Engineering measures incorporated into the design; NM Bureau of Geology & Mineral Resources; USGS; NM Geological Society; Topographic map	☐ Yes ☑ No
Within a 100-year floodplain FEMA map	☐ Yes ⊠ No

11. Temporary Pits, Emergency Pits, and Below-grade Tanks Permit Application Attachment Checklist: Subsection B of 19.15.17.9 NMAC
Instructions: Each of the following items must be attached to the application. Please indicate, by a check mark in the box, that the documents are attached.
Hydrogeologic Report (Below-grade Tanks) - based upon the requirements of Paragraph (4) of Subsection B of 19.15.17.9 NMAC Hydrogeologic Data (Temporary and Emergency Pits) - based upon the requirements of Paragraph (2) of Subsection B of 19.15.17.9 NMAC Siting Criteria Compliance Demonstrations - based upon the appropriate requirements of 19.15.17.10 NMAC Design Plan - based upon the appropriate requirements of 19.15.17.11 NMAC
 ☑ Operating and Maintenance Plan - based upon the appropriate requirements of 19.15.17.12 NMAC ☑ Closure Plan (Please complete Boxes 14 through 18, if applicable) - based upon the appropriate requirements of Subsection C of 19.15.17.9 NMAC and 19.15.17.13 NMAC
Previously Approved Design (attach copy of design) API Number: or Permit Number:
12.
Closed-loop Systems Permit Application Attachment Checklist: Subsection B of 19.15.17.9 NMAC Instructions: Each of the following items must be attached to the application. Please indicate, by a check mark in the box, that the documents are
attached.
☐ Geologic and Hydrogeologic Data (only for on-site closure) - based upon the requirements of Paragraph (3) of Subsection B of 19.15.17.9 ☐ Siting Criteria Compliance Demonstrations (only for on-site closure) - based upon the appropriate requirements of 19.15.17.10 NMAC ☐ Design Plan - based upon the appropriate requirements of 19.15.17.11 NMAC
Operating and Maintenance Plan - based upon the appropriate requirements of 19.15.17.12 NMAC
Closure Plan (Please complete Boxes 14 through 18, if applicable) - based upon the appropriate requirements of Subsection C of 19.15.17.9 NMAC and 19.15.17.13 NMAC
Previously Approved Design (attach copy of design) API Number:
☐ Previously Approved Operating and Maintenance Plan API Number:(Applies only to closed-loop system that use
above ground steel tanks or haul-off bins and propose to implement waste removal for closure)
Permanent Pits Permit Application Checklist: Subsection B of 19.15.17.9 NMAC Instructions: Each of the following items must be attached to the application. Please indicate, by a check mark in the box, that the documents are attached. Undergood being Person, besselves the requirements of Personant (1) of Subsection B of 10.15.17.0 NMAC.
 ☐ Hydrogeologic Report - based upon the requirements of Paragraph (1) of Subsection B of 19.15.17.9 NMAC ☐ Siting Criteria Compliance Demonstrations - based upon the appropriate requirements of 19.15.17.10 NMAC ☐ Climatological Factors Assessment ☐ Certified Engineering Design Plans - based upon the appropriate requirements of 19.15.17.11 NMAC
Dike Protection and Structural Integrity Design - based upon the appropriate requirements of 19.15.17.11 NMAC Leak Detection Design - based upon the appropriate requirements of 19.15.17.11 NMAC Liner Specifications and Compatibility Assessment - based upon the appropriate requirements of 19.15.17.11 NMAC
☐ Quality Control/Quality Assurance Construction and Installation Plan
 Operating and Maintenance Plan - based upon the appropriate requirements of 19.15.17.12 NMAC Freeboard and Overtopping Prevention Plan - based upon the appropriate requirements of 19.15.17.11 NMAC
Nuisance or Hazardous Odors, including H ₂ S, Prevention Plan
☐ Emergency Response Plan ☐ Oil Field Waste Stream Characterization
Monitoring and Inspection Plan
Erosion Control Plan
Closure Plan - based upon the appropriate requirements of Subsection C of 19.15.17.9 NMAC and 19.15.17.13 NMAC
Proposed Closure: 19.15.17.13 NMAC Proposed Closure: 19.15.17.13 NMAC
Instructions: Please complete the applicable boxes, Boxes 14 through 18, in regards to the proposed closure plan. Type: Drilling Workover Emergency Cavitation P&A Permanent Pit Below-grade Tank Closed-loop System
☐ Alternative Proposed Closure Method: ☐ Waste Excavation and Removal
Waste Removal (Closed-loop systems only)
On-site Closure Method (Only for temporary pits and closed-loop systems)
 ✓ In-place Burial ☐ On-site Trench Burial ☐ Alternative Closure Method (Exceptions must be submitted to the Santa Fe Environmental Bureau for consideration)
15.
Waste Excavation and Removal Closure Plan Checklist: (19.15.17.13 NMAC) Instructions: Each of the following items must be attached to the
closure plan. Please indicate, by a check mark in the box, that the documents are attached. Protocols and Procedures - based upon the appropriate requirements of 19.15.17.13 NMAC
Confirmation Sampling Plan (if applicable) - based upon the appropriate requirements of Subsection F of 19.15.17.13 NMAC
☐ Disposal Facility Name and Permit Number (for liquids, drilling fluids and drill cuttings) ☐ Soil Backfill and Cover Design Specifications - based upon the appropriate requirements of Subsection H of 19.15.17.13 NMAC
Re-vegetation Plan - based upon the appropriate requirements of Subsection I of 19.15.17.13 NMAC
☐ Site Reclamation Plan - based upon the appropriate requirements of Subsection G of 19.15.17.13 NMAC

Waste Removal Closure For Closed-loop Systems That Utilize Above Ground S Instructions: Please indentify the facility or facilities for the disposal of liquids, d		
facilities are required.	raing finas and arta cuttings. Ose anachment if h	we mun iwo
Disposal Facility Name:	Disposal Facility Permit Number:	
	Disposal Facility Permit Number:	
Will any of the proposed closed-loop system operations and associated activities occ ☐ Yes (If yes, please provide the information below) ☐ No		ice and operations?
Required for impacted areas which will not be used for future service and operation Soil Backfill and Cover Design Specifications based upon the appropriate Re-vegetation Plan - based upon the appropriate requirements of Subsection I Site Reclamation Plan - based upon the appropriate requirements of Subsection	requirements of Subsection H of 19.15.17.13 NMAC of 19.15.17.13 NMAC	2
Siting Criteria (regarding on-site closure methods only): 19.15.17.10 NMAC Instructions: Each siting criteria requires a demonstration of compliance in the considered was Requests regarding changes to certain siting criteria may require considered an exception which must be submitted to the Santa Fe Environmental demonstrations of equivalency are required. Please refer to 19.15.17.10 NMAC for	administrative approval from the appropriate distr Bureau office for consideration of approval. Justi	rict office or may be
Ground water is less than 50 feet below the bottom of the buried waste. - NM Office of the State Engineer - iWATERS database search; USGS; Data	obtained from nearby wells	☐ Yes ☑ No ☐ NA
Ground water is between 50 and 100 feet below the bottom of the buried waste - NM Office of the State Engineer - iWATERS database search; USGS; Data	obtained from nearby wells	☐ Yes ☑ No ☐ NA
Ground water is more than 100 feet below the bottom of the buried waste. - NM Office of the State Engineer - iWATERS database search; USGS; Data	obtained from nearby wells	☐ Yes ☐ No ☑ NA
Within 300 feet of a continuously flowing watercourse, or 200 feet of any other sign lake (measured from the ordinary high-water mark). - Topographic map; Visual inspection (certification) of the proposed site	nificant watercourse or lakebed, sinkhole, or playa	☐ Yes ⊠ No
Within 300 feet from a permanent residence, school, hospital, institution, or church - Visual inspection (certification) of the proposed site; Aerial photo; Satellite		☐ Yes ☑ No
Within 500 horizontal feet of a private, domestic fresh water well or spring that less watering purposes, or within 1000 horizontal feet of any other fresh water well or sp NM Office of the State Engineer - iWATERS database; Visual inspection (e.g., 1997).	oring, in existence at the time of initial application.	☐ Yes ⊠ No
Within incorporated municipal boundaries or within a defined municipal fresh water adopted pursuant to NMSA 1978, Section 3-27-3, as amended. - Written confirmation or verification from the municipality; Written approve	·	☐ Yes ⊠ No
Within 500 feet of a wetland. - US Fish and Wildlife Wetland Identification map; Topographic map; Visua	l inspection (certification) of the proposed site	☐ Yes ☑ No
Within the area overlying a subsurface mine Written confirmation or verification or map from the NM EMNRD-Mining	and Mineral Division	☐ Yes ☑ No
Within an unstable area. - Engineering measures incorporated into the design; NM Bureau of Geology Society; Topographic map	& Mineral Resources; USGS; NM Geological	Yes No
Within a 100-year floodplain FEMA map		☐ Yes ☑ No
Non-Site Closure Plan Checklist: (19.15.17.13 NMAC) Instructions: Each of the by a check mark in the box, that the documents are attached. Siting Criteria Compliance Demonstrations - based upon the appropriate requirements of Construction/Design Plan of Burial Trench (if applicable) based upon the appropriate requirements of Protocols and Procedures - based upon the appropriate requirements of 19.15 Confirmation Sampling Plan (if applicable) - based upon the appropriate requirements of Disposal Facility Name and Permit Number (for liquids, drilling fluids and documents of Soil Cover Design - based upon the appropriate requirements of Subsection Site Reclamation Plan - based upon the appropriate requirements of Subsection Site Reclamation Plan - based upon the appropriate requirements of Subsection	uirements of 19.15.17.10 NMAC Subsection F of 19.15.17.13 NMAC propriate requirements of 19.15.17.11 NMAC ad) - based upon the appropriate requirements of 19. 5.17.13 NMAC uirements of Subsection F of 19.15.17.13 NMAC Subsection F of 19.15.17.13 NMAC rill cuttings or in case on-site closure standards cann H of 19.15.17.13 NMAC I of 19.15.17.13 NMAC	15.17.11 NMAC

Operator Application Certification: I hereby certify that the information submitted with this application is true	e, accurate and complete to the best of my knowledge and belief.		
Name (Print): Maria S. Gomez	Title: Sr. Regulatory Analyst		
Signature: Maria D. Dones	Date: _March 3, 2011		
e-mail address: maria.gomez@elpaso.com	Telephone: 713-420-5038 / cell 832-683-0361		
OCD Approval: Permit Application (including closure plan)			
OCD Representative Signature:	Approval Date: 3/4/2011		
DISTRICT SUPERVISOR	OCD Permit Number:		
Closure Report (required within 60 days of closure completion): Subsection K of 19.15.17.13 NMAC Instructions: Operators are required to obtain an approved closure plan prior to implementing any closure activities and submitting the closure report. The closure report is required to be submitted to the division within 60 days of the completion of the closure activities. Please do not complete this section of the form until an approved closure plan has been obtained and the closure activities have been completed.			
	Closure Completion Date:		
22. Closure Method: ☐ Waste Excavation and Removal ☐ On-Site Closure Method ☐ ☐ If different from approved plan, please explain.	Alternative Closure Method		
	ystems That Utilize Above Ground Steel Tanks or Haul-off Bins Only: ids, drilling fluids and drill cuttings were disposed. Use attachment if more than Disposal Facility Permit Number:		
Disposal Facility Name:	Disposal Facility Permit Number:		
Were the closed-loop system operations and associated activities performed on or in areas that will not be used for future service and operations? Yes (If yes, please demonstrate compliance to the items below) No			
Required for impacted areas which will not be used for future service and Site Reclamation (Photo Documentation) Soil Backfilling and Cover Installation Re-vegetation Application Rates and Seeding Technique	operations:		
24. Closure Report Attachment Checklist: Instructions: Each of the follo mark in the box, that the documents are attached.	wing items must be attached to the closure report. Please indicate, by a check		
☐ Proof of Closure Notice (surface owner and division) ☐ Proof of Deed Notice (required for on-site closure) ☐ Plot Plan (for on-site closures and temporary pits) ☐ Confirmation Sampling Analytical Results (if applicable) ☐ Waste Material Sampling Analytical Results (required for on-site cl ☐ Disposal Facility Name and Permit Number ☐ Soil Backfilling and Cover Installation ☐ Re-vegetation Application Rates and Seeding Technique ☐ Site Reclamation (Photo Documentation)	losure)		
On-site Closure Location: Latitude	Longitude NAD: ☐ 1927 ☐ 1983		
Operator Closure Certification: I hereby certify that the information and attachments submitted with this closure report is true, accurate and complete to the best of my knowledge and belief. I also certify that the closure complies with all applicable closure requirements and conditions specified in the approved closure plan. Name (Print):			
Signature:			
e-mail address:	Telephone:		

El Paso E&P Company, L.P. Pit Closure Plan

In accordance with Rule 19 15 17 12 NMAC, the following information describes the closure requirements of temporary pits on locations. This is El Paso E&P Company, L.P.'s (El Paso) standard procedure for all temporary pits. A separate plan will be submitted for any temporary pit which does not conform to this plan.

All closure activities will include proper documentation and be available for review upon request and will be submitted to NMOCD within 60 days of pit closure. Closure report will be filed on C-144 and incorporate the following:

- Details on Capping and Covering, where applicable
- Plot Plan (Pit Diagram)
- Inspection Reports
- Sampling Results

General Plan

- 1. Free standing liquids will be removed as soon as practical for recycle use in the drilling of other wells. Any free standing liquids that are not recycled will be removed prior to pit closure and disposed of in a division approved facility or recycle, reuse or reclaim the liquids in a manner the appropriate division district office approves. Pit solids will be allowed to air dry as completely as possible prior to starting pit closing activities.
- 2. The preferred method of closure for all temporary pits will be on-site burial, assuming that all the criteria listed in sub-section (8) of 19 15 17 13 are met.
- 3. The surface owner shall be notified of El Paso's proposed closure plan using a means that provides proof of notice (i.e., certified mail, return receipt requested).
- 4. Within 6 months of the Rig Off status occurring, El Paso will ensure that temporary pits are closed, re-contoured.
- 5. Notice of Closure will be given to the Santa Fe Division office between 72 hours and one week of closure, via email, or verbally. The notification of closure will include the following:
 - Operator's Name
 - Location by Section, Township, Range, Well Name and API Number
- 6. Liner of temporary pit shall be removed above "mud level" after stabilization. Removal of liner will consist of manually or mechanically cutting liner at mud level and removing all remaining liner. Care will be taken to remove "All" of the liner (i.e., edges of liner entrenched or buried). All excessive liner will be disposed of at a licensed disposal facility.
- 7. Pit contents shall be tested prior to mixing of any soils. Test results will be compared to NMOCD limits. If the test results are within the NMOCD limits no soil will be mixed with the pit contents. If the sample results exceed the NMOCD limits the contents will be mixed with non-waste containing, earthen material in order to achieve the solidification process. The mixing ratio shall not exceed 3 parts clean soil to 1 part pit contents. The mixed contents will then be re-tested and the results will be compared to the NMOCD limits.
- 8. A five point composite sample will be taken of the pit using sampling tools and all samples tested per subsection B of 19 15 17 13(B)(1)(b). In the event that the criteria

are not met, all contents will be handled per Subparagraph (a) of Paragraph (1) of Subsection B of 19 15 17 13 (i.e. dig, haul).

Composite	Tests Method	Limit (mg/kg)
Benzene	EPA SW-846 8021B or 8260B	0.2
BTEX	EPA SW-846 8021B or 8260B	50
TPH	EPA SW-846 418 1	2500
GRO/DRO	EPA SW-846 8015M	500
Chlorides	EPA 300 1	1000

- 9. Upon completion of testing, the pit area will be backfilled with compacted, non-waste containing, earthen material. A minimum of four feet of cover shall be achieved and the cover shall include one food of suitable material to establish vegetation at the site, or the background thickness of topsoil, whichever is greater.
- 10. Re-contouring of location will match fit, shape, line, form and texture of the surrounding as closely as possible. Re-shaping will include drainage control, prevent ponding, and prevent erosion. Natural drainage will be unimpeded and water bars and/or silt traps will be placed in areas where needed to prevent erosion on a large scale. Final re-contour shall have a uniform appearance with smooth surface, fitting the natural landscape.
- 11. Notification will be sent to NMOCD when the reclaimed area is seeded.
- 12. El Paso shall seed the disturbed areas upon abandonment of the pit and well site. Seeding will be accomplished via drilling on the contour whenever practical or by other division-approved methods. Vegetation cover will be as per Vermejo Ranch requirements.
- 13. The temporary pit will be located with a steel marker, no less than four inches in diameter, cemented in a hole three feet deep in the center of the onsite burial upon the abandonment of all the wells on the pad. The marker will be flushed with the ground to allow access of the active well pad and for safety concerns. The marker will include a threaded collar to be used for future abandonment. The top of the marker will contain a welded steel 12" square plate that indicated the onsite burial of the temporary pit. The plate will be easily removable and a four foot tall riser will be threaded into the top of the collar marker and welded around the base with the operator's information at the time of all wells on the pad are abandoned. The operator's information will include the following Operator Name, Lease Name, Well Name and number, Section, Township, Range and an indicator that the marker is an onsite burial location.

El Paso E&P Company, L.P. Pit Design and Construction Plan

In accordance with Rule 19 15 17 the following information describes the design and construction of temporary pits on El Paso E&P Company, L.P. (El Paso) locations. This El Paso's standard procedure for all temporary pits. A separate plan will be submitted for any temporary pit which does not conform to this plan.


- 1. El Paso will design and construct a temporary pit to contain liquids and solids and prevent contamination of fresh water and protect public health and environment.
- 2. Prioir to construction the pit, topsoil will be stockpiled in the construction zone for later use in restoration.
- 3. El Paso will post a well sign, not less than 12" by 24", on the well site prior to construction of the temporary pit. The sign will list the operator on record as the operator, the location of the well site by section, township, range, and emergency numbers.
- 4. El Paso shall construct all new fences utilizing 4 strand barbed wire. T-posts shall be installed every 12 feet and corners shall be anchored utilizing wooded posts. The entire location including pits will be fenced at all times.
- 5. El Paso shall construct the temporary pits so that the foundation and interior slope are firm and free of rocks, debris, sharp edges or irregularities to prevent liner failure.
- 6. Pit walls will be walked down by a crawler type tractor following construction.
- 7. All temporary pits will be lined with 20-mil, reinforced, LDPE liner, complying with EPA SW-846 method 9090A requirements.
- 8. Geotextile will be installed beneath the liner when rocks, debris, sharp edges or irregularities cannot be avoided.
- 9. All liners will be anchored in the bottom of a compacted earth-filled trench at least 18 inches deep.
- 10. El Paso will utilize bonded seamed liners.
- 11. The liner shall be protected from any fluid force or mechanical damage through the use of mud pit slides, or a manifold system.
- 12. The pit shall be protected from run-off by constructing and maintaining diversion ditches around the location or around the perimeter of the pit in some cases.
- 13. The volume of the pit shall not exceed 10 acre-feet, including freeboard.

El Paso E&P Company, L.P. Maintenance and Operating Plan for Temporary Pits

In accordance with Rule 19 15 17, El Paso E&P Company, L.P. (El Paso) will maintain and operate a temporary pit in accordance with the following plan:

- 1. El Paso will discharge into a temporary pit only fluids used or generated during the drilling or workover process.
- 2. El Paso will maintain a temporary pit free of miscellaneous solid waste or debris.
- 3. Any hydrocarbon base drilling fluid generated during the drilling or workover operation will be contained in an appropriate tank, it will not be discharged into a temporary pit. If any measureable layer of oil from the surface or a temporary pit after any drilling or workover operation, El Paso will remove it immediately.
- 4. El Paso shall maintain at least two feet of freeboard for a temporary pit.
- 5. El Paso will use a check list to perform a daily pit inspection while the drilling or workover rig is on-site. After drilling or workover operations, El Paso will inspect the temporary pit weekly so long liquids remain in the temporary pit. A log of the inspections will be kept in the well file, inspections will be available for the district office's review upon request. El Paso will file a copy of the log with the District IV office once temporary pit is closed.
- 6. El Paso shall remove all free liquids from a temporary pit within 30 days from the date the drilling or workover rig is released.
- 7. El Paso shall remove any liquids from the temporary pit used for cavitation within 48 hours after completing cavitation. El Paso may request additional time to remove the liquids from The District IV Division Office if it is not feasible to remove the liquids within 48 hours.

El Paso E & P CBM Vertical Drill Site Location/Pit Design

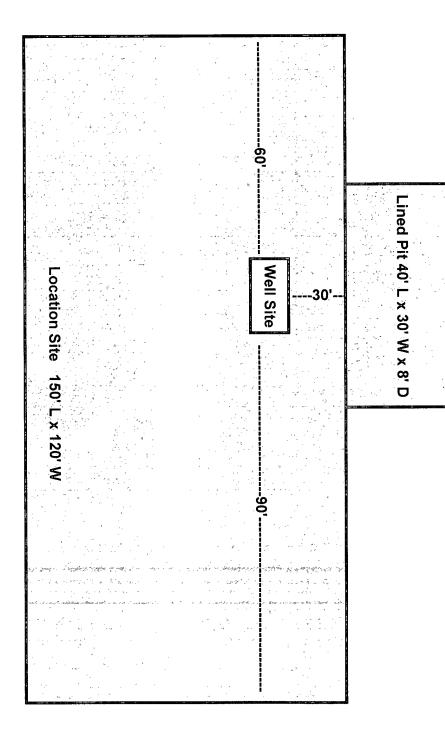

VPR E-65

Siting Criteria Certification

I certify that all the following are true statements and were made through visual inspection:

- This location is not within 300 feet of a continuously flowing watercourse, or 200 feet of any other significant watercourse or lakebed, sinkhole, or playa lake (measured from the ordinary high-water mark).
- This location is not within 300 feet from a permanent residence, school, hospital, institution, or church in existence at the time of initial application.
- This location is not within 1000 feet from a permanent residence, school, hospital, institution, or church in existence at the time of initial application.
- This location is not within 500 horizontal feet of a private, domestic fresh water well or spring that less than five households use for domestic or stock watering purposes, or within 1000 horizontal feet of any other fresh water well or spring, in existence at the time of initial application.
- This location is not within incorporated municipal boundaries or within a defined municipal fresh water field covered under a municipal ordinance adopted pursuant to NMSA 1978, Section 3-27-3, as amended.
- This location is not within 500 feet of a wetland.
- This location is not within the area overlaying a subsurface mine.
- This location is not within an unstable area.
- This location is not within a 100-year floodplain.

Bryan Olmstead - Operations Spvsr - Raton

3-1-2011

Date