

SWD

Initial

Application

Received: 09/18/19

This application is placed in file for record. It MAY or MAY NOT have been reviewed to be determined Administratively Complete

P.O. No: FMJOY-190918-C-1080

Revised March 23, 2017

RECEIVED: 09/18/19	REVIEWER:	TYPE: SWD	APP NO: pLEL1926127912
---------------------------	-----------	------------------	-------------------------------

ABOVE THIS TABLE FOR OCD DIVISION USE ONLY

NEW MEXICO OIL CONSERVATION DIVISION
 - Geological & Engineering Bureau -
 1220 South St. Francis Drive, Santa Fe, NM 87505

**ADMINISTRATIVE APPLICATION CHECKLIST**

THIS CHECKLIST IS MANDATORY FOR ALL ADMINISTRATIVE APPLICATIONS FOR EXCEPTIONS TO DIVISION RULES AND
 REGULATIONS WHICH REQUIRE PROCESSING AT THE DIVISION LEVEL IN SANTA FE

Applicant: Trove Energy and Water, LLC **OGRID Number:** 372488
Well Name: WLC South Federal SWD No.2 **API:** 30-025-xxxxx
Pool: Proposed: SWD; Devonian-Silurian **Pool Code:** 97869

**SUBMIT ACCURATE AND COMPLETE INFORMATION REQUIRED TO PROCESS THE TYPE OF APPLICATION
 INDICATED BELOW**

- 1) **TYPE OF APPLICATION:** Check those which apply for [A]
 A. Location – Spacing Unit – Simultaneous Dedication
☐ NSL ☐ NSP (PROJECT AREA) ☐ NSP (PRORATION UNIT) ☐ SD
- B. Check one only for [I] or [II]
 [I] Commingling – Storage – Measurement
☐ DHC ☐ CTB ☐ PLC ☐ PC ☐ OLS ☐ OLM
 [II] Injection – Disposal – Pressure Increase – Enhanced Oil Recovery
☐ WFX ☐ PMX ☒ SWD ☐ IPI ☐ EOR ☐ PPR
- 2) **NOTIFICATION REQUIRED TO:** Check those which apply.
 A. ☒ Offset operators or lease holders
 B. ☐ Royalty, overriding royalty owners, revenue owners
 C. ☒ Application requires published notice
 D. ☒ Notification and/or concurrent approval by SLO
 E. ☒ Notification and/or concurrent approval by BLM
 F. ☒ Surface owner
 G. ☒ For all of the above, proof of notification or publication is attached, and/or,
 H. ☐ No notice required

FOR OCD ONLY

- ☐ Notice Complete
☐ Application
 Content
 Complete

- 3) **CERTIFICATION:** I hereby certify that the information submitted with this application for administrative approval is **accurate** and **complete** to the best of my knowledge. I also understand that **no action** will be taken on this application until the required information and notifications are submitted to the Division.

Note: Statement must be completed by an individual with managerial and/or supervisory capacity.

Ben Stone

Print or Type Name

Signature

9/17/2019

Date

903-488-9850

Phone Number

ben@sosconsulting.us

e-mail Address



September 17, 2019

New Mexico Oil Conservation Division
1220 South St. Francis Drive
Santa Fe, New Mexico 87505

Attn: Ms. Adrienne Sandoval, Director

Re: Application of Trove Energy and Water, LLC to permit for salt water disposal the proposed WLC South Federal SWD No.2, located in Section 28, Township 26 South, Range 33 East, NMPM, Lea County, New Mexico.

Dear Ms. Sandoval,

Please find the enclosed form C-108 Application for Authority to Inject, supporting the above-referenced request for salt water disposal. This SWD prospect was recently heard at an OCD examiner hearing on September 5, 2019 however: the spot was inadvertently placed on the wrong side of the nearby section line - the old spot was in section 29, the new and correct spot is in section 28. New notice has been made and applicable exhibits revised as needed.

Trove Energy and Water is a developing salt water disposal services to operators in southeast New Mexico and seeks to optimize efficiency, both economically and operationally, of all its operations. Approval of this application is consistent with that goal as well as the NMOCD's mission of preventing waste and protection of correlative rights.

This application for a proposed Devonian SWD interval includes the currently mandated increased One-Mile Area of Review including pertinent and available seismic information for the area and region. Published legal notice ran September 15, 2019 in the Hobbs News-Sun and all offset operators and other affected parties have been notified individually. The legal notice affidavit is included with this application. The application also includes a wellbore schematic, area of review maps, affected party plat and other required information for a complete Form C-108. The well is located on federal surface and minerals and the Bureau of Land Management CFO and offset operators have been notified of this application.

I respectfully request that the approval of this salt water disposal well proceed swiftly and if you or your staff requires additional information or has any questions, please do not hesitate to call or email me.

Best regards,

Ben Stone, Partner
SOS Consulting, LLC
Agent for Trove Energy and Water, LLC

Cc: Application attachment and file

APPLICATION FOR AUTHORIZATION TO INJECT

- I. PURPOSE: *Salt Water Disposal* and the application *QUALIFIES* for administrative approval.
- II. OPERATOR: *Trove Energy and Water, LLC*
ADDRESS: *1919 North Turner, Hobbs, NM 88240*
- CONTACT PARTY: *Agent: SOS Consulting, LLC – Ben Stone (903) 488-9850*
- III. WELL DATA: *All well data and applicable wellbore diagrams are ATTACHED.*
- IV. *This is not an expansion of an existing project.*
- V. *A map is attached* that identifies all wells and leases within two miles of any proposed injection well with a *ONE-Mile* radius circle drawn around each proposed injection well. This circle identifies the well's area of review.
- *VI. A tabulation is attached of data on all wells of public record within the area of review which penetrate the proposed injection zone. *There are NO (0) Wells in the subject AOR which Penetrate the proposed Devonian interval.* The data includes a description of each well's type, construction, date drilled, location, depth, and a schematic of any plugged well illustrating all plugging detail. *NO P&A Wells penetrate.*
- VII. *The following data is ATTACHED* on the proposed operation, including:
1. Proposed average and maximum daily rate and volume of fluids to be injected;
 2. Whether the system is open or closed;
 3. Proposed average and maximum injection pressure;
 4. Sources and an appropriate analysis of injection fluid and compatibility with the receiving formation if other than reinjected produced water; and,
 5. If injection is for disposal purposes into a zone not productive of oil or gas at or within one mile of the proposed well, attach a chemical analysis of the disposal zone formation water (may be measured or inferred from existing literature, studies, nearby wells, etc.).
- *VIII. *Appropriate geologic data on the injection zone is ATTACHED* including appropriate lithologic detail, geologic name, thickness, and depth. Give the geologic name, and depth to bottom of all underground sources of drinking water (aquifers containing waters with total dissolved solids concentrations of 10,000 mg/l or less) overlying the proposed injection zone as well as any such sources known to be immediately underlying the injection interval.
- IX. *Stimulation program – a conventional acid job may be performed to clean and open the formation.*
- *X. Attach appropriate logging and test data on the well. (If well logs have been filed with the Division, they need not be resubmitted). *Well Logs will be filed with OCD.*
- *XI. *There are NO water wells/ PODs within one mile of the proposed salt water disposal well. Representative analyses are ATTACHED.*
- XII. *An affirmative statement is ATTACHED that available geologic and engineering data has been examined and no evidence was found* of open faults or any other hydrologic connection between the disposal zone and any underground sources of drinking water.
- XIII. *"Proof of Notice" section on the next page of this form has been completed and ATTACHED. There are 3 offset lessees and/or mineral owners within 1 mile and state and federal minerals - all have been noticed. Well location is Federal.*
- XIV. Certification: I hereby certify that the information submitted with this application is true and correct to the best of my knowledge and belief.

NAME: *Ben Stone* TITLE: *SOS Consulting, LLC agent for Trove Energy and Water, LLC*

SIGNATURE:  DATE: *9/18/2019*

E-MAIL ADDRESS: *ben@sosconsulting.us*

* If the information required under Sections VI, VIII, X, and XI above has been previously submitted, it need not be resubmitted. Please show the date and circumstances of the earlier submittal:

FORM C-108 – APPLICATION FOR AUTHORIZATION TO INJECT (cont.)

III. WELL DATA – *The following information and data is included (See ATTACHED Wellbore Schematic):*

A. The following well data must be submitted for each injection well covered by this application. The data must be both in tabular and schematic form and shall include:

- (1) Lease name; Well No., Location by Section, Township and Range; and footage location within the section.
- (2) Each casing string used with its size, setting depth, sacks of cement used, hole size, top of cement, and how such top was determined.
- (3) A description of the tubing to be used including its size, lining material, and setting depth.
- (4) The name, model, and setting depth of the packer used or a description of any other seal system or assembly used.

Division District Offices have supplies of Well Data Sheets which may be used or which may be used as models for this purpose. Applicants for several identical wells may submit a "typical data sheet" rather than submitting the data for each well.

B. The following must be submitted for each injection well covered by this application. All items must be addressed for the initial well. Responses for additional wells need be shown only when different. Information shown on schematics need not be repeated.

- (1) The name of the injection formation and, if applicable, the field or pool name.
- (2) The injection interval and whether it is perforated or open-hole.
- (3) State if the well was drilled for injection or, if not, the original purpose of the well.
- (4) Give the depths of any other perforated intervals and detail on the sacks of cement or bridge plugs used to seal off such perforations.
- (5) Give the depth to and the name of the next higher and next lower oil or gas zone in the area of the well, if any.

XIV. PROOF OF NOTICE *pursuant to the following criteria is ATTACHED.*

All applicants must furnish proof that a copy of the application has been furnished, by certified or registered mail, to the owner of the surface of the land on which the well is to be located and to each leasehold operator within one-half mile of the well location.

Where an application is subject to administrative approval, a proof of publication must be submitted. Such proof shall consist of a copy of the legal advertisement which was published in the county in which the well is located. The contents of such advertisement must include:

- (1) The name, address, phone number, and contact party for the applicant;
- (2) The intended purpose of the injection well; with the exact location of single wells or the Section, Township, and Range location of multiple wells;
- (3) The formation name and depth with expected maximum injection rates and pressures; and,
- (4) A notation that interested parties must file objections or requests for hearing with the Oil Conservation Division, 1220 South St. Francis Dr., Santa Fe, New Mexico 87505, within 15 days.

NO ACTION WILL BE TAKEN ON THE APPLICATION UNTIL PROPER PROOF OF NOTICE HAS BEEN SUBMITTED.

C-108 - Items III, IV, V

Item III - Subject Well Data

Wellbore Diagram - PROPOSED

Item IV – Tabulation of AOR Wells

NO wells penetrate the proposed injection interval.

Item V – Area of Review Maps

1. Two Mile AOR Map with One-Mile Fresh Water Well Radius
2. One-Half Mile AOR Map

All Above Exhibits follow this page.



WELL SCHEMATIC - PROPOSED WLC South Federal SWD Well No.2


API 30-025-xxxxx

1310' FNL & 10' FEL, SEC. 28-T26S-R33E
LEA COUNTY, NEW MEXICO

SWD; Devonian-Silurian (97869)

Spud Date: 1/02/2020

SWD Config Dt: 2/15/2020

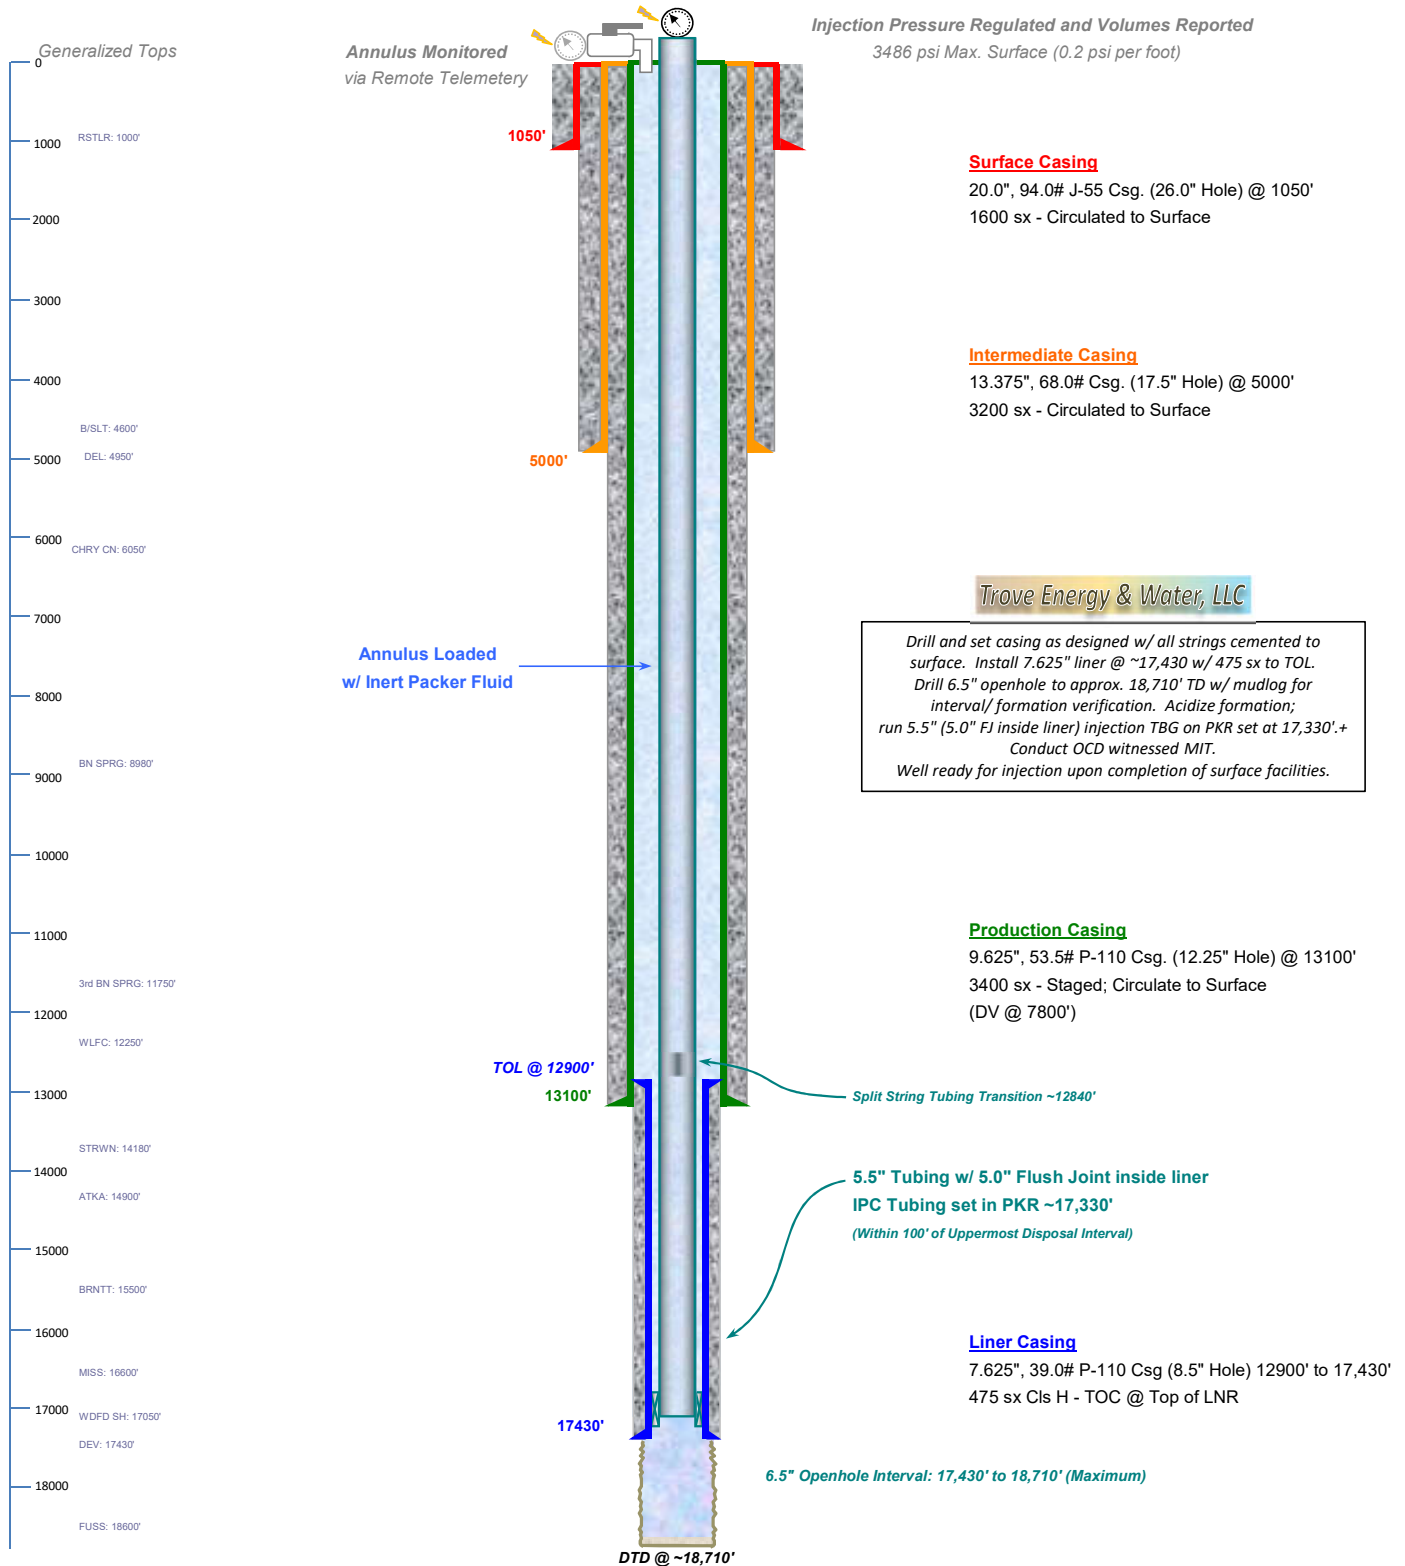


Drawn by: Ben Stone, 9/17/2019




WLC South Federal SWD No.2 - Area of Review / 2 Miles

(Attachment to NMOCD Form C-108 - Item V)


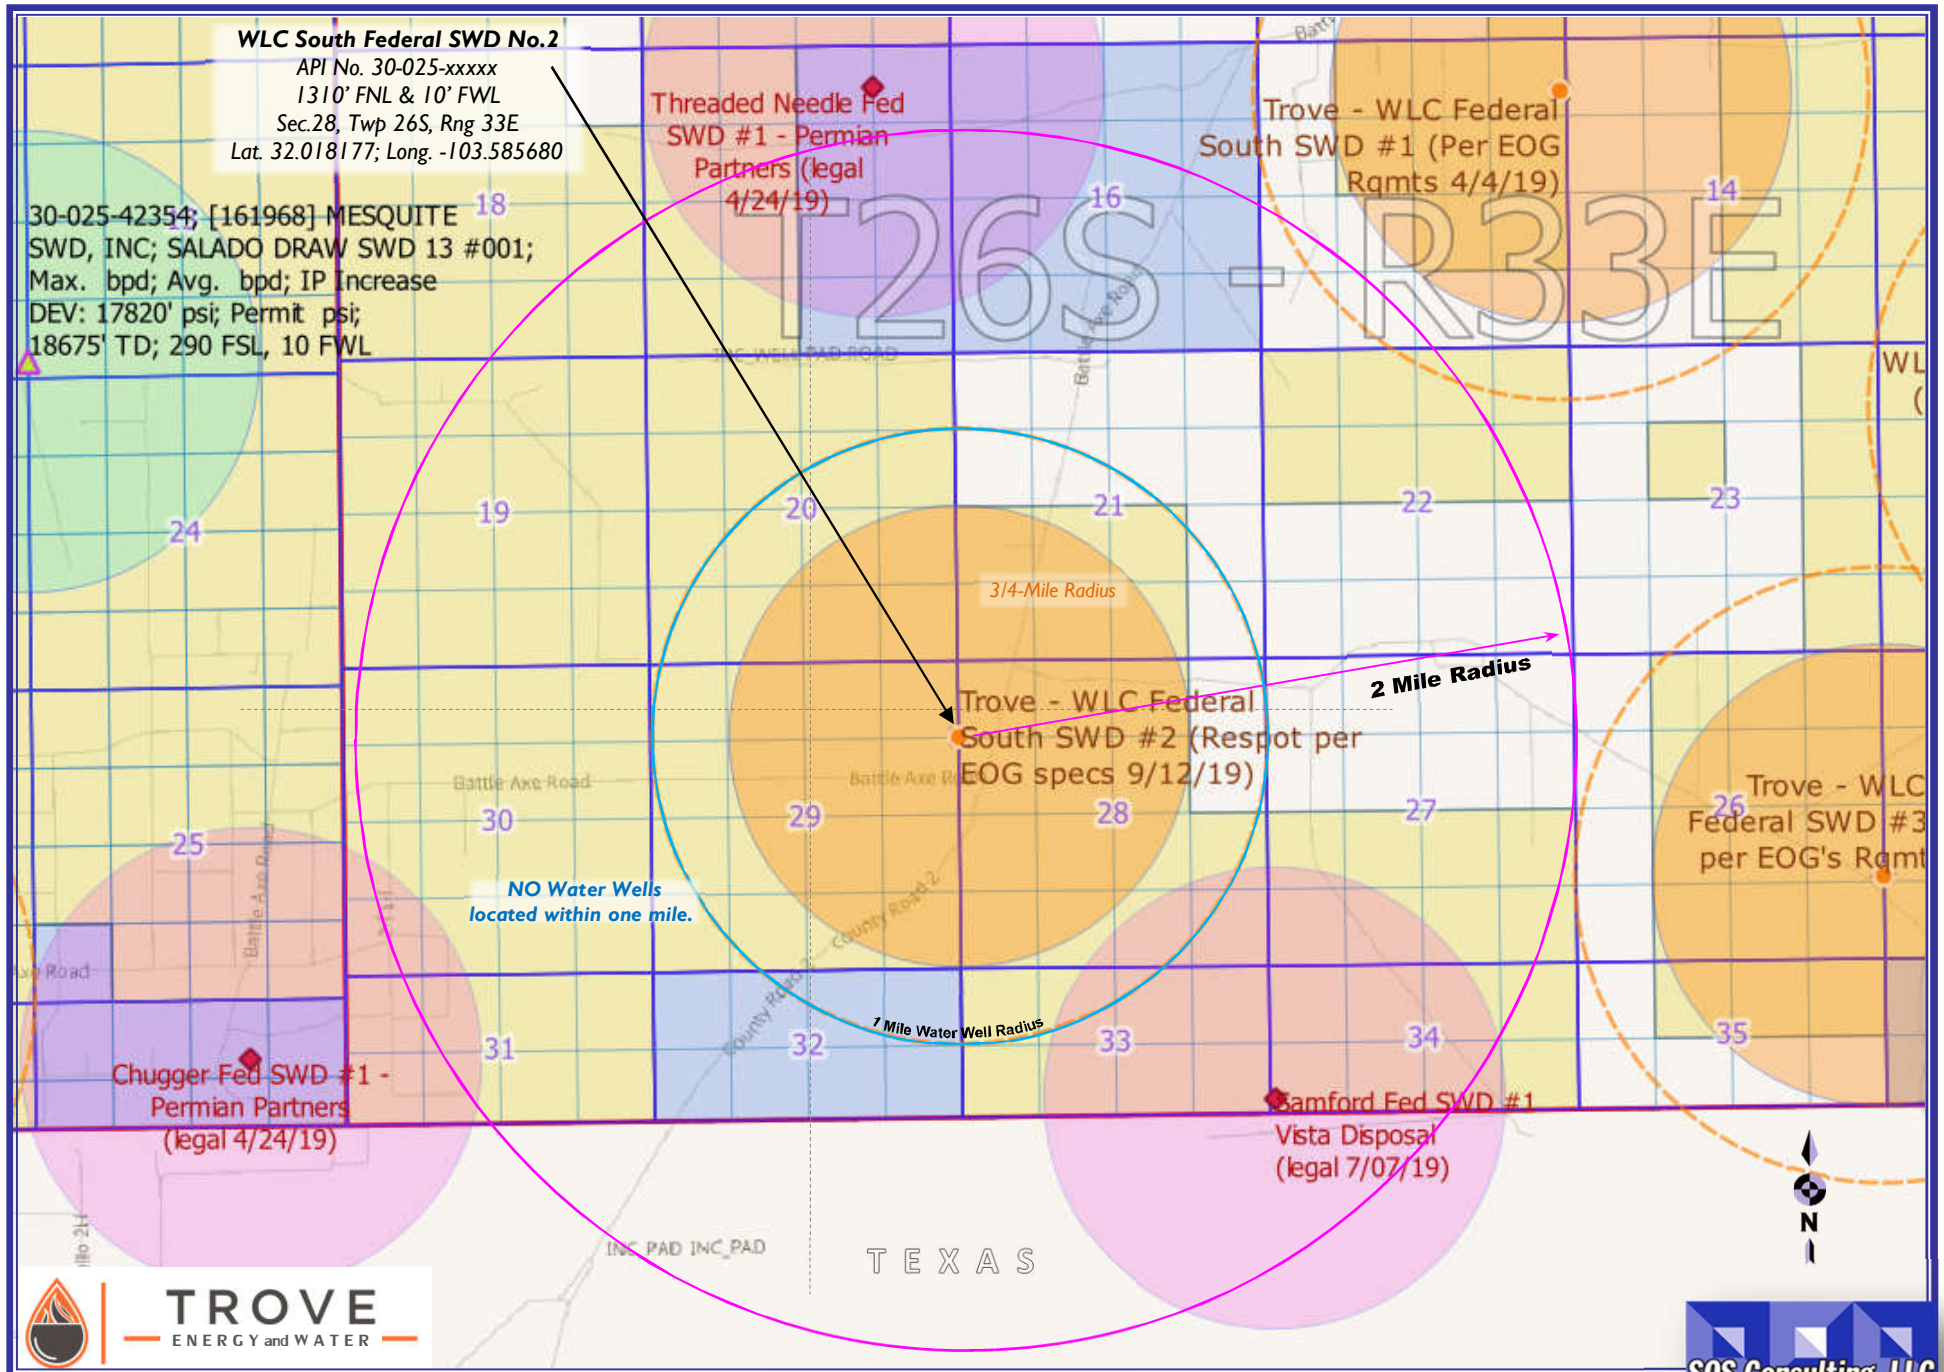


WLC South Federal SWD Well No.2 – One Mile Area of Review / Overview Map

(Attachment to NMOCD Form C-108, Application for Authority to Inject.)

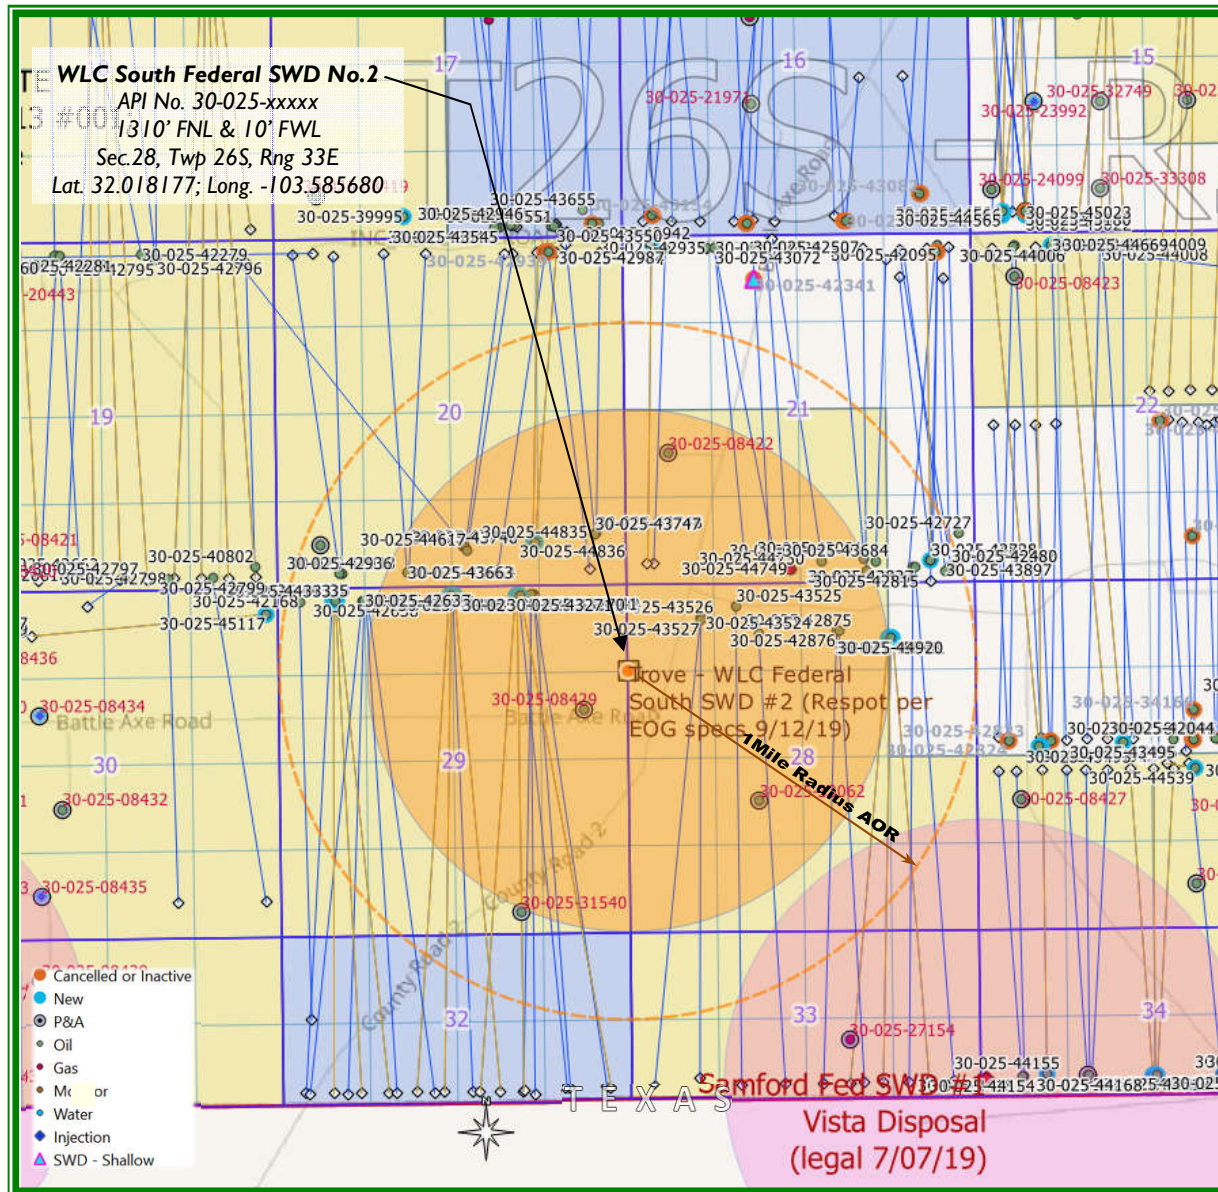

23.7 miles W/SW of Jal, NM

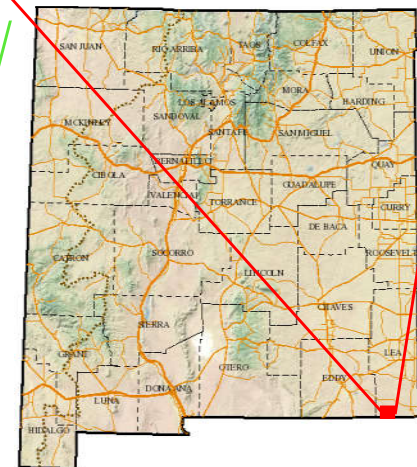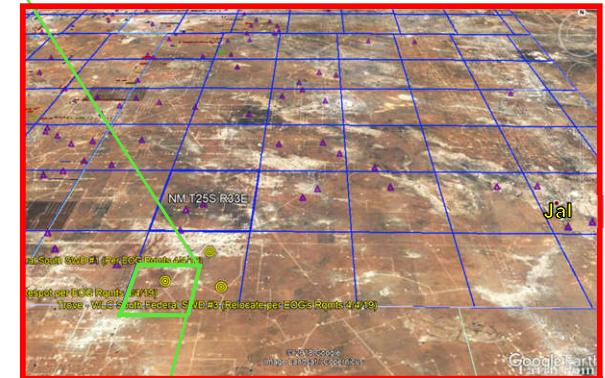

Lea County, New Mexico

C-108 - Item VI

Area of Review Well Data

**THERE ARE NO WELLS WHICH PENETRATE THE
PROPOSED DEVONIAN FORMATION IN THE
ONE-HALF MILE AREA of REVIEW**

C-108 ITEM X

LOGS and AVAILABLE TEST DATA

**A Standard Suite of Logs will be run after
drilling the well and submitted to the Division.**

C-108 ITEM VII – PROPOSED OPERATION

Note: All Trove Energy and Water WLC South SWD Prospects were vetted with EOG Review Team.

Trove WLC South Federal SWD #2

Commercial SWD Facility

Upon approval of all permits for SWD, operations would begin within 30 days. Completion of the well operations will take approximately 6-8 weeks. Facility construction including installation of the tank battery, berms, plumbing and other and associated equipment would be occurring during the same interval but at a different location from the well. In any event, it is not expected for the construction phase of the project to last more than 60 days, depending on availability of contractors and equipment.

Configure for Salt Water Disposal

Prior to commencing any work, an NOI sundry(ies) will be submitted to configure the well for SWD and will detail the completion workover including all work otherwise described above, any change to the procedure noted herein and to perform mechanical integrity pressure test per OCD test procedures. (Notify NMOCD 24 hours prior.) The casing/tubing annulus will be monitored for communication with injection fluid or loss of casing integrity.

Operational Summary

The SWD facility will not be fenced so that trucks may access for load disposal 24/7.

Future plans would include tying the SWD into a pipeline so the well and injection equipment will be a closed system and equipped with pressure limiting devices and volume meters. The annulus, loaded with an inert, anti-corrosion packer fluid, will be monitored for pressure.

The facility and tanks will be equipped with telemetry devices and visual alarms to alert the operator and customers of full tanks or an overflow situation.

Anticipated daily maximum volume is 30,000 bpd and an average of 17,500 bpd at a maximum surface injection pressure of 3486 psi (.2 psi/ft gradient – maximum pressure will be adjusted if the top of interval is modified after well logs are run).

Potential releases will be contained and cleaned up immediately. The operator shall repair or otherwise correct the situation within 48 hours before resuming operations. OCD will be notified within 24 hours of any release greater than 5 bbls. If required, remediation will start as soon as practicable. Operator shall comply with 19.15.29 NMAC and 19.15.30 NMAC; as necessary and appropriate and OCD form C-141 will be submitted promptly.

C-108 ITEM VII – PRODUCED WATER ANALYSES

Item VII.4 – Water Analysis of Source Zone Water

Delaware
Bone Spring
Wolfcamp

Item VII.5 – Water Analysis of Disposal Zone Water

Devonian

Water Analyses follow this page.

C-108 Item VII.5 - Produced Water Data
Trove Energy & Water, LLC - WLC Mid Federal Project Area

SOURCE ZONE

DELAWARE

API No	3001510181	Lab ID	
		Sample ID	5532
Well Name	SUPERIOR STATE 002	Sample No	
Location	ULSTR 08 25 S 30 E 1980 S 660 E	Lat / Long	32.14281 -103.89616
		County	Eddy
Operator (when sampled)			
	Field CORRAL CANYON	Unit	I
Sample Date		Analysis Date	
	Sample Source SWAB	Depth (if known)	
	Water Typ		
ph		alkalinity_as_caco3_mgL	
ph_temp_F		hardness_as_caco3_mgL	
specificgravity		hardness_mgL	
specificgravity_temp_F		resistivity_ohm_cm	
tds_mgL	155173	resistivity_ohm_cm_temp	
tds_mgL_180C		conductivity	
chloride_mgL	92820	conductivity_temp_F	
sodium_mgL		carbonate_mgL	
calcium_mgL		bicarbonate_mgL	122
iron_mgL		sulfate_mgL	133
barium_mgL		hydroxide_mgL	
magnesium_mgL		h2s_mgL	
potassium_mgL		co2_mgL	
strontium_mgL		o2_mgL	
manganese_mgL		anionremarks	
Remarks			

(Produced water data courtesy of NMT Octane NM WAIDS database.)



C-108 Item VII.5 - Produced Water Data
Trove Energy & Water, LLC - WLC Mid Federal Project Area

SOURCE ZONE

BONE SPRING

API No	3002533529	Lab ID	
		Sample ID	6681
Well Name	THYME APY FEDERAL 002	Sample No	
Location	ULSTR 01 23 S 32 E 1650 N 1650 E	Lat / Long	32.33657 -103.62470
		County	Lea
Operator (when sampled)			
	Field RED TANK	Unit	G
Sample Date	11/27/2001	Analysis Date	
	Sample Source	Depth (if known)	
	Water Typ		
ph	6.1	alkalinity_as_caco3_mgL	
ph_temp_F		hardness_as_caco3_mgL	
specificgravity	1.15	hardness_mgL	
specificgravity_temp_F		resistivity_ohm_cm	
tds_mgL	172896	resistivity_ohm_cm_temp	
tds_mgL_180C		conductivity	
chloride_mgL	104976	conductivity_temp_F	
sodium_mgL		carbonate_mgL	
calcium_mgL	0	bicarbonate_mgL	781
iron_mgL	0	sulfate_mgL	1150
barium_mgL	0	hydroxide_mgL	
magnesium_mgL	2025	h2s_mgL	0
potassium_mgL		co2_mgL	
strontium_mgL		o2_mgL	
manganese_mgL		anionremarks	

Remarks

(Produced water data courtesy of NMT Octane NM WAIDS database.)



C-108 Item VII.5 - Produced Water Data
Trove Energy & Water, LLC - WLC Mid Federal Project Area

SOURCE ZONE

WOLFCAMP

API No 3002501678		Lab ID	
Well Name LAGUNA PLATA FEDERAL UNIT 001		Sample ID	5096
		Sample No	
Location ULSTR 22 19 S 33 E	Lat / Long 32.64341	-103.64461	
1980 S 710 E		County Lea	
Operator (when sampled)			
	Field TONTO	Unit I	
Sample Date	Analysis Date		
	Sample Source DST	Depth (if known)	
	Water Typ		
ph		alkalinity_as_caco3_mgL	
ph_temp_F		hardness_as_caco3_mgL	
specificgravity		hardness_mgL	
specificgravity_temp_F		resistivity_ohm_cm	
tds_mgL	46915	resistivity_ohm_cm_temp	
tds_mgL_180C		conductivity	
chloride_mgL	27270	conductivity_temp_F	
sodium_mgL		carbonate_mgL	
calcium_mgL		bicarbonate_mgL	714
iron_mgL		sulfate_mgL	1116
barium_mgL		hydroxide_mgL	
magnesium_mgL		h2s_mgL	
potassium_mgL		co2_mgL	
strontium_mgL		o2_mgL	
manganese_mgL		anionremarks	
Remarks			

(Produced water data courtesy of NMT Octane NM WAIDS database.)



C-108 Item VII.5 - Produced Water Data
Trove Energy Water, LLC - WLC Mid Federal Project Area

DISPOSAL ZONE

DEVONIAN

API No 3002521082		Lab ID	
		Sample ID	5720
Well Name	ANTELOPE RIDGE UNIT 003	Sample No	
Location	ULSTR 34 23 S 34 E 1980 S 1650 W	Lat / Long	32.25922 -103.46068
		County	Lea
Operator (when sampled)			
	Field ANTELOPE RIDGE	Unit K	
Sample Date	11/14/1967	Analysis Date	
	Sample Source UNKNOWN	Depth (if known)	
	Water Typ		
ph	6.9	alkalinity_as_caco3_mgL	
ph_temp_F		hardness_as_caco3_mgL	
specificgravity		hardness_mgL	
specificgravity_temp_F		resistivity_ohm_cm	
tds_mgL	80187	resistivity_ohm_cm_temp_	
tds_mgL_180C		conductivity	
chloride_mgL	47900	conductivity_temp_F	
sodium_mgL		carbonate_mgL	
calcium_mgL		bicarbonate_mgL	476
iron_mgL		sulfate_mgL	900
barium_mgL		hydroxide_mgL	
magnesium_mgL		h2s_mgL	
potassium_mgL		co2_mgL	
strontium_mgL		o2_mgL	
manganese_mgL		anionremarks	
Remarks			

(Produced water data courtesy of NMT Octane NM WAIDS database.)



C-108 – Item VIII

Geologic Information

The Devonian and Silurian consist of carbonates including light colored dolomite and chert intervals interspersed with some tight limestone intervals. Several thick sections of porous dolomite capable of taking water are believed present within the subject formations in the area. Depth control data was inferred from deep wells to the south and east. If the base of Devonian and top of Silurian rocks come in as expected the well will only be drilled deep enough for adequate logging rathole.

At a proposed depth of 18,710' BGL (Below Ground Level) the well will TD approximately 1,280' below the estimated top of the Devonian. Mud logging through the interval will ensure the target interval remains in Devonian and Silurian. Once Devonian is determined, the casing shoe depth will be set at an approximate maximum upper depth of 17,430' BGL. Injection will occur through the resulting openhole interval. Should mud or other logs indicate depth adjustment is required to exploit the desired formation as described; sundries with appropriate data will be filed with the OCD.

The Devonian is overlain by the Woodford Shale and Mississippian Lime and underlain by the Middle and Lower Ordovician; Simpson, McKee and Ellenburger.

Fresh water in the area is generally available from the Rustler and Santa Rosa formations. State Engineer's records show water wells in the area with a depth to groundwater of 110 to 220 feet and an average depth of 157 feet.


There are NO water wells located within one mile of the proposed SWD however; a representative analysis of area fresh water is included in this application.

C-108 - Item VIII

Geological Data

EARTHQUAKE / SEISMIC INFORMATION SUPPLEMENT

Map Source: State of stress in the Permian Basin, Texas and New Mexico: Implications for induced seismicity (Figure 1); Jens-Erik Lund Snee/ Mark Zoback, February 2018

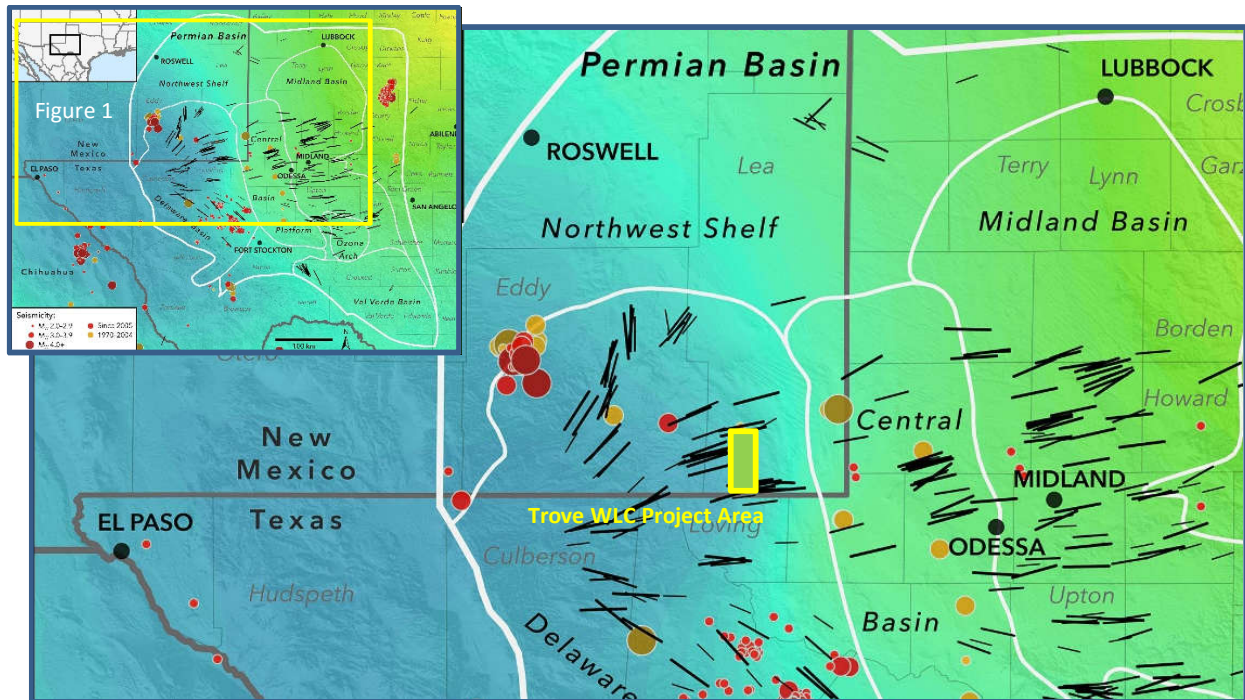

TROVE PSE PROJECT VICINITY

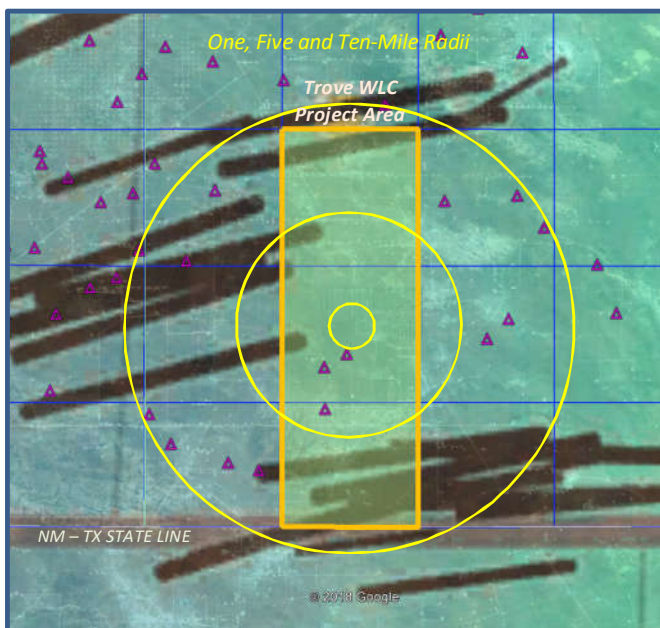


Figure 1. State of stress in the Permian Basin, Texas and New Mexico. Black lines are the measured orientations of the maximum horizontal stress (SHmax), with line length scaled by data quality. The colored background is an interpolation of measured relative principal stress magnitudes (faulting regime) expressed using the $A\phi$ parameter (see text for details) of Simpson (1997). Blue lines are fault traces known to have experienced normal-sense offset within the past 1.6 Ma, from the USGS Quaternary Faults and Folds Database (Crone and Wheeler, 2000). The boundary between the Shawnee and Mazatzal basement domains is from Lund et al. (2015), and the Precambrian Grenville Front is from Thomas (2006). The Permian Basin boundary is from the U.S. Energy Information Administration, and the subbasin boundaries are from the Texas Bureau of Economic Geology Permian Basin Geological Synthesis Project. Earthquakes are from the USGS National Earthquake Information Center, the TexNet Seismic Monitoring Program, and Gan and Frohlich (2013). Focal mechanisms are from Saint Louis University (Herrmann et al., 2011).

C-108 - Item VIII


Geological Data

EARTHQUAKE / SEISMIC INFORMATION SUPPLEMENT (cont.)

In the following map, a layer with USGS historical earthquake data is overlaid and, a layer showing lines to represent Precambrian faults as documented by Ruppel, et al. (2005). Finally, a layer showing all currently permitted SWDs completed or proposed to be completed in the Devonian (Silurian) formation.

The USGS earthquakes shown are well known to the area. The 2012 quake located approximately 13 miles due east of Loving is also shown (22.4 miles). This was perhaps the most significant of the area in recent years but was determined to not be related to oil and gas activity. The best known and largest in recent history was the 1992, 4.6 magnitude quake centered south of Eunice, NM (29.5 miles).

The Precambrian faults and existing Devonian SWDs are discussed in more detail on the next page.

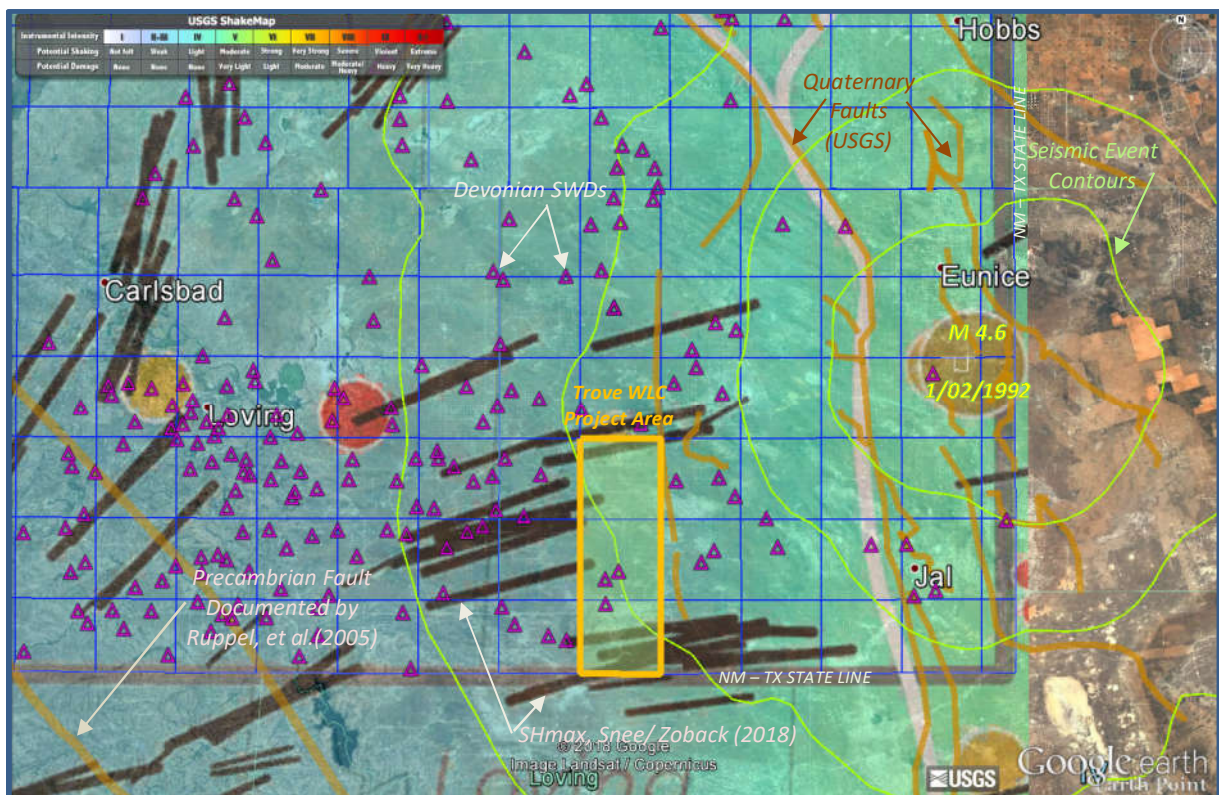

REGIONAL VIEW - DEVONIAN SWD LOCATIONS, PRECAMBRIAN FAULTS, S_{Hmax} , USGS MAGNITUDE


C-108 - Item VIII

Geological Data

EARTHQUAKE / SEISMIC INFORMATION SUPPLEMENT (cont.)

The primary Precambrian faults in the area as documented by Ruppel, et al. (2005) is represented on this map by the thick, pink colored lines. The most significant of these is the fault associated with the Rio Grande Rift, running southeast to northwest and, runs adjacent to a portion of Hwy 285 however; only a small portion the associated fault which runs parallel approximately 15 miles northeast is depicted below. The Trove WLC Project SWD Area is located some 30 miles from the fault. Other documented faults (USGS, 2000) are shown for eastern Lea County and extending into west Texas. Other Devonian SWDs in the area are also shown (small purple triangles) completed or proposed to be completed in the Devonian (Silurian) formation.

The previously referenced study by Snee and Zoback (shown on previous exhibits) evaluated the strike-slip probability using probabilistic FSP (Fault Slip Potential) analysis of known faults in the Permian Basin. The study predicts that the Precambrian fault shown here has less than a 10% probability of being critically stressed to the point of creating an induced seismicity event. The main reason for the low probability is due to the relationship of the strike of the fault to the regional S_{Hmax} orientation; the proposed SWD being well removed from the area.

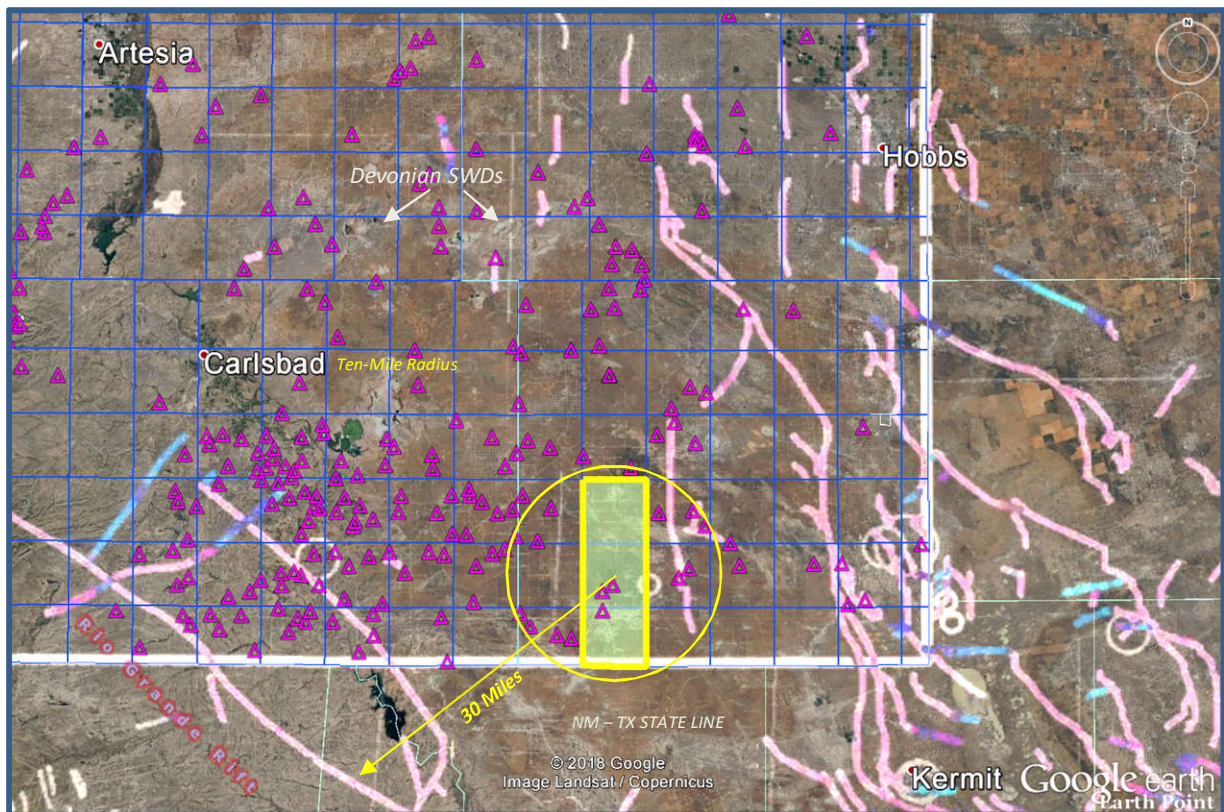


VICINITY - PERMITTED DEVONIAN SWDs, COMPOSITE FAULTS


C-108 - Item VIII

Geological Data

EARTHQUAKE / SEISMIC INFORMATION SUPPLEMENT (cont.)

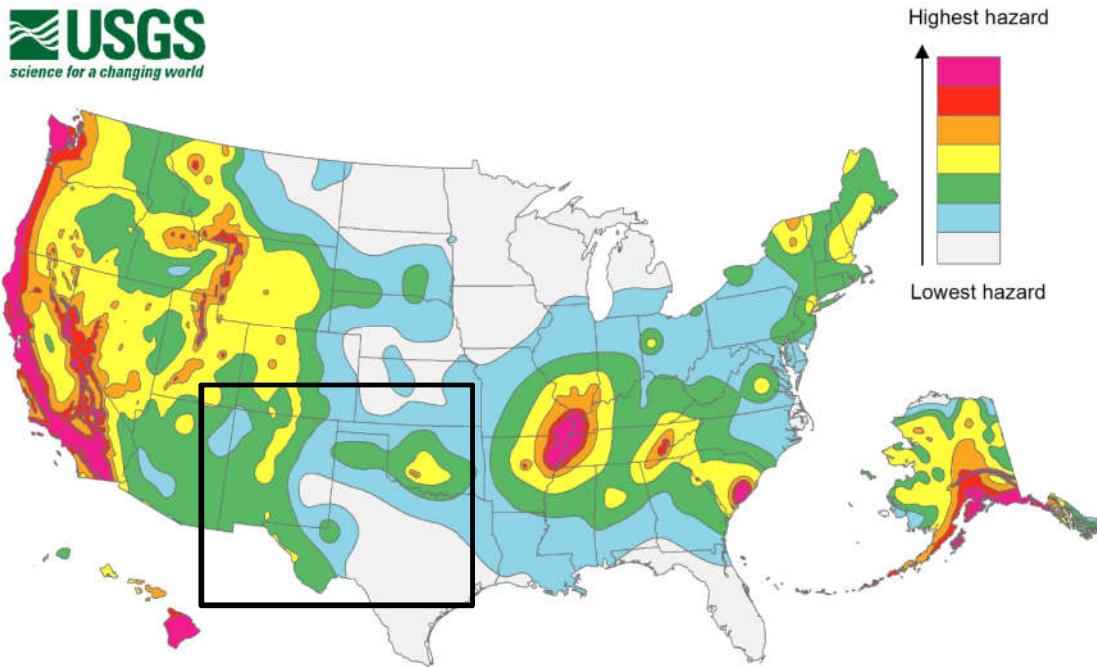

2014 map data: The USGS notes in its report that fracking may be to blame for a sizeable uptick in earthquakes in places like Oklahoma. "Some states have experienced increased seismicity in the past few years that may be associated with human activities such as the disposal of wastewater in deep wells," the report says. USGS hopes to use that data in future maps but it isn't included in this one. "Injection-induced earthquakes are challenging to incorporate into hazard models because they may not behave like natural earthquakes and their rates change based on man-made activities," the report says.

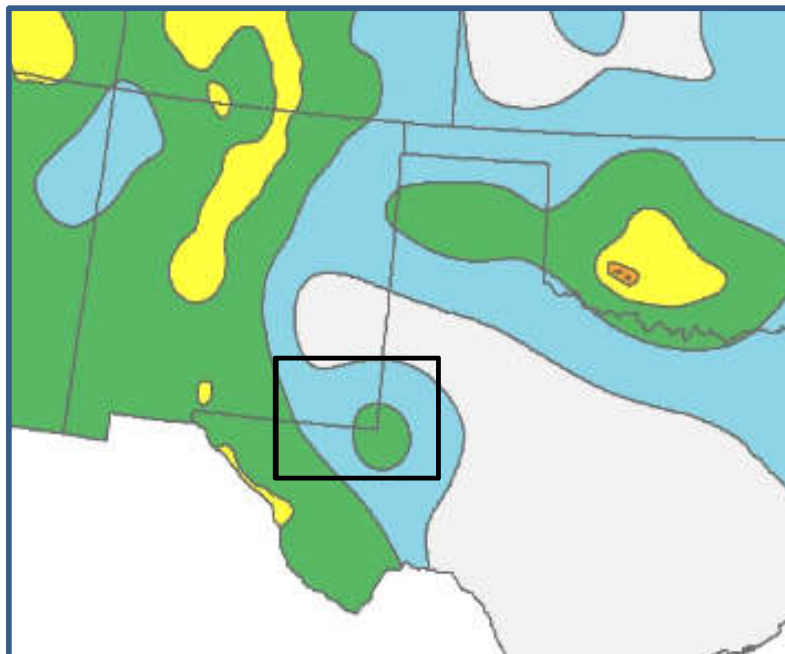


C-108 - Item VIII

Geological Data

EARTHQUAKE / SEISMIC INFORMATION SUPPLEMENT (cont.)

USGS 2014 REGIONAL MAP DATA OVERLAY IN GOOGLE EARTH W/ HISTORICAL EARTHQUAKES

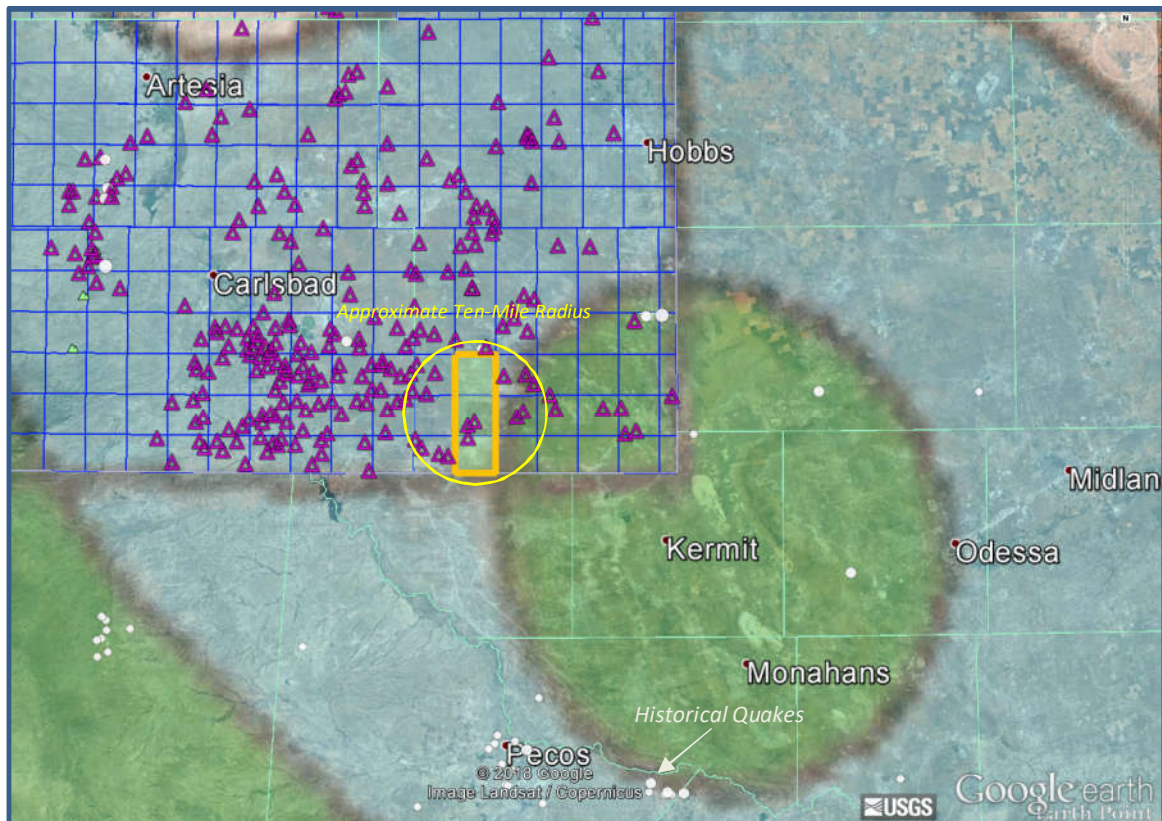


An updated USGS map for 2018 is on the next page. While methodology remained essentially the same according to USGS, the interpreted results and color-coding did have some modification. However, the subject area in southeast New Mexico on both maps remains very low and on the 2018 map, the area is assigned a value of <1% of “potentially minor-damage ground shaking”.

C-108 - Item VIII

Geological Data

EARTHQUAKE / SEISMIC INFORMATION SUPPLEMENT (cont.)

USGS 2018 ONE-YEAR MODEL

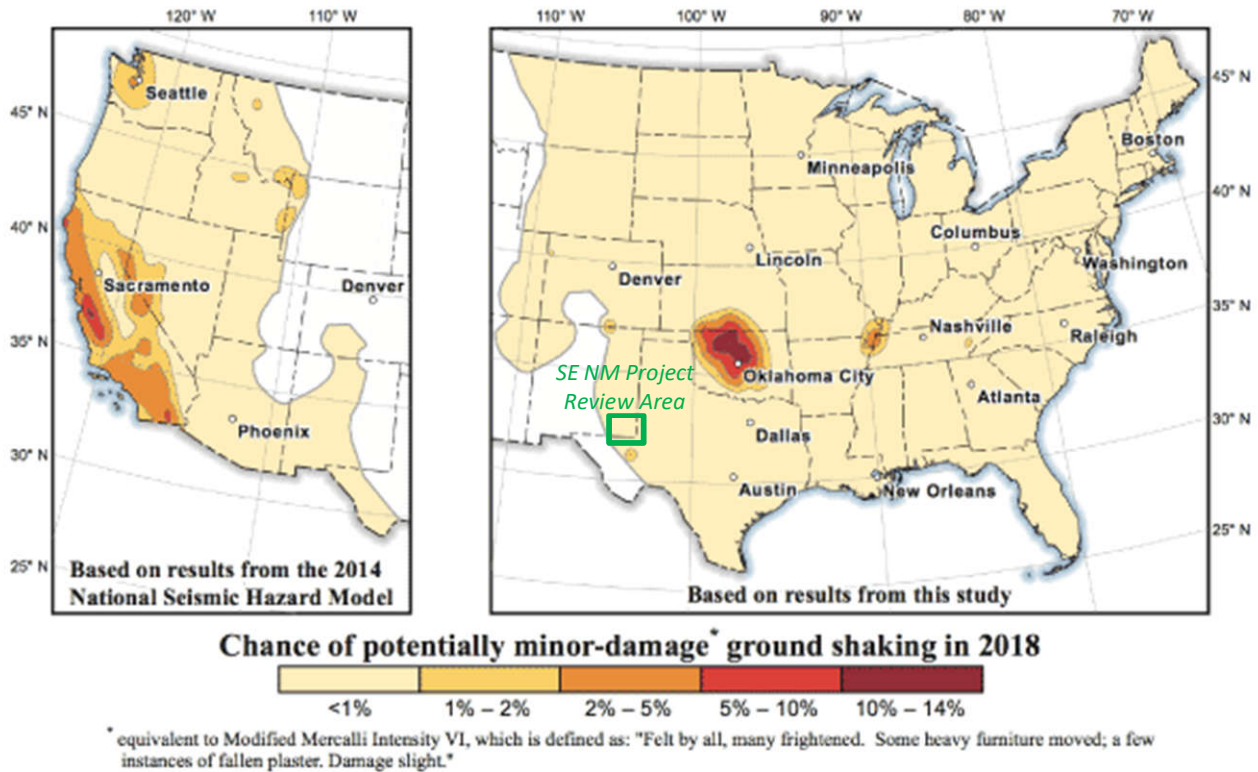

Map showing chance of damage from an earthquake in the Central and Eastern United States during 2018. Percent chances are represented as follows: pale yellow, less than 1 percent; dark yellow, 1 to 2 percent; orange, 2 to 5 percent; red, 5 to 10 percent; dark red, 10 to 12 percent. See Hazard from the western United States from the [2014 National Seismic Hazard Maps](#) (Petersen et al., 2014) for comparison.

The USGS has produced the 2018 one-year probabilistic seismic hazard forecast for the central and eastern United States from induced and natural earthquakes. For consistency, the updated 2018 forecast is developed using the same probabilistic seismicity-based methodology as applied in the two previous forecasts.

Based on publicly available data for the subject area, it is reasonable to believe the risk of induced seismic activity due to disposal injection into this well is extremely low.

Trove Energy and Water, LLC

Fault Slip Potential Analysis

FSP Methodology

- 4 FSP areas (100 square miles each) centered on townships in southeast New Mexico to cover all proposed Trove SWDs.
- Exact geologic conditions of the FSP areas are unknown.
- Two scenarios modeled for each FSP area using range of possible geologic conditions based on nearby geophysical logs.
- Scenario 1 uses low end of possible geologic conditions.
- Scenario 2 uses high end of possible geologic conditions.
- Each scenario modeled over 25 years. Stress gradients and pore pressure gradients derived from published papers (Snee and Zoback 2018).
- Reference depth, injection interval thickness, porosity, and permeability derived from nearby geophysical logs penetrating the injection interval (New Mexico OCD 2019, see appendix).
- One mapped Precambrian fault in the 100 square mile area of review for FSP area 1. No mapped or known sedimentary or Precambrian faults in the 100 square mile area of review for FSP areas 2, 3, and 4 (USGS 2019 and Wilson 2018).
- Additional random faults generated using strike and dip consistent with known New Mexico faults (USGS 2019, Snee and Zoback 2018).
- Advanced geological parameters derived from well logs and confirmed with previous expert testimony in the region (Reynolds 2019).

Parameters


Parameter	Value	Source
Vertical Stress Gradient (psi/ft)	1.1	Snee and Zoback (2018)
Horizontal Stress Direction (degrees azimuth)	75	Snee and Zoback (2018)
Reference Depth (ft)	16,600-17,500	Well Logs NMOCD (2019)
Initial Reservoir Pressure Gradient (psi/ft)	0.44	Snee and Zoback (2018)
A Phi	0.7	Snee and Zoback (2018)
Friction Coefficient	0.7	Snee and Zoback (2018)
Thickness with High Porosity (ft)	100-250	Well Logs NMOCD (2019)
Porosity (%)	5-10	Well Logs NMOCD (2019)
Permeability (mD)	10-100	Well Logs NMOCD (2019)
Fault Strike Minimum (degrees)	140	Snee and Zoback (2018)
Fault Strike Maximum (degrees)	190	Snee and Zoback (2018)
Fault Dip Minimum (degrees)	60	Snee and Zoback (2018)
Fault Dip Maximum (degrees)	90	Snee and Zoback (2018)
Density (kg/m ³)	1000	ALL Research and Reynolds (2019)
Dynamic Viscosity (Pa*s)	0.0003	ALL Research and Reynolds (2019)
Fluid Compressibility (Pa ⁻¹)	4.70E-10	ALL Research and Reynolds (2019)
Rock Compressibility (Pa ⁻¹)	8.70E-10	ALL Research and Reynolds (2019)

Injection Data


- 13 deep class II injection wells active in 2019 within 4 areas of review (see appendix).
- Monthly average injection rates calculated from injection start-date through April 2019 (see appendix).
- 14 proposed Trove SWDs within 4 areas of review.
- Proposed Trove SWDs assumed to inject at proposed average rate of 40,000 bpd.

FSP Areas

Trove FSP Areas

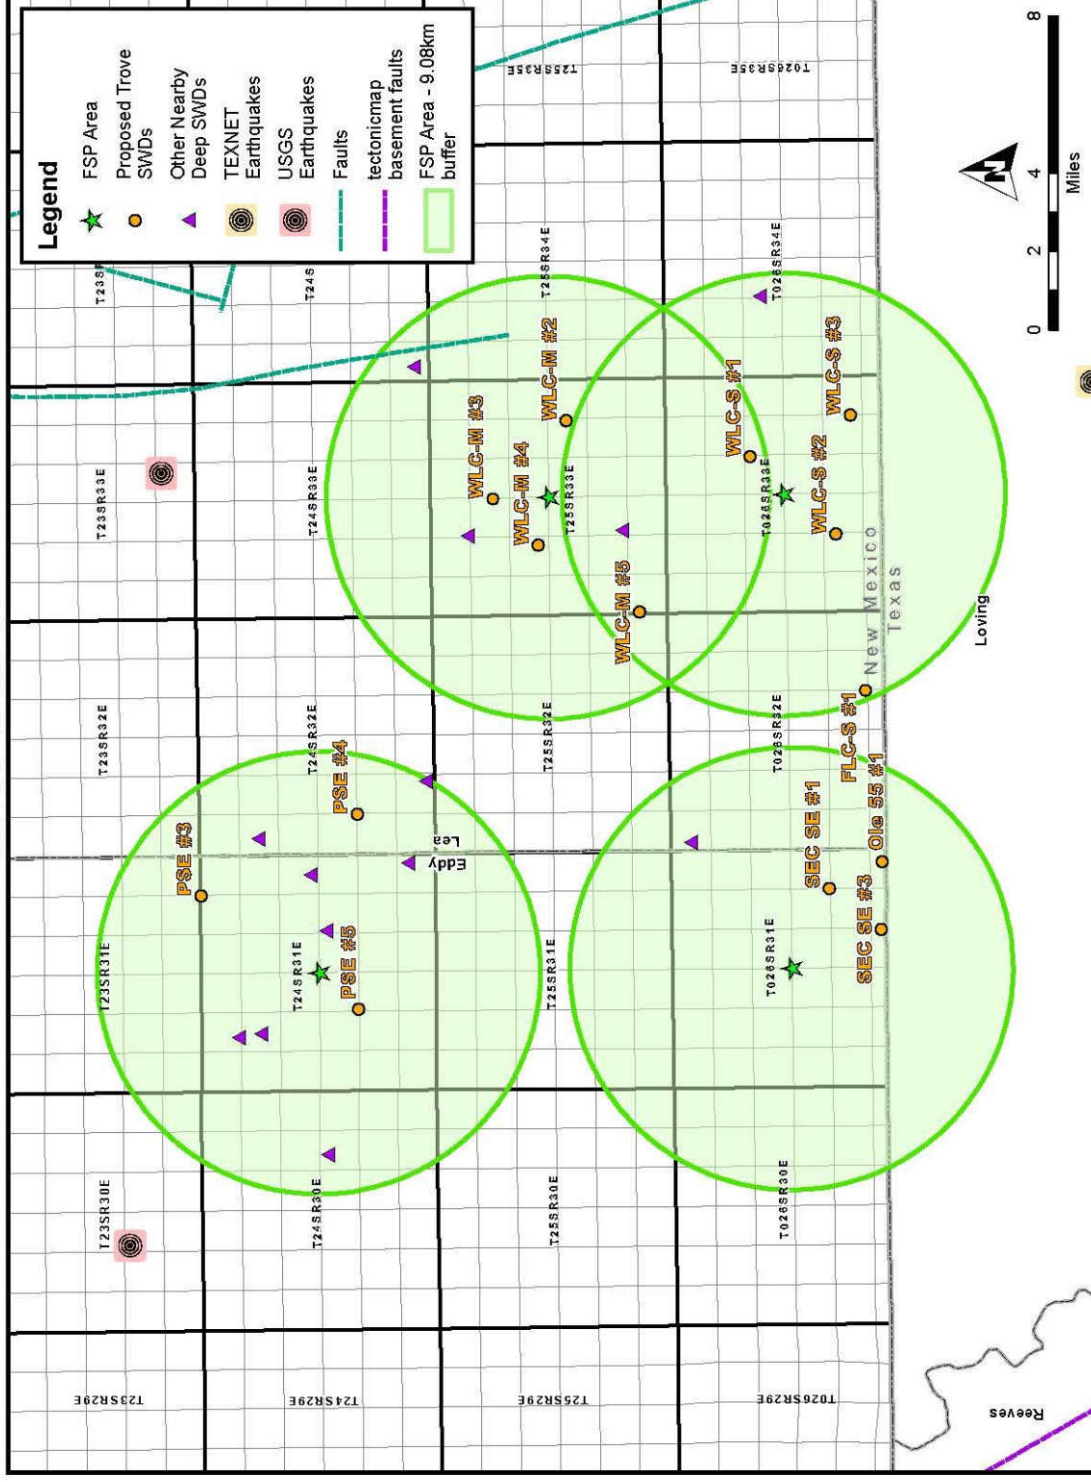

FSP After 25 Years - Area 2 - Scenario 1

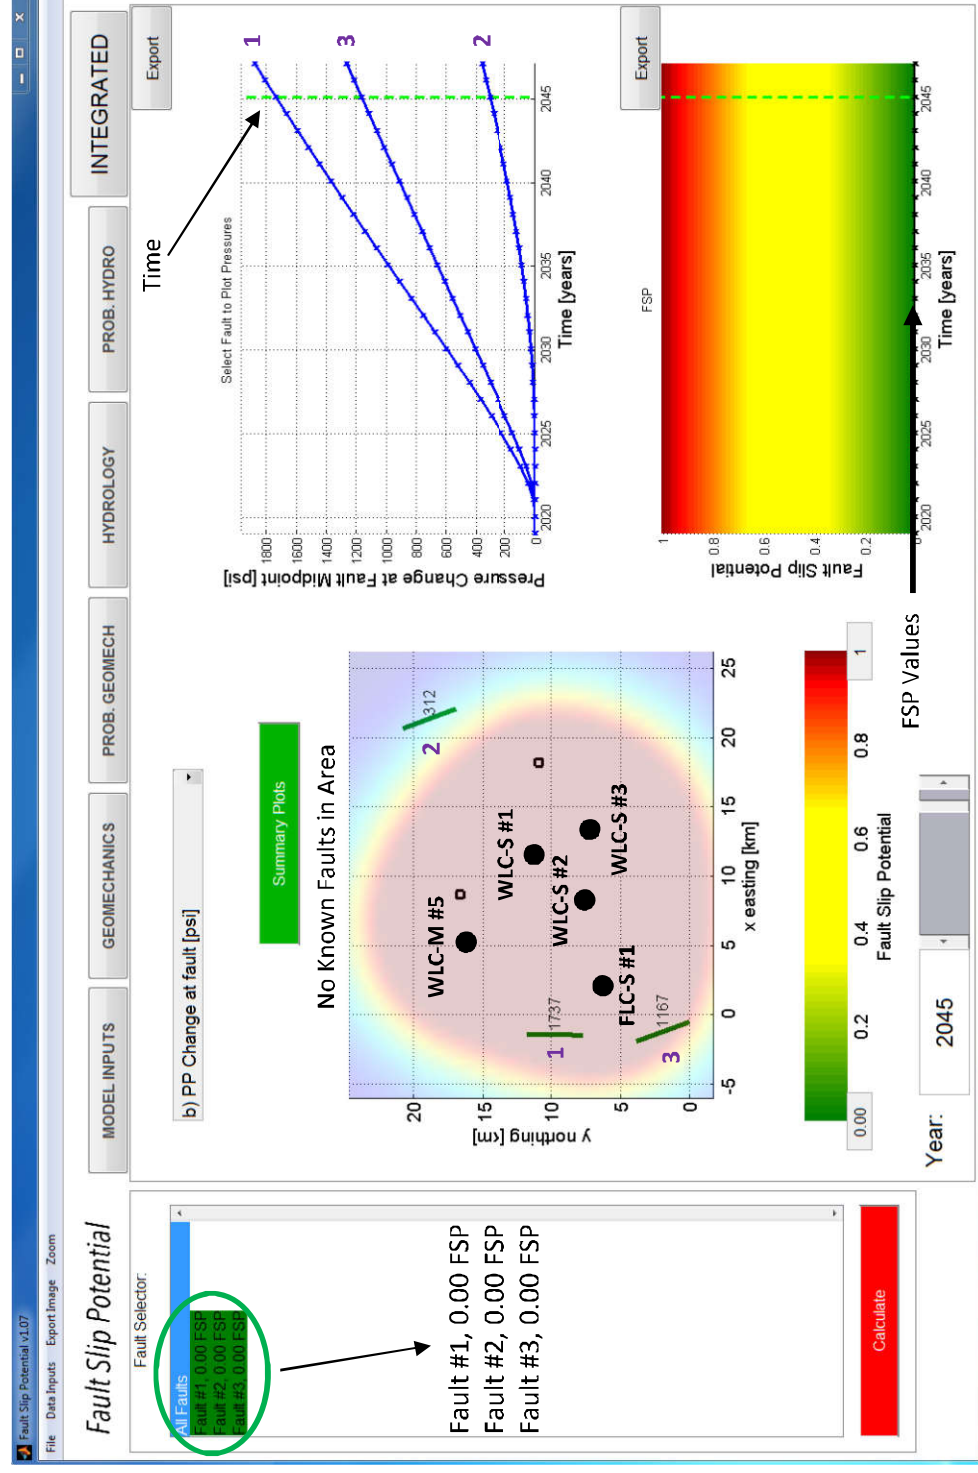

Parameters

Estimated Porosity
5%


Estimated Permeability
10 mD

Estimated Injection Interval
17,500 – 19,100 ft

Estimated Thickness with High
(5%) Porosity
100 ft

- = Proposed Trove SWDs
- = Other Deep SWDs

FSP After 25 Years - Area 2 - Scenario 2

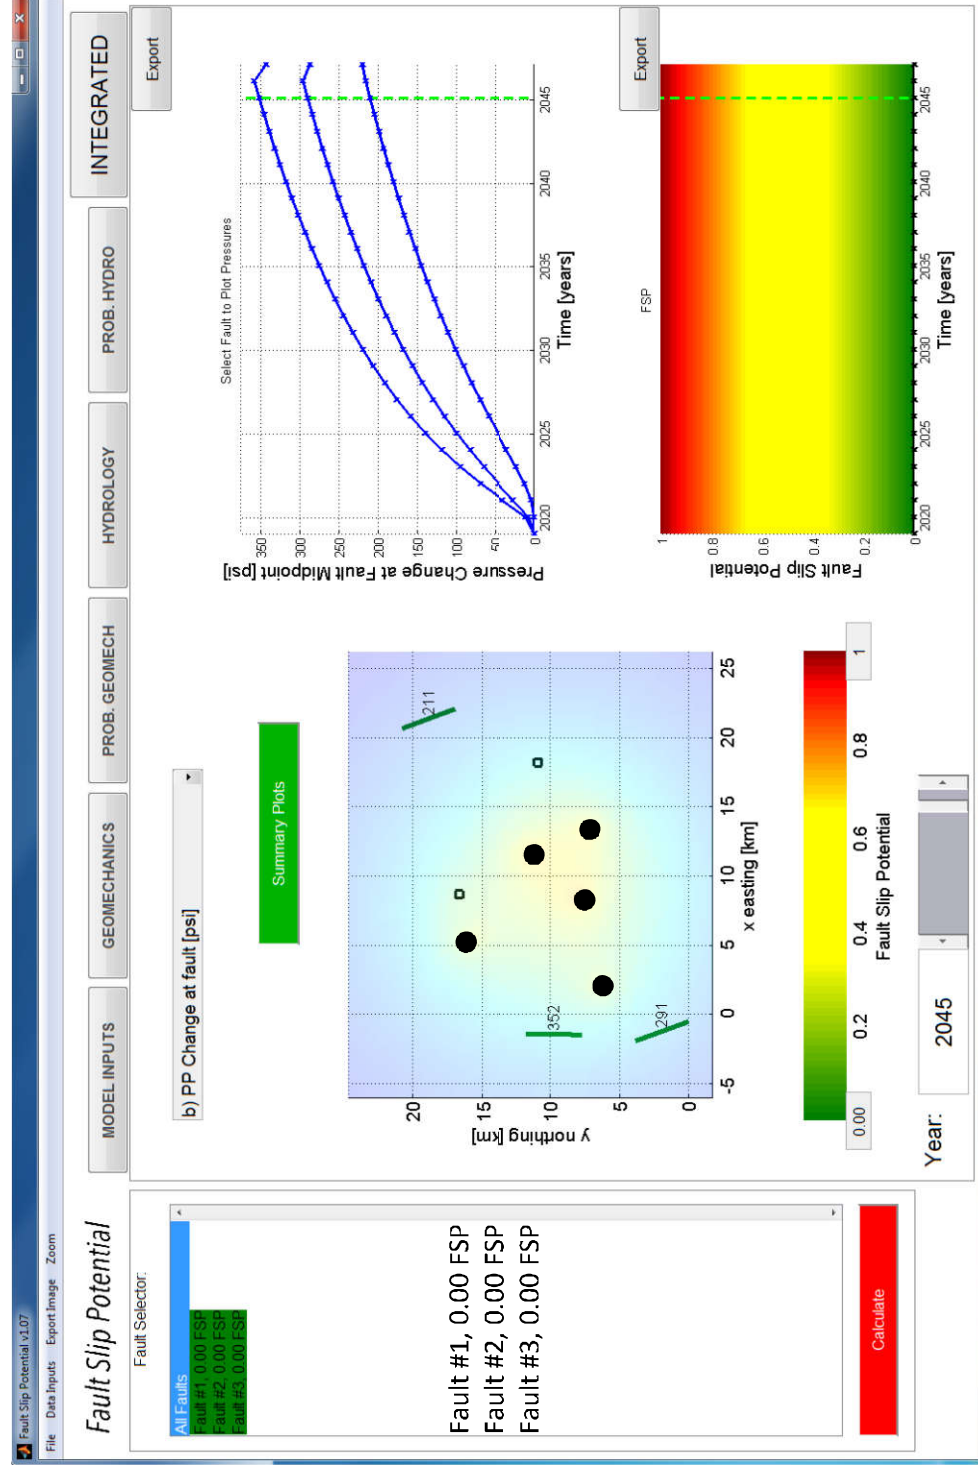

Parameters

Estimated Porosity
10%

Estimated Permeability
100 mD

Estimated Injection Interval
17,500 – 19,100 ft

Estimated Thickness with High
(10%) Porosity
250 ft

- = Proposed Trove SWDs
- = Other Deep SWDs

Conclusions

- There is one mapped Precambrian fault in the 100 square mile review of FSP area 1, which shows FSP of 0.00 over 25 years in both high and low geologic scenarios.
- Known faults in southeast New Mexico do not align with the horizontal stress field, and are not likely to slip.
- FSP modeling through 25 years, with injection rates that are likely overestimated, shows no risk of potential fault slip in the areas of review.
- These areas present little to no risk for injection induced seismicity.

References

- U.S. Geological Survey. "Information by Region-New Mexico." <https://earthquake.usgs.gov/earthquakes/byregion/newmexico.php> (Accessed June 24, 2019)
- U.S. Geological Survey. "Faults." <https://earthquake.usgs.gov/hazards/qafaults/> (Accessed June 24, 2019)
- EMNRD Oil Conservation Division. "Welcome to the New Mexico Mining & Minerals Division." <http://www.emnrd.state.nm.us/OCD/ocdonline.html> (Accessed July 19, 2019)
- Snee, Jens-Erik Lund, and Mark D. Zoback. 2018. "State of Stress in the Permian Basin, Texas and New Mexico: Implications for Induced Seismicity." *The Leading Edge* 37, no. 2 (February 2018): 127-34.
- Wilson, Scott J. 2018. "Affidavit of Scott J. Wilson, Amended Applications of NGL Water Solutions Permian, LLC for Approval of Saltwater Disposal Wells in Lea County, New Mexico." New Mexico Oil Conservation Division Case No. 16438 and Case No. 16440.
- Reynolds, Todd. 2019. "FSP Analysis (Fault Slip Potential) Exhibits." New Mexico Oil Conservation Division Case No. 20313, Case No. 20314, and Case No. 20472.

Appendix

Control Log Well Details and Nearby Deep SWDs Injection Data


Notes: Approximately 100-250 feet of >5% porosity within injection interval. Montoya is tight where present on logs.

Nearby Deep SWD Injection Data

FSP Area	API #	Well Name	Average Daily Injection Rate (BWPD)	Injection Start-Date
1	30-015-43867	CYPRESS SWD #001	8,377	Jul - 2018
1	30-025-29000	DIAMOND 31 FEDERAL COM #001	2,950	Jan - 2014
1, 2	30-025-35598	RED HILLS SWD #001	8,346	Dec - 2018
2	30-025-42355	RATTLESNAKE 16 SWD #001	5,834	Dec - 2015
3	30-025-43379	PADUCA 6 SWD #001Y	21,046	Aug - 2017
4	30-025-41524	COTTON DRAW 32 STATE SWD #002	12,724	Mar - 2017
4	30-015-41649	COTTON DRAW UNIT SWD #181	10,367	Jan - 2014
4	30-015-44676	MESA VERDE SWD #003	8,396	Sep - 2018
4	30-015-40935	PLU DELAWARE B 23 FEDERAL SWD #001	9,742	Jul - 2013
4	30-015-44612	SAND DUNES SWD #001	1,472	Nov - 2018
4	30-015-44131	SAND DUNES SWD #002	17,396	Jul - 2018
4	30-025-43473	STATION SWD #001	25,243	Aug - 2018
4	30-015-44416	STRIKER 2 SWD #001	11,584	Oct - 2018

C-108 - Item XI

Groundwater Basins - Water Column / Depth to Groundwater

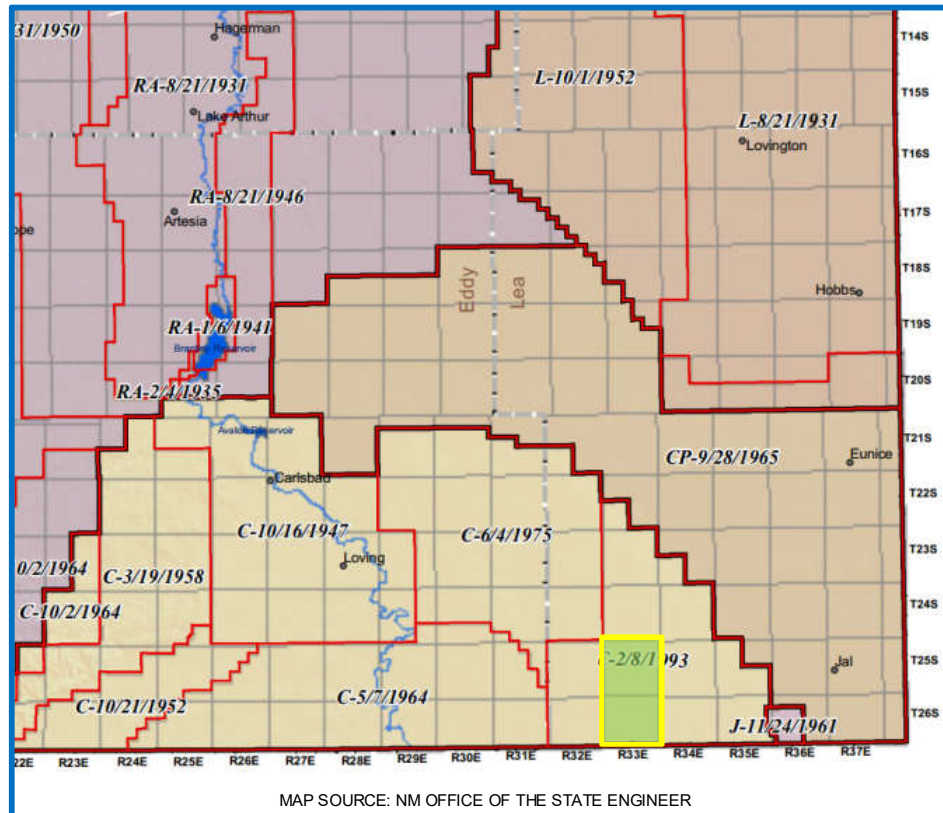

The subject well is located within the Carlsbad Basin.

Fresh water in the area is generally available from the Rustler and Santa Rosa formations. State Engineer's records show water wells in the area with a depth to groundwater of 90 to 185 feet and an average depth of 142 feet.

There are NO water wells located within one mile of the proposed SWD.


C-108 Item XI

Water Wells Within One Mile

WLC South Federal SWD No.2 - Water Well Locator Map

There are NO water wells (PODs) within a one-mile radius of the proposed SWD.

A representative sample is included herein.

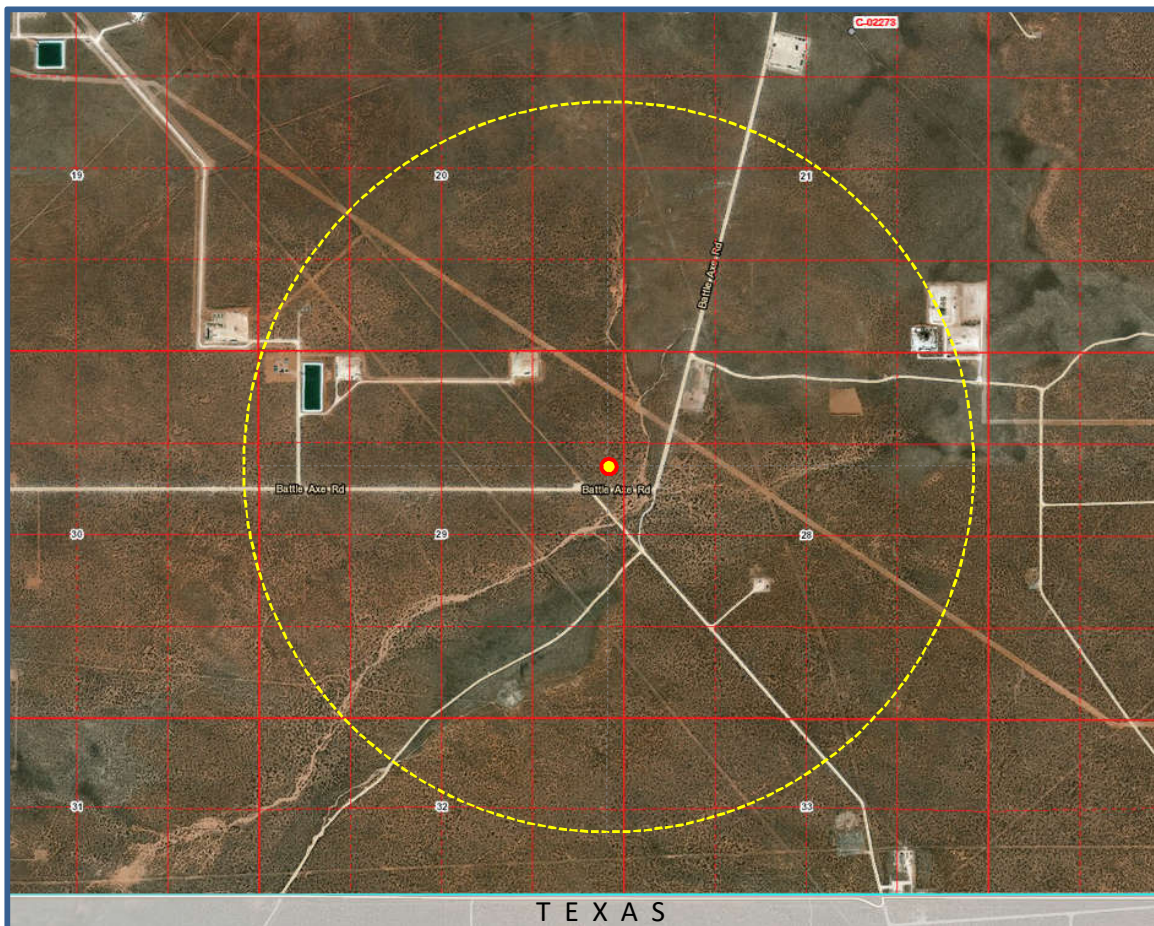

Data from NM Office of the State Engineer displayed in OSE-GIS System.

C-108 ITEM XI – WATER WELLS IN AOR

Depth to Ground Water



New Mexico Office of the State Engineer Water Column/Average Depth to Water

(A CLW##### in the
POD suffix indicates the
POD has been replaced
& no longer serves a
water right file.)

(R=POD has
been replaced,
O=orphaned,
C=the file is
closed)

(quarters are 1=NW 2=NE 3=SW 4=SE)
(quarters are smallest to largest)

(NAD83 UTM in meters)

(In feet)

POD Number	POD Sub- Code	basin	County	Q 64	Q 16	Q 4	Sec	Tws	Rng	X	Y	Depth Well	Depth Water	Water Column
C 02270	CUB	LE		1	1	2	27	26S	33E	636063	3543722	150	125	25
C 02273	CUB	LE			1	2	21	26S	33E	634549	3545134*	160	120	40
C 02285 POD1	CUB	LE		1	4	4	03	26S	33E	636613	3548855	220	220	0
C 02286	CUB	LE		3	4	4	03	26S	33E	636470	3548714	220	175	45
C 02287	C	LE		3	4	4	03	26S	33E	636427	3548708	220		
C 02288	CUB	LE		4	4	4	03	26S	33E	636646	3548758	220	180	40
C 02289	CUB	LE		4	4	4	03	26S	33E	636612	3548675*	200	160	40
C 02290	CUB	LE		4	4	4	03	26S	33E	636538	3548770	200	160	40
C 02293	CUB	LE		2	2	1	14	26S	33E	637501	3546975	200	135	65
C 02294	CUB	LE		4	4	3	11	26S	33E	637465	3547003	200	145	55
C 02295	CUB	LE		2	2	4	12	26S	33E	639850	3547710*	250	200	50
C 03577 POD1	CUB	LE		3	3	3	22	26S	33E	636010	3543771	750	110	640
C 03596 POD1	C	LE		3	3	4	22	26S	33E	636017	3543756	225		

Average Depth to Water: **157 feet**

Minimum Depth: **110 feet**

Maximum Depth: **220 feet**

Record Count: 13

PLSS Search:

Township: 26S

Range: 33E


*UTM location was derived from PLSS - see Help

The data is furnished by the NMOSE/ISC and is accepted by the recipient with the expressed understanding that the OSE/ISC make no warranties, expressed or implied, concerning the accuracy, completeness, reliability, usability, or suitability for any particular purpose of the data.

C-108 ITEM XII

Geologic Affirmation

We have examined available geologic and engineering data and have found no evidence of open faults or other hydrologic connection between the disposal interval and any underground sources of drinking water.

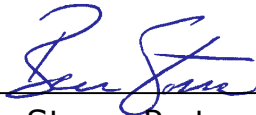

Ben Stone, Partner
SOS Consulting, LLC

Project: Trove Energy and Water, LLC
WLC South Project Area
Reviewed 2/22/2019

C-108 ITEM XIII – PROOF OF NOTIFICATION

IDENTIFICATION AND NOTIFICATION OF INTERESTED PARTIES

Exhibits for Section

Affected Parties Map


List of Interested Parties

Notification Letter to Interested Parties

Proof of Certified Mailing

Published Legal Notice

WLC South Federal SWD Well No.2 – Affected Parties Plat (Attachment to NMOCD Form C-108, Application for Authority to Inject.)

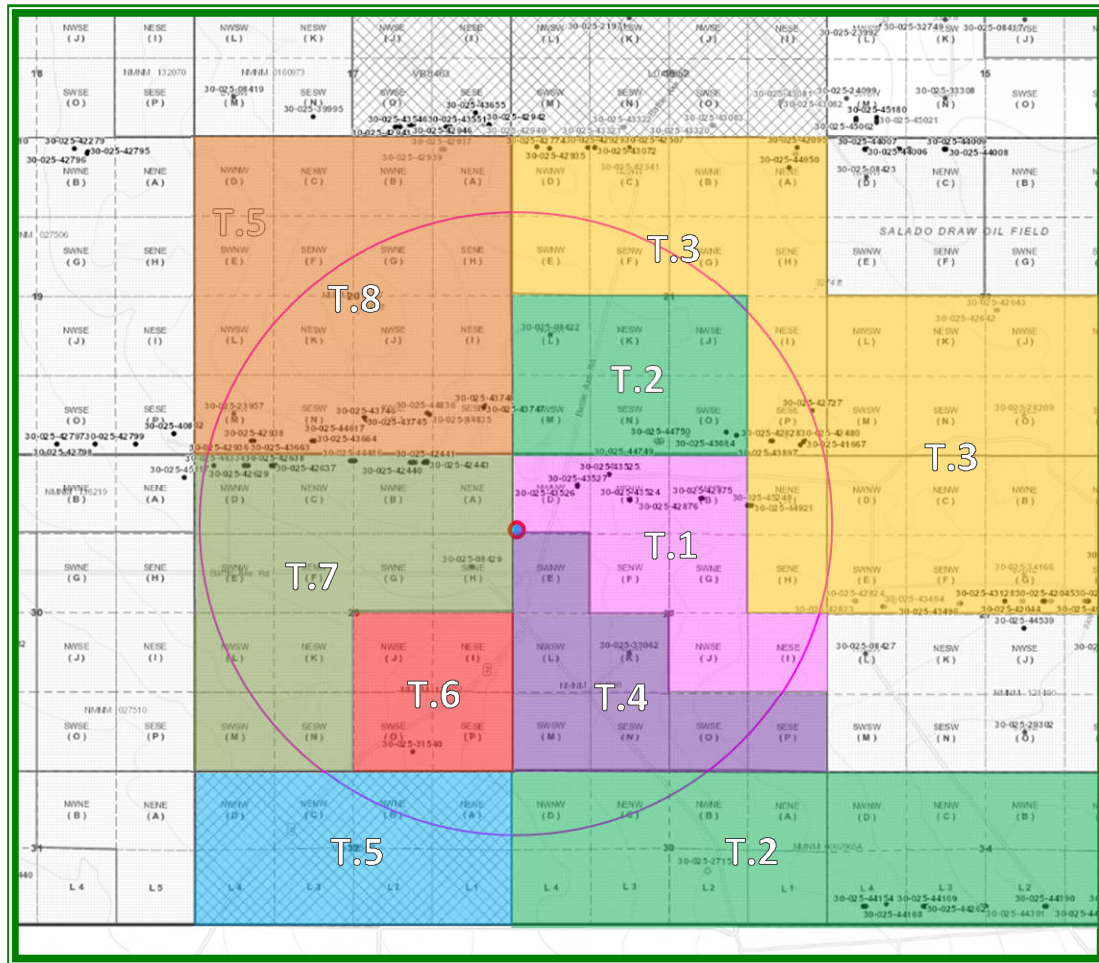

LEGEND

- | | |
|---|---|
| T.1 – NMNM-121490 – EOG Resources, Inc. | T.5 – VB-1838-0002 – Chevron USA, Inc. |
| T.2 – NMNM-0002965A – ConocoPhillips Co. | T.6 – NMNM-125653 – Chevron USA, Inc. |
| T.3 – NMNM-015321 – Battle Axe Ranch, LLC | T.7 – NMNM-027506 – Chevron USA, Inc. |
| T.4 – NMNM-084898 – EOG Resources, Inc. | T.8 – NMNM-118727 – EOG Resources, Inc. |

C-108 ITEM XIII – PROOF OF NOTIFICATION

AFFECTED PARTIES LIST

SOS Consulting is providing electronic delivery of C-108 applications.
ALL APPLICABLE AFFECTED PARTIES ARE PROVIDED A LINK IN THE NOTICE LETTER
TO A SECURE SOS/ CITRIX SHAREFILE® SITE TO VIEW AND DOWNLOAD
A FULL COPY OF THE SUBJECT C-108 APPLICATION IN PDF FORMAT.

"AFFECTED PERSON" MEANS THE DIVISION DESIGNATED OPERATOR; IN THE ABSENCE OF AN OPERATOR, A LESSEE WHOSE INTEREST IS EVIDENCED BY A WRITTEN CONVEYANCE DOCUMENT EITHER OF RECORD OR KNOWN TO THE APPLICANT AS OF THE DATE THE APPLICANT FILES THE APPLICATION; OR IN THE ABSENCE OF AN OPERATOR OR LESSEE, A MINERAL INTEREST OWNER WHOSE INTEREST IS EVIDENCED BY A WRITTEN CONVEYANCE DOCUMENT EITHER OF RECORD OR KNOWN TO THE APPLICANT AS OF THE DATE THE APPLICANT FILED THE APPLICATION FOR PERMIT TO INJECT.; PER OCD RULES NMAC 19.15.26.7, A. AND 19.15.26.8, B.2.

SURFACE OWNER

- 1 U.S. DEPARTMENT OF INTERIOR
Bureau of Land Management
Oil & Gas Division
620 E. Greene St.
Carlsbad, NM 88220
Certified: 7018 2290 0001 2038 6629

OFFSET MINERALS LESSEES and OPERATORS (All Notified via USPS Certified Mail)

BLM Leases NMNM-0002965A, 359292, 0000127A (T.1, T.4 and T.8 on Map)

Lessee & Operator

- 2 EOG RESOURCES, INC.
105 S. 4th St.
Artesia, NM 88210
Certified: 7018 2290 0001 2038 6636

BLM Lease NMNM-0002965A (T.2 on Map)

Lessee

CONOCOPHILLIPS COMPANY
P.O. Box 2197
Houston, TX 77252-2197

Operator

EOG RESOURCES, INC.
105 S. 4th St.
Artesia, NM 88210

BLM Lease NMNM-015321 and Split Estate – Battle Axe Ranch, LLC (T.3 on Map)

Lessee & Operator

EOG RESOURCES, INC.
105 S. 4th St.
Artesia, NM 88210

State Lease VB-1838-0002 and BLM Leases NMNM-125653, 027506 (T.5, T.6 and T.7 on Map)

Lessee & Operator

- 3 CHEVRON USA, INC.
Attn: Linda McMurray, Permitting Team
6301 Deauville Blvd.
Midland, TX 79706
Certified: 7018 2290 0001 2038 6643

C-108 ITEM XIII – PROOF OF NOTIFICATION
AFFECTED PARTIES LIST (cont.)

OFFSET MINERALS OWNERS (Notified via USPS Certified Mail)

U.S. DEPARTMENT OF INTERIOR
Bureau of Land Management
Oil & Gas Division
620 E. Greene St.
Carlsbad, NM 88220

- 4 STATE OF NEW MEXICO
Oil, Gas and Minerals Division
310 Old Santa Fe Trail
Santa Fe, NM 87504
Certified: 7018 2290 0001 2038 6650

REGULATORY

NEW MEXICO OIL CONSERVATION DIVISION (FedEx'ed original and copy)
1220 S. St. Francis Dr.
Santa Fe, NM 87505

NEW MEXICO OIL CONSERVATION DIVISION (FedEx'ed copy)
1625 N. French Drive
Hobbs, NM 88240

September 16, 2019

NOTIFICATION TO INTERESTED PARTIES
via U.S. Certified Mail – Return Receipt Requested

To Whom It May Concern:

Trove Energy and Water, LLC, Hobbs, New Mexico, is preparing applications to the New Mexico Oil Conservation Division to drill and complete for salt water disposal the WLC South Federal SWD Well No.2. The proposed commercial operation will be for produced water disposal from area operators. As indicated in the notice below, the well will be located in Section 28, Township 26 South, Range 33 East in Lea County, New Mexico.

The published notice states that the interval will be from 17,430 feet to 18,710 feet into the Devonian, Silurian and Fusselman formations.

Following is the notice published in the Hobbs News-Sun, Hobbs, New Mexico on or about September 15, 2019.

LEGAL NOTICE

Trove Energy and Water, LLC, 1919 North Turner, Hobbs, NM 88240, is filing Form C-108 (Application for Authority to Inject) with the New Mexico Oil Conservation Division seeking administrative approval for a salt water disposal well. The proposed well, the WLC South Federal SWD Well No.2 will be located 1310' FNL and 10' FWL, Section 28, Township 26 South, Range 33 East, Lea County, New Mexico; approximately 23.7 miles west/ southwest of Jal, NM.

Produced water from area production will be commercially disposed into the Devonian, Silurian and Fusselman formations at a maximum interval depth of 17,430' to 18,710' at a maximum surface pressure of 3486 psi and a rate limited only by such pressure. Mudlogging and e-logs will confirm final interval depths.

Interested parties wishing to object to the proposed application must file with the New Mexico Oil Conservation Division, 1220 St. Francis Dr., Santa Fe, NM 87505, (505)476-3460 within 15 days of the date of this notice. Additional information may be obtained from the applicant's agent, SOS Consulting, LLC, (903)488-9850 or, email info@sosconsulting.us.

You have been identified as a party who may be interested as an offset lessee or operator.

You are entitled to a full copy of the application. A full copy in PDF format will be posted on the SOS Consulting **ShareFile** site and available for future download (posting may lag behind the notice effort).

Use the URL link: <https://sosconsulting.sharefile.com/d-s7661ece733a4dd29>
(Please Note: The ShareFile service is powered by Citrix Systems and is completely secure.*)

The link to this file will be active for 60 days from the date of this letter. Your company can access and download the file a maximum of five (5) times. (One copy may be downloaded and shared as needed among your company.)

If preferred, you may call SOS Consulting, LLC at 903-488-9850, or email info@sosconsulting.us, and the same PDF file copy will be expedited to you via email.

Please use a subject like **"WLC South Fed SWD #2 September 2019 PDF Copy Request"**.

Thank you for your attention in this matter.

Best regards,



Ben Stone, SOS Consulting, LLC
Agent for Trove Energy and Water, LLC

Cc: Application File

SOS Consulting is committed to providing superior quality work using technology to assist clients and affected parties in obtaining the documentation required. SOS will continue to utilize methods which are less energy and resource intensive including, the reduction of paper copies.

We hope you'll partner with us and appreciate these efforts.

* You will be asked for your email, name and company.
This will not be used by anyone except keeping track of the file downloads.
You will not be solicited by SOS or anyone else. Data is stored on Citrix Systems servers only.

CITRIX



C-108 – Item XIV

Proof of Notice - Certified Mail Receipts

7018 2290 0001 2038 6629

**U.S. Postal Service™
CERTIFIED MAIL® RECEIPT**
Domestic Mail Only

For delivery information, visit our website at www.usps.com®.

OFFICIAL USE

Certified Mail Fee	\$ 3.50
Extra Services & Fees (check box, add fee as appropriate)	
<input type="checkbox"/> Return Receipt (hardcopy)	\$
<input type="checkbox"/> Return Receipt (electronic)	\$
<input type="checkbox"/> Certified Mail Restricted Delivery	\$ 2.80
<input type="checkbox"/> Adult Signature Required	\$
<input type="checkbox"/> Adult Signature Restricted Delivery	\$
Postage	\$.55
Total Postage and Fees	\$ 6.85

Sent To: Bureau of Land Management
Oil & Gas Division
620 E. Greene St.
Carlsbad, NM 88220

Postmark Here: SEP 16 2019

9399 9802 1000 2038 6629

**U.S. Postal Service™
CERTIFIED MAIL® RECEIPT**
Domestic Mail Only

For delivery information, visit our website at www.usps.com®.

OFFICIAL USE

Certified Mail Fee	\$ 3.50
Extra Services & Fees (check box, add fee as appropriate)	
<input type="checkbox"/> Return Receipt (hardcopy)	\$
<input type="checkbox"/> Return Receipt (electronic)	\$
<input type="checkbox"/> Certified Mail Restricted Delivery	\$ 2.80
<input type="checkbox"/> Adult Signature Required	\$
<input type="checkbox"/> Adult Signature Restricted Delivery	\$
Postage	\$.55
Total Postage and Fees	\$ 6.85

Sent To: EOG RESOURCES, INC.
Attn: Chuck Moran
5509 Champions Drive
Midland, TX 79706

Postmark Here: SEP 16 2019

7018 2290 0001 2038 6643

**U.S. Postal Service™
CERTIFIED MAIL® RECEIPT**
Domestic Mail Only

For delivery information, visit our website at www.usps.com®.

OFFICIAL USE

Certified Mail Fee	\$ 3.50
Extra Services & Fees (check box, add fee as appropriate)	
<input type="checkbox"/> Return Receipt (hardcopy)	\$
<input type="checkbox"/> Return Receipt (electronic)	\$
<input type="checkbox"/> Certified Mail Restricted Delivery	\$ 2.80
<input type="checkbox"/> Adult Signature Required	\$
<input type="checkbox"/> Adult Signature Restricted Delivery	\$
Postage	\$.55
Total Postage and Fees	\$ 6.85

Sent To: CHEVRON USA, INC.
Attn: Linda McMurray, Permitting Team
6301 Deauville Blvd.
Midland, TX 79706

Postmark Here: SEP 16 2019

0599 9802 1000 2038 6643

**U.S. Postal Service™
CERTIFIED MAIL® RECEIPT**
Domestic Mail Only

For delivery information, visit our website at www.usps.com®.

OFFICIAL USE

Certified Mail Fee	\$ 3.50
Extra Services & Fees (check box, add fee as appropriate)	
<input type="checkbox"/> Return Receipt (hardcopy)	\$
<input type="checkbox"/> Return Receipt (electronic)	\$
<input type="checkbox"/> Certified Mail Restricted Delivery	\$ 2.80
<input type="checkbox"/> Adult Signature Required	\$
<input type="checkbox"/> Adult Signature Restricted Delivery	\$
Postage	\$.55
Total Postage and Fees	\$ 6.85

Sent To: STATE OF NEW MEXICO
Oil, Gas and Minerals Division
310 Old Santa Fe Trail
Santa Fe, NM 87504

Postmark Here: SEP 16 2019

Affidavit of Publication

STATE OF NEW MEXICO
COUNTY OF LEA


I, Daniel Russell, Publisher of the Hobbs News-Sun, a newspaper published at Hobbs, New Mexico, solemnly swear that the clipping attached hereto was published in the regular and entire issue of said newspaper, and not a supplement thereof for a period of 1 issue(s).

Beginning with the issue dated
September 15, 2019
and ending with the issue dated
September 15, 2019.

Daniel Russell

Gussie Black
Business

My commission expires
January 29, 2023

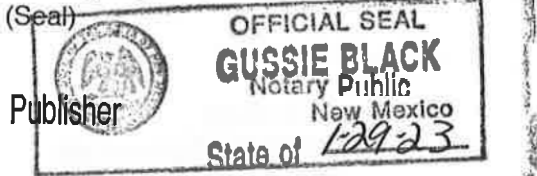

Sworn and subscribed to before me this
15th day of September 2019.

LEGALS

LEGAL NOTICE SEPTEMBER 15, 2019

Trove Energy and Water, LLC, 1919 North Turner, Hobbs, NM 88240, is filing Form C-108 (Application for Authority to Inject) with the New Mexico Oil Conservation Division seeking administrative approval for a salt water disposal well. The proposed well, the WLC South Federal SWD Well No.2 will be located 1310' FNL and 10' FWL, Section 28, Township 26 South, Range 33 East, Lea County, New Mexico, approximately 23.7 miles west/southwest of Jal, NM.

Produced water from area production will be commercially disposed into the Devonian, Silurian and Fusselman formations at a maximum interval depth of 17,430' to 18,710' at a maximum surface pressure of 3486 psi and a rate limited only by such pressure. Mudlogging and e-logs will confirm final interval depths.

Interested parties wishing to object to the proposed application must file with the New Mexico Oil Conservation Division, 1220 St. Francis Dr., Santa Fe, NM 87505, (505)478-3460 within 15 days of the date of this notice. Additional information may be obtained from the applicant's agent, SOS Consulting, LLC, (903)488-9850 or, email info@sosconsulting.us, #34701