

# New Mexico Energy, Minerals and Natural Resources Department

**Bill Richardson**  
Governor

Joanna Prukop  
Cabinet Secretary  
Reese Fullerton  
Deputy Cabinet Secretary

Mark Fesmire  
Division Director  
Oil Conservation Division



**Administrative Order SWD-1119**  
**April 28, 2008**

APPLICATION OF XTO ENERGY, INC FOR PRODUCED WATER DISPOSAL, SAN  
JUAN COUNTY, NEW MEXICO

## ADMINISTRATIVE ORDER OF THE OIL CONSERVATION DIVISION

Under the provisions of Rule 701(B), XTO Energy, Inc. (OGRID 5380) made application to the New Mexico Oil Conservation Division for permission to utilize for produced water disposal its Canyon SWD Well No. 1 (API No. 30-045-34454) located 845 feet from the South line and 1945 feet from the West line of Section 35, Township 26 North, Range 11 West, NMPM, San Juan County, New Mexico.

### THE DIVISION DIRECTOR FINDS THAT:

- (1) The application has been duly filed under the provisions of Rule 701(B) of the Division Rules and Regulations;
- (2) Satisfactory information has been provided that all offset operators and surface owners have been duly notified;
- (3) The applicant has presented satisfactory evidence that all requirements prescribed in Rule 701 will be met;
- (4) No objections have been received within the waiting period prescribed by said rule; and
- (5) The operator is in compliance with the Division's Rule 40.

### IT IS THEREFORE ORDERED THAT:

XTO Energy, Inc. is hereby authorized to utilize its Canyon SWD Well No. 1 (API No. 30-045-34454) located 845 feet from the South line and 1945 feet from the West line of Section 35, Township 26 North, Range 11 West, NMPM, San Juan County, New Mexico, in such manner as to permit the injection of produced water for disposal



purposes into the Point Lookout member of the Mesaverde formation through perforations from 4,000 feet to 4,100 feet (approximate depths) and through plastic-lined tubing set with a packer located within 100 feet of the top of the injection interval.

IT IS FURTHER ORDERED THAT:

The operator shall take all steps necessary to ensure that the injected water enters only the proposed injection interval and is not permitted to escape to other formations or onto the surface.

Prior to injection, the operator shall swab test the perforations and supply a water analysis of the swabbed fluid and the static fluid level (or initial reservoir pressure) to the district office in Aztec on a sundry form.

After installing injection tubing, the casing-tubing annulus shall be loaded with an inert fluid and equipped with a pressure gauge or an approved leak detection device in order to determine leakage in the casing, tubing, or packer. The casing shall be pressure tested from the surface to the packer setting depth to assure casing integrity.

The wellhead injection pressure on the well shall be limited to **no more than 800 psi**. In addition, the injection well or system shall be equipped with a pressure limiting device in workable condition which shall, at all times, limit surface injection pressure to the maximum allowable pressure for this well.

The Director of the Division may authorize an increase in injection pressure upon a proper showing by the operator of said well that such higher pressure will not result in migration of the injected fluid from the injection formation. Such proper showing shall consist of a valid step-rate test run in accordance with and acceptable to this office.

The operator shall notify the supervisor of the Aztec district office of the Division of the date and time of the installation of disposal equipment and of any mechanical integrity test so that the same may be inspected and witnessed.


The operator shall immediately notify the supervisor of the Aztec district office of the Division of the failure of the tubing, casing, or packer in said well and shall take such steps as may be timely and necessary to correct such failure or leakage.

PROVIDED FURTHER THAT, jurisdiction is retained by the Division for the entry of such further orders as may be necessary for the prevention of waste and/or protection of correlative rights or upon failure of the operator to conduct operations (1) to protect fresh water or (2) consistent with the requirements in this order, whereupon the Division may, after notice and hearing, terminate the injection authority granted herein.

The operator shall provide written notice of the date of commencement of injection to the Aztec district office of the Division.

The operator shall submit monthly reports of the disposal operations on Division Form C-115, in accordance with Rule Nos. 706 and 1120 of the Division Rules and Regulations.

The injection authority granted herein shall terminate one year after the effective date of this order if the operator has not commenced injection operations into the subject well, provided however, the Division, upon written request by the operator received by the Division prior to the termination date, may grant an extension thereof for good cause shown.

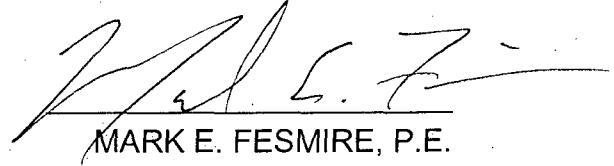

MARK E. FESMIRE, P.E.  
Director

MEF/wvjj

cc: Oil Conservation Division – Aztec  
Bureau of Land Management – Farmington