	. /		1			
DATE IN	18/98	SUSPENSE /	9.8	ENGINEER S	LOGGED	NSL
	<del>, ~ , , , , , , , , , , , , , , , , , ,</del>		<del></del>		<del></del>	

## **NEW MEXICO OIL CONSERVATION DIVISION**

- Engineering Bureau -

		ADMINISTRATIVE APPLICATION COVERSHEET
	THIS COVERSHE	ET IS MANDATORY FOR ALL ADMINISTRATIVE APPLICATIONS FOR EXCEPTIONS TO DIVISION RULES AND REGULATIONS
Applic	[PC-Po	[NSP-Non-Standard Proration Unit] [NSL-Non-Standard Location] [DD-Directional Drilling] [SD-Simultaneous Dedication] [nhole Commingling] [CTB-Lease Commingling] [PLC-Pool/Lease Commingling] [DOI Commingling] [OLS - Off-Lease Storage] [OLM-Off-Lease Measurement] [WFX-Waterflood Expansion] [PMX-Pressure Maintenance Expansion] [SWD-Salt Water Disposal] [IPI-Injection Pressure Increase] [Iffed Enhanced Oil Recovery Certification] [PPR-Positive Production Response]
[1]	TYPE OF A	PPLICATION - Check Those Which Apply for [A]
	[A]	Location - Spacing Unit - Directional Drilling  NSL DNSP DD DSD FEB   8 1998
	Check [B]	Cone Only for [B] and [C] Commingling - Storage - Measurement  DHC CTB PLC PC OLS OLM
	[C]	Injection - Disposal - Pressure Increase - Enhanced Oil Recovery  ☐ WFX ☐ PMX ☐ SWD ☐ IPI ☐ EOR ☐ PPR
[2]	NOTIFICAT	TION REQUIRED TO: - Check Those Which Apply, or ☐ Does Not Apply ☐ Working, Royalty or Overriding Royalty Interest Owners
	[B]	☐ Offset Operators, Leaseholders or Surface Owner
	[C]	☐ Application is One Which Requires Published Legal Notice
	[D]	Notification and/or Concurrent Approval by BLM or SLO U.S. Bureau of Land Management - Commissioner of Public Lands, State Land Office
	[E]	☐ For all of the above, Proof of Notification or Publication is Attached, and/or,
	[F]	☐ Waivers are Attached
[3]	INFORMAT	TION / DATA SUBMITTED IS COMPLETE - Statement of Understanding
		, or personnel under my supervision, have read and complied with all applicable R il Conservation Division. Further, I assert that the attached application for admini

ules and strative approval is accurate and complete to the best of my knowledge and where applicable, verify that all interest (WI, RI, ORRI) is common. I understand that any omission of data, information or notification is cause to have the application package returned with no action taken.

Note: Statement must be completed by an individual with supervisory capacity. Regulatory/Compliance Administrator

Title

## BURLINGTON RESOURCES

SAN JUAN DIVISION

February 16, 1998

SENT FEDERAL EXPRESS

Ms. Lori Wrotenbery, Director New Mexico Oil Conservation Division 2040 South Pacheco Santa Fe, New Mexico 87505

Re:

San Juan 30-6 Unit #41A

1630'FNL, 1900'FWL Section 13, T-30-N, R-6-W, Rio Arriba County

API # 30-039-not assigned

Dear Ms. Wrotenbery:

Burlington Resources: is applying for administrative approval of an unorthodox gas well location for the Dakota pool. Approval was granted by the New Mexico Oil Conservation Division for NSL-3875 (enclosed) to drill and complete a well in the Mesa Verde pool at this location. It is now intended to drill and dually complete this well in both the Mesa Verde and Dakota pools. The original application for the referenced location was due to terrain, and the presence of extensive archaeology above LaJara Wash and on the ledges.

Production from the Basin Dakota pool is to be included in a 320 acre gas spacing and proration unit ("GPU") comprising of the West Half (W/2) of Section 13, T-30-N, R-6-W, Rio Arriba County, New Mexico.

The following attachments are for your review:

Application for Permit to Drill.

Completed C-102 at referenced location.

Offset operators/owners plat - Burlington is the offset operator.

7.5 minute topographic map showing the orthodox windows, and enlargement of the map to define topographic features.

We appreciate your earliest consideration of this application.

Sincerely

**Ceggy Bradfield** 

Regulatory/Compliance Administrator

xc:

NMOCD - Aztec District Office

Bureau of Land Management - Farmington

submitted in lieu of Form 3160-5

# UNITED STATES DEPARTMENT OF THE INTERIOR BUREAU OF LAND MANAGEMENT

	5.	Lease Number SF-080713	
. Type of Well  GAS	6.	If Indian, All. or Tribe Name	
	7.	Unit Agreement Name	
. Name of Operator			
BURLINGTON RESOURCES ON COMMUNICATION		20.6 77.4	
OIL & GAS COMPANY	8.	San Juan 30-6 Unit Well Name & Number	
. Address & Phone No. of Operator	<b>.</b>	San Juan 30-6 U #41A	
PO Box 4289, Farmington, NM 87499 (505) 326-9700	9.	<b>API Well No.</b> 30-039-	
. Location of Well, Footage, Sec., T, R, M	10.	Field and Pool	
1630'FNL, 1900'FWL, Sec.13, T-30-N, R-6-W, NMPM	11.	Blanco MV/Basin DK County and State Rio Arriba Co, NM	
2. CHECK APPROPRIATE BOX TO INDICATE NATURE OF NOTICE, REP Type of Submission Type of Action	PORT, OTHER	DATA	
<del></del>	nange of Pl	ans	
	ew Construc		
	on-Routine ater Shut o		
Final Abandonment Altering Casing Co			
Other -		J	
3. Describe Proposed or Completed Operations	<del></del>		
An application for permit to drill has been submitted			
single Mesaverde. It is now intended to drill and corn Dakota dual. A revised C-102 well location plat is at depth is now 7835'. The revised casing and cementing 15.5# K-55 flushjoint liner will be run from 3355-783 liner will be cemented as follows: cement to cover a overlap with 227 sx Class "B" 50/50 poz w/2% gel, 5 m 0.4% fluid loss additive (302 cu.ft., 40% excess ceme prior to completion. A cement float shoe will be run top of the shoe joint. Note: to facilitate higher hydhanger will be used. Instead, a longstring of 5 1/2" with a minimum of 100' of cement overlap between the completion of the well, a 5 1/2" CIBP will be set abound pull the 5 1/2" casing above the 7" casing shoe. be milled and two strings of tubing with a packer will	ttached. The program is 35'. The 5 minimum of ops Gilsonient). WOC a on bottom draulic sticasing wil 5 1/2" and ove the las The 5 1/2"	e new proposed total as follows: a 5 1/2" 1/2" production 100" of 5 1/2" x 7" te, 0.25 pps Cellophane minimum of 18 hours with float collar on mulation, no liner 1 be run and cemented 7" casing strings. Aft fracturing job to cut bridge plug will then	
Dakota dual. A revised C-102 well location plat is at depth is now 7835'. The revised casing and cementing 15.5# K-55 flushjoint liner will be run from 3355-783 liner will be cemented as follows: cement to cover a overlap with 227 sx Class "B" 50/50 poz w/2% gel, 5 m 0.4% fluid loss additive (302 cu.ft., 40% excess ceme prior to completion. A cement float shoe will be run top of the shoe joint. Note: to facilitate higher hydranger will be used. Instead, a longstring of 5 1/2" with a minimum of 100' of cement overlap between the completion of the well, a 5 1/2" CIBP will be set abound pull the 5 1/2" casing above the 7" casing shoe.	trached. The program is 35'. The 5 minimum of ops Gilsonient). WOC a on bottom draulic stimulic stimul	e new proposed total as follows: a 5 1/2" 1/2" production 100" of 5 1/2" x 7" te, 0.25 pps Cellophane minimum of 18 hours with float collar on mulation, no liner le run and cemented 7" casing strings. Aft t fracturing job to cut bridge plug will then or a dual completion.	
Dakota dual. A revised C-102 well location plat is at depth is now 7835'. The revised casing and cementing 15.5# K-55 flushjoint liner will be run from 3355-783 liner will be cemented as follows: cement to cover a overlap with 227 sx Class "B" 50/50 poz w/2% gel, 5 m 0.4% fluid loss additive (302 cu.ft., 40% excess ceme prior to completion. A cement float shoe will be run top of the shoe joint. Note: to facilitate higher had hanger will be used. Instead, a longstring of 5 1/2" with a minimum of 100' of cement overlap between the completion of the well, a 5 1/2" CIBP will be set abound pull the 5 1/2" casing above the 7" casing shoe. be milled and two strings of tubing with a packer will a variance is requested from Onshore Order #2, III, I	trached. The program is 35'. The 5 minimum of ops Gilsonient). WOC a on bottom draulic stimulic stimul	e new proposed total as follows: a 5 1/2" 1/2" production 100" of 5 1/2" x 7" te, 0.25 pps Cellophane minimum of 18 hours with float collar on mulation, no liner 1 be run and cemented 7" casing strings. Aft t fracturing job to cut bridge plug will then or a dual completion.	
Dakota dual. A revised C-102 well location plat is at depth is now 7835'. The revised casing and cementing 15.5# K-55 flushjoint liner will be run from 3355-783 liner will be cemented as follows: cement to cover a overlap with 227 sx Class "B" 50/50 poz w/2% gel, 5 gol, 4% fluid loss additive (302 cu.ft., 40% excess ceme prior to completion. A cement float shoe will be run top of the shoe joint. Note: to facilitate higher hydhanger will be used. Instead, a longstring of 5 1/2" with a minimum of 100' of cement overlap between the completion of the well, a 5 1/2" CIBP will be set abound pull the 5 1/2" casing above the 7" casing shoe. be milled and two strings of tubing with a packer will have a packer will be 5 1/2" flushjoint/6 1/4" hole will be 0.375", a 6	ttached. The program is 35'. The 5 minimum of ops Gilsonient). WOC a on bottom draulic stimulic stimul	e new proposed total as follows: a 5 1/2" 1/2" production 100" of 5 1/2" x 7" te, 0.25 pps Cellophane minimum of 18 hours with float collar on mulation, no liner 1 be run and cemented 7" casing strings. Aft t fracturing job to cut bridge plug will then or a dual completion.	
Dakota dual. A revised C-102 well location plat is at depth is now 7835'. The revised casing and cementing 15.5# K-55 flushjoint liner will be run from 3355-783 liner will be cemented as follows: cement to cover a overlap with 227 sx Class "B" 50/50 poz w/2% gel, 5 m 0.4% fluid loss additive (302 cu.ft., 40% excess ceme prior to completion. A cement float shoe will be run top of the shoe joint. Note: to facilitate higher hydhanger will be used. Instead, a longstring of 5 1/2" with a minimum of 100' of cement overlap between the completion of the well, a 5 1/2" CIBP will be set about and pull the 5 1/2" casing above the 7" casing shoe. be milled and two strings of tubing with a packer will have a requested from Onshore Order #2, III, the 5 1/2" flushjoint/6 1/4" hole will be 0.375", a 0	trached. The program is 35'. The 5 minimum of ops Gilsonient). WOC a on bottom draulic stimulic stimul	e new proposed total as follows: a 5 1/2" 1/2" production 100' of 5 1/2" x 7" te, 0.25 pps Cellophane minimum of 18 hours with float collar on mulation, no liner le be run and cemented 7" casing strings. Aft fracturing job to cut bridge plug will then or a dual completion.  In collar clearance in ance.	
Dakota dual. A revised C-102 well location plat is at depth is now 7835'. The revised casing and cementing 15.5# K-55 flushjoint liner will be run from 3355-783 liner will be cemented as follows: cement to cover a overlap with 227 sx Class "B" 50/50 poz w/2% gel, 5 m 0.4% fluid loss additive (302 cu.ft., 40% excess ceme prior to completion. A cement float shoe will be run top of the shoe joint. Note: to facilitate higher hyd hanger will be used. Instead, a longstring of 5 1/2" with a minimum of 100' of cement overlap between the completion of the well, a 5 1/2" CIBP will be set about and pull the 5 1/2" casing above the 7" casing shoe. be milled and two strings of tubing with a packer will be milled and two strings of tubing with a packer will be 5 1/2" flushjoint/6 1/4" hole will be 0.375", a 0.4.  I hereby cert2fy that the foregoing is true and corrections.	trached. The program is 35'. The 5 minimum of ops Gilsonient). WOC a on bottom draulic stimulic stimul	e new proposed total as follows: a 5 1/2" 1/2" production 100' of 5 1/2" x 7" te, 0.25 pps Cellophane minimum of 18 hours with float collar on mulation, no liner be run and cemented 7" casing strings. After fracturing job to cut bridge plug will then for a dual completion.  In and collar clearance in ance.	

District I PO Box 1980, Hopps, NM 88241-1980

District II PO Drawer DD. Artesia. NM 88211-0719

District III 1000 Rio Brazos Rd., Aztec. NM 87410

District IV PO Box 2088, Santa Fe, NM 87504-2088

State of New Mexico Energy, Minerals & Natural Resources Department

Revised February 2 Instructions C Submit to Appropriate District State Lease - 4 Fee Lease - 3


OIL CONSERVATION DIVISION PO Box 2088 Santa Fe, NM 87504-2088

AMENDED RE

Form

### WELL LOCATION AND ACREAGE DEDICATION PLAT

			MLLL	LUCATI	LON AND A	UNDAGE DED.	ICATION PL	-A I	
'Δ	PI Numbe	٢	'Pool Code 'Pool Name						
30-039	)		72319/71599 Blanco Mesaverde/Basin Dakota						
*Property	Property Name						·	Well Numb∈	
7469	,		SAN JUAN 30-6 UNIT						41A
'OGRID N	٧٥.		*Operator Name						Elevation
14538			BURLINGTON RESOURCES OIL & GAS COMPANY						6338 '
					<sup>10</sup> Sunface	Location		!	
UL or lot no.	Section	TOWNED	Range	Lot Idn	Feet from the	North/South line	Feet from the	East/West lune	Cou
F	13	30N	6W		1630	North	1900	West	R:
		11 E	ottom	Hole L	ocation I	f Different	From Surf	ace	
UL or lot no.	Section	TOWNER	Range	Lot Ion	Feet from the	North/South line	Feet from the	East/West 1100	Co.
MV-W/320 DK-W/320	)	or Infill MC	onwolldation	Code 15 Orc	der No.	er			
NO ALLOW	IABLE W					ON UNTIL ALL EN APPROVED			ONSOLID,
16	4.**			4 <b>51</b> 8.	36'		" OPER	RATOR CER	TIFICA

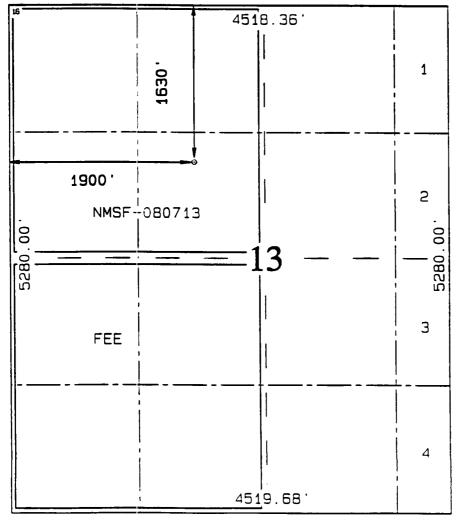

	I hereby centify that the information contained true and complete to the best of my knowledge &
1	
1	
	Donay Masher
\	Signature / Machine
	Peggy Bradfield Printed Name
	Regulatory Administ:
	Title / /
	2/11/96
	/ / / / / / / / / / / / / / / / / / / /

Date "SURVEYOR CERTIFICA" I hereby certify that the well location shown or was plotted from field notes or actual surveys a or under my supervision and that the same is u correct to the best of my belief.

1997 JULY 21.

Date of Survey


Certificate Number

# UNITED STATES DEPARTMENT OF THE INTERIOR BUREAU OF LAND MANAGEMENT


#### APPLICATION FOR PERMIT TO DRILL, DEEPEN, OR PLUG BACK 1a. Type of Work 5. Lease Number SF-080713 DRILL **Unit Reporting Number** 8910005380 Type of Well 1b. 6. If Indian, All. or Tribe GAS 2. Operator 7. Unit Agreement Name BURLINGTON RESOURCES Oil & Gas Company San Juan 30-6 Unit 3. Address & Phone No. of Operator 8. Farm or Lease Name PO Box 4289, Farmington, NM 87499 San Juan 30-6 Unit 9. Well Number (505) 326-9700 41A 10. Field, Pool, Wildcat 4. Location of Well 1630'FNL, 1900'FWL Blanco Mesa Verde 11. Sec., Twn, Rge, Mer. (NMPM) Latitude 36<sup>o</sup> 48.9, Longitude 107<sup>o</sup> 24.9 Sec 13, T-30-N, R-6-W API # 30-039-14. 13. State Distance in Miles from Nearest Town 12. County 7 miles to Gobernador MM Rio Arriba 15. Distance from Proposed Location to Nearest Property or Lease Line 1630' Acres in Lease 16. 17. Acres Assigned to Well 320 W/2 18. Distance from Proposed Location to Nearest Well, Drlg, Compl, or Applied for on this Lease 1300' 20. Rotary or Cable Tools **Proposed Depth** 19. 59201 Rotary 21. Elevations (DF, FT, GR, Etc.) 22. Approx. Date Work will Start 6338'GR 23. **Proposed Casing and Cementing Program** See Operations Plan attached 24. Authorized by Regulatory/Compliance Administrator APPROVAL DATE PERMIT NO. APPROVED BY TITLE DATE

PLAT #1

BURLINGTON RESOURCES OIL & GAS COMPANY
SAN JUAN 30-6 UNIT #41A, 1630' FNL & 1900' FWL
SECTION 13, T30N, R6W, NMPM, RIO ARRIBA COUNTY, NEW MEXICO
GROUND ELEVATION: 6338' DATE: JULY 21, 1997

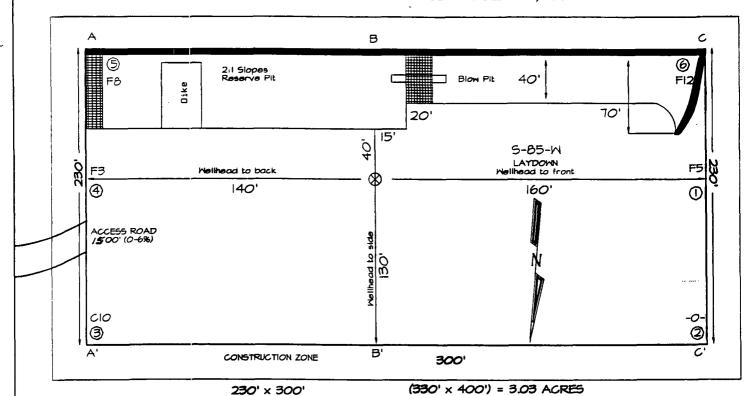

Reserve Pit Dike: to be 8' above Deep side (overflow - 3' wide and 1' above shallow side). Blow Pit: overflow pipe halfway between top and bottom and to extend over plastic liner and into blow (

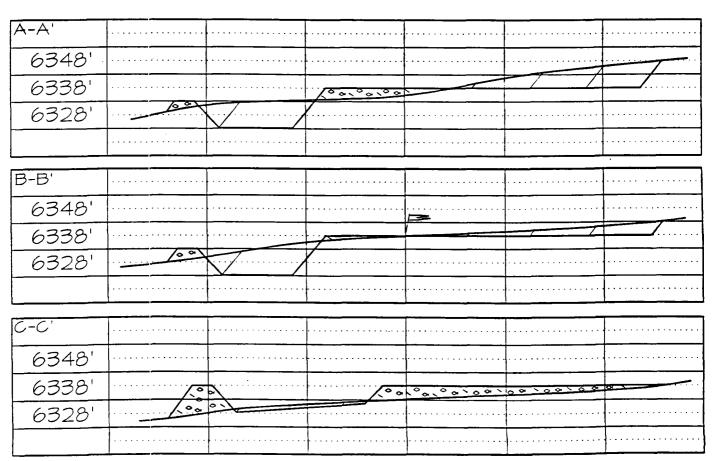

Note: Contractor should call One-Call for location of any marked or unmarked buried pipelines or came on well pad and/or access road at least two (2) working days prior to construction



#### San Juan 30-6 Unit #41A Multi-Point Surface Use Plan


- 1. Existing Roads Refer to Map No. 1. Existing roads used to access the proposed location will be properly maintained for the duration of the project. Bureau of Land Management right-of-way has been applied for as shown on Map No. 1.
- Planned Access Road Refer to Map No. 1. The required new access road is shown on Map No. 1. The gradient, shoulder, crowning and other design elements will meet or exceed those specified by the responsible government agency. The new access road surface will not exceed twenty feet (20') in width. No additional turnarounds or turnouts will be required. Upon completion of the project, the access road will be adequately drained to control soil erosion. Approximately 1500' of access road will be constructed. Pipelines are indicated on Map No. 1A.
- 3. Location of Existing Wells Refer to Map No. 1A.
- 4. Location of Existing and/or Proposed Facilities if Well is Productive
  - a. On the Well Pad Refer to Plat No. 1, anticipated production facilities plat.
  - b. Off the Well Pad Anticipated pipeline facilities as shown on the attached plat from Williams Field Service.
- Location and Type of Water Supply Water will be hauled by truck for the proposed project and will be obtained from LaJara Water Hole located SW/4 Section 11, T-30-N, R-6-W, New Mexico..
- 6. Source of Construction Materials If construction materials are required for the proposed project, such materials will be obtained from a commercial quarry.
- 7. Methods of Handling Waste Materials All garbage and trash materials will be removed from the site for proper disposal. A portable toilet will be provided for human waste and serviced in a proper manner. If liquids are left in the reserve pit after completion of the project, the pit will be fenced until the liquids have had adequate time to dry. The location clean-up will not take place until such time as the reserve pit can be properly covered over to prevent run-off from carrying waste materials into the watershed. Reserve pits will be lined as needed with either 12 mil bio-degradable plastic liner or a bentonite liner. All earthen pits will be so constructed as to prevent leakage from occurring; no earthen pit will be located on natural drainage. Generation of hazardous waste is not anticipated. Federal regulations will be adhered to regarding handling and disposal of such waste if so generated.
- 8. Ancillary Facilities None anticipated.
- 9. Wellsite Layout Refer to the location diagram and to the wellsite cut and fill diagram (Figure No. 4). The blow pit will be constructed with a 2'/160' grade to allow positive drainage to the reserve pit and prevent standing liquids in the blow pit.

- 10. Plans for Restoration of the Surface After completion of the proposed project, the location will be cleaned and leveled. The location will be left in such a condition that will enable reseeding operations to be carried out. Seed mixture as designated by the responsible government agency will be used. The reseeding operations will be performed during the time period set forth by the responsible government agency. The permanent location facilities will be painted as designated by the responsible government agency.
- 11. Surface Ownership Gomez y Gomez
- 12. Other Information Environmental stipulations as outlined by the responsible government agency will be adhered to. Refer to the archaeological report for a description of the topography, flora, fauna, soil characteristics, dwellings, historical and cultural sites.
- 13. Operator's Representative and Certification Burlington Resources Oil & Gas Company Regional Drilling Manager, Post Office Box 4289, Farmington, NM 87499, telephone (505) 326-9700. I hereby certify that I, or persons under my direct supervision, have inspected the proposed drill site and access route; that I am familiar with the conditions which presently exist; that the statements made in this plan, are to the best of my knowledge, true and correct; and that the work associated with the operations proposed herein will be performed by Burlington Resources Oil and Gas Company and its contractors and subcontractors in conformity with this plan and the terms and conditions under which it is approved.


Regulatory/Compliance Administrator Date


# San Juan 30-6 Unit #41A OFFSET OPERATOR \ OWNER PLAT Non Standard Location Dakota Formation Well

Township 30 North, Range 6 West

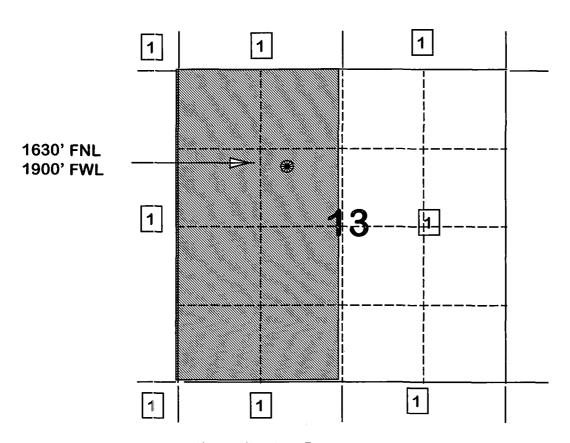

1) Burlington Resources

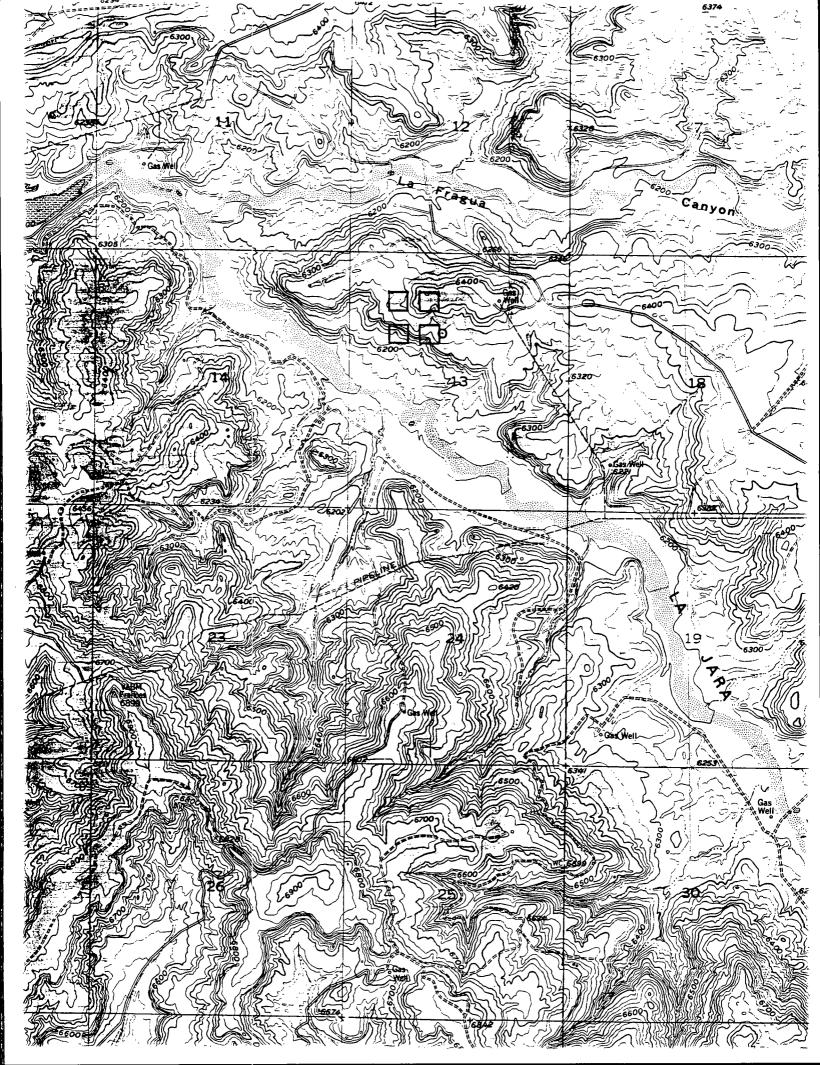

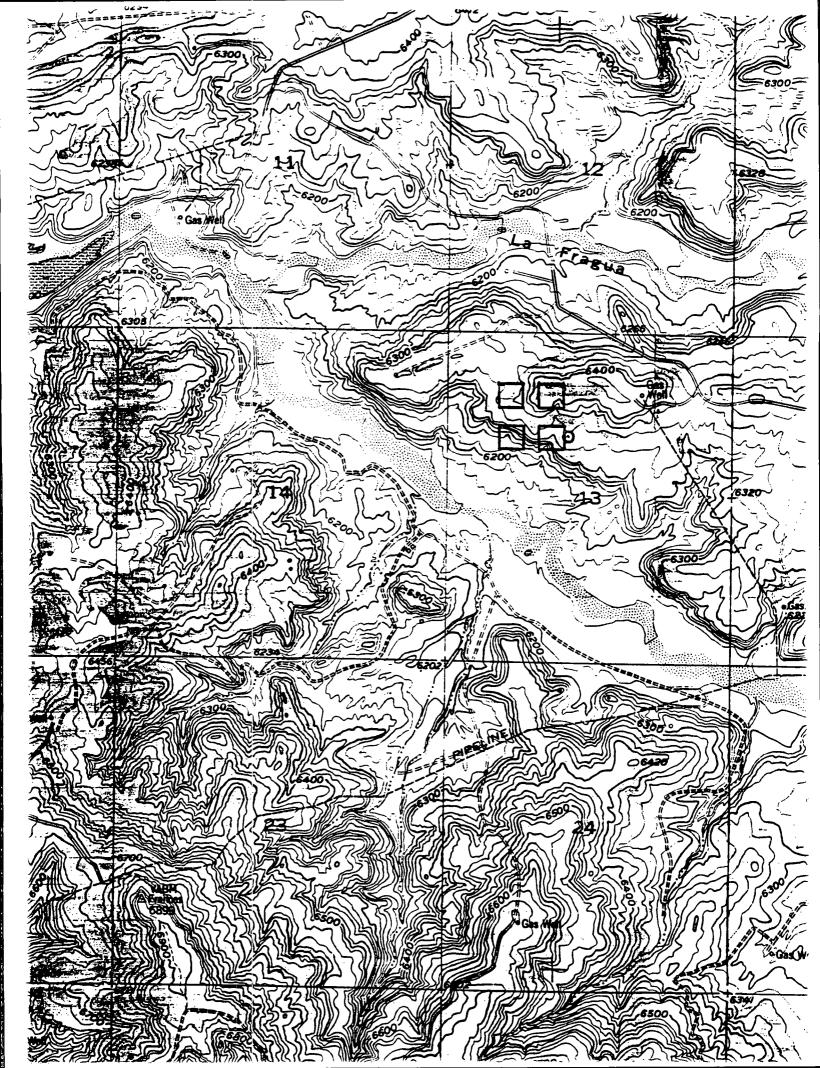

## NEW MEXICO ENERGY, MINERALS & NATURAL RESOURCES DEPARTMENT

September 20, 1997

MERIDIAN OIL

SEP 2 9 1997

FARMINGTON. NEW MEXICO Burlington Resources Oil & Gas Company P.O. Box 4289 Farmington, New Mexico 87499-4289

REGULATORY

Attention: Peggy Bradfield

Administrative Order NSL-3875

Dear Ms. Bradfield:

Reference is made to your application dated September 12, 1997 for an unorthodox Blanco-Mesaverde "infill" gas well location on an existing standard 320-acre gas spacing and proration unit ("GPU") for said Blanco-Mesaverde Pool, comprising the W/2 of Section 13, Township 30 North, Range 6 West, NMPM, Rio Arriba County, New Mexico. Said GPU is currently dedicated to the San Juan "30-6" Unit Well No. 41 (API No. 30-039-18201), located at a standard gas well location 1090 feet from the South line and 990 feet from the West line (Unit M) of said Section 13.

By the authority granted me under the provisions of Rule 2(d) of the "General Rules for the Prorated Gas Pools of New Mexico/Special Rules and Regulations for the Blanco-Mesaverde Pool", as promulgated by Division Order No. R-8170, as amended, the following described well to be drilled at an unorthodox "infill" gas well location in said Section 13 is hereby approved:

> San Juan "30-6" Unit Well No. 41-A 1630' FNL - 1900' FWL (Unit F)

Further, both the San Juan "30-6" Unit Well Nos. 41 and 41-A are to be dedicated to the subject GPU, further said wells and GPU will be subject to all existing rules, regulations, policies, and procedures applicable to prorated gas pools in Northwest New Mexico.

Sincerely,

William J. LeMa

Director

WJL/MES/kv

Oil Conservation Division - Aztec cc:

U. S. Bureau of Land Management - Farmington