




APPLICATION FOR AUTHORIZATION TO INJECT C-108 Application for Class II AGI Well

Ameredev Operating, LLC
Independence AGI #1

Presented in Hearing Before the
New Mexico Oil Conservation Commission
Case #21381

October 8, 2020

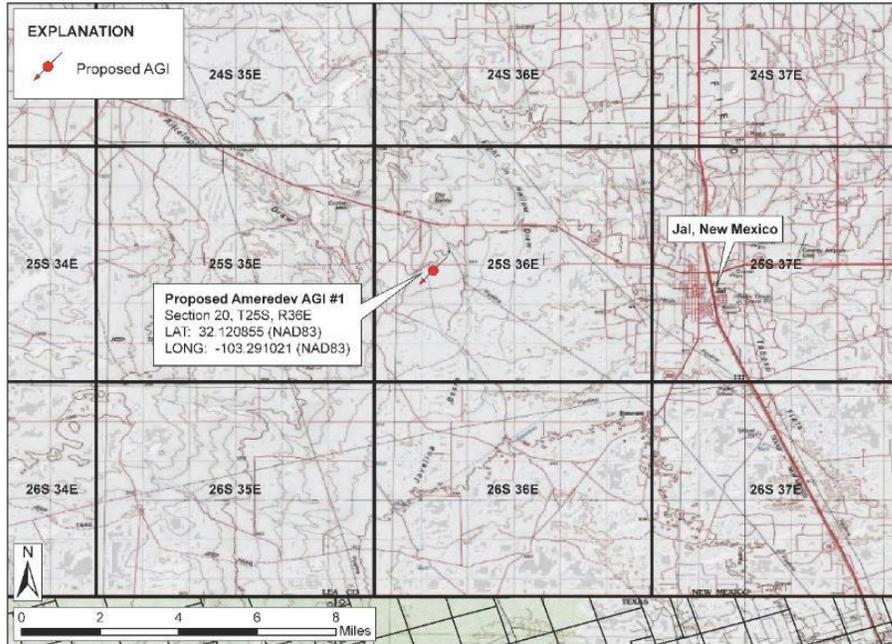

GEOLEX
INCORPORATED

Application prepared by:
Geolex, Inc.®
500 Marquette Ave NW, #1350
Albuquerque, NM 87102
(505)842-8000

AMEREDEV OPERATING, LLC WITNESSES

- ▶ **FLOYD HAMMOND** – Ameredev Operating, LLC

- ▶ **ALBERTO A. GUTIÉRREZ, C.P.G.** – Geolex, Inc.®
 - M.S. Geology (UNM 1980)
 - Registered geologist in 21 states; 40 years experience
 - Petroleum geology and hydrogeology expert
 - Expert in permitting, design, construction, and operation of AGI wells

- ▶ **DAVID A. WHITE, M.S.** – Geolex, Inc.®
 - M.S. Geology (UNM 2018)
 - Extensive project management experience and geologic support for AGI projects
 - Permitted, designed, and constructed AGI wells in Permian Basin
 - Expert in petroleum geology, seismic interpretation, and fault-slip probability modeling

PRESENTATION TOPICS FOR EACH WITNESS

- ▶ **FLOYD HAMMOND** – Describe history of Ameredev NM operations, overall benefits of Ameredev gas-treating plant and role of AGI project in gas facility operations
- ▶ **ALBERTO A. GUTIÉRREZ, R.G.** – Describe relevant site geology and hydrogeology, system design, operation, analyses of effect on injection zone, and all components of C-108 application
- ▶ **DAVID A. WHITE, M.S.** – Describe induced-seismicity risk assessment, assessment of local subsurface pressure conditions to assess reservoir containment potential, and injection modeling to predict resultant acid gas plume

PROPOSED GAS PLANT AND AGI WELL

▶ PLANT CAPACITY AND ASSOCIATED INFRASTRUCTURE

- 12 MMSCF per day of treated acid gas (TAG) that will be generated by the treating plant
- The AGI system is integral to assure and maintain plant capacity

▶ THE AGI IS NECESSARY TO SUPPORT PRODUCTION OF SOUR GAS

- Minimizes environmental risks and permitting associated with other forms of sour gas handling
- The well will provide capacity for sour gas production and future production increases
- Independence AGI #1 will provide producers with increased treating capacity and minimizes potential associated costs
- Complete sequestration of acid gases reduces the potential for field flaring and waste of resources
- An adequate reservoir that lies well below any existing production has been identified

KEY ELEMENTS OF AMEREDEV'S C-108 APPLICATION


- ▶ AGI project has substantial environmental benefit of greenhouse gas reduction due to sequestration of CO₂ which otherwise would be released to atmosphere
- ▶ AGI project reduces waste and air emissions by eliminating flaring of acid gas or operation of a sulfur recovery unit as sulfur control measures
- ▶ Nearby oil and gas wells, water wells, and surface water in the area of the proposed AGI are protected by well design and geologic factors
- ▶ Detailed interpretation of seismic and available logs has permitted the accurate delineation of the reservoir assuring that nearby SWD and producing wells will be protected
- ▶ Fault-slip probability modeling demonstrates that the proposed AGI and nearby SWD can be operated without significant risk of induced-seismic events (probability less than 0.13)
- ▶ Additionally, subsequent slip-probability simulations that exclude contributions of the proposed AGI help to delineate the minimal impact operation of the AGI contributes to the total risk of fault slip

KEY ELEMENTS OF AMEREDEV'S C-108 APPLICATION (cont.)

- ▶ Injection simulations completed utilizing Schlumberger Petrel and Eclipse platforms demonstrate that, after 30 years, the main body of the plume will extend between approximately 1 to 1.3 miles with diffuse concentrations extending between 1.5 and 1.8 miles
- ▶ Ameredev's C-108 application includes all required information needed to approve the installation of the proposed AGI well
- ▶ A H₂S Contingency Plan consistent with Rule 11 for the proposed Ameredev plant and AGI well will be prepared, submitted, and approved by NMOCD prior to commencement of injection operations. This plan will include all appropriate required coordination with state and local emergency planning stakeholders, including appropriate representatives of the city of Jal. Similar plans have been approved by OCD for facilities located much closer to larger population centers than this proposed well.
- ▶ All parties requiring notification have been provided notice and complete copies of the Ameredev C-108 application and there are no objections to the proposed AGI project

PROJECT LOCATION AND BACKGROUND


- ▶ The Ameredev gas-treating facility will be located in Section 20, Township 25 South, Range 36 East in Lea County, New Mexico (see location map on next slide)
- ▶ When fully operational, the plant will sequester approximately 12 million cubic feet (MMSCF) of TAG per day
- ▶ The Independence AGI #1 well will be drilled at approximately 829' from the north line (FNL) and 1,443' from the west line (FWL) of Section 20, T25S, R33E
- ▶ The AGI well will be drilled as a vertical well from this surface location and completed in the Siluro-Devonian formations at approximately 16,230 to 17,900 feet

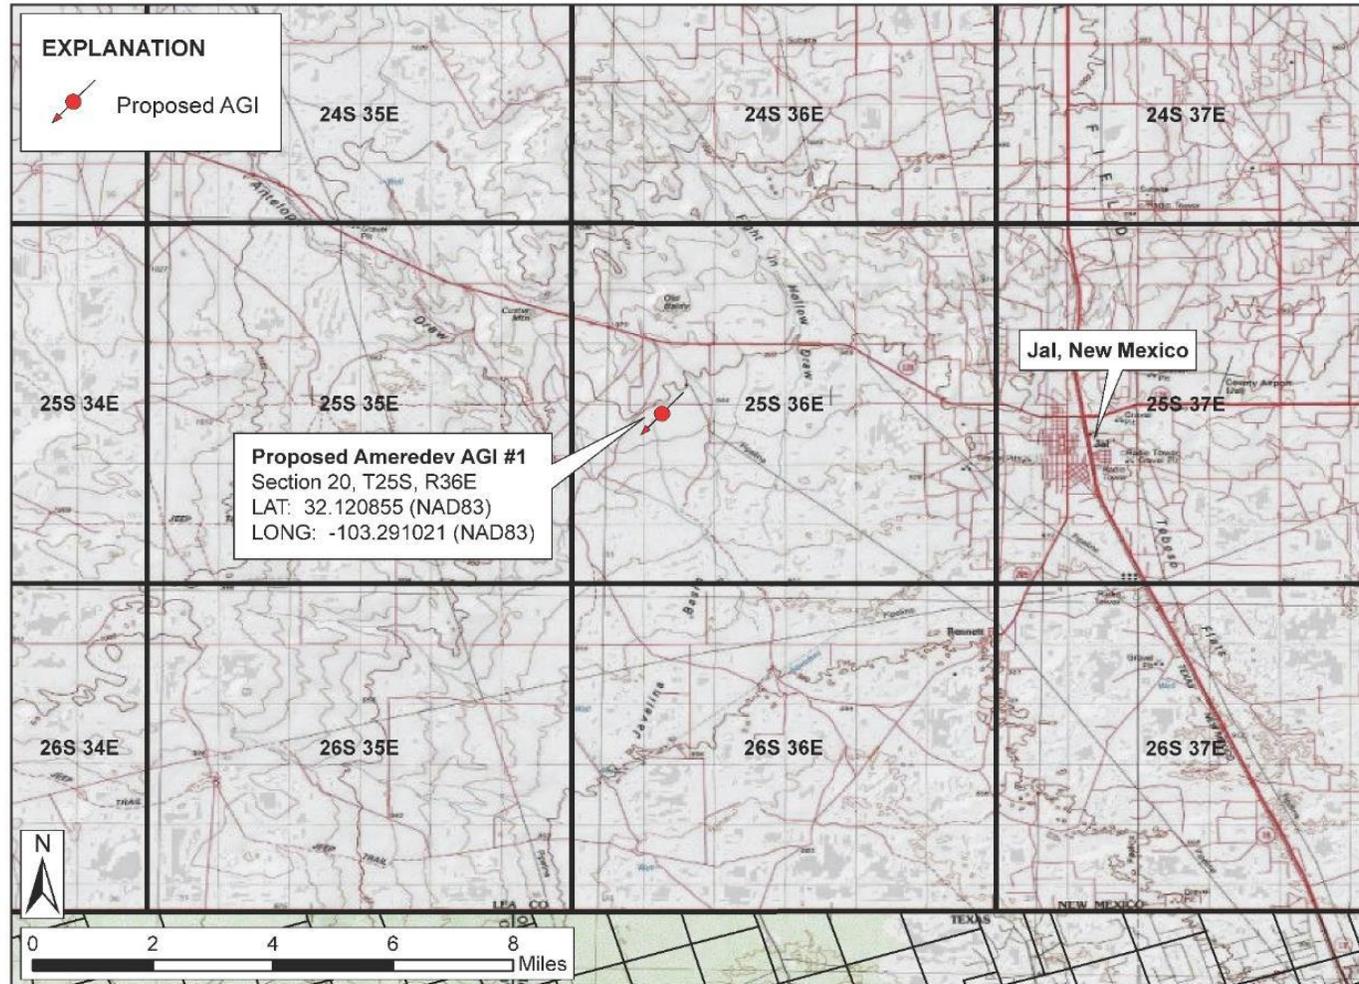

General location map for proposed AGI well in Section 20 (T25S, R36E) approximately six miles west of Jal, New Mexico

AMEREDEV SITE DETAILS

- ▶ The overall site for the proposed treating facility encompasses approximately 320 acres and the AGI will be sited at the northern margin of Section 20
- ▶ All affected lands are owned by a wholly-owned subsidiary of Amerdev II, LLC
- ▶ Field gas will be “sweetened” by amine units and the TAG will then be compressed and piped to the AGI well
- ▶ The proposed well and all surface equipment will be contained within the plant area

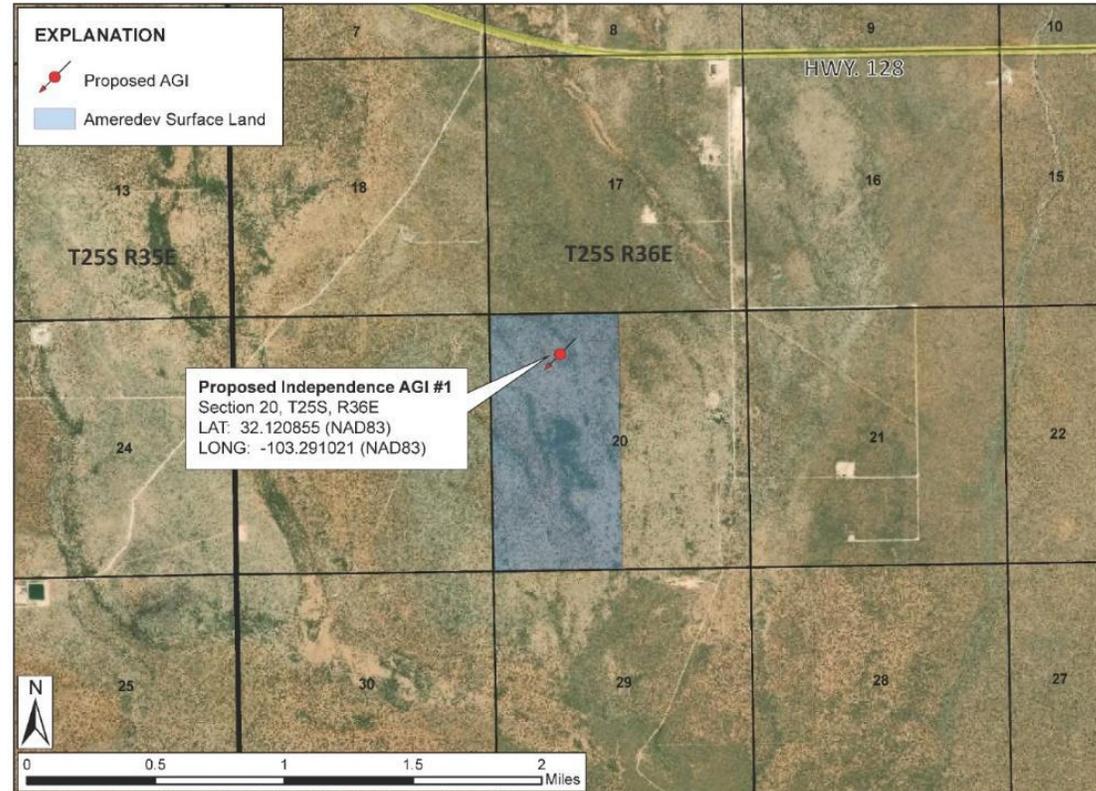

Detailed location map showing the proposed Independence AGI #1 and Amerdev surface lands where plant facility will be constructed

MAXIMUM ALLOWABLE OPERATING PRESSURE

- ▶ Ameredev requests a maximum allowable operating pressure (MAOP) of 4,779 psig for the proposed Independence AGI #1
- ▶ MAOP calculated utilizing NMOCD-approved method for identifying maximum surface injection pressure
- ▶ Anticipated acid gas characteristics determined utilizing AQUALibrium™ software

MAXIMUM ALLOWABLE OPERATING PRESSURE (MAOP) DETERMINATION

$$IP_{Max} = PG(D_{Top})$$

WHERE: IP_{Max} = Maximum Surface Injection Pressure (psi)
 PG = Pressure Gradient of Injection Fluid (psi/ft)
 D_{Top} = Depth at top of injection zone

AND

$$PG = 0.2 + 0.433 (1.04 - SG_{TAG})$$

WHERE: SG_{TAG} = Average specific gravity of treated acid gas in the tubing
 (SG_{TAG} at top = 0.76, and SG_{TAG} at bottom = 0.88; see Table 3)

For the maximum requested injection volume case, it is assumed that:

$$SG_{TAG} = 0.82 \text{ (Average of 0.76 and 0.88)}$$

AND

$$D_{Top} = 16,230 \text{ feet}$$

THEREFORE

$$PG = 0.2 + 0.433(1.04 - 0.82)$$

$$PG = 0.294 \frac{psi}{ft}$$

AND

$$IP_{Max} = 0.294 \frac{psi}{ft} \times 16,230 \text{ feet}$$


$$IP_{Max} = 4,779 \text{ psi}$$

Determination of MAOP utilizing NMOCD-approved method



AGI SYSTEM DESIGN


- ▶ Anticipated composition of TAG will be approximately 70% CO₂ and 30% H₂S with trace concentrations of nitrogen and light (C₁-C₇) hydrocarbons
- ▶ TAG will be transmitted from the amine system to compressors on the well site via low-pressure pipelines (see diagram on next slide)
- ▶ Acid gas will be compressed to approximately 2,000 to 2,500 psi and transmitted to the AGI well through corrosion-resistant tubulars protected by automatic safety valve
- ▶ Injection tree will be constructed utilizing corrosion-resistant alloys and elastomers
- ▶ A subsurface safety valve (SSSV) will be set at approximately 250' below the surface
- ▶ The permanent injection packer and the lower 300 feet of tubing and production casing will be constructed utilizing corrosion-resistant alloy materials
- ▶ Bottom-hole pressure and temperatures transducers will be installed on a mandrel overlying the packer to provide real-time monitoring of the injection zone

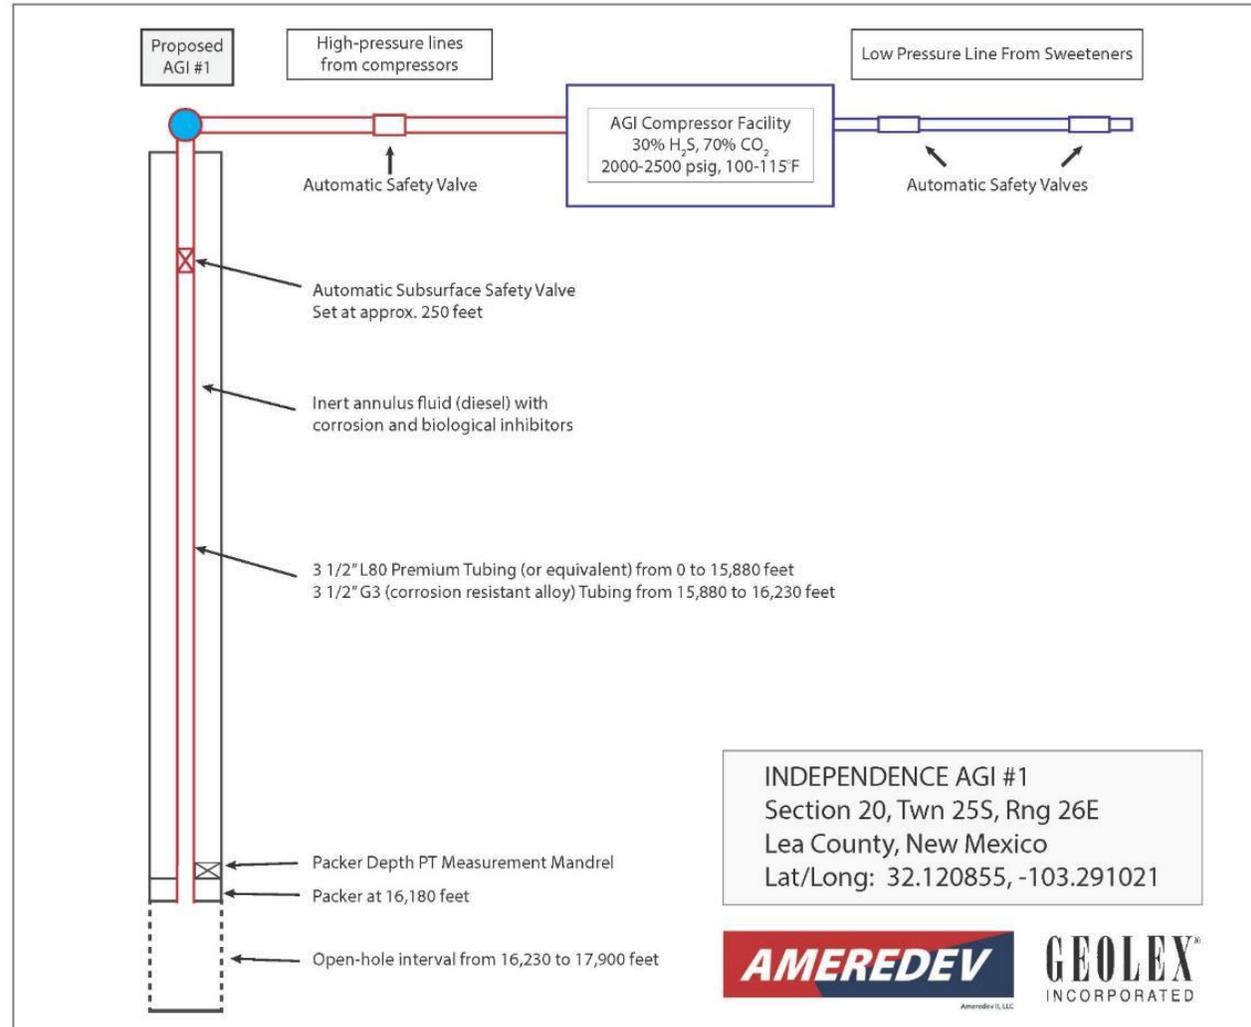

General schematic of surface facilities and proposed Independence AGI #1

DESIGN OF INDEPENDENCE AGI #1

- ▶ Surface casing to 1,400' to protect fresh groundwater and shallow formations
- ▶ First intermediate to 3,200' to isolate the Salado salt
- ▶ Second intermediate to 7,150' utilizing DV tools and cement to adequately isolate the Capitan from approx. 3,970' to 5,500'
- ▶ Third intermediate to 13,200' protecting B. Spring, Wolfcamp, Strawn, and Atoka producing zones
- ▶ Production casing to 15,930' utilizing conventional tubulars and 300' feet of corrosion-resistant alloy (CRA) casing from 15,930' to 16,230' to protect lower-well components
- ▶ Open-hole completion from 16,230' to 17,900'
- ▶ All strings will be cemented to surface and verified by 360° cement bond logs
- ▶ Final casing plan may be subject to material availability, however, any modification of the proposed casing plan will be coordinated with and approved by NMOCD to assure adequate isolation of Salado salt and Capitan Reef formations

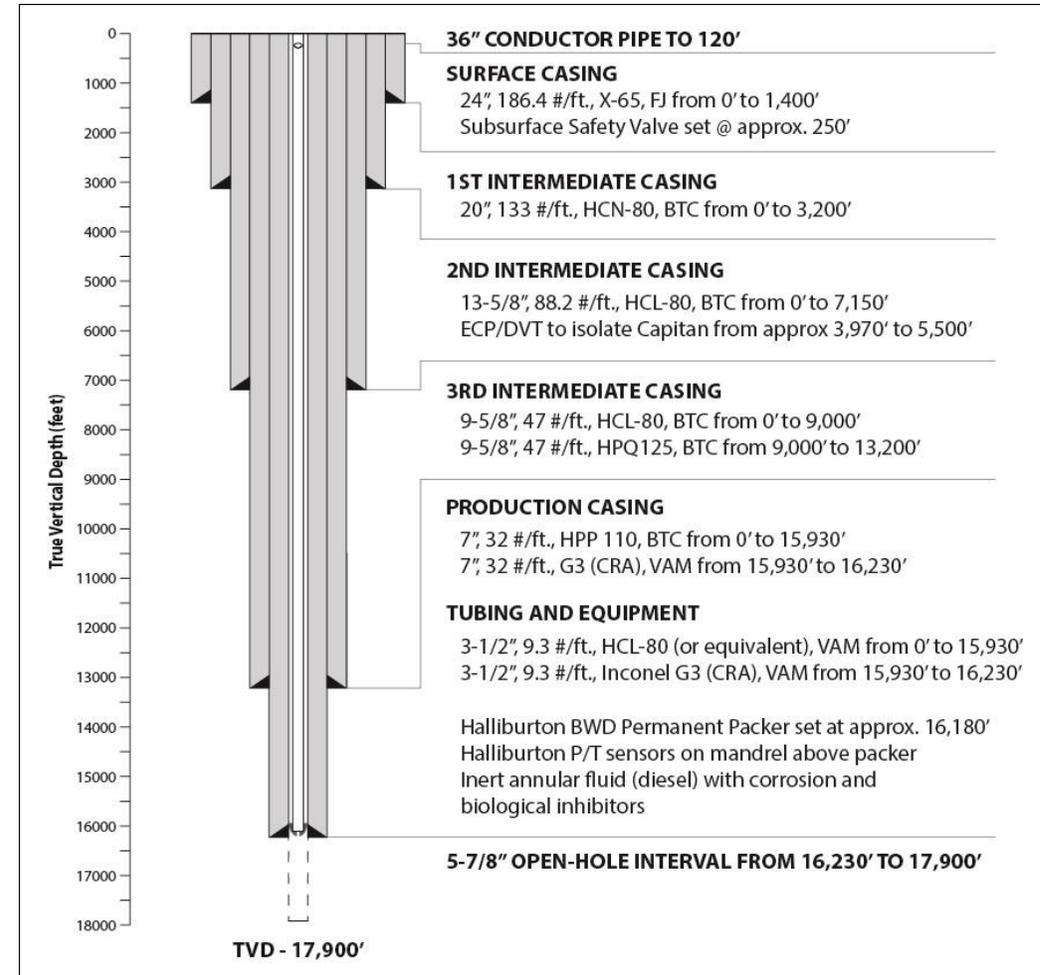

Proposed Independence AGI #1 well schematic including anticipated casing program

WELL LOGGING, RESERVOIR TESTING AND MONITORING


- ▶ Mud logging will be conducted during all depths below the conductor
- ▶ The borehole from 1,400' to total depth will be logged using gamma ray, formation density, resistivity, neutron density, and sonic tools
- ▶ The injection zone (16,230' to 17,900') and overlying caprock will also be logged using Fullbore Formation MicroImager (FMI), or equivalent
- ▶ Side-wall cores from selected intervals will be collected for laboratory porosity and permeability tests should the condition of the borehole be suitable for these operations
- ▶ Following an acid displacement in the injection zone, a work string and bottom-hole sensors will be installed to the base of the injection zone and a step-rate and warm-back test will be conducted
- ▶ Following the step-rate test, a 10-day fall-off test will be completed
- ▶ The permanent pressure/temperature sensors located at the permanent injection packer will be used for long-term monitoring of reservoir behavior during normal injection operations

ADJACENT OPERATORS AND SURFACE OWNER NOTIFICATION AND NOTICES


- ▶ Ameredev's complete C-108 application was sent to adjacent operators and surface owners within the one-mile radius of the proposed well via Certified Mail, return receipt requested
- ▶ Notice of the application and the Commission hearing were published in the local newspaper by NMOCC
- ▶ There are no outstanding objections to Ameredev's application
- ▶ The AGI project will supporting offsetting production by:
 - Allowing increased production capacity of sour gas resources
 - Increasing royalties paid to the State of New Mexico
 - Protecting freshwater resources and correlative rights
 - Avoiding concerns about acid gas disposal in the Delaware Mountain Group

GEOLOGY OF THE PROJECT AREA

- ▶ Proposed AGI located on the eastern margin of the Delaware Basin
- ▶ Surface deposits include aeolian and alluvial deposits, with local exposures of Triassic redbeds
- ▶ Approximately 9,000 feet of Permian strata overly approx. 8,000 feet of older Paleozoic strata (Penn. – Devonian)
- ▶ Devonian Woodford Shale (~300' thick) forms the local caprock that seals the injection reservoir
- ▶ Targeted injection reservoir includes upper Devonian, Wristen, Fusselman, and Montoya formation strata
- ▶ Local structure includes normal faults, typically oriented parallel to sub-parallel to the northerly trend of the Central Basin Platform

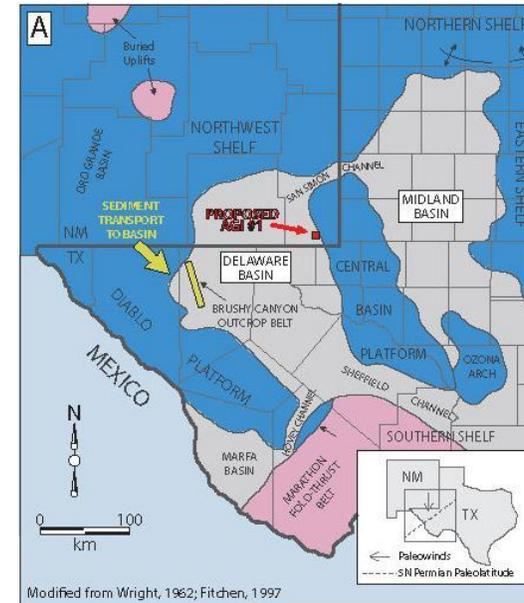

Structural setting (panel A) and general lithologies of the Permian Basin (panel B). Proposed AGI location annotated in Panel A

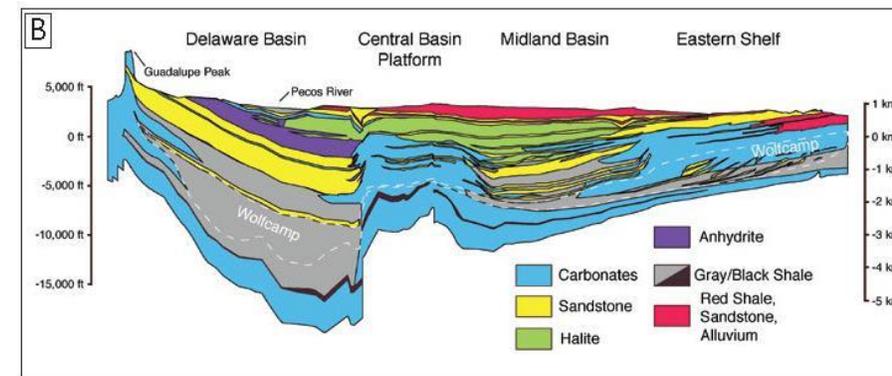

Generalized stratigraphic correlation chart for the Permian Basin region

SYSTEM	SERIES/ STAGE	NORTHWEST SHELF	CENTRAL BASIN PLATFORM	MIDLAND BASIN & EASTERN SHELF	DELAWARE BASIN	VAL VERDE BASIN
PERMIAN	OCHOAN	DEWEY LAKE RUSTLER SALADO	DEWEY LAKE RUSTLER SALADO	DEWEY LAKE RUSTLER SALADO	DEWEY LAKE RUSTLER SALADO CASTILE	RUSTLER SALADO
	GUADALUPIAN	TANSILL YATES SEVEN RIVERS QUEEN GRAYBURG SAN ANDRES GLORIETA	TANSILL YATES SEVEN RIVERS QUEEN GRAYBURG SAN ANDRES GLORIETA	TANSILL YATES SEVEN RIVERS QUEEN GRAYBURG SAN ANDRES SAN ANGELO	★ DELAWARE MT. GROUP BELL CANYON CHERRY CANYON BRUSHY CANYON	TANSILL YATES SEVEN RIVERS QUEEN GRAYBURG SAN ANDRES
	LEONARDIAN	CLEARFORK YESO WICHITA ABO	CLEARFORK WICHITA	LEONARD SPRABERRY, DEAN	★ BONE SPRING	LEONARD
	WOLFCAMPIAN	WOLFCAMP	WOLFCAMP	WOLFCAMP	★ WOLFCAMP	WOLFCAMP
PENNSYLVANIAN	VIRGILIAN	CISCO	CISCO	CISCO	CISCO	CISCO
	MISSOURIAN	CANYON	CANYON	CANYON	CANYON	CANYON
	DESMOINESIAN	STRAWN	STRAWN	STRAWN	★ STRAWN	STRAWN
	ATOKAN	ATOKA — BEND —	ATOKA — BEND —	ATOKA — BEND —	ATOKA — BEND —	(ABSENT)
	MORROWAN	MORROW	(ABSENT)	(ABSENT ?)	MORROW	(ABSENT)
MISSISSIPPIAN	CHESTERIAN MERAMECIAN OSAGEAN KINDERHOOKIAN	CHESTER MERAMEC OSAGE KINDERHOOK	CHESTER MERAMEC OSAGE "BARNETT" KINDERHOOK WOODFORD DEVONIAN	CHESTER MERAMEC OSAGE "BARNETT" KINDERHOOK WOODFORD DEVONIAN	CHESTER MERAMEC OSAGE "BARNETT" KINDERHOOK WOODFORD DEVONIAN	MERAMEC OSAGE "BARNETT" KINDERHOOK WOODFORD DEVONIAN
	DEVONIAN	WOODFORD DEVONIAN	KINDERHOOK WOODFORD DEVONIAN	KINDERHOOK WOODFORD DEVONIAN	KINDERHOOK WOODFORD DEVONIAN	KINDERHOOK WOODFORD DEVONIAN
SILURIAN	SILURIAN (UNDIFFERENTIATED)	SILURIAN SHALE FUSSELMAN	SILURIAN SHALE FUSSELMAN	SILURIAN SHALE FUSSELMAN	MIDDLE SILURIAN FUSSELMAN	MIDDLE SILURIAN FUSSELMAN
ORDOVICIAN	UPPER	MONTOYA	MONTOYA	SYLVAN MONTOYA	SYLVAN MONTOYA	SYLVAN MONTOYA
	MIDDLE	SIMPSON	SIMPSON	SIMPSON	SIMPSON	SIMPSON
	LOWER	ELLENBURGER	ELLENBURGER	ELLENBURGER	ELLENBURGER	ELLENBURGER
CAMBRIAN	UPPER	CAMBRIAN	CAMBRIAN	CAMBRIAN	CAMBRIAN	CAMBRIAN
PRECAMBRIAN						

General stratigraphy and producing zones (red stars) in the immediate area of the proposed Independence AGI #1 (modified from Yang and Dorobek, 1995)


ANTICIPATED FORMATIONS

Stratigraphy of the subsurface underlying the proposed AGI #1 location is demonstrated in nearby offset well logs of West Jal B Deep #1 (right). Proposed injection interval is annotated in the associated log (blue bar)

FORMATION	DEPTH (FEET)	FORMATION	DEPTH (FEET)
Dockum	246	Bone Springs	8,286
Ochoa-Dewey	867	Wolfcamp	10,979
Rustler	1,271	Strawn	11,340
Salado	1,825	Atoka	12,590
Tansill	3,124	Morrow	13,759
Yates	3,274	Barnett	14,941
7 Rivers	3,454	Osage	15,388
Queen	3,541	Woodford	15,914
Capitan Reef	3,977	Devonian	16,230
Bell Canyon	5,469	Wristen	16,575
Cherry Canyon	6,246	Fusselman	17,320
Brushy Canyon	7,098	Montoya	17,820

Anticipated formation tops at the proposed Independence AGI #1 surface location


WEST JAL B DEEP #1
SEC 17, T25S, R36E

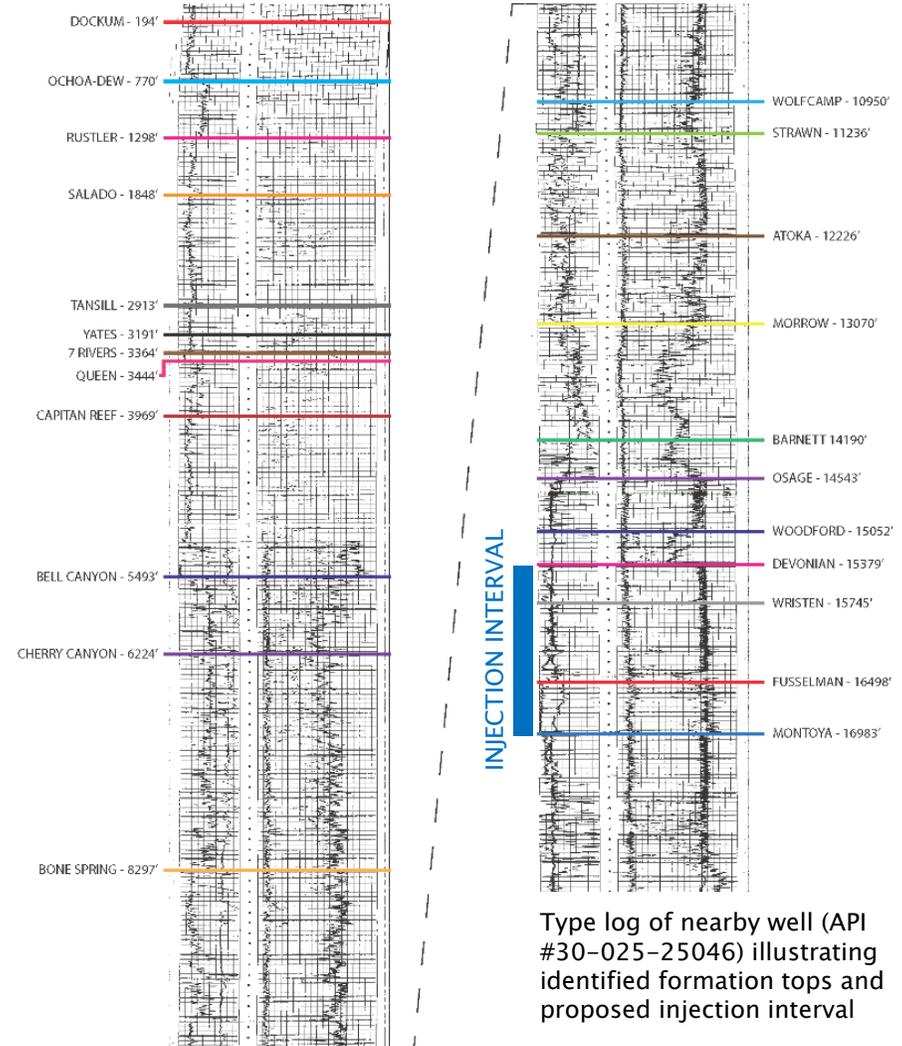

Type log of nearby well (API #30-025-25046) illustrating identified formation tops and proposed injection interval

STRUCTURAL GEOLOGY OF THE AREA


- ▶ Subsea elevations of the top of the Devonian (target reservoir) are shown in the following map (right)
- ▶ The proposed AGI location lies down-dip of a local structural high to the northeast approximately 1 mile from two faults identified in the area
- ▶ Faults identified in review of 3D seismic survey data covering the area of the proposed AGI
- ▶ Cross section A–A' is included on the following slide

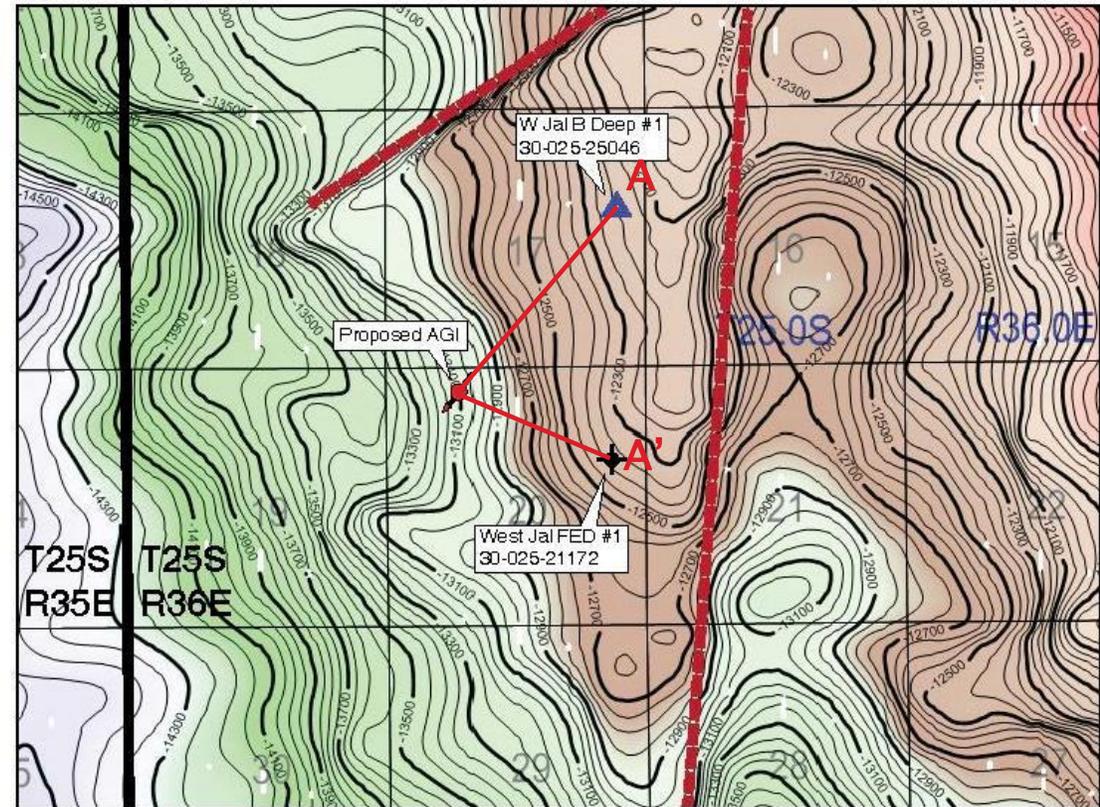

Interpreted seismic map of subsea elevations of the top of the Devonian (targeted injection reservoir)

STRUCTURAL GEOLOGY OF THE AREA


- ▶ Structural cross section A–A' illustrates porosity profile observed in nearby offset wells penetrating the proposed injection zone
- ▶ Proposed injection interval in the area of Independence AGI #1 is overlain by more than 300 feet of dense Woodford Shale and more than 950 feet of low-porosity, low-permeability Mississippian carbonates
- ▶ Targeted injection interval (blue bar) includes porous intervals identified within upper Devonian, Wristen, and Fusselman formation strata

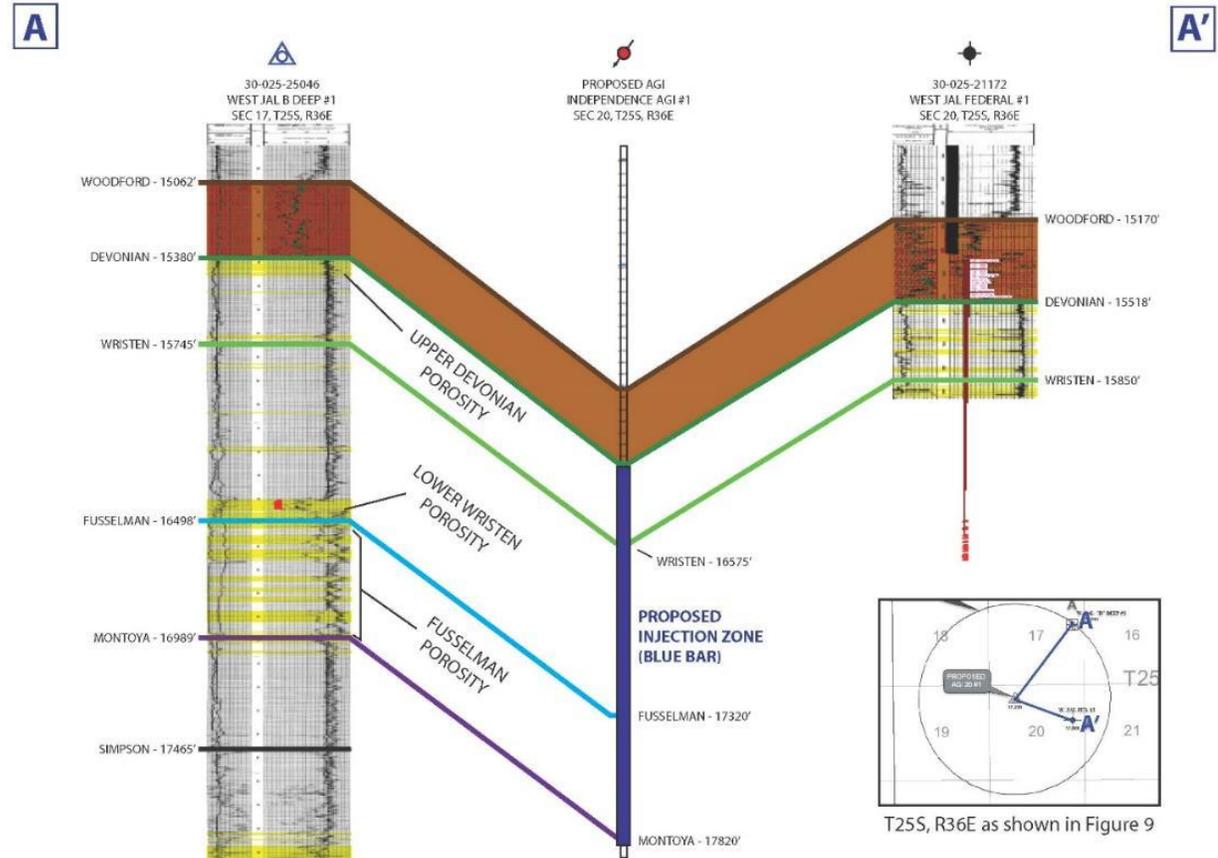

Cross section showing cap rock (Woodford Shale) and porous zones (yellow) identified within the targeted injection interval

GROUNDWATER CONDITIONS IN THE AREA OF REVIEW


- ▶ Based on the New Mexico Water Rights Database (NMOSE), there are two water wells within one mile of the proposed AGI well
- ▶ The nearest well lies 0.33 miles from the proposed AGI location
- ▶ Total depth of observed wells range from 505 to 560 feet and both are operated by NGL South Ranch
- ▶ These water-bearing zones will be protected by the surface casing of Independence AGI #1, which will extend approx. 1,400 feet within Rustler Formation strata

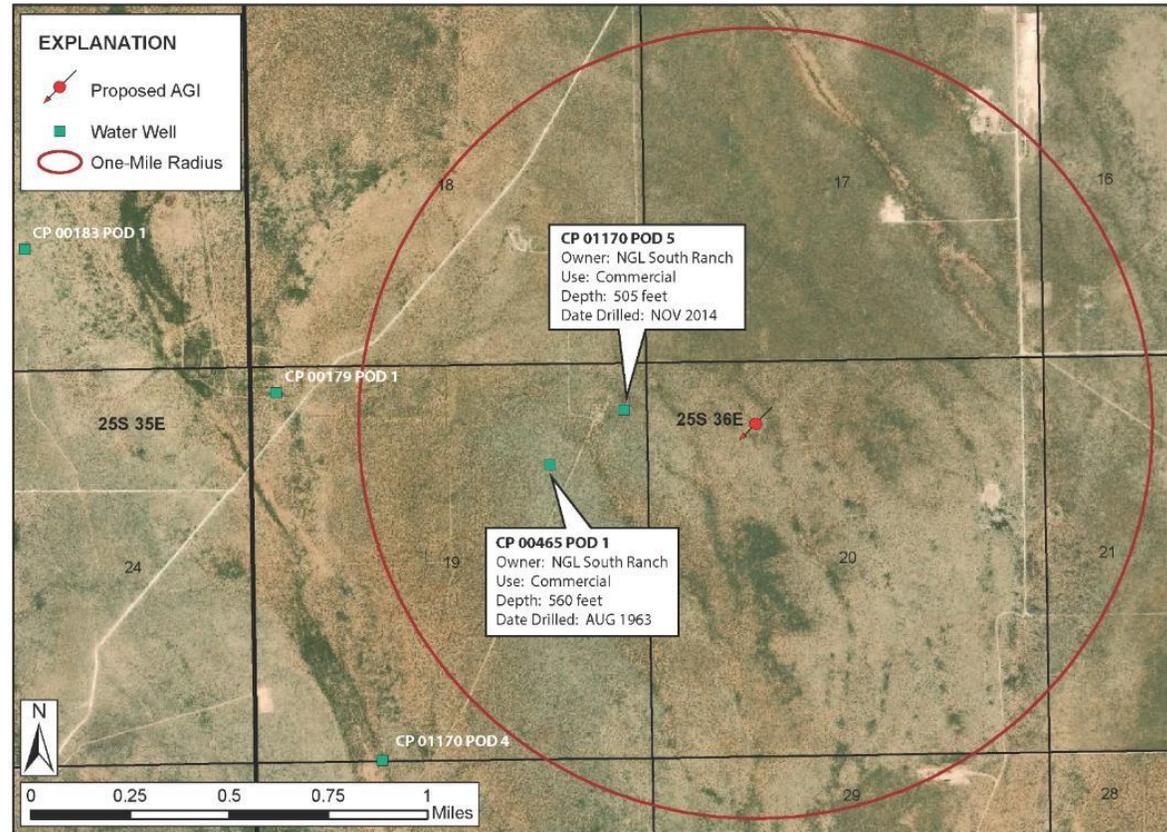

Water wells within one mile of the proposed Independence AGI #1 as recorded in the New Mexico Office of the State Engineer's records

WELLS WITHIN ONE MILE OF THE AGI

- ▶ There are six (6) existing wells within one mile of the proposed AGI, including one (1) active, one (1) permitted, and four (4) plugged wells
- ▶ Of these wells, two penetrate the proposed injection interval
- ▶ The West Jal Unit #1 (API #30-025-21172) is 0.64 miles from the proposed AGI well and was properly plugged and abandoned in 1984
- ▶ The West Jal B Deep Unit #1 (API #30-025-25046) lies 0.98 miles from the proposed AGI and is an active SWD. The operator, BC&D Operating, Inc. has been notified of the AGI project and has communicated they have no objection to the proposed well

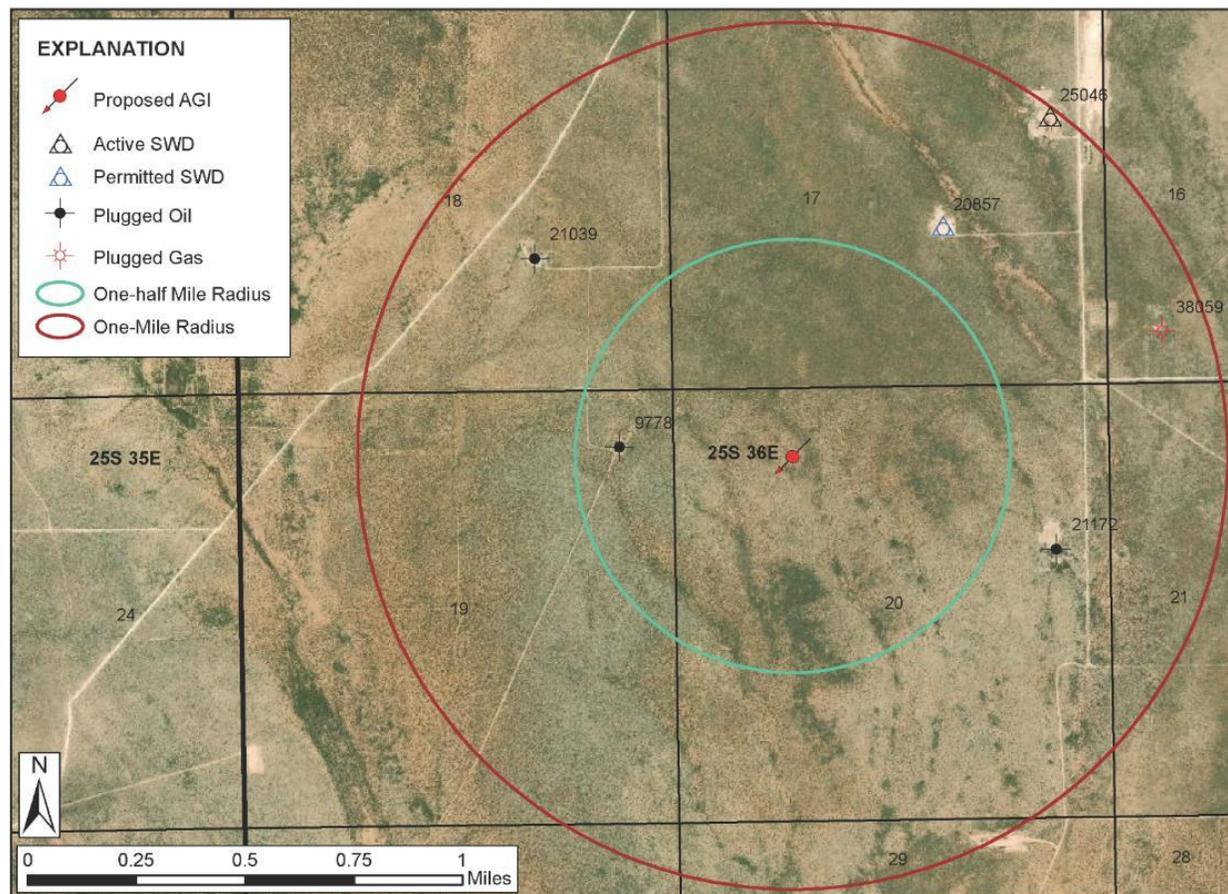

Identified wells within one mile of the proposed Independence AGI #1. Wells shown are annotated with the last 5 digits of the API number 30-025-XXXXX.

REVIEW OF IDEAL CHARACTERISTICS OF A RESERVOIR FOR PERMANENT DISPOSAL OF ACID GAS (CO₂/H₂S)

1. Geologic seal to permanently contain injected fluid
2. Isolated from any fresh groundwater
3. No effect on existing or potential production
4. Laterally extensive, permeable, good porosity
5. Excess capacity for anticipated injection volumes
6. Compatible fluid chemistry


✓ **AMEREDEV'S PROPOSED AGI #1 MEETS ALL OF THESE CRITERIA**

EVALUATING FAULT SLIP POTENTIAL

- ▶ To evaluate the potential for induced–seismic events in response to injected fluids, Geolex conducted an induced–seismicity risk assessment in the area of the proposed Independence AGI #1
- ▶ Components of Risk Assessment:
 1. Review and interpretation of licensed 3D seismic survey data to identify subsurface features in the area of the proposed AGI well (courtesy of Ameredeve)
 2. Fault–slip probability modeling of an eight–well, 30–year acid gas injection scenario that simulates operation of the proposed well and nearby SWD operations and predicts the associated risk of induced–seismic events (Assessment completed utilizing Stanford FSP model)

SEISMIC SURVEY REVIEW AND NEARBY INJECTION WELLS


- ▶ Geolex evaluated and interpreted 3D seismic survey data to identify subsurface faults to be included in the FSP model evaluation
- ▶ Eight (8) faults typically trending N-S parallel to the trend of the Central Basin Platform with smaller features exhibiting semi-perpendicular trends
- ▶ The nearest faults to the AGI location are observed to lie approximately one mile east and north of the proposed well location

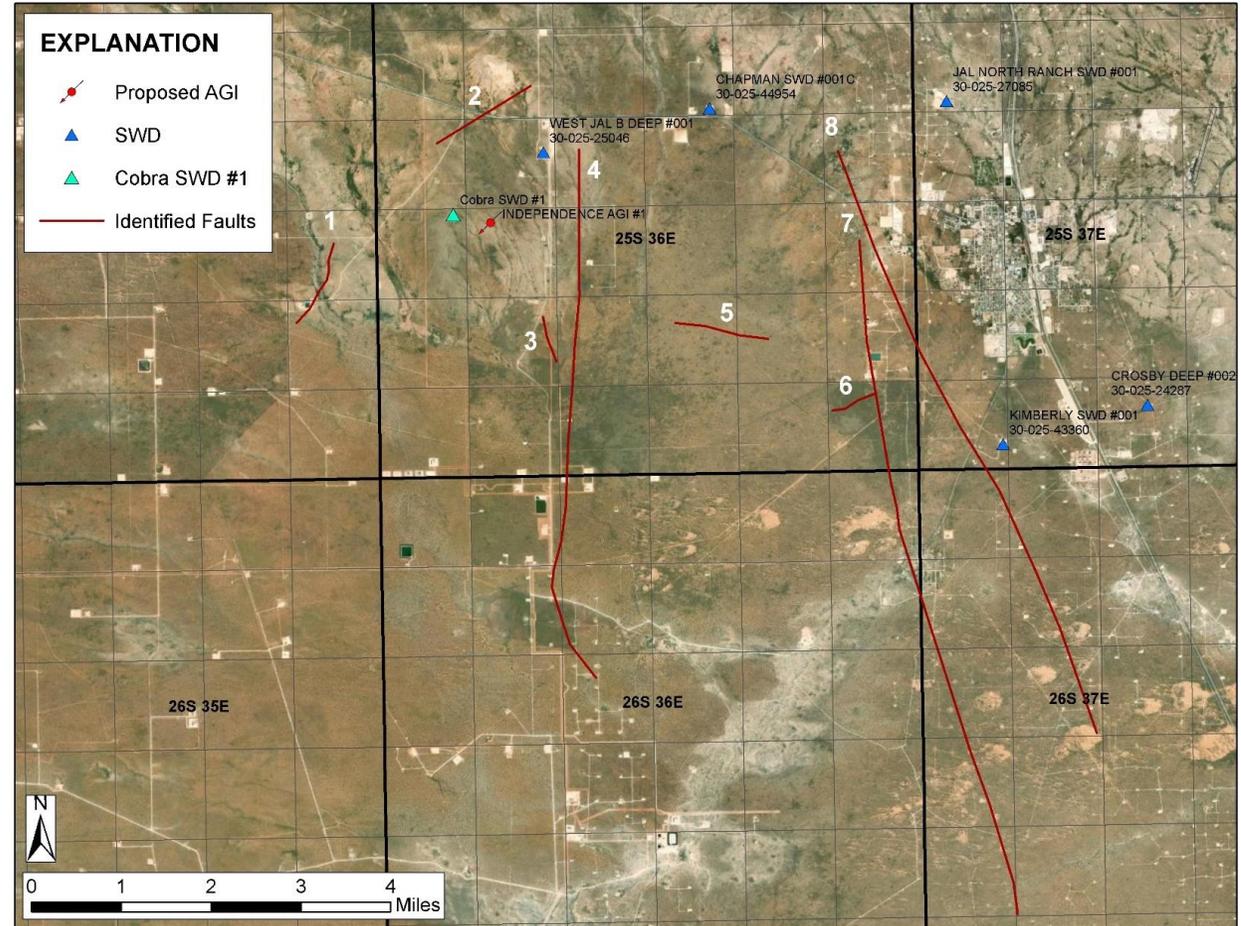

Identified faults in the area of the proposed Independence AGI #1 well

SEISMIC SURVEY REVIEW AND NEARBY INJECTION WELLS

- ▶ SWD wells included in model simulations reflect active, approved, and previously operating wells within 8 miles of the proposed AGI
- ▶ With the exception of Cobra SWD #1, wells without an approved SWD Order were not included in FSP simulations
- ▶ Cobra SWD #1 was included due to its proposed proximity to the AGI well and its application being taken under advisement during the July 25, 2019 OCD Examiner Hearing

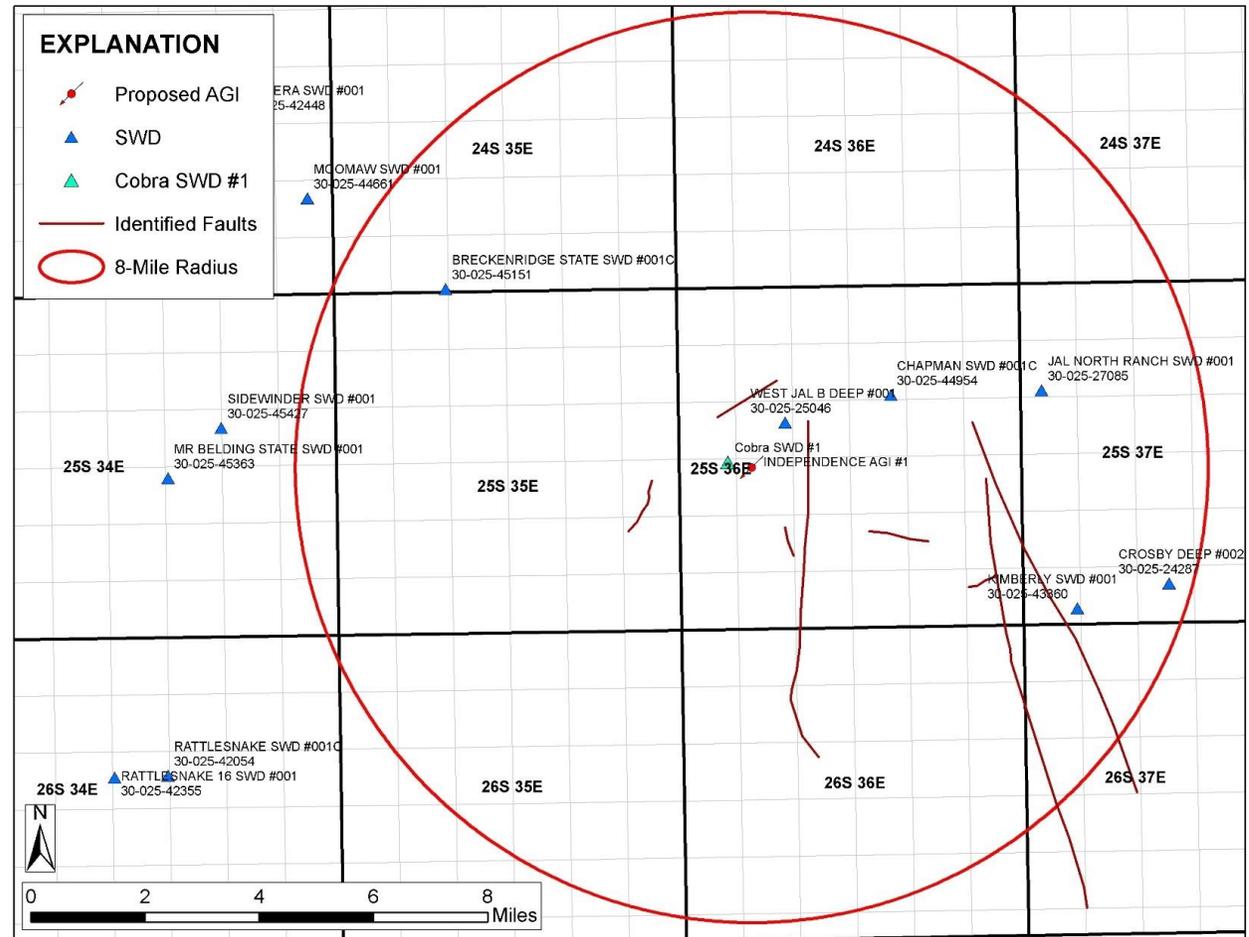

Nearby SWD wells included in slip-probability modeling simulations including proposed Cobra SWD #1 which awaits hearing decision

MODEL INPUT PARAMETERS


- ▶ The FSP model first utilizes input parameters describing local stress conditions, fault geometry, and orientation to determine the required pressure increase to induce motion along each simulated feature
- ▶ Faults in the vicinity of the proposed Independence AGI #1 were observed to be steeply dipping (near vertical) typically trending approximately N-S and NW-SE

Modeled Parameter	Input Value	Variability (+/-)	UOM	Source
<i>Stress</i>				
Vertical Stress Gradient	1.05	0.105	psi/ft	Nearby well estimate
Max Horizontal Stress Direction	N75E	5	Deg	Lund Snee & Zoback, 2018
Reference Depth	17000		ft	Nearby well evaluation
Initial Res. Pressure Gradient	0.43	0.043	psi/ft	Lund Snee & Zoback, 2018 Nearby well evaluation
A _φ Parameter	0.6	0.06	-	Lund Snee & Zoback, 2018
Reference Friction Coefficient (μ)	0.6	0.06	-	Standard value
<i>Hydrologic</i>				
Aquifer Thickness	1500	0	ft	Nearby well evaluation
Porosity	3.5	0.35	%	Nearby well evaluation
Permeability	25	2	mD	Nearby well evaluation
<i>Material Properties</i>				
Density (Water)	1040	40	Kg/m ³	Standard value
Dynamic Viscosity (Water)	0.0008	0.0001	Pa.s	Standard value
Fluid Compressibility (Water)	3.6 x 10 ⁻¹⁰	0	Pa ⁻¹	Standard value
Rock Compressibility	1.08 x 10 ⁻⁹	0	Pa ⁻¹	Standard value
<i>Acid Gas Properties @ 8,800 psi & 210 °F</i>				
Density	879.67	-	kg/m ³	AQUALibrium™
Dynamic Viscosity	9.542 x 10 ⁻⁵	-	Pa.s	AQUALibrium™

Input parameters and source material for FSP model simulations

DEFINING FAULTS FOR FSP SIMULATION

- ▶ To accurately characterize their non-linear expression, the eight (8) identified fault features were subdivided into 29 fault segments to be represented in fault-slip simulations
- ▶ Initial step by the FSP simulation is to estimate the change in pressure conditions required to induce slip based on local stress characteristics and orientation of subsurface features

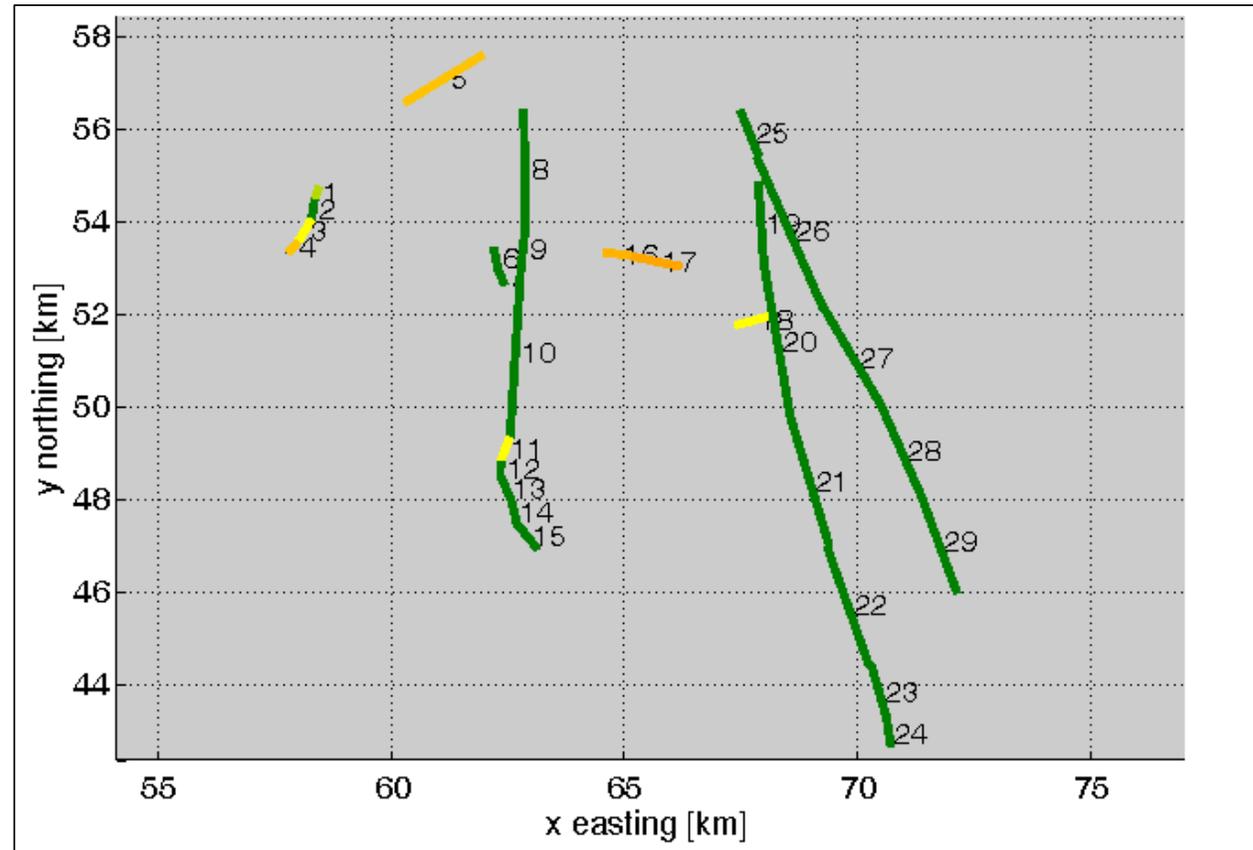

Subdivision of eight identified faults into 29 fault segments for simulation

REQUIRED CONDITIONS TO INDUCE SLIP

- ▶ As shown in the Table, pore pressure increases required to induce slip, as predicted by the FSP model, range from approximately 1,080 to 6,930 psi
- ▶ Faults generally striking closer to orientation of maximum horizontal stress direction (N75E) are predicted to require less pore-pressure increase to induce slip than those features striking approx. N-NW
- ▶ Segments exhibiting lowest predicted pressure increase to induce slip correspond to faults 1, 2, 5, and 6 (as shown in Slide 25)

Segment #	ΔPP Required to Slip (PSI)	Segment #	ΔPP Required to Slip (PSI)
1	3137	16	1101
2	4357	17	1085
3	1786	18	1554
4	1201	19	6012
5	1197	20	6680
6	6869	21	6914
7	6298	22	6758
8	5645	23	6931
9	4610	24	6590
10	5005	25	6508
11	2709	26	6327
12	5302	27	5455
13	6339	28	6305
14	6899	29	6684
15	4197		

Model-estimated pore-pressure increase required to induced slip along each fault segment included in FSP model simulations

INJECTION WELLS IN THE VICINITY OF THE PROPOSED AGI

- ▶ Geolex identified eight (8) Devonian injection wells within approx. 8 miles that were included in FSP simulations to predict the associated risk for injection-induced fault slip
- ▶ To provide a conservative estimate of risk, all included SWD and the proposed AGI were operated at their maximum anticipated daily injection rate, as recorded in their respective C-108 applications
- ▶ Daily injection volumes range from approximately 5,000 to 50,000 barrels per day with the contribution of the AGI consisting of <3% of total volume injected in the area
- ▶ Model limitations require simulation of the AGI utilizing injectate characteristics of produced water, which provides additional assurance that a conservative estimate of risk is produced as water exhibits greater viscosity and is significantly less compressible than acid gas


INJECTION WELLS INCLUDED IN FSP MODEL SIMULATIONS

Well #	API	Well Name	Volume (bbls/day)	Start (year)	End (year)
1	-	Independence AGI #1	5250	2020	2050
2	3002524287	Crosby Deep #2	6800	2010	2012
3	3002525046	West Jal B Deep #1	30000	2015	2050
4	3002527085	Jal N. Ranch SWD #1	10000*	2017	2050
5	3002543360	Kimberly SWD #1	20000	2019	2050
6	3002544954	Chapman SWD #1	25000	2020	2050
7	-	Cobra SWD #1	50000	2020	2050
8	3002545151	Breckinridge State #1	40000	2020	2050


*NMOCD records include no information regarding the maximum anticipated injection volume and estimates were made based on reported injection volume data

INJECTION SIMULATION RESULTS

- ▶ After 40 years of simulated injection, model-estimated pressure increase experienced at fault midpoints ranges from approximately 17–560 psi
- ▶ Predicted pressure changes resulting from the simulated injection scenario fall sufficiently short of the model-determined pressure required to induce slip along included faults
- ▶ Model-determined actual pressure increase experienced at fault midpoints range from less than 1% to 47% of pressure increase required to induce slip

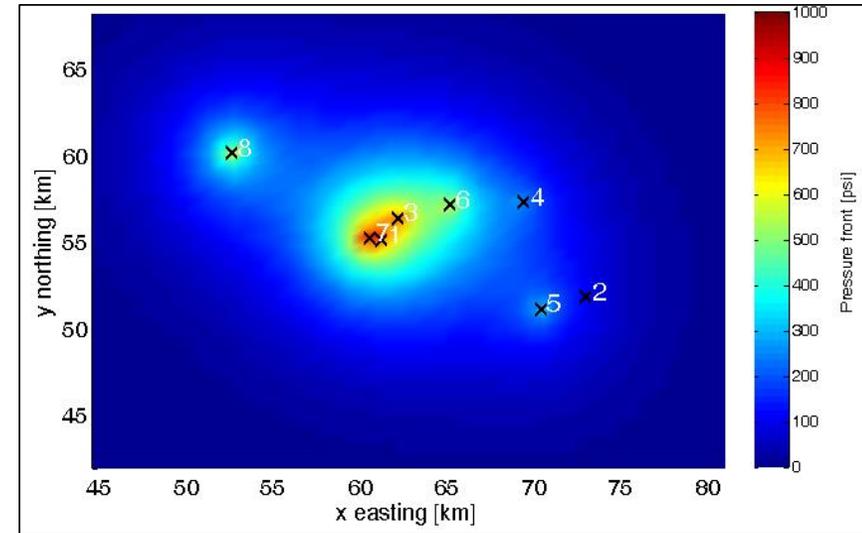


Resultant pressure conditions after 30 years of AGI operations

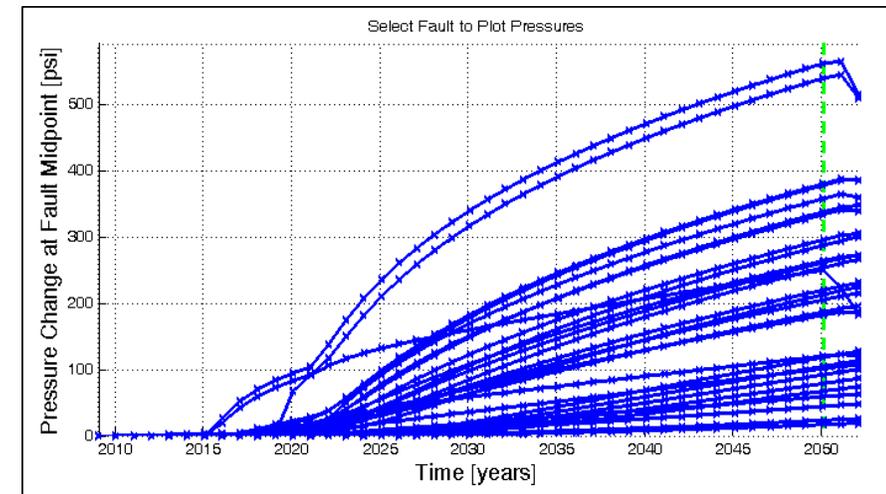


Pressure change experienced at each fault segment throughout the simulated injection scenario

FSP SIMULATION RESULTS

- ▶ In response to the simulated injection scenario, the FSP model predicts non-zero slip probability estimates for five (5) fault segments
- ▶ Slip probability estimates for these fault segments range from 0.01 to 0.13
- ▶ The majority of fault segments (24) included are predicted by the FSP model to have **no potential** for injection-induced slip (probability = 0.00)

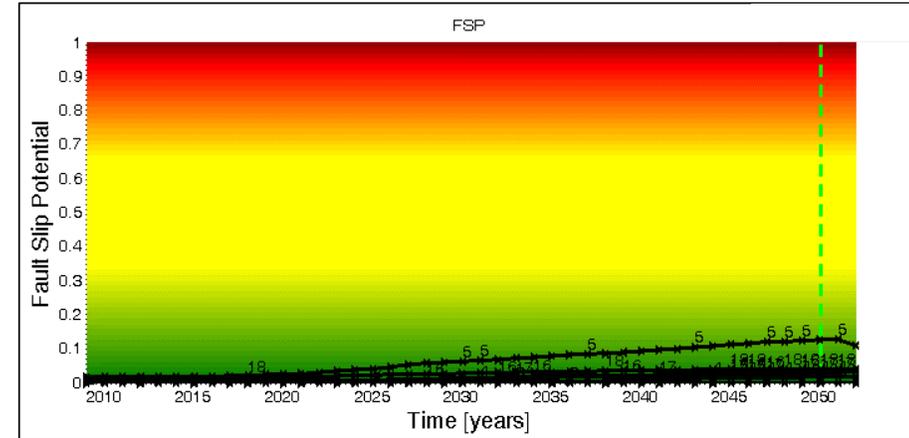


Fault Slip Potential through the simulated injection period (2010–2050)

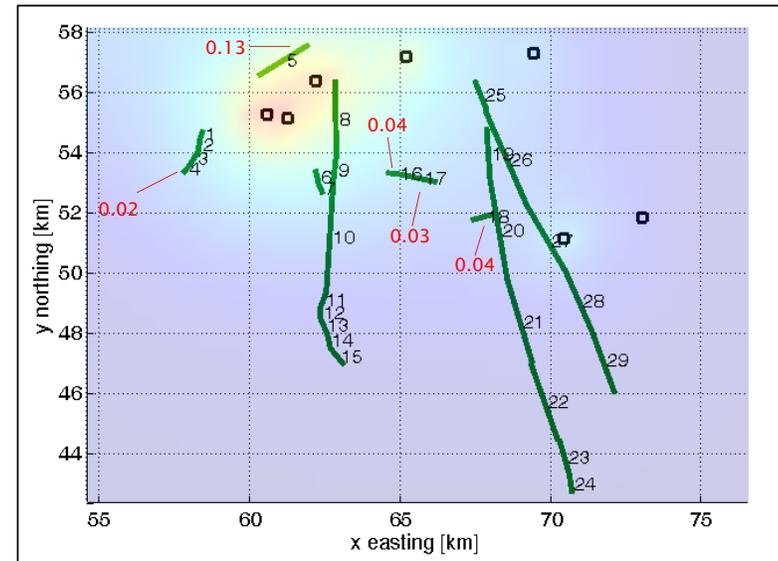

FSP fault map annotated with non-zero model predictions of slip probability (red)

FSP SIMULATION RESULTS

- ▶ Generally, identified faults are not predicted to be at significant risk for injection-induced slip in response to the eight-well injection scenario presented
- ▶ Fault-slip probability estimates range from 0.01 to 0.13 after 40 years of injection operations, with the majority of fault segments predicted to have zero probability for slip
- ▶ Subsequent simulation conducted that excludes the injection volume contributions of Independence AGI #1 demonstrate the minimal impact the proposed well will exert on the reservoir (shown in Table)
- ▶ As simulated, the proposed AGI can be operated without contributing significantly to the total risk of injection-induced slip, which under these operating conditions remains minimal throughout the total simulation period

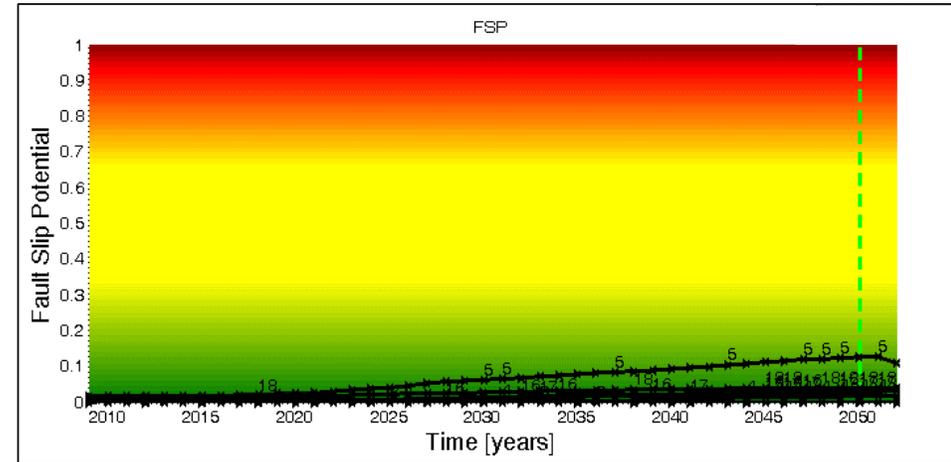

Fault Slip Potential through the simulated injection period (2010–2050)

Segment #	Predicted Δ PP (PSI)	Predicted Δ PP NO AGI (PSI)	Δ PP Required to Slip (PSI)	Probability of Slip	Probability (No AGI)
4	261	247	1201	0.02	0.02
5	560	535	1197	0.13	0.13
16	287	274	1101	0.04	0.04
17	253	244	1085	0.03	0.03
18	186	182	1554	0.04	0.03

Tabulated summary of FSP model results for fault segments predicted by the to have non-zero estimates of fault-slip probability


POTENTIAL FOR VERTICAL MIGRATION

Greater than 300 feet of dense Woodford Shale is anticipated to serve as excellent caprock for the Devonian reservoir, however, additional characterization of local pressure conditions was conducted to assure acid gas has no potential to migrate vertically out of zone, including:

- Review of relevant studies characterizing regional pressure conditions in the Delaware Basin
- Compilation of drilling fluid records representing nearby wells to characterize local pressure conditions in the area of the proposed AGI
- Preparation of a preliminary drilling–fluids program to obtain specific drilling–fluid recommendations for drilling a Siluro–Devonian well in the location of the proposed Independence AGI #1

OVERPRESSURE CONDITIONS IN THE DELAWARE BASIN


- ▶ Regional pore–pressure model of Delaware Basin generated by Rittenhouse et al. (2016), informed by:
 - >23,700 mud weight recordings
 - >4,000 DST and fracture injection tests
- ▶ Pore–pressure gradient increase observed from lower B. Springs to base of Woodford Shale
- ▶ Higher density mud weights required from Lower Wolfcamp to base of Woodford Shale
- ▶ Return to normal pressure conditions below Woodford Shale (proposed Independence AGI #1 injection zone)
- ▶ Results of this pore–pressure model indicate Devonian injection zone will be under–pressured relative to overlying producing zones

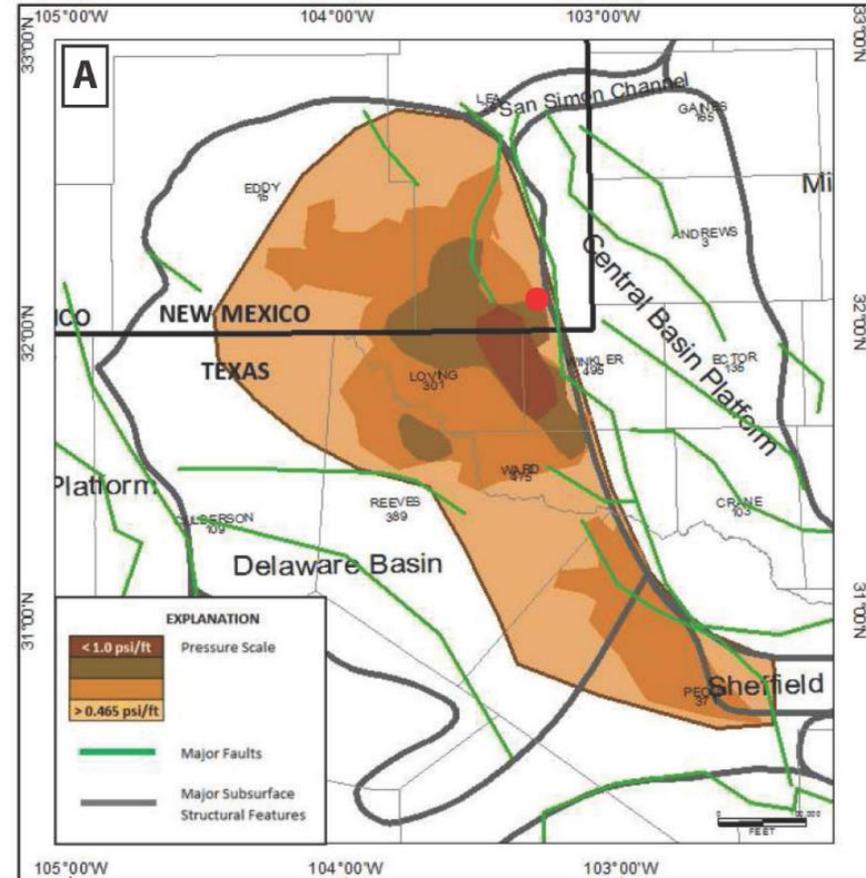

Mapped extent of present–day over–pressure conditions in the Delaware Basin (Rittenhouse et al., 2016). Proposed AGI location denoted by red circle.

OVERPRESSURE CONDITIONS IN THE DELAWARE BASIN


- ▶ Regional pore–pressure model of Delaware Basin generated by Rittenhouse et al. (2016), informed by:
 - >23,700 mud weight recordings
 - >4,000 DST and fracture injection tests
- ▶ Pore–pressure gradient increase observed from lower B. Springs to base of Woodford Shale
- ▶ Higher density mud weights required from Lower Wolfcamp to base of Woodford Shale
- ▶ Return to normal pressure conditions below Woodford Shale (proposed Independence AGI #1 injection zone)
- ▶ Results of this pore–pressure model indicate Devonian injection zone will be under–pressured relative to overlying producing zones

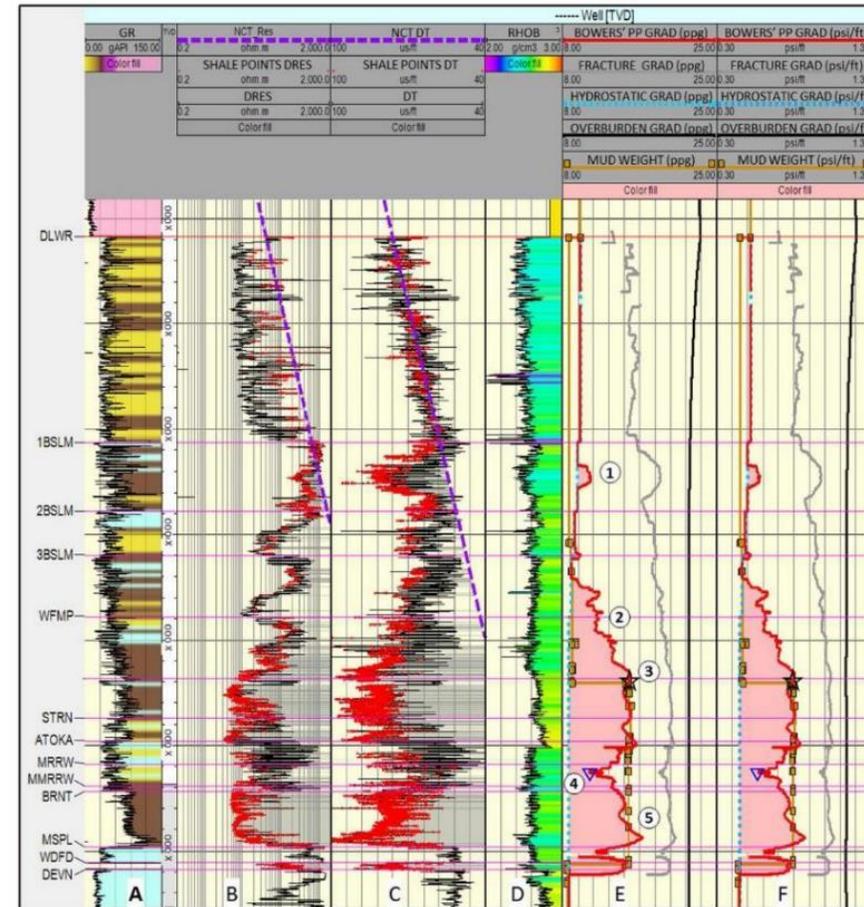

Example log response illustrating stratigraphic onset of over–pressure conditions and associated drilling–fluid densities in strata overlying the proposed Devonian injection zone

LOCAL DRILLING FLUID RECORDS

- ▶ To verify pressure conditions indicated by regional pore-pressure model (Rittenhouse et al., 2016), available drilling fluid records in the area of the proposed AGI well were compiled
- ▶ Well data (shown right) illustrates significantly high fluid densities utilized while drilling Atoka/Strawn through Mississippian intervals:
 - Mud Density Range – 12.1 to 15.1 PPG
 - Average Fluid Density – 13.5 PPG
- ▶ Devonian drilling fluids in the area (when available) average 9.0 PPG
- ▶ Local drilling fluid records support expectation that targeted Devonian reservoir is under-pressured relative to overlying producing zones

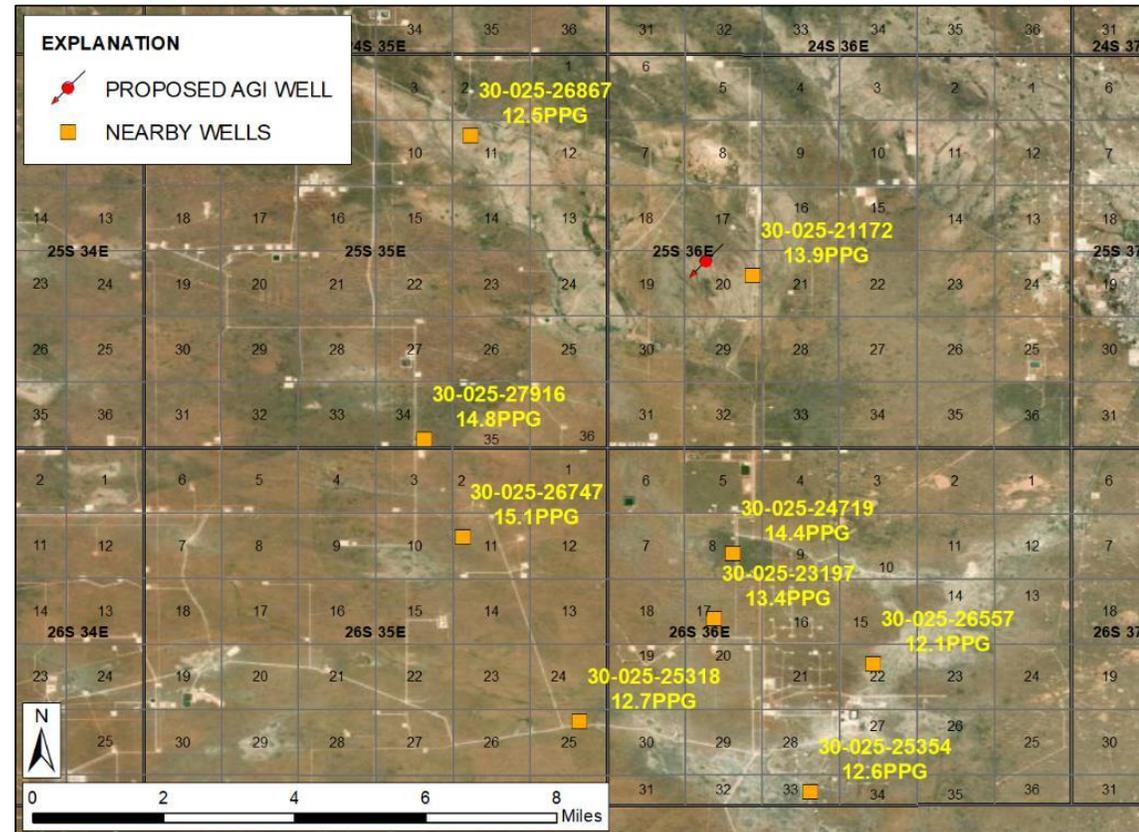

Annotated map illustrating drilling fluid densities utilized in zones overlying the target Siluro-Devonian reservoir in the area of the proposed AGI well

INDEPENDENCE AGI #1 – FLUID PROGRAM

12,300' – 16,000'

Fluid Type	Brine water / Xanthan Gum / Barite / Pac LV							
Potential Hazards	Seepage / lost circulation / abnormal pressure / well bore cleaning							
12,300' – 16,000'. <i>Drill an 8 5/8" well bore and set 7" liner from 12,100' to 16,000'.</i>								
Drilling Fluid Recommendations								
Interval Depth (feet) (MD TVD)	Fluid Density (Ppg.)	Viscosity (sec/quant)	Plastic Viscosity (cps)	Yield Point (lbs/100 ft. ²)	pH	Filtrate - API (Cm3/30 min.)	Drill Solids (% volume)	Chloride (mg/l)
12,300' – 13,000'	10.0 – 11.0	36 – 40	10 – 15	8 – 10	10.5	10 – 12	< 5	165k – 185k
13,000' – 16,000'	12.4 – 12.9	40 – 45	12 – 18	10 – 15	10.5	8 – 10	< 5	165k – 185k

16,000' – 17,600'

Fluid Type	Cut brine / Xanthan Gum / Pac LV / <i>Acid Soluble LCM</i>							
Potential Hazards	Severe lost circulation							
16,000' – 17,600'. <i>Drill a 5 7/8" well bore for open hole completion</i>								
Drilling Fluid Recommendations								
Interval Depth (feet) (MD TVD)	Fluid Density (Ppg.)	Viscosity (sec/quant)	Plastic Viscosity (cps)	Yield Point (lbs/100 ft. ²)	pH	Filtrate - API (Cm3/30 min.)	Solids (% volume)	Chloride (mg/l)
16,000' – 17,600'	9.0 – 9.2	32 – 34	6 – 10	4 – 8	10.5	10 – 15	< 5	40k – 90k (*)

- ▶ Shown above is a preliminary mud program generated by Artesia Lumber Co./Buckeye, Inc. for the proposed Independence AGI #1
- ▶ Recommendation includes utilization of 12.4 to 12.9 PPG drilling fluids in zones overlying Devonian injection reservoir in anticipation of high-pressure conditions
- ▶ Fluid density recommendation reduced to 9.0 to 9.2 PPG in the Devonian injection reservoir and program notes potential for “severe lost circulation”

VERTICAL MIGRATION POTENTIAL


- ▶ Upon review of regional and local pore–pressure conditions, operation of the proposed AGI well is not anticipated to present any risk for vertical migration of acid gas out of the intended reservoir
- ▶ Records of drilling–fluid characteristics, specific drilling fluid recommendations for the proposed AGI, and published literature demonstrate that the target Devonian injection reservoir is under–pressured relative to overlying producing zones
- ▶ Pressure differential between the target injection reservoir and overlying strata will aid in preventing vertical migration of acid gas out of the intended zone
- ▶ Furthermore, were conduits in fact present allowing for communication between zones, the pressure differential demonstrated by nearby drilling–fluid records would not be locally maintained

SIMULATING INJECTION OPERATIONS OF THE PROPOSED AGI WELL

- ▶ To characterize and predict the resultant acid gas plume after 30 years of operation, injection simulations were conducted utilizing Schlumberger modeling and simulation platforms
 - Schlumberger PETREL was utilized to construct a geologic simulation grid representing the subsurface strata
 - Injection simulations were conducted utilizing Schlumberger ECLIPSE and include relevant nearby wells with reasonable potential to affect the resultant AGI plume

GEOLOGIC SIMULATION MODEL


- ▶ A geologic simulation grid was constructed to simulate operation of the proposed Independence AGI #1
- ▶ Simulation grid constructed utilizing 3D seismic survey data and local well control
- ▶ The simulation area covers a total area of approximately 20 square miles in the area of the proposed Independence AGI #1
- ▶ Multiple case simulations consider operation of the proposed AGI well, West Jal B Deep SWD #1, and the proposed Cobra SWD #1

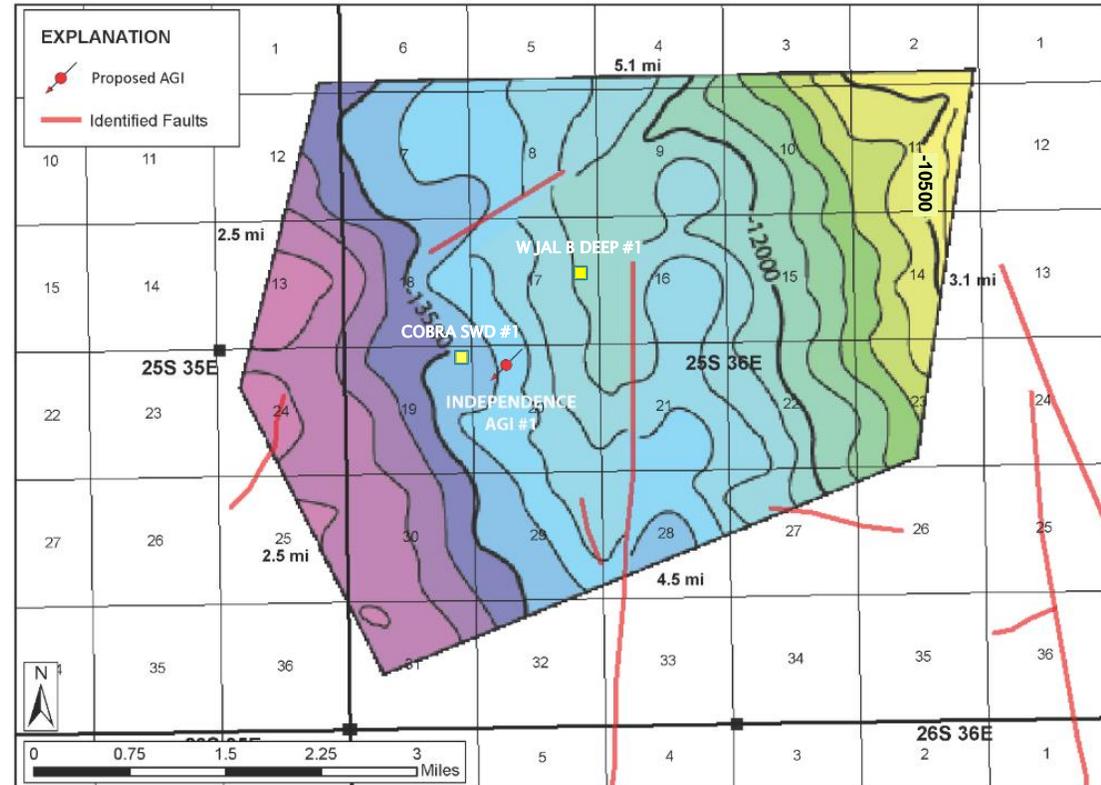

Location map illustrating areal extent of geologic simulation grid constructed to simulation operation of the proposed AGI well and the nearby West Jal B Deep #1 well

GEOLOGIC SIMULATION MODEL

- ▶ Geologic simulation grid is comprised of 292 simulation layers characterizing eight (8) discrete zones identified in review of the injection reservoir
- ▶ Total simulation model includes 923,000 grid cells with areal dimensions of 500 x 500 feet
- ▶ Simulation area covers an area of approximately 20 square miles and includes relevant subsurface features and nearby injection wells

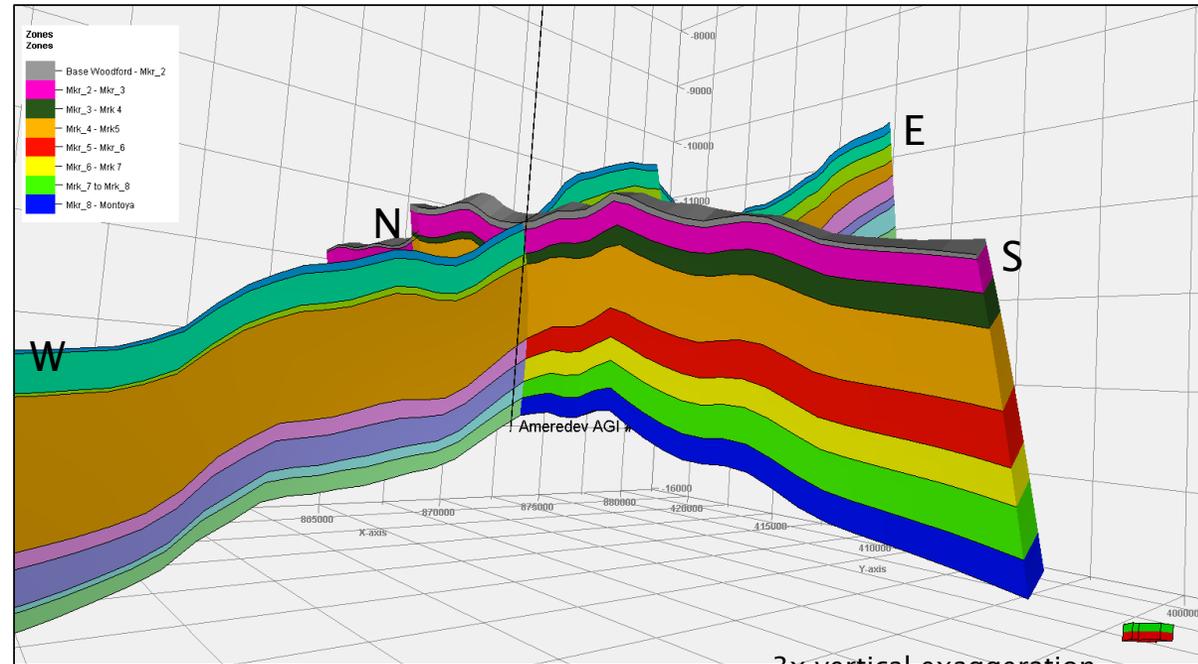

Three-dimensional render of the constructed geologic simulation grid representing eight discrete zone identified in the target reservoir and delineated based on porosity and permeability characteristics

INJECTION RESERVOIR CHARACTERISTICS


- ▶ Targeted injection reservoir subdivided into eight (8) zones based on interpreted porosity and permeability characteristics
- ▶ Average porosity estimates made for each identified zone based on available well-log data
- ▶ Average total injection zone porosity of approximately 3.9%
- ▶ Permeability values estimated based on available DST and injection test data and were further refined based on dolomite permeability studies of Lucia et al. (1995)

Zone	Top	Base	Φ (Feet)	Avg. Φ	Φ Range	K Range (mD)	Avg. K (mD)
1	16230	16294	64	5.0%	3-10%	10-100	40
2	16294	16497	203	2.0%	0-10%	0.1-10	1.0
3	16497	16584	87	4.0%	1-7%	0.1-10	3
4	16584	17218	634	1.0%	0-3%	0.1-5	0.75
5	17218	17378	160	8.0%	1-20%	10-400	140
6	17378	17561	183	6.0%	1-8%	10-100	50
7	17561	17684	123	8.0%	1-16%	1.0-200	100
8	17684	17820	136	8.0%	1-16%	1.0-200	100


Identified zones within the injection reservoir delineated based on interpreted porosity and permeability characteristics

GEOLOGIC MODEL CHARACTERISTICS


- ▶ Model porosity distribution generated from available well-log data (n=2), including West Jal B Deep #1 and West Jal Unit #1, as well as a synthetic log generated for the proposed Independence AGI #1
- ▶ Synthetic log representing the AGI location generated based on review of 3D seismic survey impedance data and local well data
- ▶ Model permeability distribution was generated using the Winland R35 method as normal and beta distributions generated no instances of permeability less than 0.1 mD
- ▶ As geophysical well log data were available for only two wells in the area of the proposed AGI, 3D seismic survey impedance data were utilized to define key intervals of low-porosity

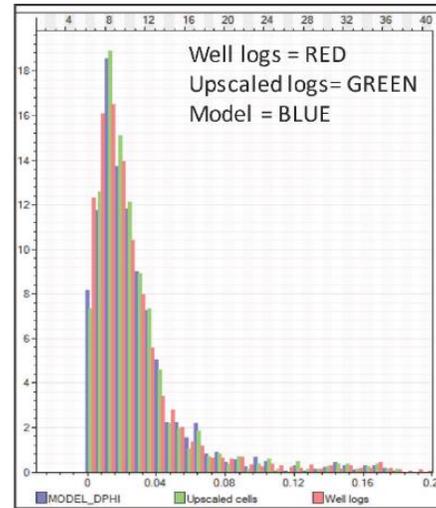

DPHI Distribution
(2 available well logs)

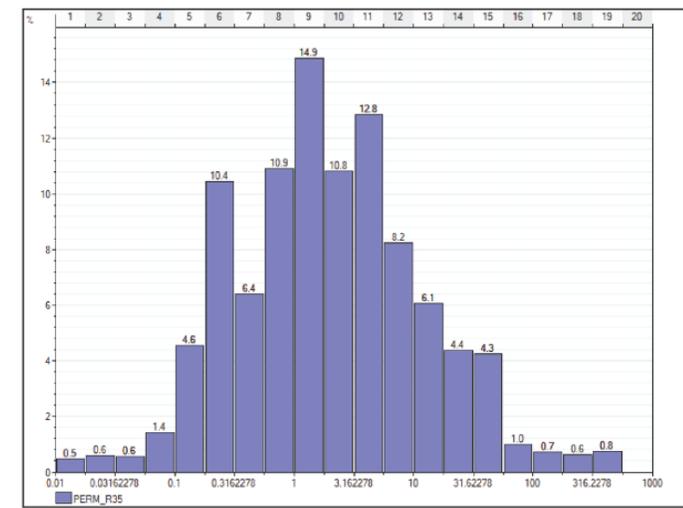


Winland R35 Permeability Distribution

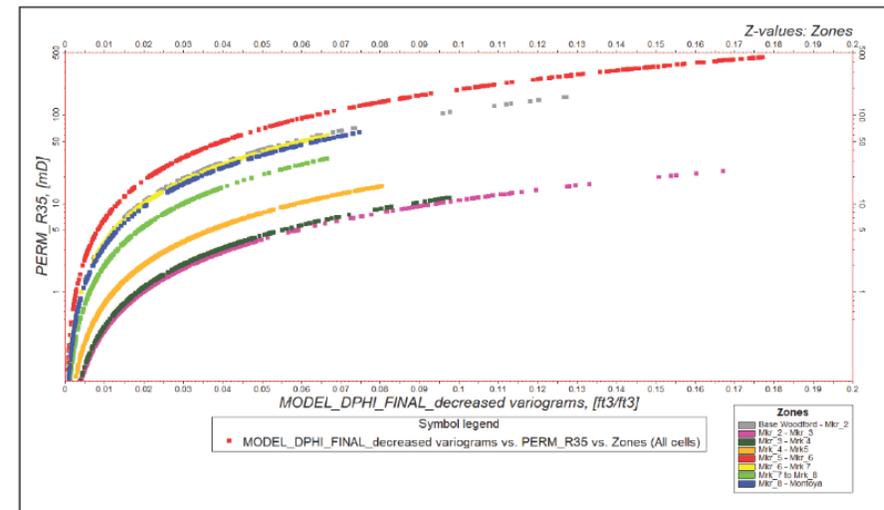


Permeability (Winland R35) vs. Model DPHI

GEOLOGIC MODEL CHARACTERISTICS

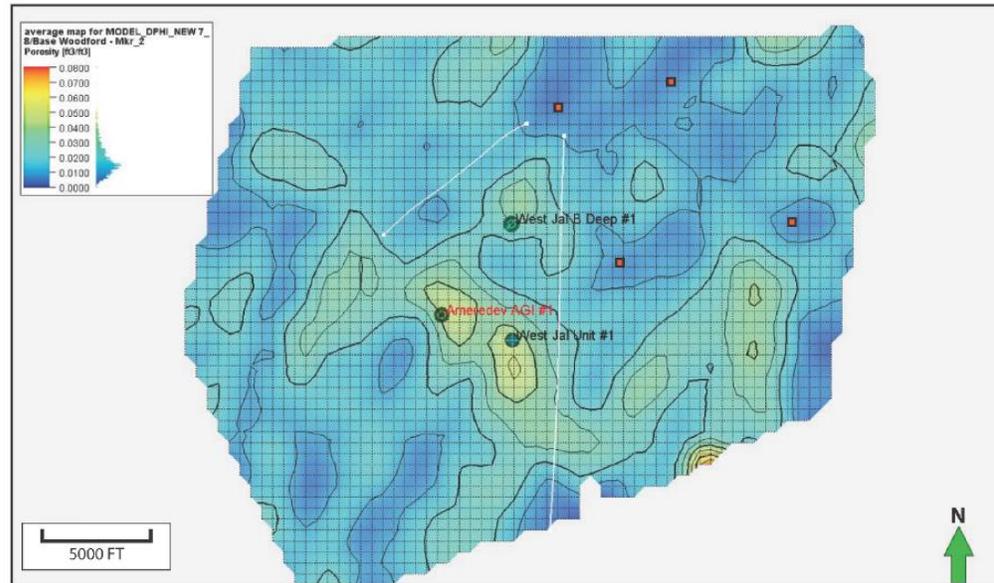

Zone 1 Porosity Distribution (upper Devonian)

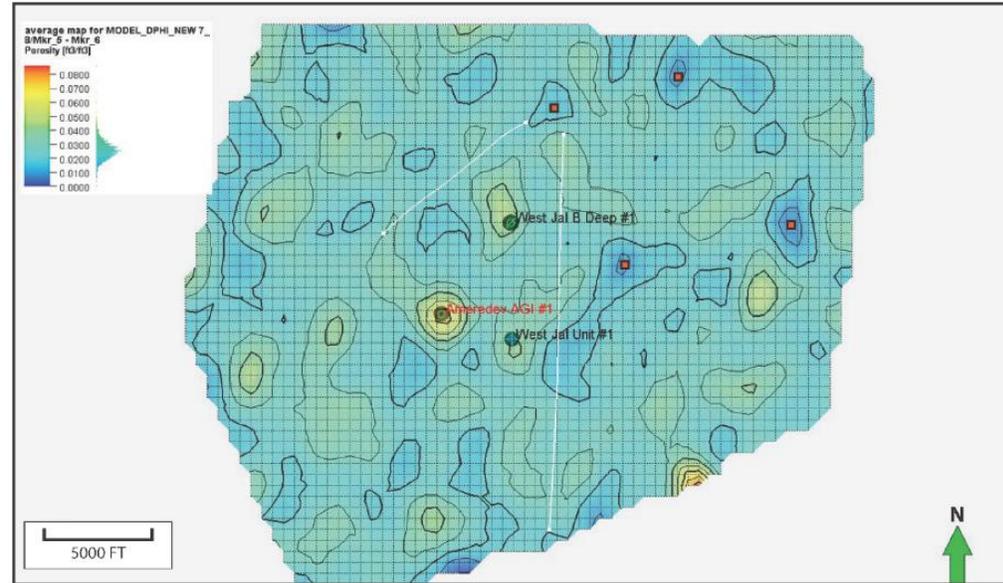

Zone 5 Porosity Distribution Map (Wristen/Fusselman)

- ▶ Average porosity distribution maps for reservoir Zone 1 and Zone 5 are shown above as they are predicted to be the primary receivers of acid gas in this area (correlating to upper Devonian and Wristen/Fusselman strata)
- ▶ Synthetic wells implemented to characterize low-porosity zones and are denoted as orange squares (low-porosity zones interpreted from 3D seismic impedance data)

INJECTION SIMULATION PARAMETERS AND CHARACTERISTICS (ECLIPSE)

- ▶ Simulation considers injection of a mixed acid gas stream of approximately 70% CO₂ and 30% H₂S for a total of 30 years
- ▶ NIST REFPROP utilized to determine gas properties for injection simulations (comparable to AQUAlibrium™ software)
- ▶ Proposed AGI and SWD operated at maximum anticipated injection rate continuously throughout simulation
- ▶ Simulation assumes reservoir is 100% saturated with brine in hydrostatic equilibrium upon commencement of injection simulation
- ▶ Boundary of simulation area is closed and faults are simulated as barriers to flow (non-transmissive)
- ▶ Multiple case simulations were conducted to evaluate resultant plume with and without continuous and coincident operation of the West Jal B Deep #1 and the proposed Cobra SWD #1

INJECTION CASE STUDIES


- ▶ In total, four case simulations were completed utilizing the Schlumberger ECLIPSE simulation platform
- ▶ Cases include injection scenarios to consider the operation of the proposed AGI, the nearby W Jal Deep SWD, and the proposed Cobra SWD under various operating conditions
- ▶ Simulations considering the proposed Cobra SWD #1 well were conducted in response to requests made by NMOCD and NM SLO (Case 4)
- ▶ Additionally, NMOCD requested increasing the daily injection rate of the W Jal B Deep well (Cases 3 & 4)

CASE #	AGI INJ. RATE (MMSCFD)	WEST JAL B DEEP INJ. RATE (BPD)	COBRA SWD INJ. RATE (BPD)
1	12	0	0
2	12	15,000	0
3	12	30,000	0
4	12	30,000	50,000


Summary of case simulations and associated injection well operating parameters

CASE 1 – SIMULATION RESULTS


- ▶ Maximum lateral dispersion distance of acid gas is predicted to be 1.6 miles from the AGI well location
- ▶ Gas saturation distribution maps (panels A and B) demonstrate that relatively low concentrations of acid gas reach this maximum extent and that the main body of the plume (>20% saturation) only extends approximately one (1) mile from the AGI
- ▶ Cross-sectional views of the injection reservoir (panels C and D) demonstrate Zone 1 and Zone 5 are predicted to receive the greatest volume of acid gas

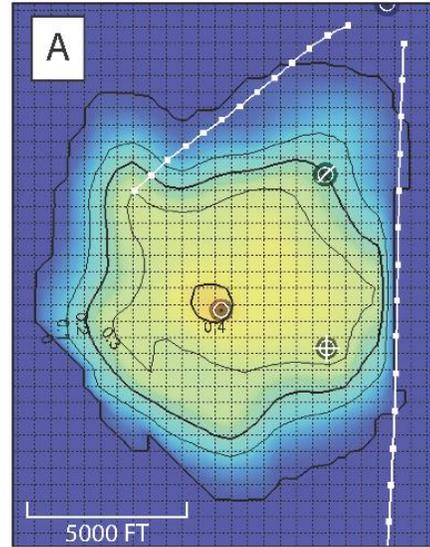


Zone 1 Gas saturation map

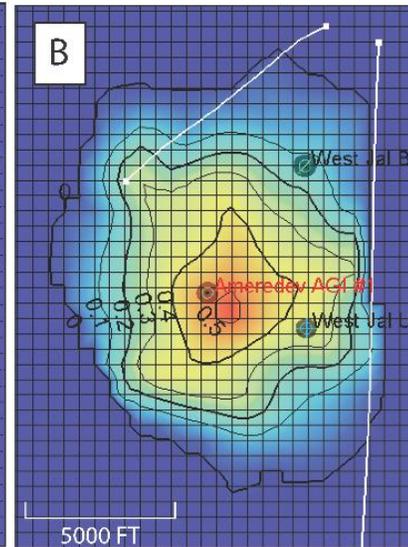


Zone 5 Gas saturation map

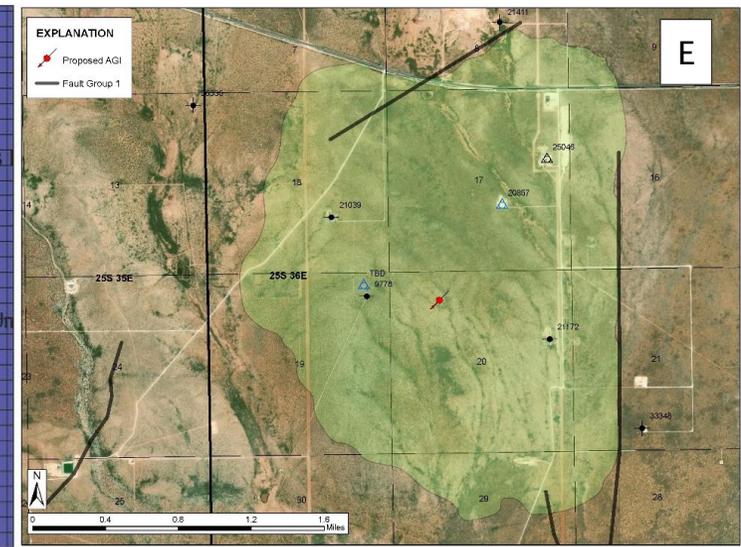

Total potential acid gas plume footprint (all zones) including diffuse areas <0.1 saturation

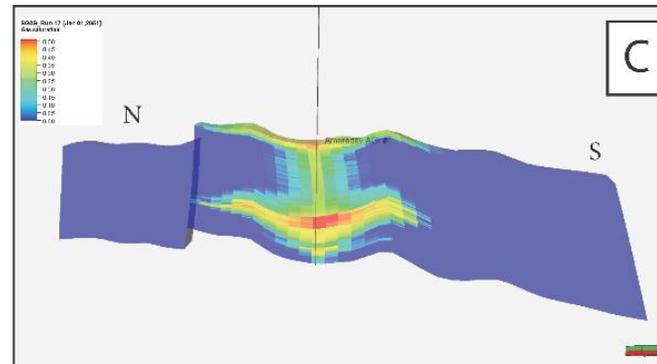


North-South cross-sectional view of resultant plume

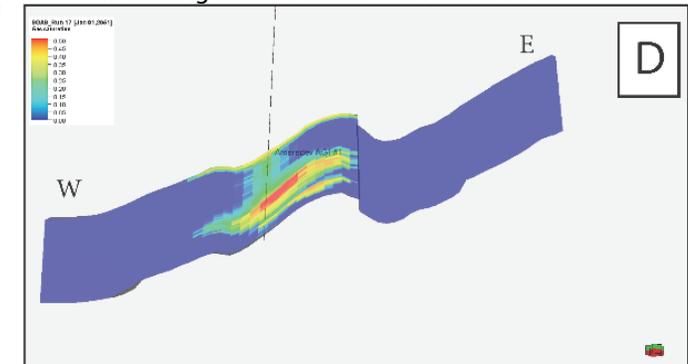


West-East cross-sectional View of resultant plume

CASE 2 – SIMULATION RESULTS


- ▶ Maximum lateral dispersion distance of acid gas is predicted to be 1.8 miles from the AGI well location
- ▶ Gas saturation distribution maps (panels A and B) demonstrate that relatively low concentrations of acid gas reach this maximum extent and that the main body of the plume (>20% saturation) only extends approximately 1.3 miles from the AGI
- ▶ Cross-sectional views of the injection reservoir (panels C and D) demonstrate Zone 1 and Zone 5 are predicted to receive the greatest volume of acid gas

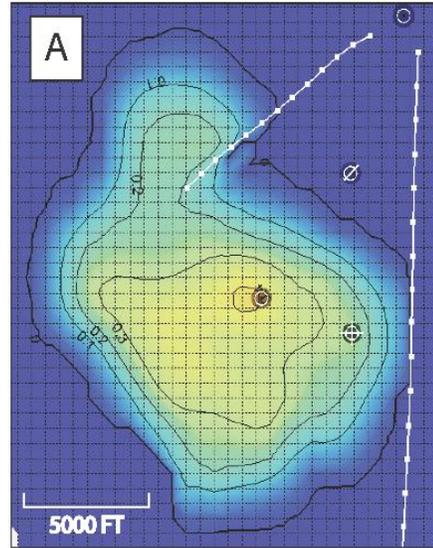


Zone 1 Gas saturation map

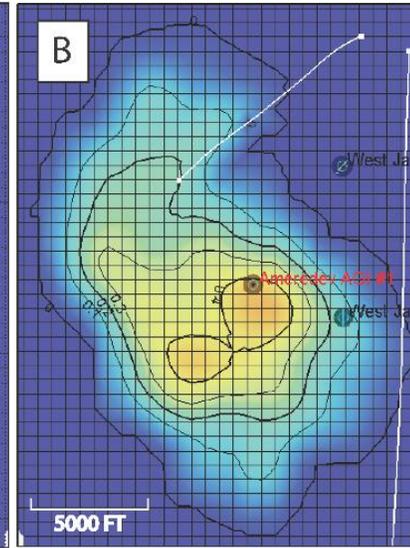


Zone 5 Gas saturation map

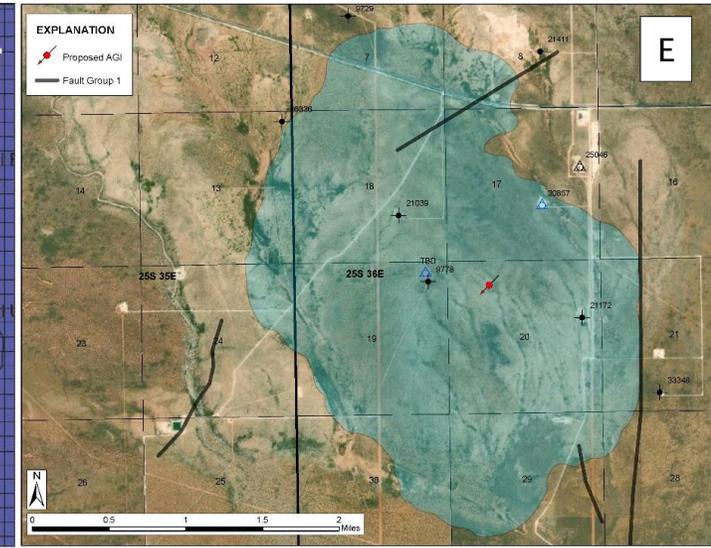

Total potential acid gas plume footprint (all zones) including diffuse areas <0.1 saturation

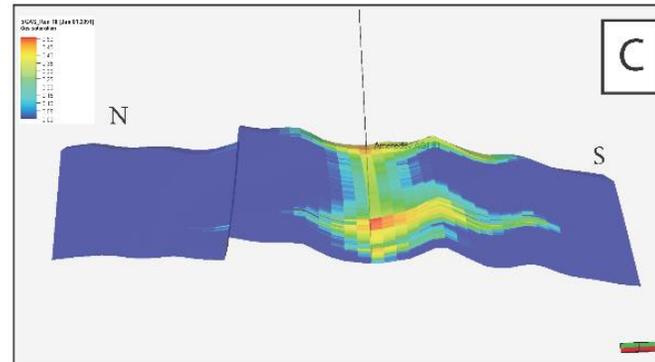


North-South cross-sectional view of resultant plume

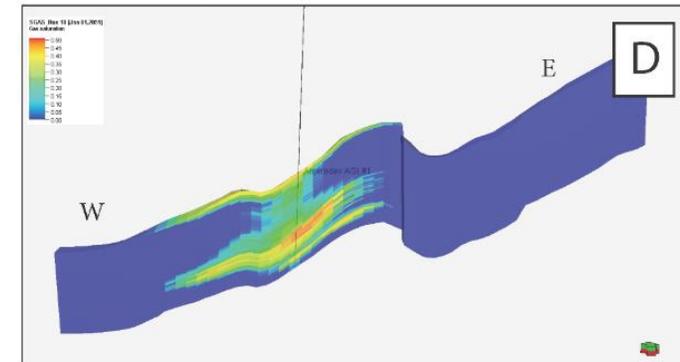


West-East cross-sectional View of resultant plume

CASE 1 & 2 – INJECTION RATE AND PRESSURE

CASE 1 – EXCLUDING SWD WELLS

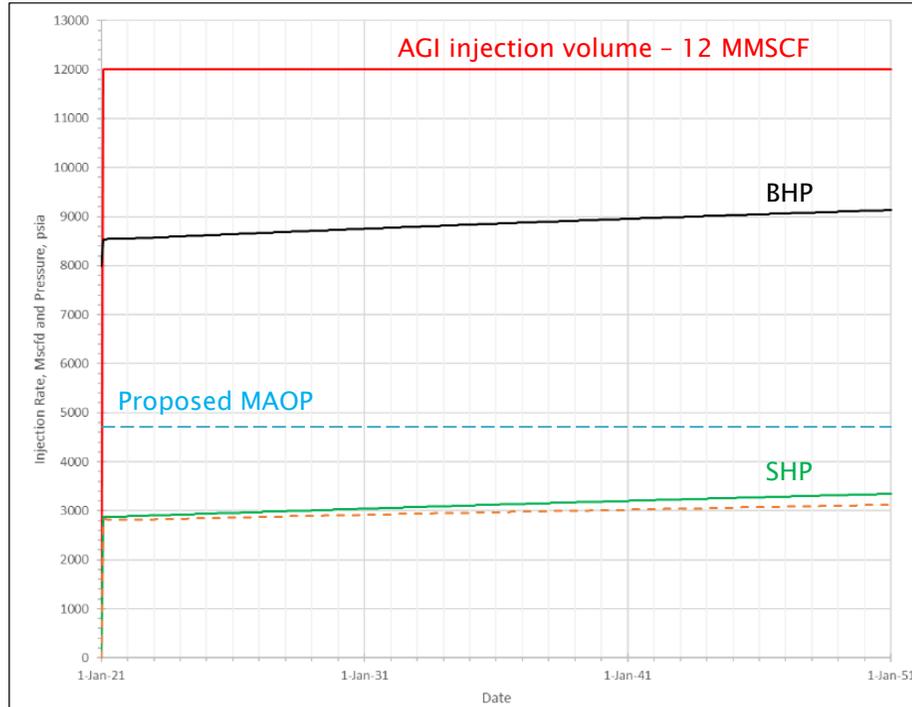

CASE 2 – AGI & WEST JAL B DEEP (15,000 BPD)

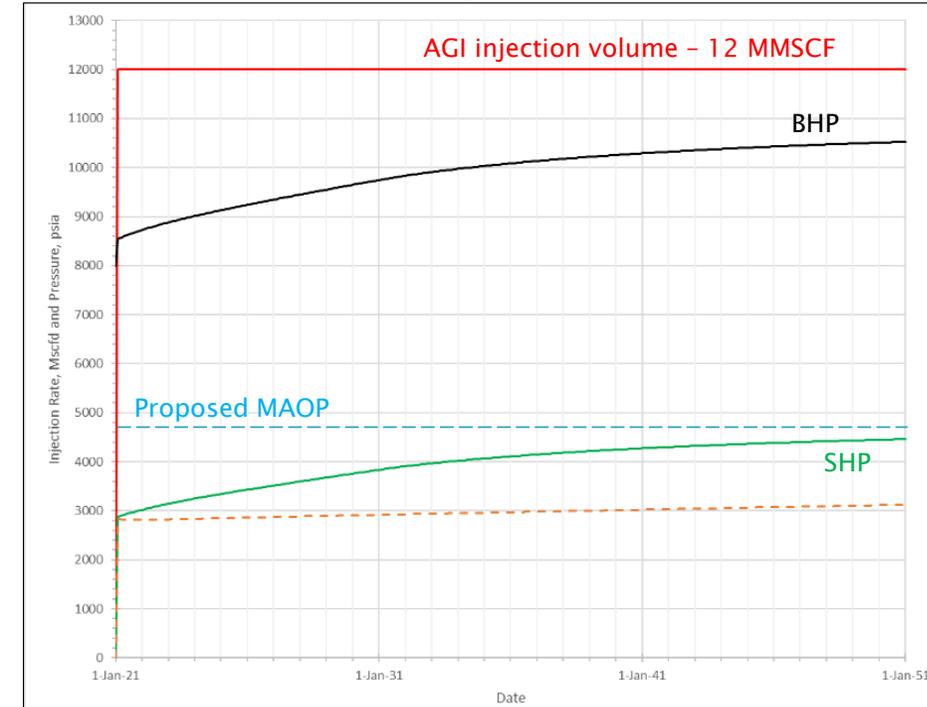

- ▶ In both case simulations 1 and 2 (including/excluding West Jal B Deep #1), the reservoir is fully capable of accommodating the proposed acid gas volumes without exceeding the requested MAOP of 4,779 psi. Acid gas injection rate, bottom-hole pressure, and surface injection pressure trends are shown in red, black, and green, respectively.

DISTRIBUTION OF INJECTATE BY ZONE

- ▶ Only minimal change in the distribution of acid gas by zone is observed between cases, indicating operation of the West Jal B Deep #1 primarily results in a deflection of the injected acid gas
- ▶ Pressure influence from West Jal B Deep #1 results in only minimal increase in acid gas received by minor zones identified within the Devonian reservoir
- ▶ Distribution of acid gas, as predicted by the injection simulations are in agreement with our experience operating Devonian AGI wells, in that upper Devonian and Wristen/Fusselman strata commonly accept the greatest proportions of acid gas


CASE SIMULATION 1 - EXCLUDING SWD

ZONE #	CUMULATIVE INJECTION (MMSCF)	TOTAL PERCENT
1	19,451	14.8
2	976	0.7
3	1,222	0.9
4	2,725	2.1
5	82,541	62.8
6	10,725	8.2
7	5,619	4.3
8	8,223	6.3
TOTAL	131,484	100


CASE SIMULATION 2 - INCLUDING SWD

ZONE #	CUMULATIVE INJECTION (MMSCF)	TOTAL PERCENT
1	21,852	16.6
2	1,207	0.9
3	1,532	1.2
4	3,190	2.4
5	82,293	62.6
6	11,731	8.9
7	4,090	3.1
8	5,588	4.2
TOTAL	131,484	100


CASE 1 – RESULTANT PRESSURE

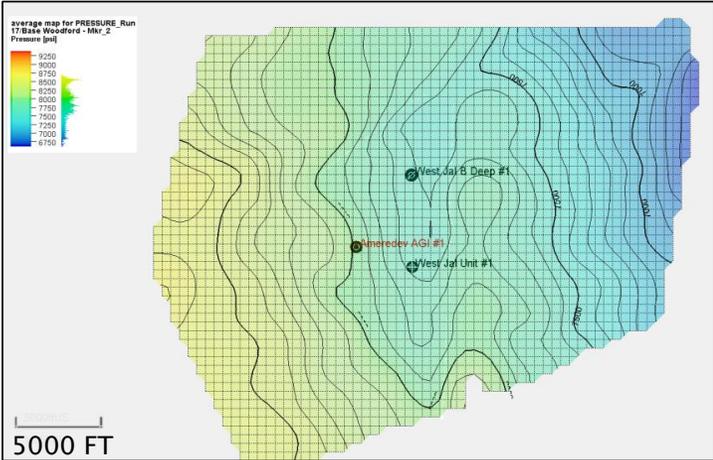


Zone 1 Initial conditions at start of simulation

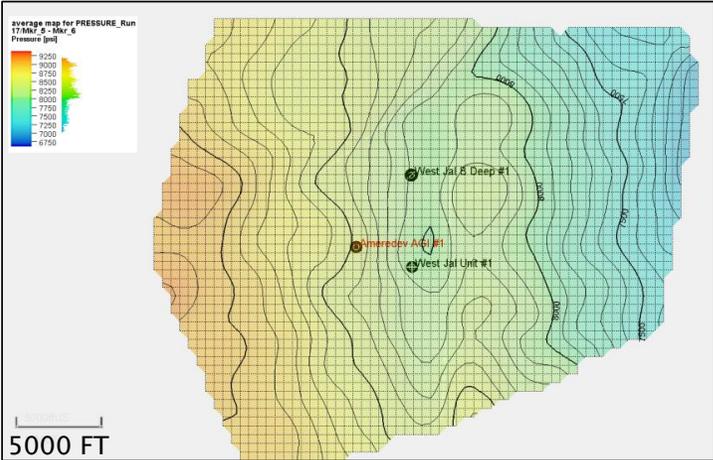


Zone 5 Initial conditions at start of simulation

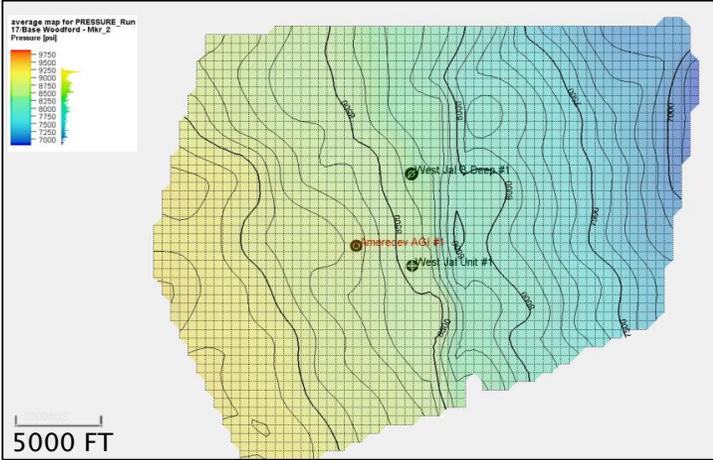


Zone 1 Conditions upon completion of simulation

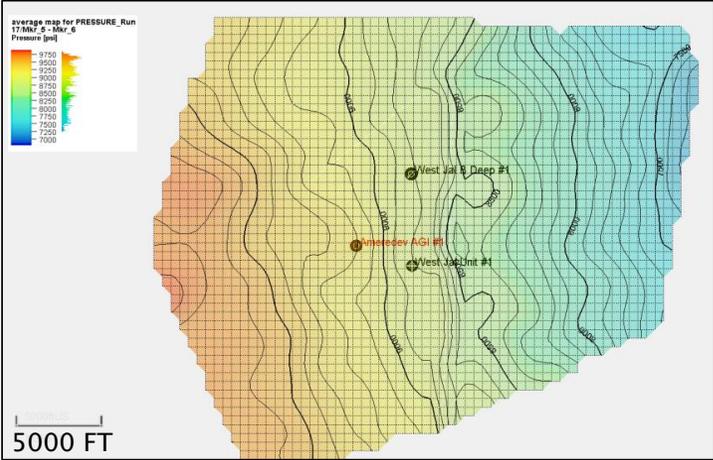


Zone 5 Conditions upon completion of simulation

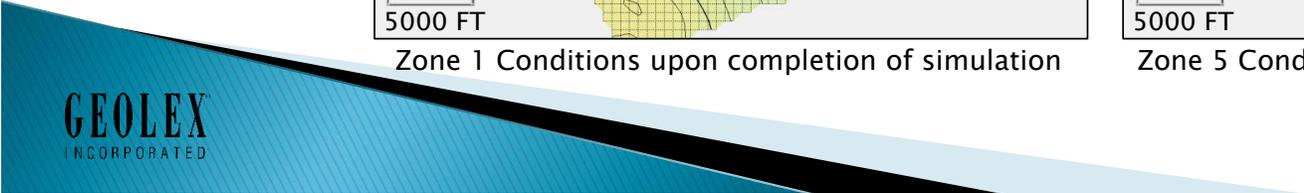


CASE 2 – RESULTANT PRESSURE

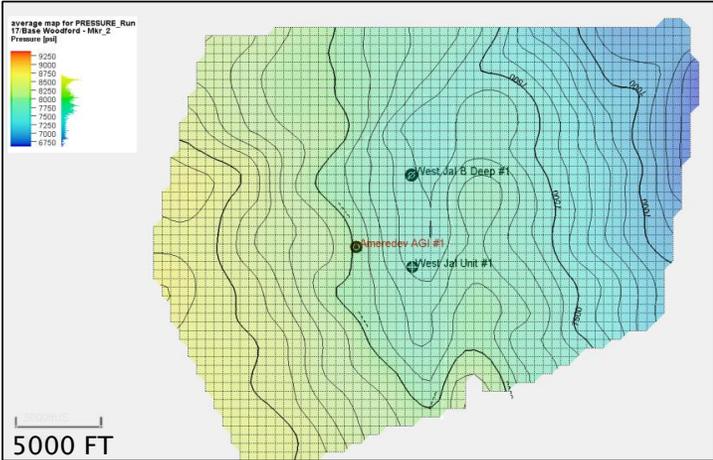


Zone 1 Initial conditions at start of simulation

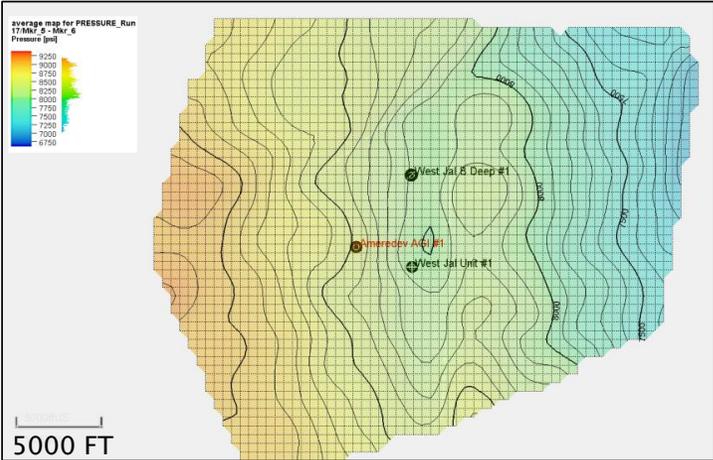

Zone 5 Initial conditions at start of simulation

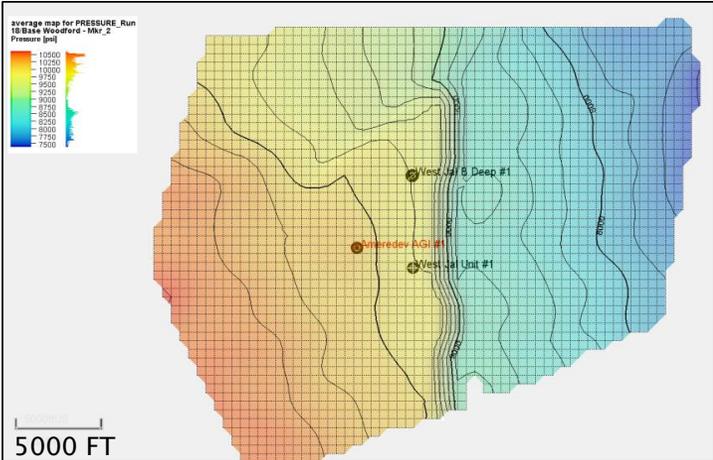


Zone 1 Conditions upon completion of simulation

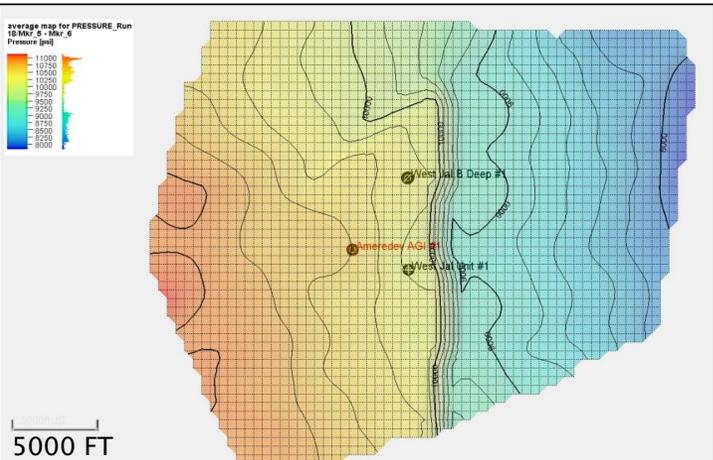


Zone 5 Conditions upon completion of simulation




CASE 3 – SIMULATION RESULTS

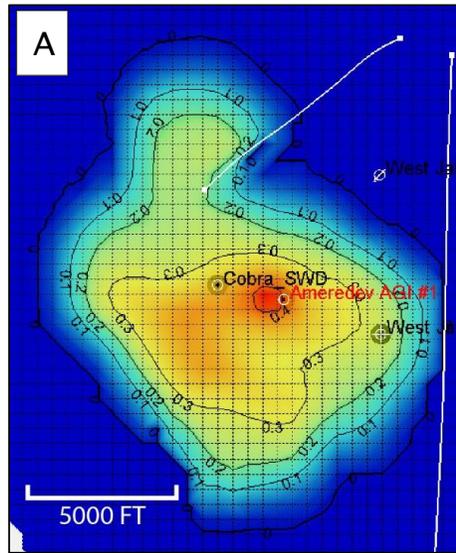


Zone 1 Gas saturation map

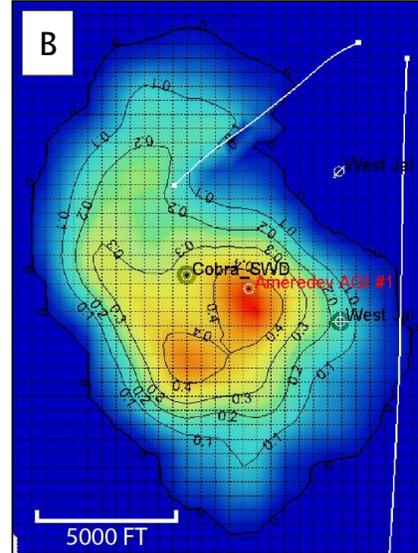

Zone 5 Gas saturation map


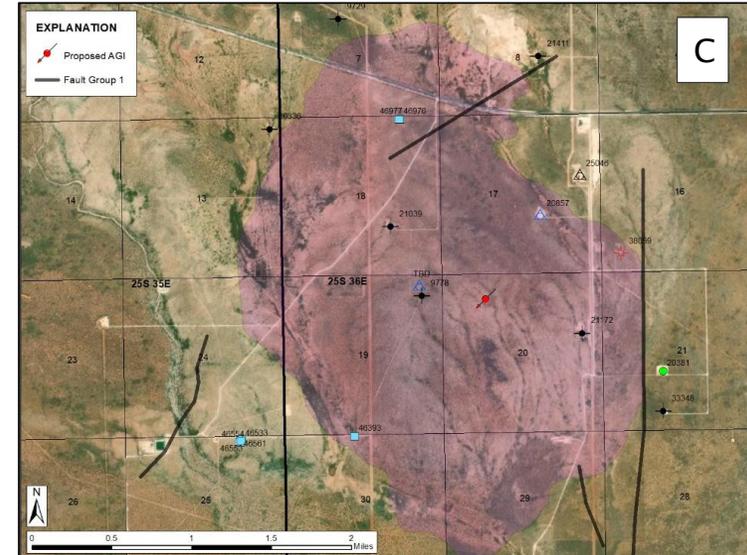


CASE 4 – SIMULATION RESULTS

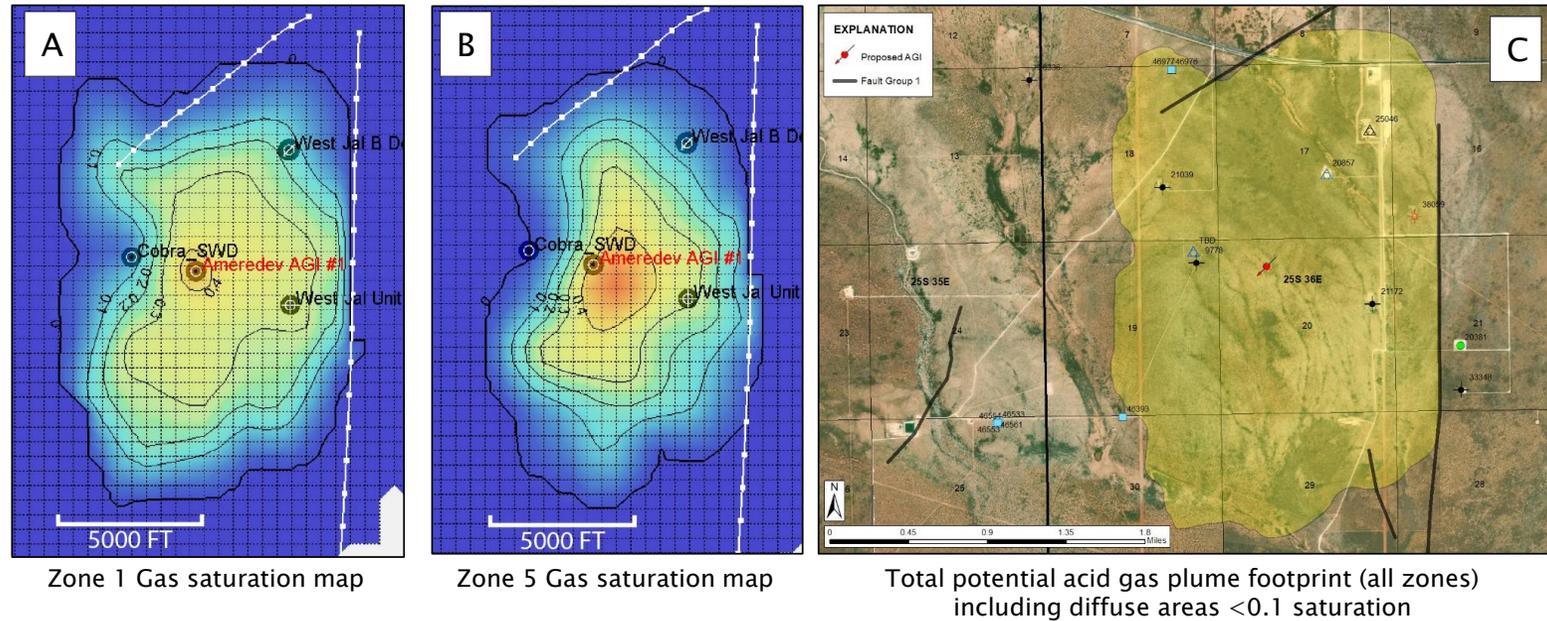

- ▶ Maximum lateral dispersion distance of acid gas is predicted to be 1.5 miles from the AGI well location
- ▶ Gas saturation distribution maps (panels A and B) demonstrate that relatively low concentrations of acid gas reach this maximum extent and that the main body of the plume (>20% saturation) extends approximately 1 mile from the AGI

CASE 3 & 4 – INJECTION RATE AND PRESSURE

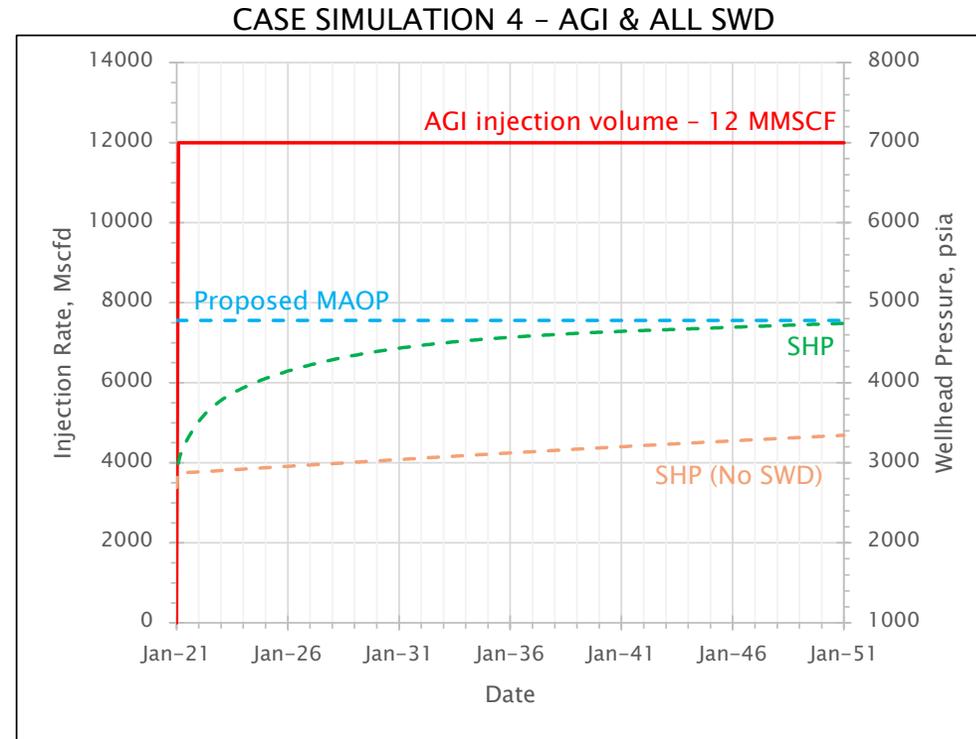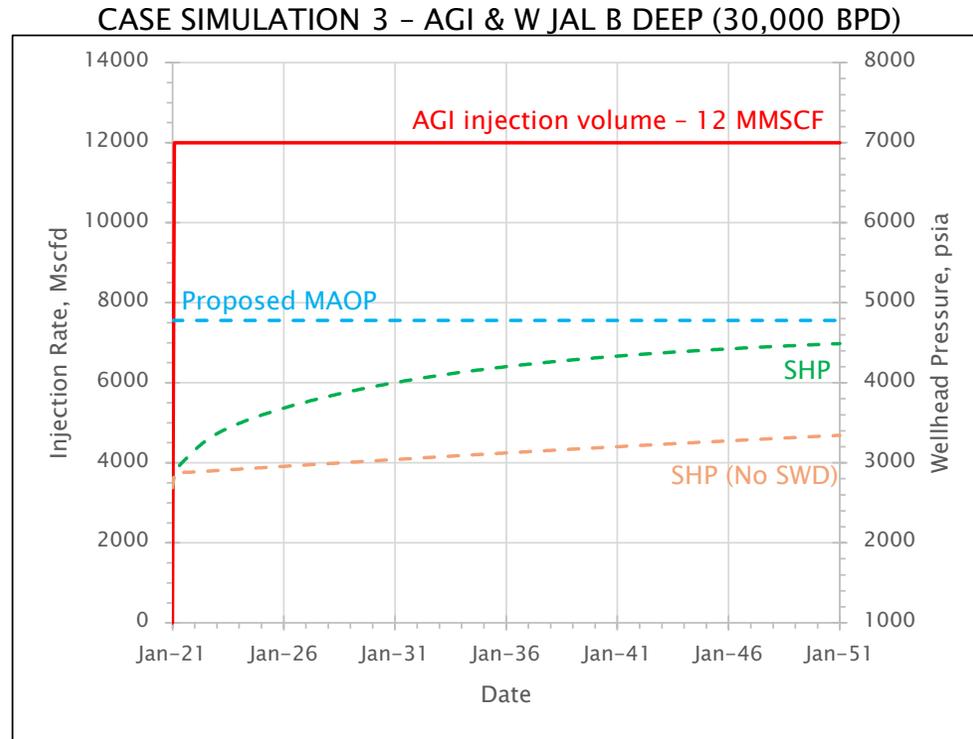

- ▶ In both case simulations (including/excluding West Jal B Deep #1), the reservoir is able to accommodate the proposed acid gas volumes without exceeding the requested MAOP of 4,779 psi.
- ▶ In both cases 3 and 4, West Jal B Deep and the proposed Cobra SWD #1 cannot maintain injection for the full simulation duration without exceeding their anticipated MAOP

DISTRIBUTION OF INJECTATE BY ZONE

- ▶ Case 3 injectate distribution within the target Siluro-Devonian reservoir remains relatively unchanged from simulations where West Jal B Deep is operated at 15,000 bpd
- ▶ Operation of West Jal B Deep continues to primarily re-direct dispersion pattern of AGI plume and does not result in increased uptake by minor zones within reservoir
- ▶ Significant increase in the total injectate fraction received by Zone 8 is observed when all wells are simulated (Case 4)


CASE 3 - AGI & W JAL DEEP (30K BPD)

ZONE #	CUMULATIVE INJECTION (MMSCF)	TOTAL PERCENT
1	21784	16.6
2	1210	0.9
3	1537	1.2
4	3194	2.4
5	82404	62.7
6	11796	9.0
7	4020	3.1
8	5540	4.2
TOTAL	131484	100


CASE 4 - AGI & ALL SWD

ZONE #	CUMULATIVE INJECTION (MMSCF)	TOTAL PERCENT
1	21302	16.2
2	1119	0.9
3	1492	1.1
4	3152	2.4
5	68016	51.7
6	10843	8.2
7	8951	6.8
8	16609	12.6
TOTAL	131484	100


CASE 3 – RESULTANT PRESSURE

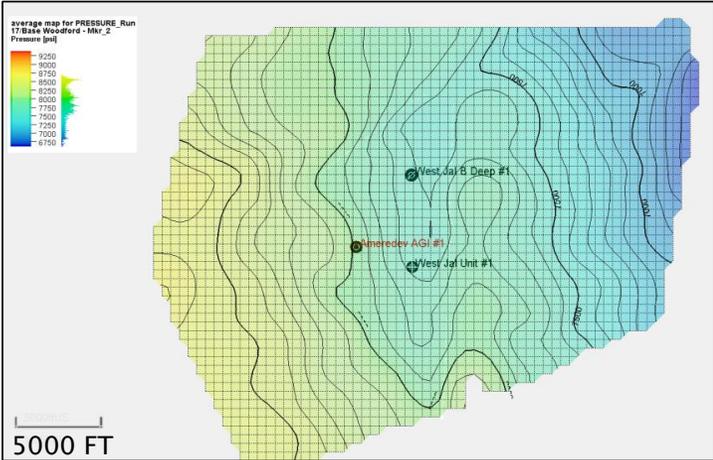


Zone 1 Initial conditions at start of simulation

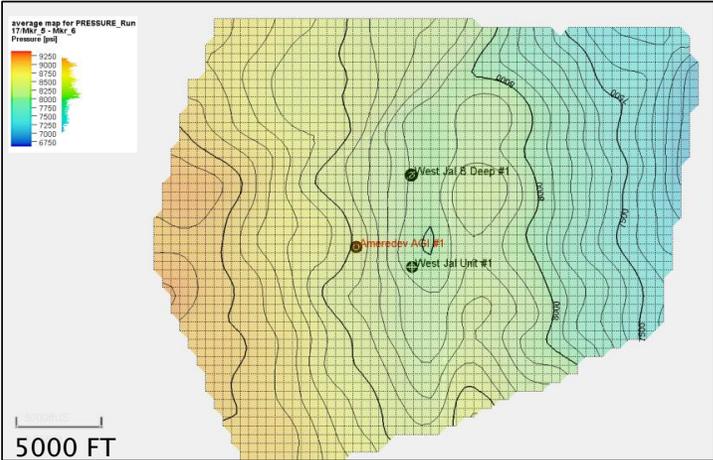

Zone 5 Initial conditions at start of simulation

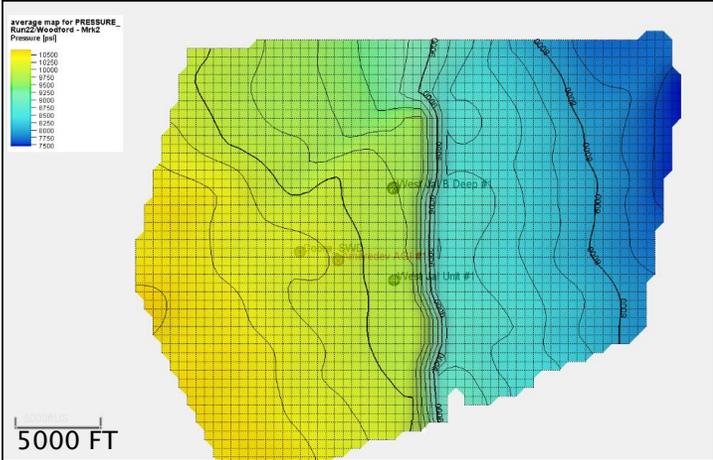


Zone 1 Conditions upon completion of simulation

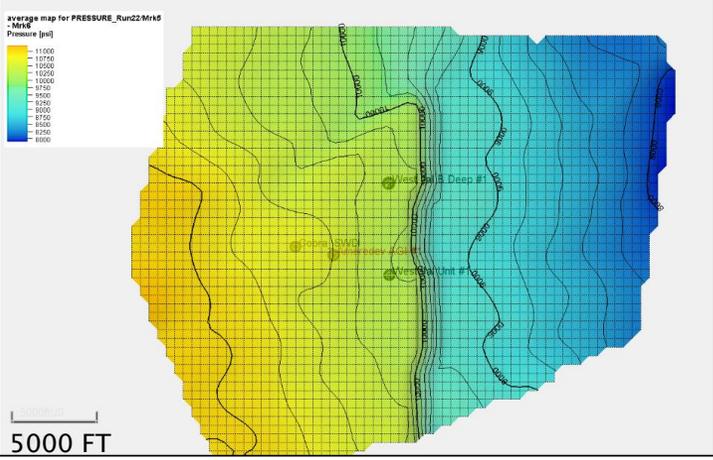


Zone 5 Conditions upon completion of simulation




CASE 4 – RESULTANT PRESSURE

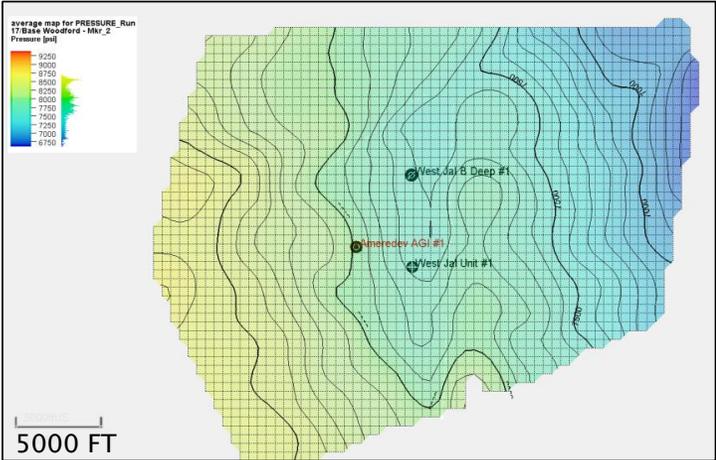


Zone 1 Initial conditions at start of simulation

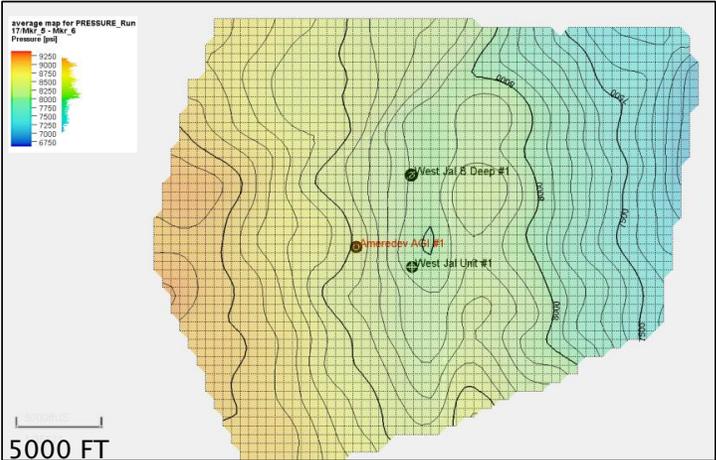


Zone 5 Initial conditions at start of simulation

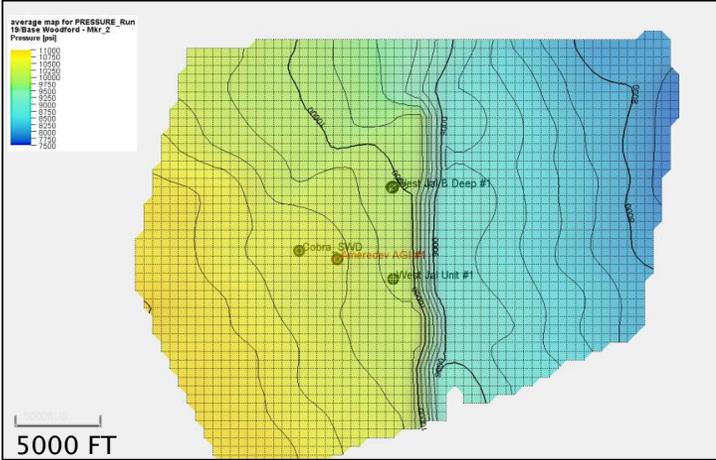

Zone 1 Conditions upon completion of simulation

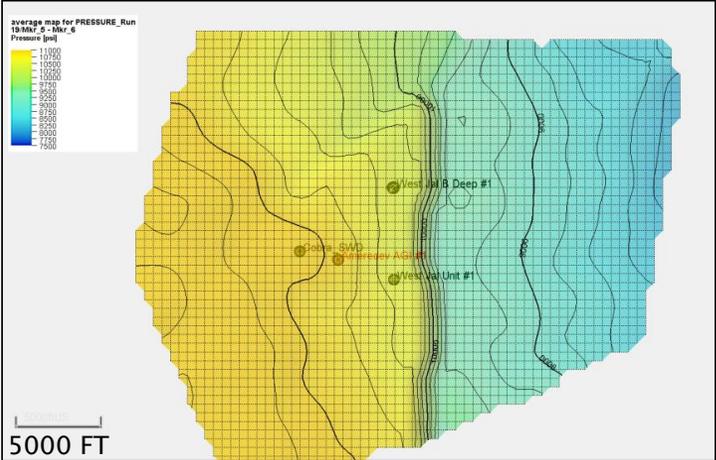

Zone 5 Conditions upon completion of simulation

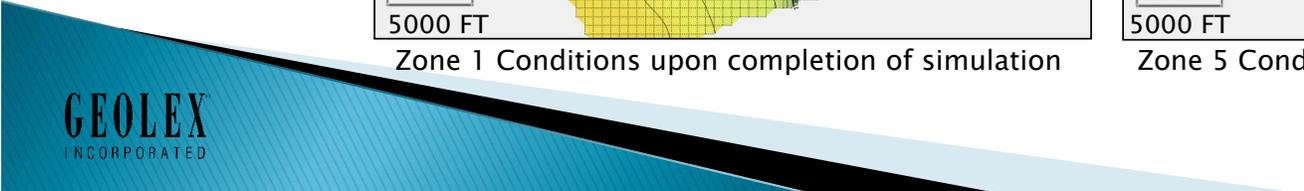

SUMMARY – INJECTION SIMULATIONS

- ▶ In summary, the Siluro–Devonian reservoir in this location is fully capable of receiving and sequestering the target 12 MMSCF per day of acid gas as proposed in Ameredev’s application.
- ▶ Injection simulations to characterize the resultant acid gas plume after 30 years of operation were conducted utilizing Schlumberger PETREL and ECLIPSE modeling and simulation platforms.
- ▶ All wells included were simulated at their maximum anticipated daily injection rates as well as increased rates and including an additional proposed well at the request of NMOCD and SLO.
- ▶ Four case studies were simulated to estimate the resultant acid gas plume when nearby SWD were operating continuously and coincident with the AGI and when the SWD were offline.
- ▶ In all cases, the target 12 MMSCF per day can successfully be maintained for 30 years without exceeding the requested MAOP of 4,779 psig, even in simulations where nearby SWD are unable to maintain injection for the full 30–year period.
- ▶ When the West Jal B Deep SWD is offline (Case #1), injection simulations predict a maximum lateral dispersion distance of 1.6 miles from the AGI wellbore, however, outer margins of the plume are characterized by diffuse concentrations (saturation less than 0.2) and the main body (saturation >0.2) of the plume extends approximately one mile from the AGI wellbore. A semi–radial dispersion pattern is observed with slight preferential dispersion in the up–dip (northeast) direction.

SUMMARY – INJECTION SIMULATIONS

- ▶ When West Jal B Deep SWD #1 injects coincident with the proposed AGI at 15,000 bpd and 30,000 bpd (Cases 2 & 3), pressure influence from West Jal B Deep inhibits northeast preferential dispersion and deflects plume approximately N-NW and S. The main body of the plume (saturation >0.2) extends approximately 1.3 miles from the AGI wellbore with more diffuse concentrations extending up to 1.8 miles.
- ▶ When West Jal B Deep SWD (at 30,000 bpd) and the proposed Cobra SWD #1 (at 50,000 bpd) are operated coincident with the proposed AGI, the resultant gas plume exhibits a slight N-S elongation and responds to the pressure influence of nearby SWD by accepting greater fractions of acid gas in minor zones within reservoir. The main body of the plume (saturation >0.2) extends approximately 1 mile from the AGI wellbore with more diffuse concentrations extending up to 1.5 miles.
- ▶ In all cases, Zone 1 and Zone 5 are predicted by the simulations to be the primary receivers of acid gas, which is in agreement with injection patterns observed in other active Siluro-Devonian AGI wells.

C-108 APPLICATION SUMMARY

- ▶ Ameredev is requesting authority to inject acid gas (CO₂/H₂S) into a deep, vertical well:
 - Into upper Devonian and Silurian Wristen and Fusselman formation strata at depths of approximately 16,230' to 17,900'
 - At a maximum injection rate of 12 MMSCF per day and maximum operating surface injection pressure of 4,779 psig (as determined by a NMOCD-approved method for determining max. surface injection pressure)
- ▶ The well and surface facilities have been designed to provide a safe and efficient injection system for the proposed gas-treating facility
- ▶ All identified surface and mineral owners and operators within one mile of the AGI have been properly notified
- ▶ There is no current or anticipated production in the Siluro-Devonian formations within at least two miles of the proposed injection site
- ▶ The proposed injection zone is capable of permanently containing the injected fluid due to low porosity and low permeability caprock above and below the injection zone and adequate capacity to sequester the anticipated volumes of acid gas
- ▶ Fresh groundwater resources are fully protected by the well design and deep (1,400') surface casing

C-108 APPLICATION SUMMARY

- ▶ Only two wells penetrate the proposed injection zone within the one-mile radius area of review, which include the properly plugged West Jal Unit #1 and the West Jal B Deep Unit #1, which is an active injection well located approximately one mile from the proposed AGI
- ▶ Fault slip probability simulations were conducted to evaluate the potential for induced-seismic events in response to the proposed injection scenario, which demonstrate that the proposed Independence AGI #1 can be operated without producing significant risk of injection-induced seismic events or contributing significantly to the total risk of injection-induced slip
- ▶ Injection simulation modeling to predict the resultant AGI plume after 30 years of injection at the maximum anticipated injection rate estimates the main body of the plume will extend 1 to 1.3 miles from the AGI wellbore with diffuse presence (saturation <0.2) extending approximately 1.5 to 1.8 miles from the AGI location
- ▶ A review of regional Delaware Basin pressure conditions, compiled drilling-fluid records, and recommended drilling procedures for the proposed AGI demonstrate that the targeted injection reservoir is under-pressured with respect to overlying producing strata. As such, this provides added assurance that injected acid gas will be contained as the pressure differential will impede and prevent vertical migration out of zone

NEGOTIATIONS WITH NMOCD & NMSLO POST APPLICATION SUBMISSION

- ▶ Revision of well design to separately isolate the Capitan Reef and Salado Formations – NMOCD will administratively approve final well design
- ▶ Modify fault slip probability modeling to include additional wells requested by NMOCD
- ▶ Modify plume migration model to incorporate Cobra SWD #1
- ▶ Ensure coordination with LEPC and Jal stakeholders in the development of the Rule 11 H₂S Contingency Plan to be approved by NMOCD prior to initiation of injection
- ▶ Redundant well application and construction timing have been negotiated with NMOCD

AMEREDEV'S REQUEST FROM THE NMOCC

- ▶ Permission to drill, test, complete, and operate Independence AGI #1 as specified in Ameredev's C-108 application at the location identified in Section 20, Township 25 South, Range 36 East
- ▶ Ameredev requests permission to inject acid gas (CO₂, H₂S, trace hydrocarbons) into the well at a MAOP of 4,779 psig and maximum average daily injection rate of 12 MMSCF per day for at least 30 years
- ▶ As proposed, this well will increase the treating capability of sour gas assets in the area and the project is supported by adjacent producers
- ▶ This proposed well will dispose of acid gas safely and effectively and assures the protection of surface and groundwater resources and correlative rights