

Schlumberger

Company: Lynx Petroleum Consultants, Inc.

Well: PACER 28 Fed. #1

Field: Lusk Strawn

County: Eddy

State: New Mexico

PLATFORM EXPRESS

Three Detector Litho Density

Compensated Neutron / Gamma Ray

1880' FNL & 1980' FEL Sec 28, T-19S, R-31E	Elev.: K.B. 3525.5 ft G.L. 3507 ft D.F. 3524.5 ft
Permanent Datum:	Ground Level
Log Measured From:	Kelly Bushing
Drilling Measured From:	Kelly Bushing
	Elev.: 3507 ft
	18.5 ft above Perm. Datum

County: Eddy
Field: Lusk Strawn
Location: 1880' FNL & 1980' FEL
Well: PACER 28 Fed. #1
Company: Lynx Petroleum Consultants, Inc.

API Serial No.	Section	Township	Range
30-015-32178	28	19S	31E

Logging Date

8-Aug-2003

Run Number

One & Two

Depth Driller

12625 ft

Schlumberger Depth

12631 ft

Bottom Log Interval

12628 ft

Top Log Interval

200 ft

Casing Driller Size @ Depth

8.625 in @ 4480 ft

Casing Schlumberger

4480 ft @ 4480 ft

Bit Size

7.875 in

Type Fluid In Hole

Brine / Starch

Density

9.3 lbm/gal

Fluid Loss

0 cm3

PH

9.5

Source Of Sample

Circulation Tank

RM @ Measured Temperature

0.244 ohm.m @ 92 degF

RMF @ Measured Temperature

0.329 ohm.m @ 82 degF

RMC @ Measured Temperature

@ @ @

Source RMF

Filtered

RM @ MRT

0.140 @ 165 0.170 @ 165

Maximum Recorded Temperatures

165 degF

Circulation Stopped

7-Aug-2003 17:30

Logger On Bottom


8-Aug-2003 2:20

Unit Number


3076 Hobbs, NM


Recorded By

April Carson

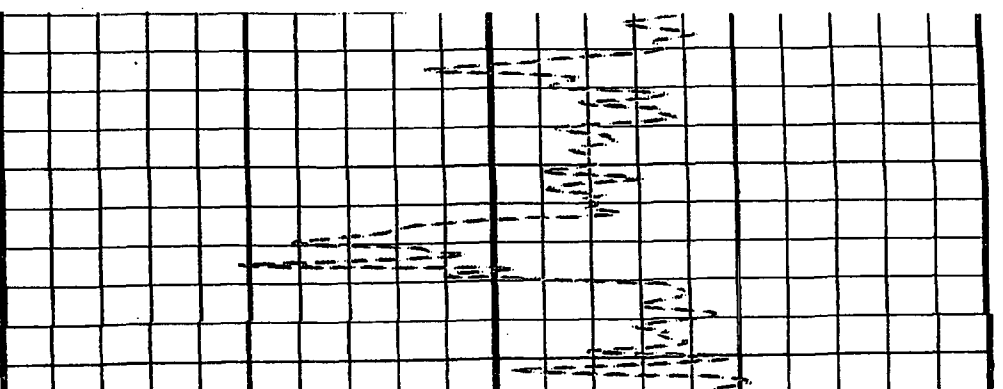

2100

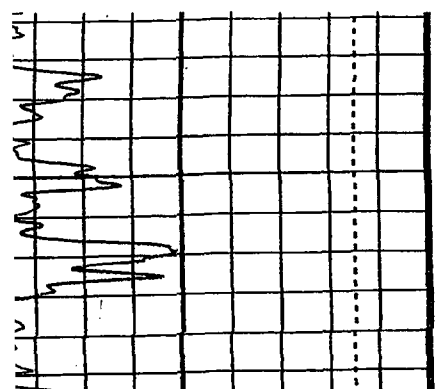

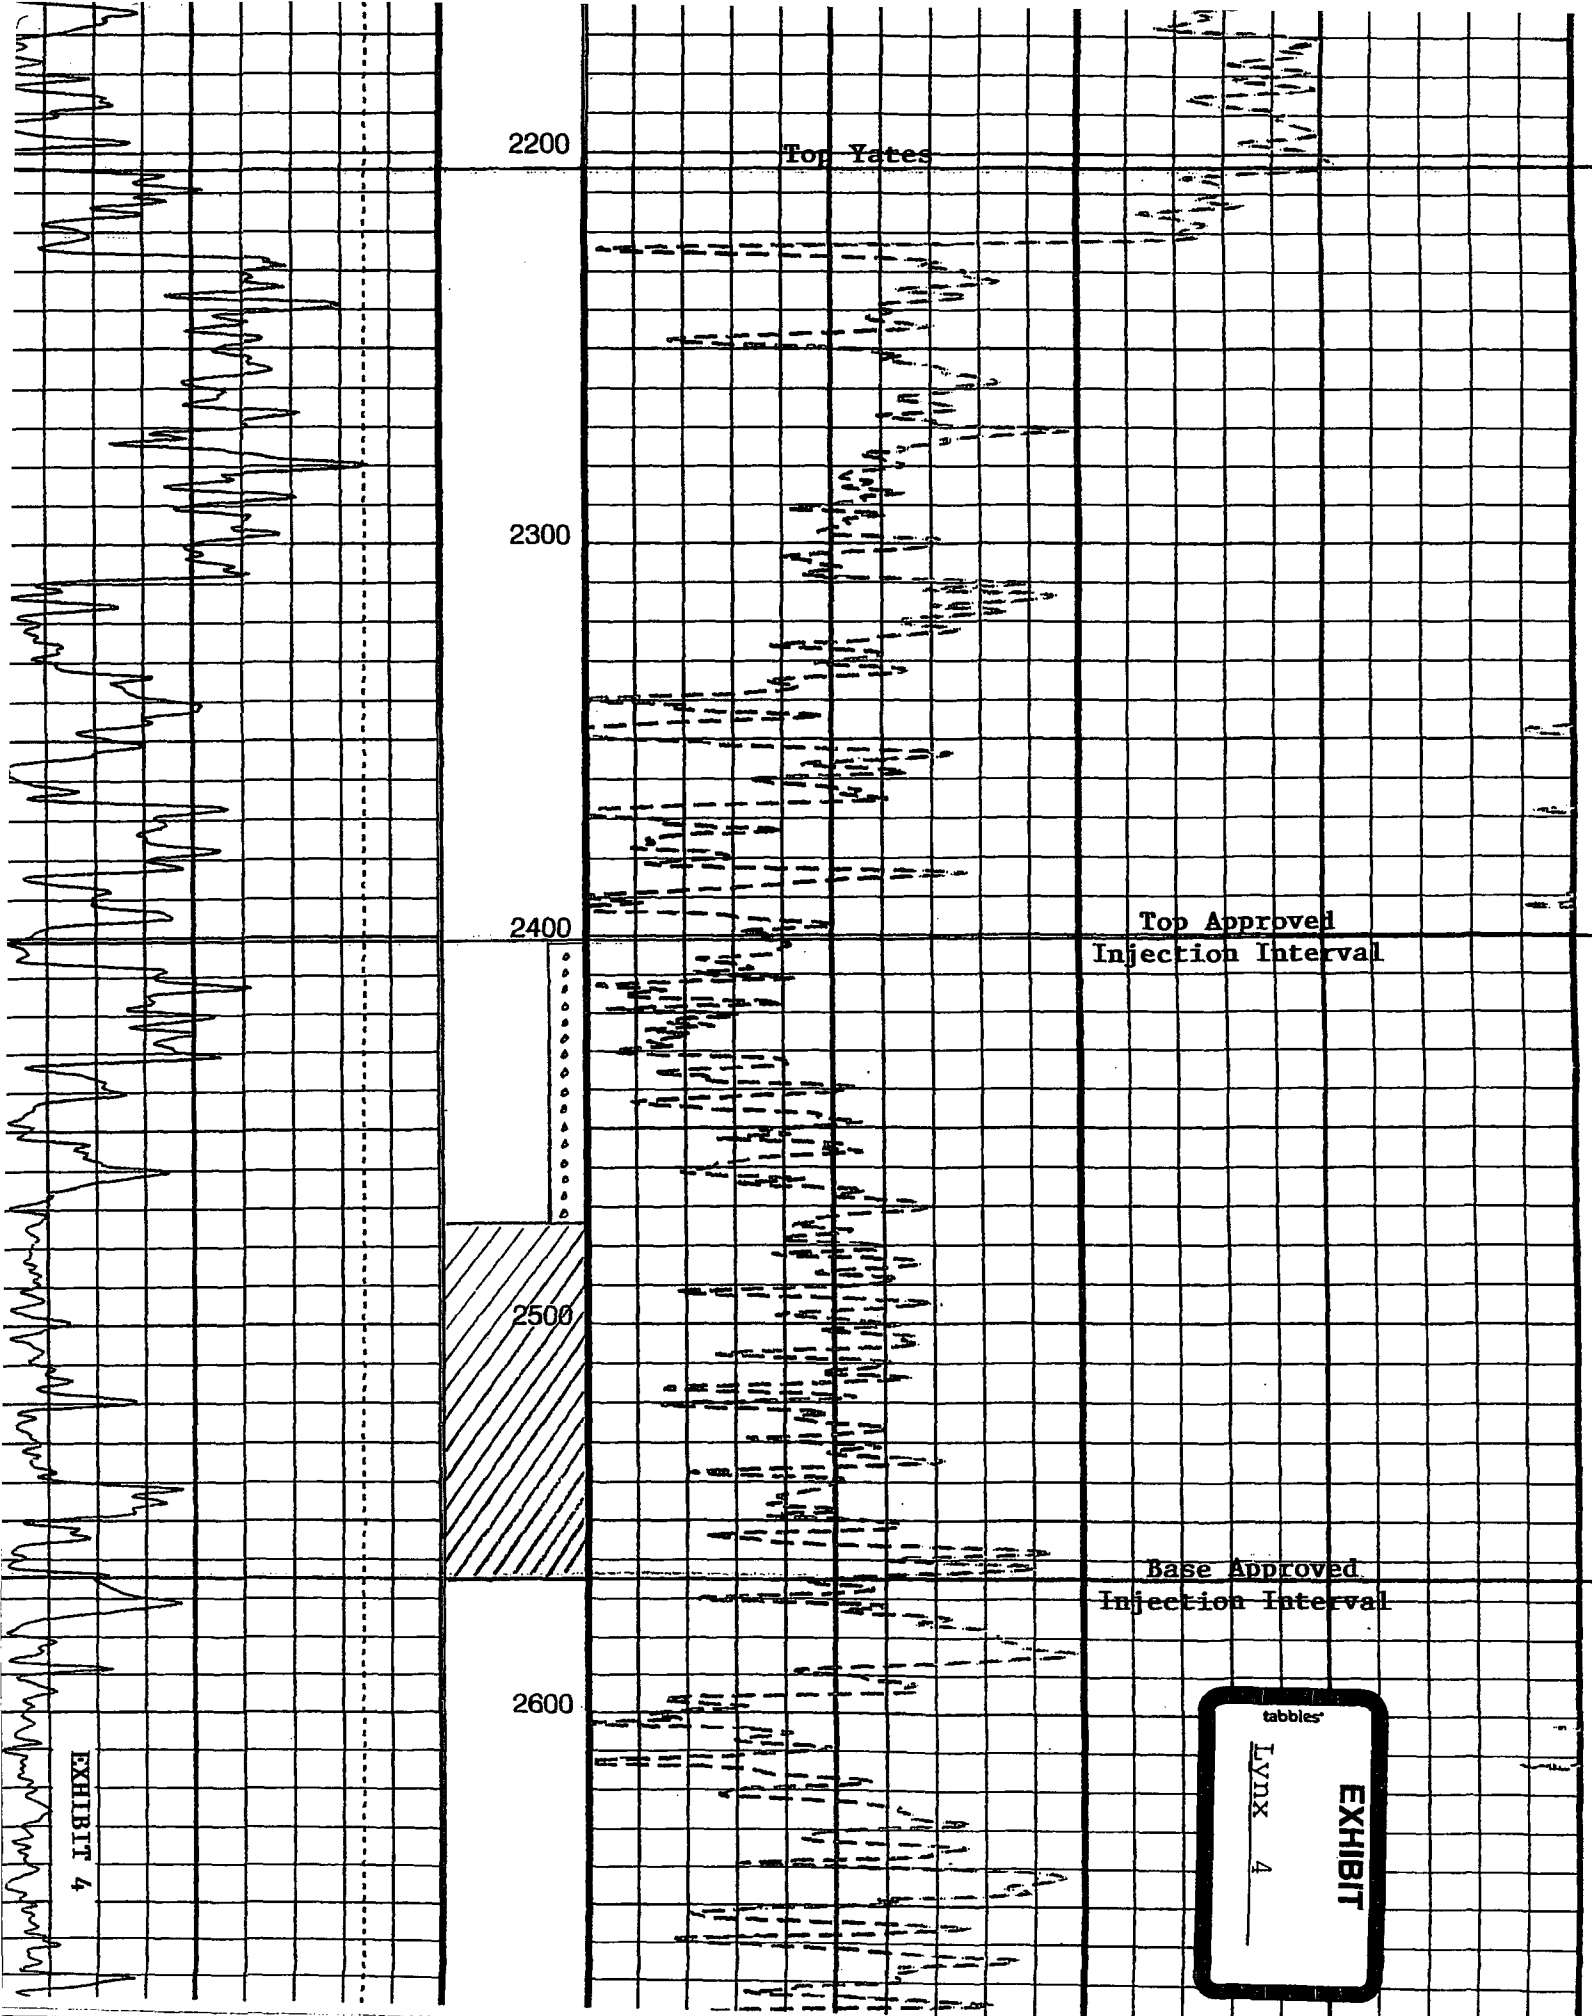

2200

Top Yates

2300

2400

Top Approved
Injection Interval

2500

Base Approved
Injection Interval

2600

EXHIBIT

tables

Lynx 4

EXHIBIT 4