

CURRENT WARREN UNIT NO. 95 NEW MEXICO FEDERAL UNIT

660' FSL & 660' FEL SEC.28,T-20S,R-38E

KBE: 3550'

GLE: 3534'

SURFACE CASING:

13-3/8", 54.5#, K-55 @ 1445'

W/ 1200 SX. TOC: CIRC

OTIS PARALLEL ANCHOR @ 5744'

BLINEBRY TUBING: 2-3/8", 4.6#, J-55 BUTTRESS

DRINKARD TUBING: 2-3/8", 4.6#, J-55 BUTTRESS

BAKER LOK-SET PACKER @ 6550'

W/ 1.81" & 1.78" PROFILE NIPPLES

ABO PERFS: 4 JSPF


6952'-7358'

PRODUCTION CASING:

7", 23# & 26#, K-55, SET @ 7448'

W/ 2770 SX. TOC: CIRC

BY: J. MILLER

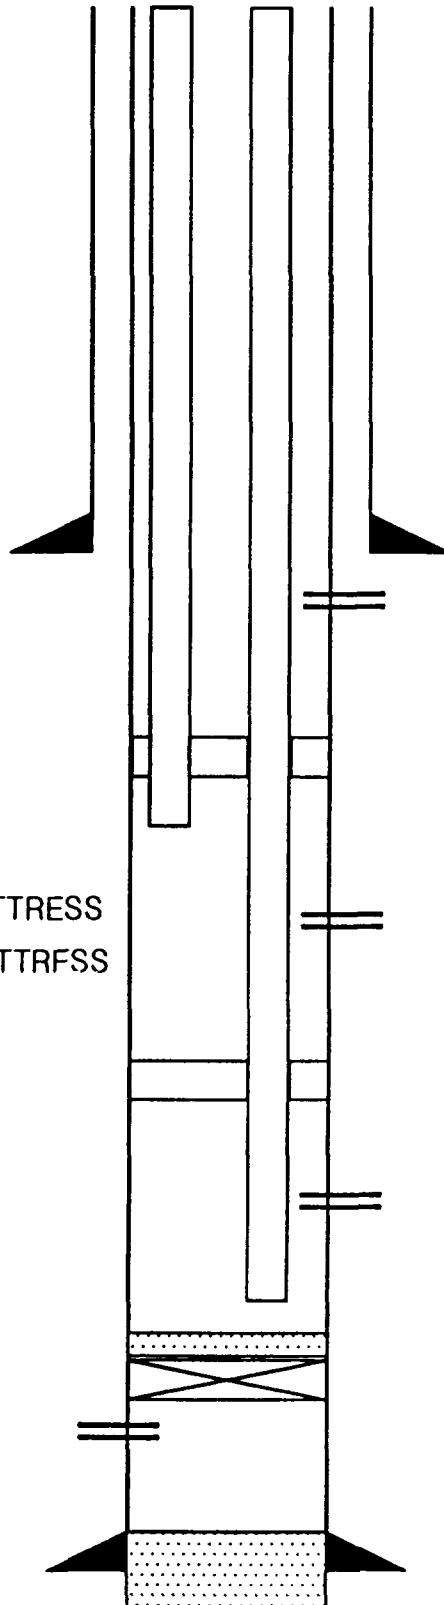

YATES SQUEEZE: 2 JSPF
2692'-2697'

BLINEBRY-TUBB PERFS:
1 JSPF @ 5756'-6527'

DRINKARD PERFS: 1 JSPF
6570'-6792'

CIBP @ 6900' W/ CMT TO 6865'

PBTD: 6865'(CMT & CIBP)

TD: 7448'

DATE: 03-05-94

BEFORE AN EXAMINER OF THE
OIL CONSERVATION DIVISION

EXHIBIT NO. **15**
CASE NO.: **11459**
Submitted by: **Conoco Inc.**
Hearing Date: **Feb. 8, 1996**