


Recommended
Shot, Qts./Ft.

Permeability, Millidarcys

Percent Water Sat.

Percent Porosity

Oil Content, Bbls./A Ft.

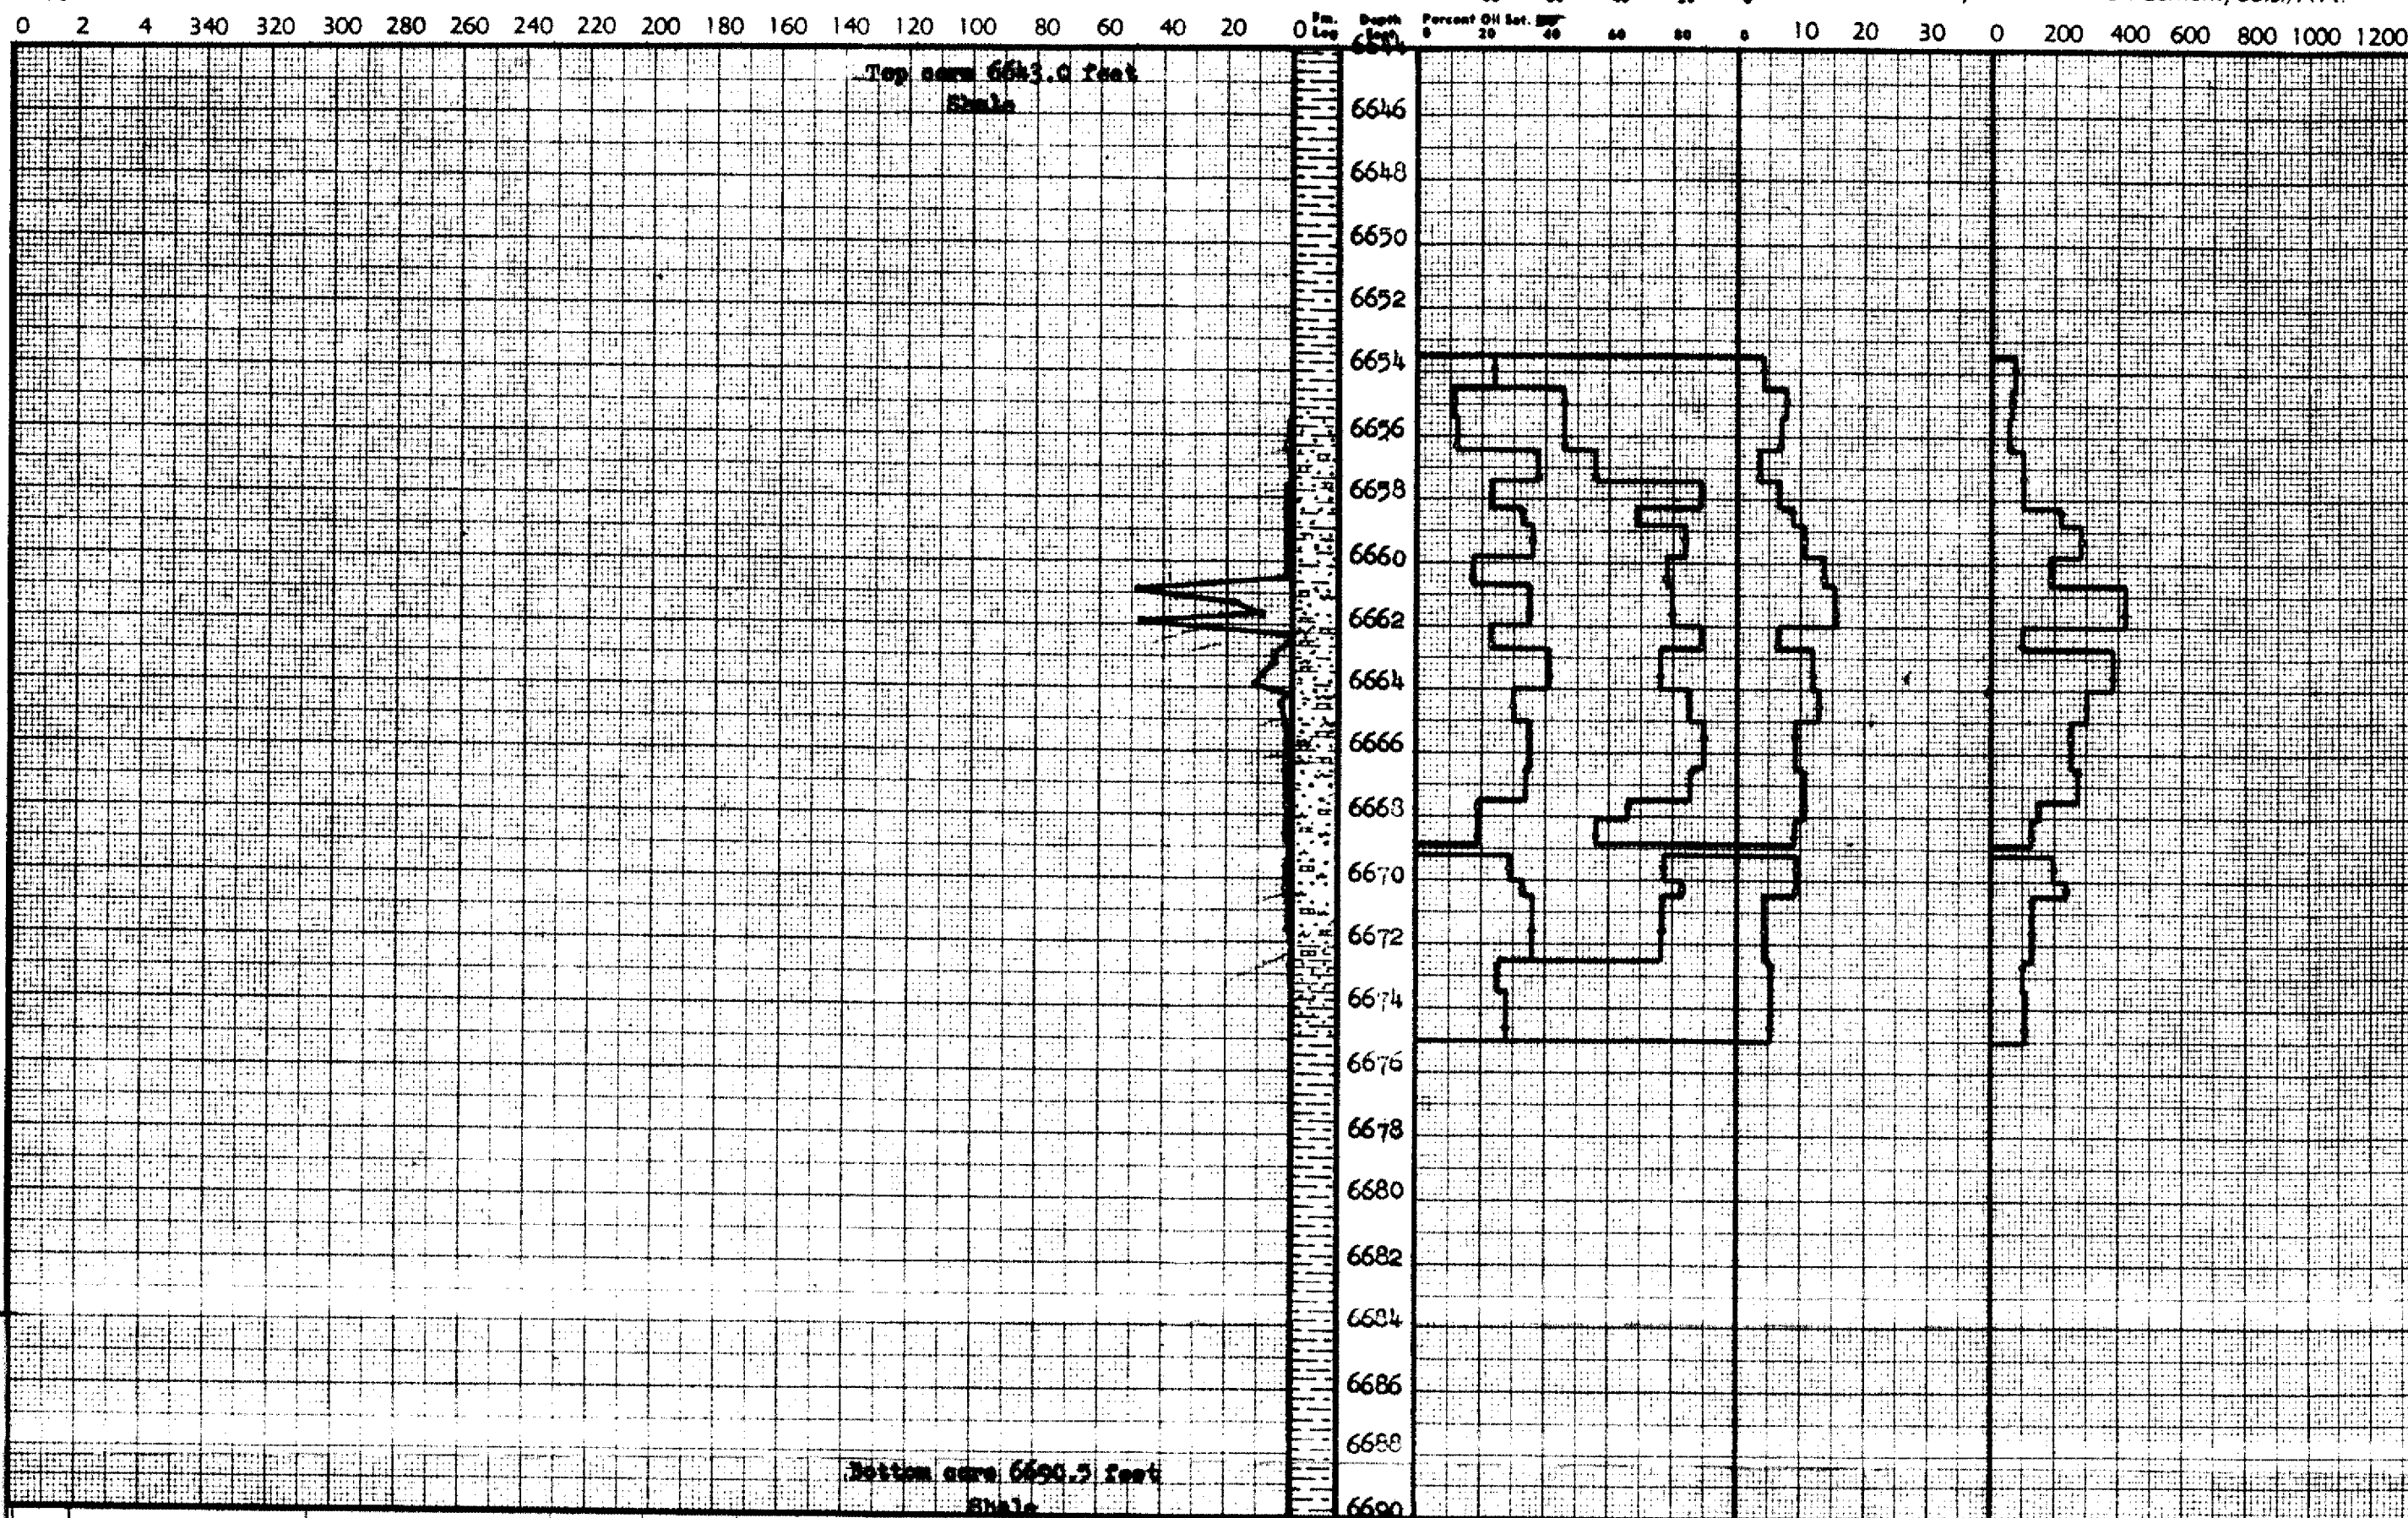

Sec.	Sand	Depth, Feet		Net Ft. of Sand	Avg. Por.	Average Core Sat.		Core Oil Content		Permeability		Flood Pot Residuals			
		From	To			Oil	Water	Avg B./A.Ft.	Total Bbl./Ac.	Avg Mds.	Capacity Ft. x Md.	Saturation Oil	Water	B./A.Ft.	Bbl./Ac.
	TOCITO SAND														
1	0.1 to 5. mi.	6658.3	6670.5	8.6	10.4	29.	23.	234.	2,010.	0.9	7.7	37.	50.	291.	2,500.
2	Above 6. mi.	6658.3	6670.5	2.6	13.7	38.	22.	404.	1,050.	19.	49.	33.	59.	352.	920.
1&2		6658.3	6670.5	11.2	11.2	31.	23.	273.	3,060.	5.1	57.	35.	52.	306.	3,420.

COMPANY LOWMY et al OPERATING ACCOUNT
LEASE FEDERAL WELL NO 11-52-85
LOCATION Approx. 610' S.N.L., 670' E.W.L. SW/4
SEC 4 T 26-N R 6-W COUNTY Rio Arriba
STATE New Mexico DATE 6-15-53
EARLOUGHER ENGINEERING TULSA, OKLAHOMA