


Recommended
Shot, Qrs./Ft.

Permeability, Millidarcys

0 2 4 340 320 300 280 260 240 220 200 180 160 140 120 100 80 60 40 20 0 Fm. Log Depth Feet Percent Oil Sat. 0 20 40 60 80 100 Percent Water Sat. 0 20 40 60 80 100 Percent Porosity 0 20 30 40 50 60 70 80 90 100 Oil Content, Bbls./A.Ft. 0 200 400 600 800 1000 1200

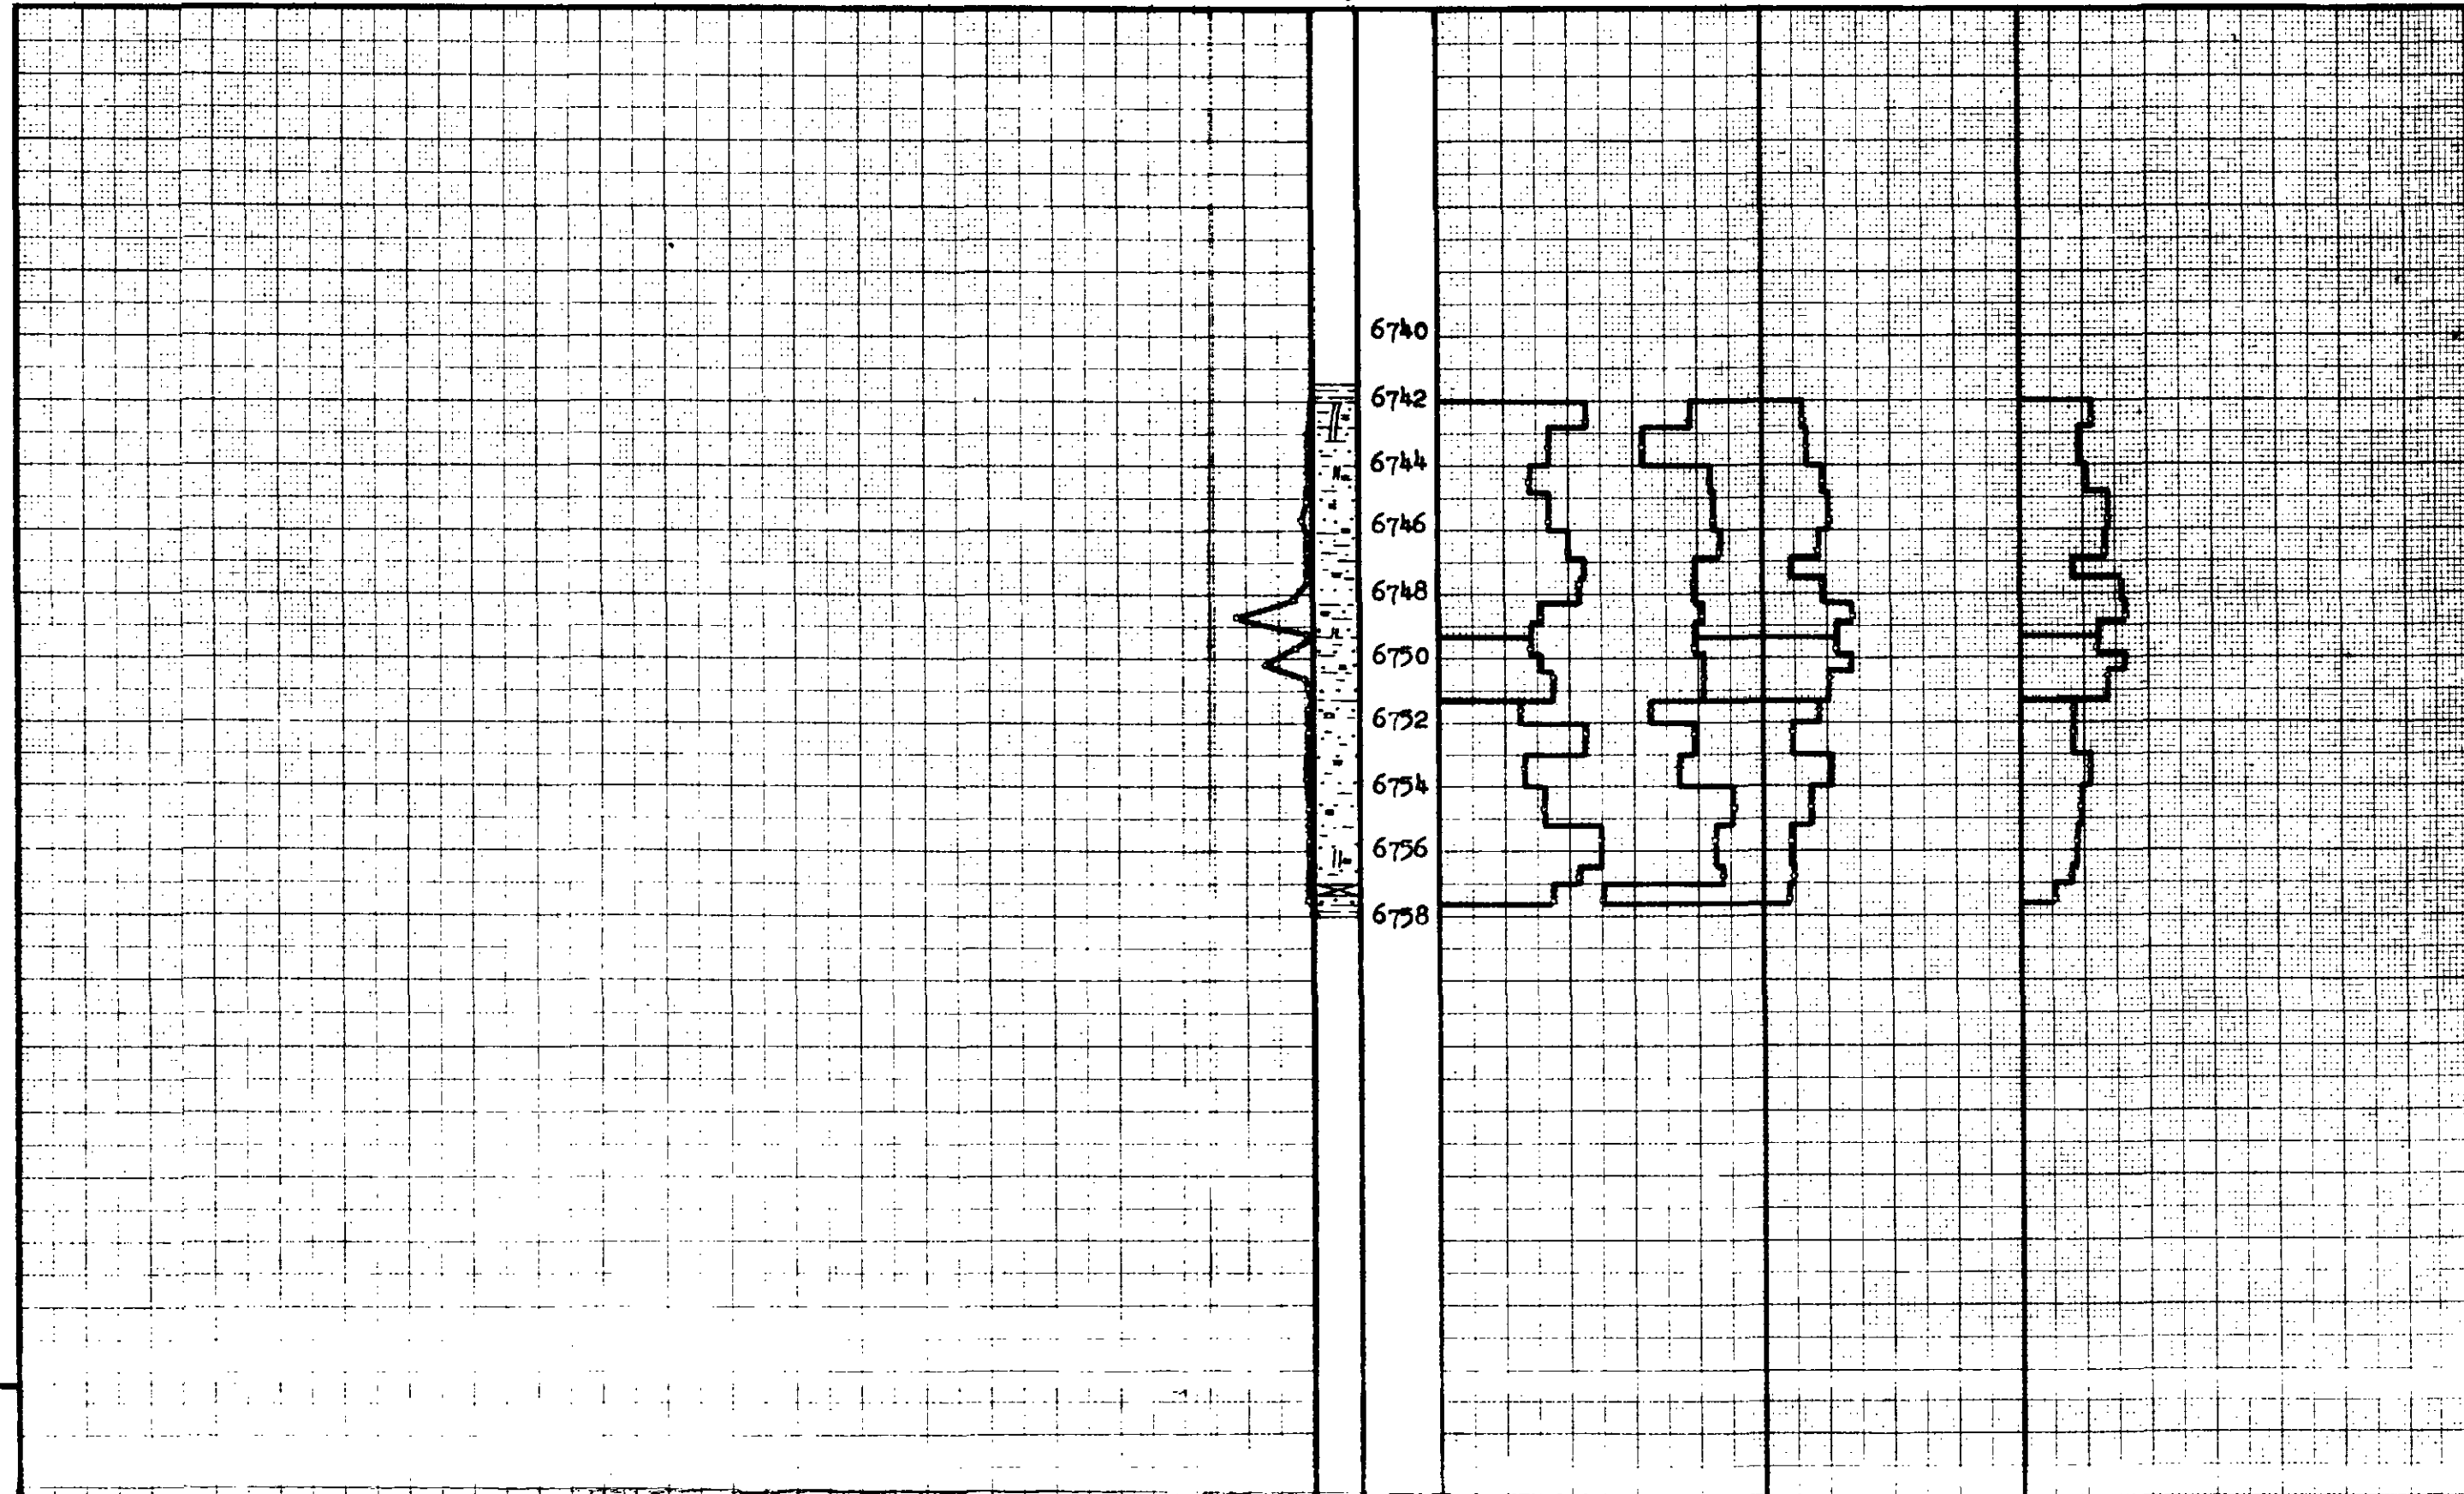

Sec.	Sand	Depth, Feet		Net Ft of Sand	Avg. Por	Average Core Sat		Core Oil Content		Permeability		Flood Pot Residuals			
		From	To			Oil	Water	Avg. B / A.Ft.	Total Bbl./Ac.	Avg Mds	Capacity Ft x Md	Saturation		Oil Content	
												Oil	Water	B / A Ft	Bbl./Ac.
TOCITO SAND															
1	0.1 to 5. md	6744.0	6754.0	7.1	10.1	32.	21.	254.	1,800.	15	11.	34.	49.	266.	1,890.
2	Above 6. md	6744.0	6754.0	1.1	14.1	31.	19.	330.	340.	19.	21.	31.	53.	330.	340.
1-2		6744.0	6754.0	8.2	10.6	32.	21.	261.	2,140.	3.9	32.	33.	50.	272.	2,230.

COMPANY **LOWRY, ET AL,** OPERATING ACCOUNT
LEASE **FEDERAL** WELL NO. **T-83**
LOCATION **NW SE/4**
SEC **2** T **26N** R **6W** COUNTY **Rio Arriba**
STATE **New Mexico** DATE **7-27-53**
EARLOUGHER ENGINEERING TULSA, OKLAHOMA