

LANE RADIOACTIVITY LOG WELLS

COMPANY

FILE NO.

Location of Well	COMPANY: SKELLY OIL CO.	COUNTY: LEA STATE: N. MEX.	FIELD: MONUMENT	WELL: PACIFIC WESTERN STATE "D" NO. 1	COMPANY: SKELLY OIL CO.
	WELL: PACIFIC WESTERN STATE "D" NO. 1				
	FIELD: MONUMENT				
	COUNTY: LEA	STATE: N. MEX.			
	LOCATION: *				
LOG MEAS. FROM	5 1/2" BRADEN HEAD	ELEV. *			
DRLG. MEAS. FROM	5 1/2" BRADEN HEAD	ELEV. *			
PERM. DATUM	5 1/2" BRADEN HEAD	ELEV. *			


TYPE OF LOG	G/R	N-		
RUN NO.	1	1		
DATE	5-17-51	5-17-51		
TOTAL DEPTH (DRILLER) WIRE LINE	3860'	3860'		
EFFECTIVE DEPTH (DRILLER)	3860'	3860'		
TOP OF LOGGED INTERVAL	2400'	2400'		
BOTTOM OF LOGGED INTERVAL	3816'	3816'		
TYPE OF FLUID IN HOLE	OIL & WATER			
FLUID LEVEL	FULL	FULL		
MAXIMUM RECORDED TEMP.		600N		
NEUTRON SOURCE STRENGTH & TYPE		8.25		
SOURCE SPACING — IN.		9		
LENGTH OF MEASURING DEVICE — IN.	36	3 5/8		
O.D. OF INSTRUMENT — IN.	3 5/8	3 5/8		
TIME CONSTANT — SECONDS	4	4		
LOGGING SPEED FT. MIN.	40	45		
STATISTICAL VARIATION — IN.				
SENSITIVITY REFERENCE	274	275		
RECORDED BY	RUNION	RUNION		
WITNESSED BY	WILKIE	WILKIE		

CASING RECORD				OPEN (BORE) HOLE RECORD			
RUN NO.	SIZE—IN.	WT.—LB.	INTERVAL	BIT SIZE—IN.	INTERVAL		
1	5 1/2		SURF. TO 3698'	7 7/8	SURF. TO 3695'		
			TO	4 3/4	3695' TO T. D.		
			TO		TO		
			TO		TO		
			TO		TO		

REMARKS OR OTHER DATA

* LOCATION AND ELEVATION UNAVAILABLE.

GAMMA RAY	CASING & COLLAR LOG DEPTH	NEUTRON
RADIATION INTENSITY INCREASES		RADIATION INTENSITY INCREASES

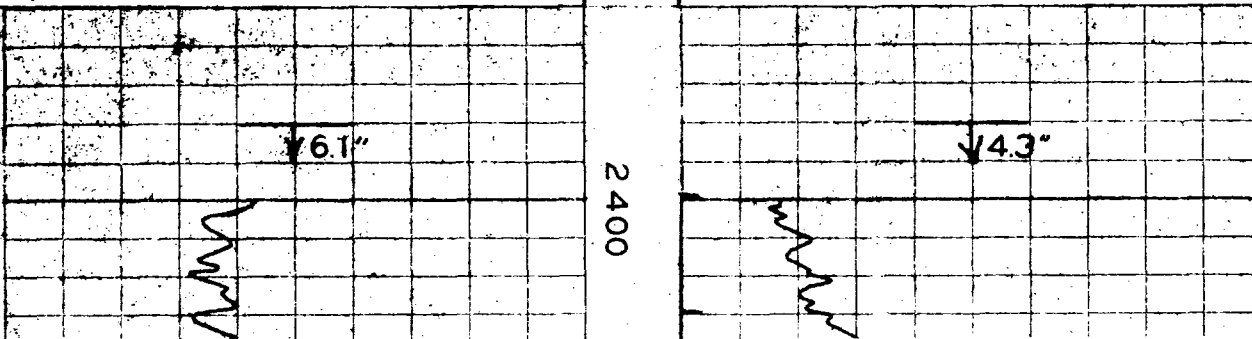

LANE RADIOACTIVITY LOG COMPANY

WELLS
Case 639
FILE NO.

Location of Well	COMPANY: SKELLY OIL CO.	COUNTY: LEA STATE: N. MEX.	WELL: PACIFIC WESTERN STATE "D" NO. 1	FIELD: MONUMENT
	WELL: PACIFIC WESTERN STATE "D" NO. 1			
	FIELD: MONUMENT			
	COUNTY: LEA STATE: N. MEX.			
LOCATION: *				
LOG MEAS. FROM 5 1/2" BRADEN HEAD ELEV. *		STATE: N. MEX.	WELL: PACIFIC WESTERN STATE "D" NO. 1	FIELD: MONUMENT
DRLG. MEAS. FROM 5 1/2" BRADEN HEAD ELEV. *				
PERM. DATUM 5 1/2" BRADEN HEAD ELEV. *				

TYPE OF LOG	G/R	N-		
RUN NO.	1	1		
DATE	5-17-51	5-17-51		
TOTAL DEPTH (DRILLER) WIRE LINE	3860'	3860'		
EFFECTIVE DEPTH (DRILLER)	3860'	3860'		
TOP OF LOGGED INTERVAL	2400'	2400'		
BOTTOM OF LOGGED INTERVAL	3816'	3816'		
TYPE OF FLUID IN HOLE	OIL & WATER			
FLUID LEVEL	FULL	FULL		
MAXIMUM RECORDED TEMP.				
NEUTRON SOURCE STRENGTH & TYPE		600N		
SOURCE SPACING — IN.		8.25		
LENGTH OF MEASURING DEVICE — IN.	36	9		
O.D. OF INSTRUMENT — IN.	3 5/8	3 5/8		
TIME CONSTANT — SECONDS	M	E		
LOGGING SPEED FT./MIN.	40	45		
STATISTICAL VARIATION — IN.				
SENSITIVITY REFERENCE	274	275		
RECORDED BY	RUNION	RUNION		
WITNESSED BY	WILKIE	WILKIE		

CASING RECORD				OPEN (BORE) HOLE RECORD			
RUN NO.	SIZE—IN.	WT.—LB.	INTERVAL	BIT SIZE—IN.	INTERVAL		
1	5 1/2		SURF. TO 3698'	7 7/8	SURF.	TO 3685'	
			TO	4 3/4	3685'	TO T. D.	
			TO			TO	
			TO			TO	
			TO			TO	

REMARKS OR OTHER DATA

* LOCATION AND ELEVATION UNAVAILABLE.

