


BEFORE THE
OIL CONSERVATION COMMISSION
SANTA FE, NEW MEXICO
San Juan EXHIBIT No. 10
CASE 1016-1017

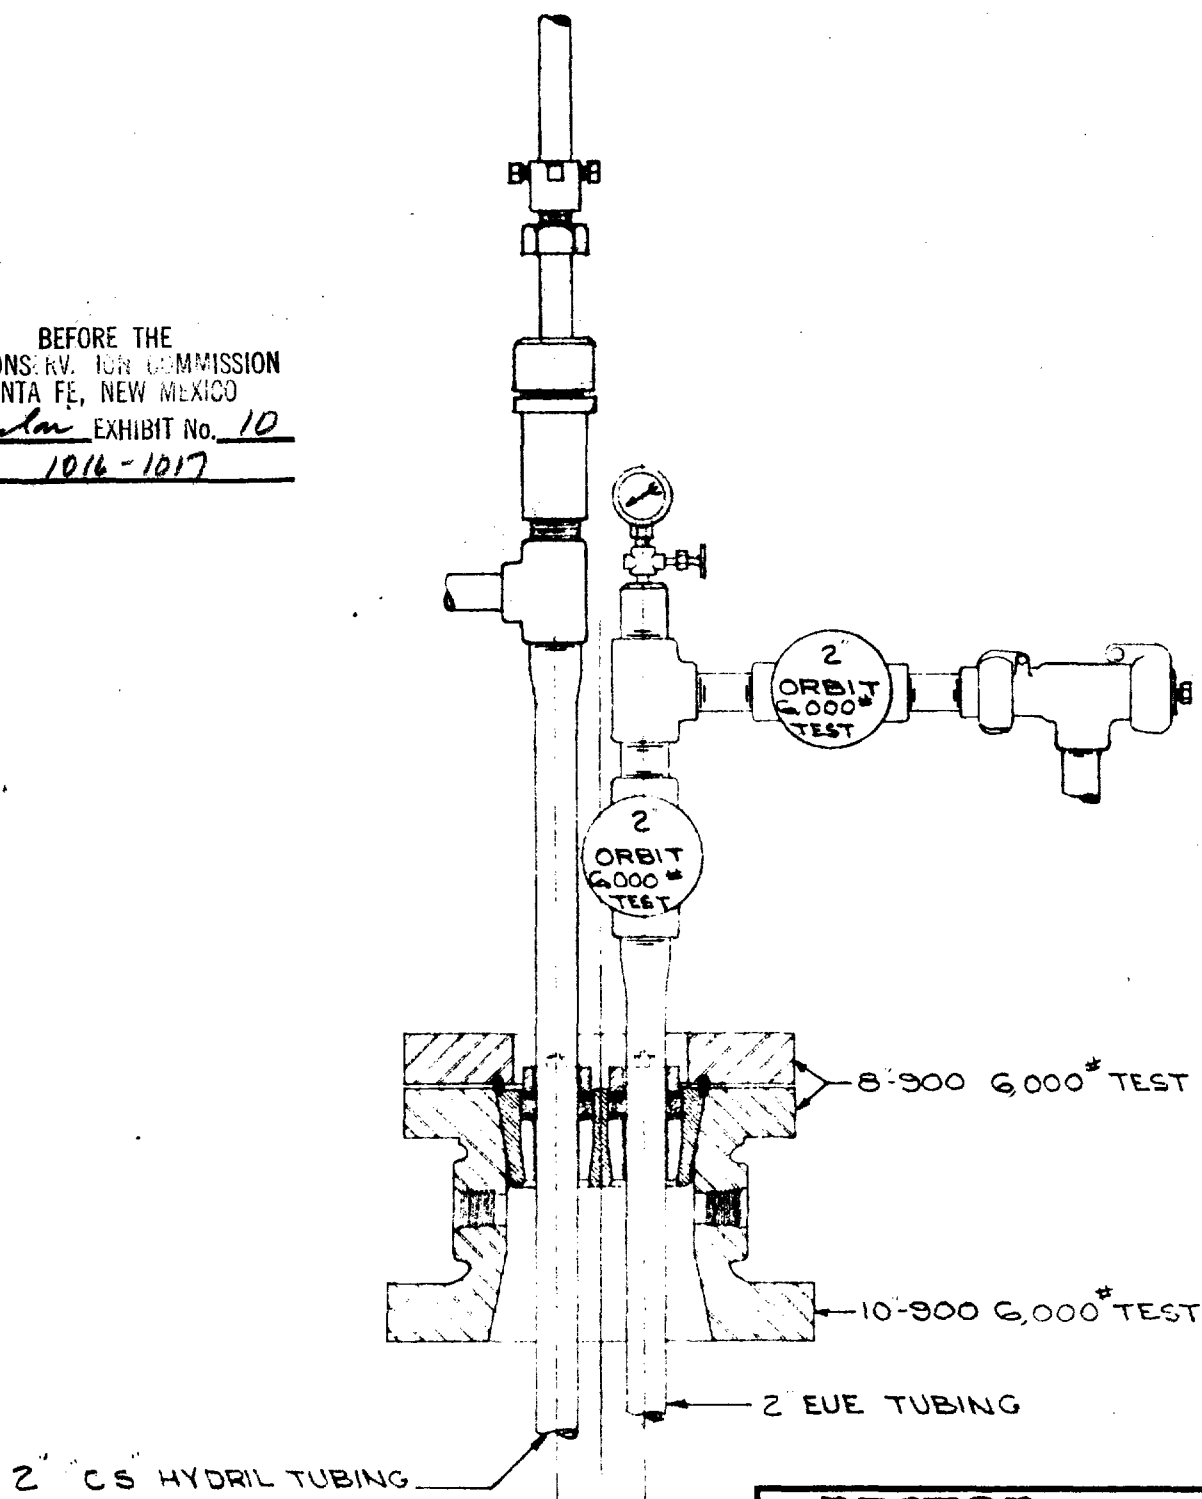

RECTOR WELL EQUIPMENT CO.

MAKING THE OIL INDUSTRY A BETTER PLACE

CSG. HD.: 10'-500X 8'-900 DUAL COMPLETION
TUB. HD.: ONE STRING FLOWING ONE
XMAS TREE: STRING PUMPING

DRAWN BY
JWF

DATE
2 7 56

QUOTATION NO.


DRAWING NO.
A-839-2

SINCLAIR OIL & GAS COMPANY
DEAN DEVONIAN and PENNSYLVANIAN POOLS
MAXIMUM PUMPING RATES

Type Rods: Bethlehem Type 43 Rated 45,000 psi working stress
Type Unit: Bethlehem 64OD - B34S - 192

Setting Depth	13,500'	11,500'	9,500'	7,500'	7,500'
Size Tubing, Inches	2"	2"	2"	2"	2"
Size Pump, Inches	1 1/4	1 1/4	1 1/4	1 1/2	1 3/4
Size Rod String, Inches	7/8-3/4-5/8	7/8-3/4-5/8	7/8-3/4-5/8	7/8-3/4	7/8-3/4
Length Stroke, Inches	192	192	192	192	192
Speed, SPM	7	9	11	11	9 1/2
Fluid Load, Lbs.	5,387	4,589	3,791	4,305	6,383
Rod Load, Lbs.	20,871	17,779	14,687	13,725	13,890
X Impulse Factor, Lbs.	23,689	21,690	19,534	18,254	17,293
Peak Rod Load, Lbs.	29,076	26,279	23,325	22,559	23,676
Counter Balance, Lbs.	23,571	20,079	16,587	15,878	17,085
Peak Torque, in lbs.	528,480	595,200	646,848	641,376	632,736
Peak Rod Stress, psi	48,355	43,704	38,791	37,517	39,375
Impulse Factor	1.135	1.22	1.33	1.33	1.245
Overtravel, Inches	38	45	46	29	21 1/2
Rod Stretch	79"	57 1/2"	39"	28"	41"
Plunger Travel, inches	151	179 1/2	199	193	172 1/2
80% Production, MWD	154	235	319	445	482

BEFORE THE
OIL FIELD COMMISSION
SANTA FE, NEW MEXICO
CASE 1016-1917

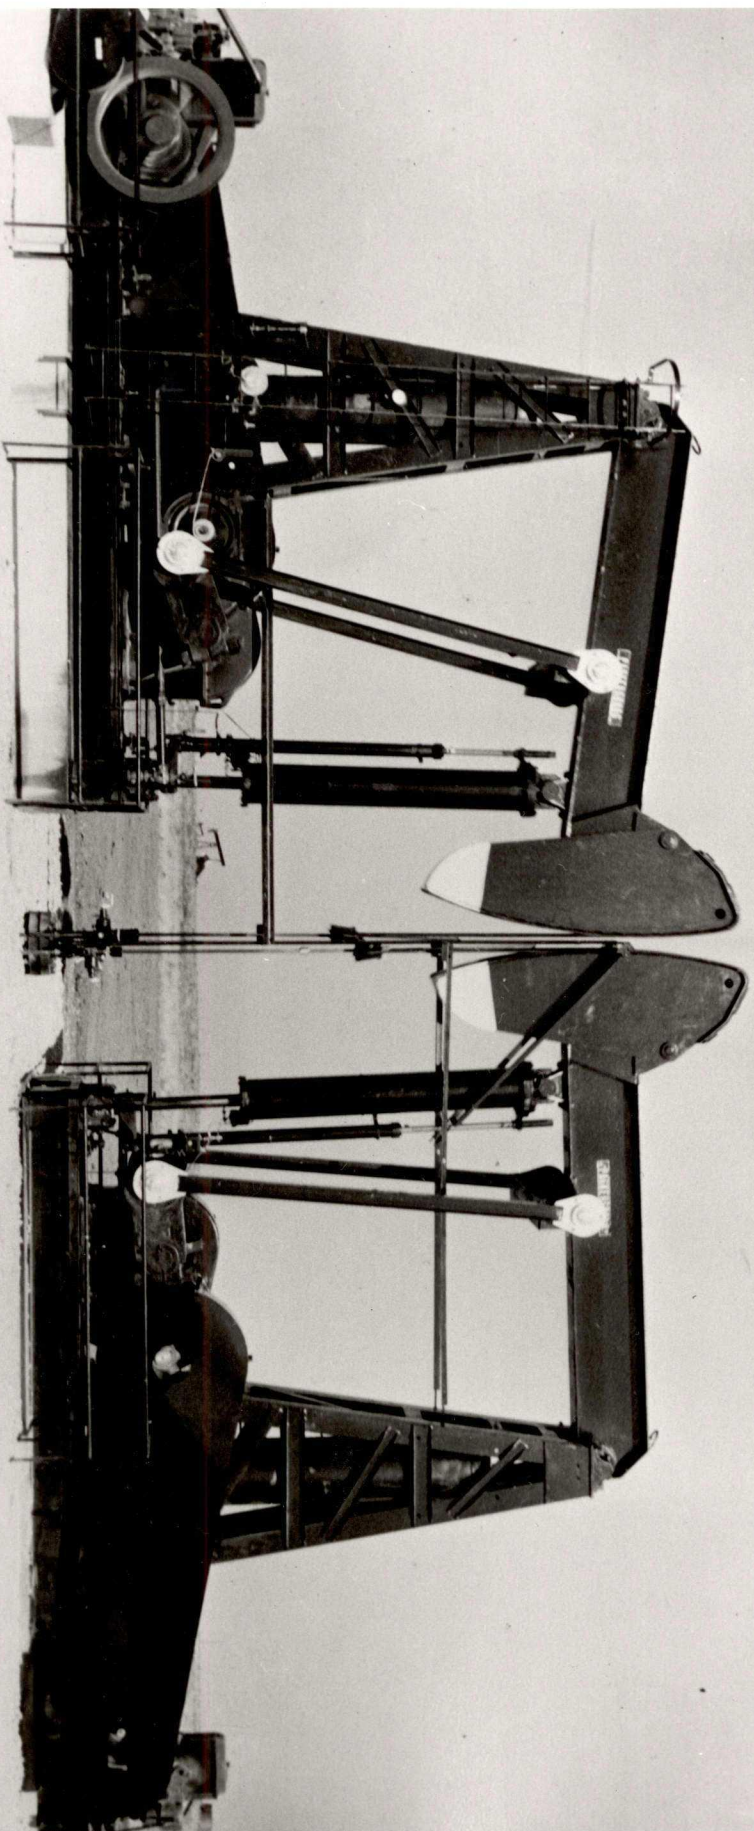

THE COMMISSION
SANTA FE, NEW MEXICO
H 617 N 1/2

SINCLAIR OIL & GAS COMPANY
H. M. FORD NO. 2

PARKER WOLF CAMP AND PENNSYLVANIAN POOLS
WOLF CAMP 8623-8651', PUMP @ 8500'
PENNSYLVANIAN 9098-9128', PUMP @ 8850'
BAKER MODEL D PACKER @ 9010'