

SAN JUAN COUNTY NEW MEXICO

R 11 W

R 10 W

T
26
N

5	4	3 * ¹⁻⁸ Griffith-Moore	2 R.H. Winger * ¹ Gulf	1 N.M. Oil & Gas Co. * ⁹	6
8	9	10 Pan American * ^{1700'} O.H. Rindel * ^{"B" No. 1}	11 SKELLY W.P. Saunders No. 1	12 * ^{1968'}	7
17	16	15 Pan Am.	14 O.H. Rindel No. 1 * ¹ TENN. GAS TRANS. Co.	13 Western Devel. Co. of Del. SKELLY	18
20	21	22	23 TENN. GAS W.O. Berger No. 2 *	24 Paul L. Davis	19
29	28	27	26 * ¹	25	30
32	33	34	35	36	31

1" = 1 MILE


SKELLY OIL COMPANY

W. P. Saunders No. 1

SW 1/4 SE 1/4 ?

SE/4 SE/4 11-26N-11W

San Juan County, N. M.

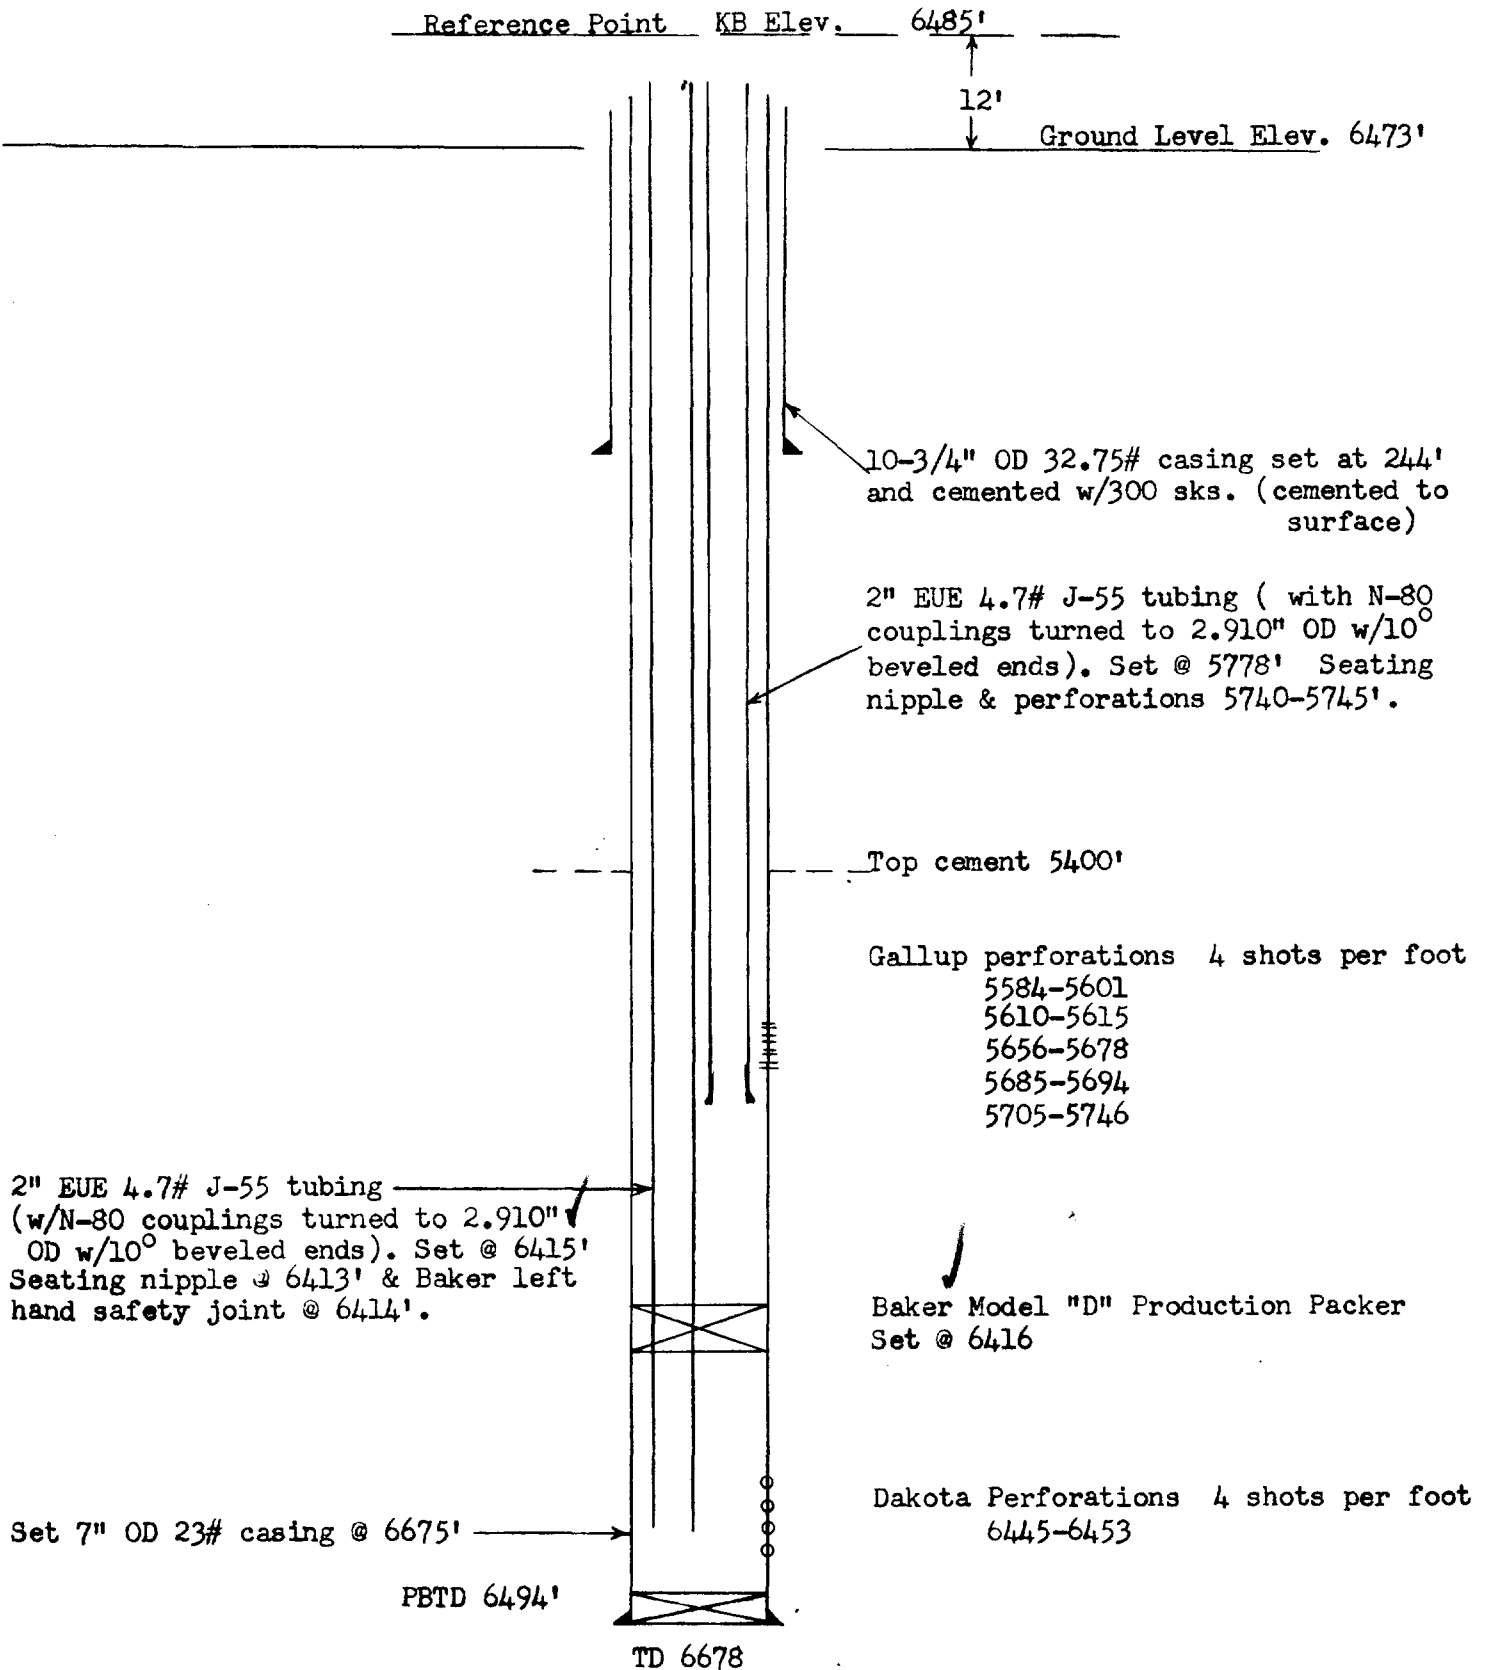

SAN JUAN COUNTY NEW MEXICO

R 11 W

R 10 W

5	4	3 *1 Gulf R.M. Winger *1 N.M. Oil & Gas Co. *1	2	1	6
8	9	10 R.A. American *1 W.P. Saunders No. 1	11 SKELLY W.P. Saunders No. 1	12 *1 M.G.	7
17	16	15 R.A. American *1 W.P. Saunders No. 1	14 SKELLY W.P. Saunders No. 1	13 SKELLY W.P. Saunders No. 1	18
20	21	22 W.P. Saunders No. 1	23 SKELLY W.P. Saunders No. 1	24 SKELLY W.P. Saunders No. 1	19
29	28	27	26 SKELLY W.P. Saunders No. 1	25 SKELLY W.P. Saunders No. 1	30
32	33	34	35	36	31

1" = 1 MILE

SKELLY OIL COMPANY

W. P. Saunders No. 1

SE/4 SE/4 11-26N-11W

San Juan County, N. M.

Reference Point KB Elev. 6485'

12'

Ground Level Elev. 6473'

10-3/4" OD 32.75# casing set at 244'
and cemented w/300 sks. (cemented to
surface)

2" EUE 4.7# J-55 tubing (with N-80
couplings turned to 2.910" OD w/10°
beveled ends). Set @ 5778' Seating
nipple & perforations 5740-5745'.

Top cement 5400'

Gallup perforations 4 shots per foot
5584-5601
5610-5615
5656-5678
5685-5694
5705-5746

2" EUE 4.7# J-55 tubing
(w/N-80 couplings turned to 2.910"
OD w/10° beveled ends). Set @ 6415'
Seating nipple @ 6413' & Baker left
hand safety joint @ 6414'.

Baker Model "D" Production Packer
Set @ 6416

Set 7" OD 23# casing @ 6675'

Dakota Perforations 4 shots per foot
6445-6453

PBTD 6494'

TD 6678