


LARGE FORMAT
EXHIBIT HAS
BEEN REMOVED
AND IS LOCATED
IN THE NEXT FILE

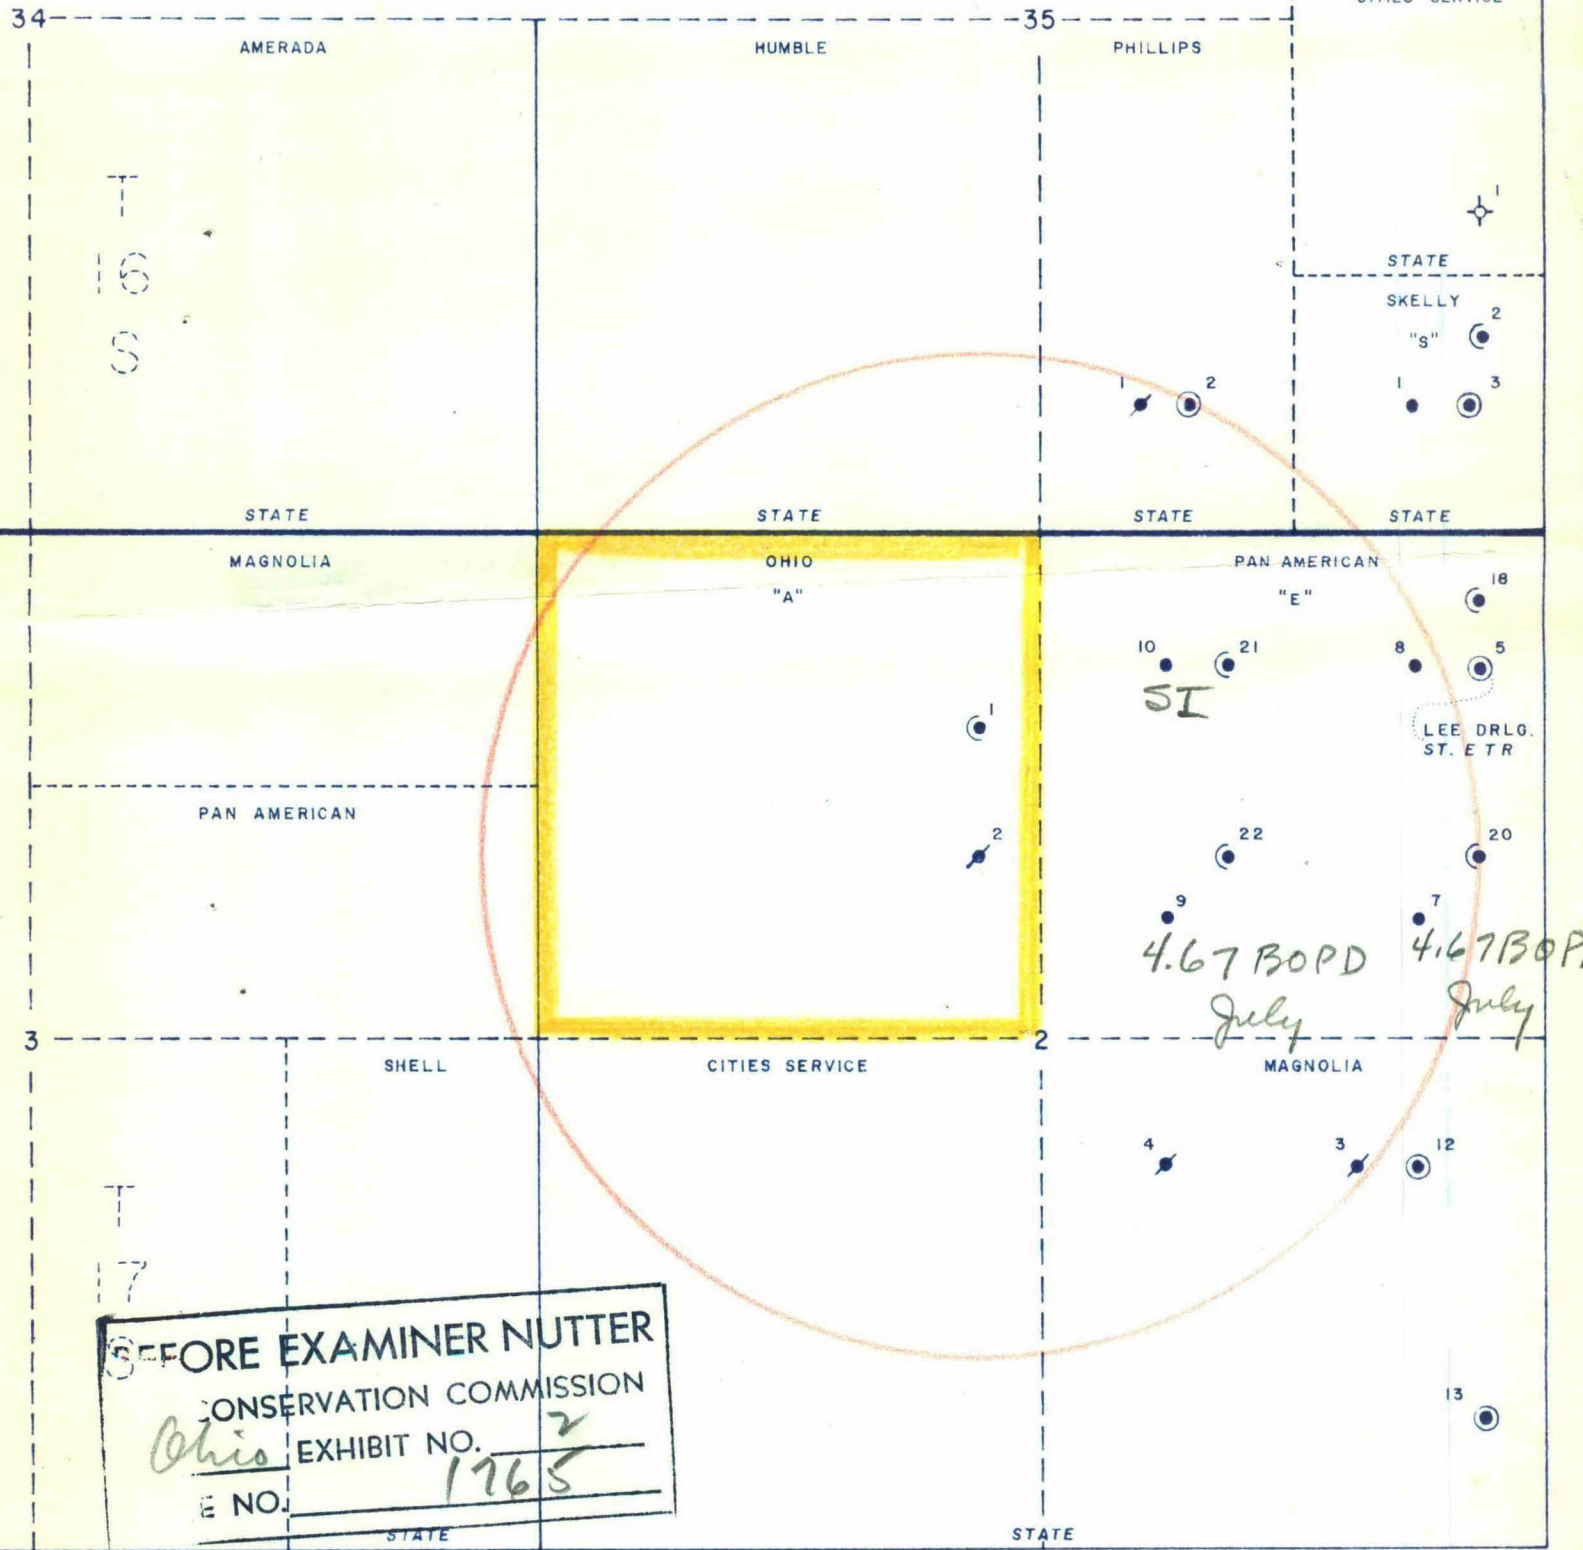

R 36 E

THE OHIO OIL COMPANY
Lovington Field
State B-4286 "A" Lease SWD Area
Lea County, New Mexico
Scale: 1" = 1000' Sept. 1, 1959

LEGEND

- Lovington San Andres
- Lovington Abo
- ⊙ Lovington Paddock

Exhibit No. 2
Case No. 1765

THE OHIO OIL COMPANY
WELLS WITHIN 1/2 MILE OF THE STATE B-4286 "A", WELL NO. 2
EXHIBIT NO. 3
CASE NO. 1765

Operator	Lease	Well No.	Location Unit, S.T.R.	Completion Interval	Completion Zone	Average BOPD July, '59	Average BUPD July, '59	Remarks
Ohio	St. B-4286 "A"	1	C-2-17-36	-4581 to -4609	Abo	59.5	223.7	
Magnolia	St. "R"	3	1-2-17-36	-1108 to ✓	San Andres	-	-	P & A 8-49
"	St. "R"	4	3-2-17-36	-1136 -1016 to ✓	San Andres	-	-	D.D. to 5130' 3-45 P & A 4-47
Pan American	St. "E", Tr. 18	7	H-2-17-36	-1130 -791 to ✓	San Andres	4.67	0	
"	St. "E", Tr. 18	8	A-2-17-36	-1096 -813 to ✓	San Andres	-	-	S.I. 4-56
"	St. "E", Tr. 18	9	G-2-17-36	-1133 -848 to ✓	San Andres	4.67	12.7	
"	St. "E", Tr. 18	10	B-2-17-36	-1300 -932 to ✓	San Andres	-	-	S.I.
"	St. "E", Tr. 18	20	H-2-17-36	-1157 -4473 to	Abo	108.3	0	
"	St. "E", Tr. 18	21	B-2-17-36	-4653 -4478 to	Abo	102.3	150.4	
"	St. "E", Tr. 18	22	G-2-17-36	-4618 -4478 to	Abo	108.3	0	
Phillips	Lowington St.	1	O-35-16-36	-4552 -1005 to ✓	San Andres	-	-	P & A 5-47
"	Lowington St.	2	O-35-16-36	-1142 -2431 to	Paddock	8.9	2.2	7-53 Acidized Giorietta -2333 to -2363

BEFORE EXAMINER NUTTER

OHIO CONSERVATION COMMISSION

Office EXHIBIT NO. 3

CASE NO. 1765

HOUSTON, TEXAS



STATE NEW MEXICO

FILING No.

RUN No.	4-10-54								
Date	8526								
First Reading	3324								
Last Reading	5202								
Feet Measured	3324								
Csg. Schlum.	3320								
Csg. Driller	8529								
Depth Reached	8530								
Bottom Driller	RDB 21' abv. GL								
Depth Datum	Gel-Starch								
Mud Nat.									
" Density	9.6								
" Viscosity	54								
" Resist.	0.36 @ 90 °F	@	°F	@	°F	@	°F	@	°F
" Res. BHT	0.24 @ 136F	@	°F	@	°F	@	°F	@	°F
" pH	6.5 @ °F	@	°F	@	°F	@	°F	@	°F
" Wtr. Loss	10.4 CC 30 min.	CC 30 min.		CC 30 min.		CC 30 min.		CC 30 min.	
Max. Temp. °F	136								
Bit Size	8 3/4"								
Spcgs.—AM	10"								
AQ	32" LS								
AQ	19" Lat								

LARGE FORMAT
EXHIBIT HAS
BEEN REMOVED
AND IS LOCATED
IN THE NEXT FILE

BEFORE EXAMINING
OIL COMPANY
Ohio
CASE NO. *1765*

13-3/8" Csg. @ 349'
w/450 sx, Cement
Circulated

9-5/8" Csg. @ 3318'
w/1750 sx, Cement
Circulated

8-3/4" Open Hole
3318'-4200'

5 1/2" Csg. Cut Off @
4200' & Pulled

Top Cem. 4280'

Top San Andres 4704'

2-7/8" O.D. Tbg.
to 5500'

Bottom of Prod. Interval
In San Andres 5147'

Baker Model "D" Retainer
Type Packer @ 5500'

Proposed Perforated Interval
5725'-5968' For Injection Zone

Baker Model "K" C.I.
Bridge Plug w/10'
Cem. On Top Of Plug @ 6000'

Top Glorietta @ 6100'

Cem. Plug 6115'-6205'

6186'-6265' Paddock Pay

Baker C.I. Bridge
Plug @ 6320' w/10'
Cem. On Top Of Plug

8378'-8480' Abo Pay

5 1/2" Csg. @ 8528'
w/1400 sx, T.D. 8530'