

CERTIFICATE OF
SURVEY DATA

The attached plat of Township 10 South, Range 32 East, is made to be used in re-establishing section corners along the east boundary and interior section corners which by long and exhaustive search have not been located from the original survey by Geo. Brown in 1882. The north and west boundaries of the Township have well monumented corners set by the USBLM in 1939.


The south boundary of the township has well monumented corners set by the USGLO in 1911. The method used on this plat for the east boundary markers is to start at the southeast corner of Sec. 36, thence N. 0° 20' E., setting a section corner monument at every 80.00 chains for 5 miles, thence continuing the same bearing to the northeast corner of Section 1.

All interior corners are set by starting at the southeast corners of Sections 31, 32, 33, 34, and 35, and traversing true North setting interior corners at 80.00 chains for 5 miles to the southeast corners of Sections 6, 5, 4, 3 and 2. The North-South distances and bearings of Sections 6, 5, 4, 3 and 2 are the distances and bearings required to tie in to the monuments on the North boundary set by the USBLM in 1939.

All distances and bearings from the U. S. Government plats of 1911 and 1939 are the criteria for this reconstruction of this township.



JOHN W. WEST



JOHN W. SHEARMAN

BEFORE EXAMINER NUTTER
OIL CONSERVATION COMMISSION
<i>C. H. S. S.</i> EXHIBIT NO. <u>1</u>
CASE NO. <u>2752</u>

CERTIFICATE OF
SURVEY DATA

The attached plat of Township 10 South, Range 32 East, is made to be used in re-establishing section corners along the east boundary and interior section corners which by long and exhaustive search have not been located from the original survey by Geo. Brown in 1882. The north and west boundaries of the Township have well monumented corners set by the USBLM in 1939.

The south boundary of the township has well monumented corners set by the USGLO in 1911. The method used on this plat for the east boundary markers is to start at the southeast corner of Sec. 36, thence N. $0^{\circ} 20'$ E., setting a section corner monument at every 80.00 chains for 5 miles, thence continuing the same bearing to the northeast corner of Section 1.

All interior corners are set by starting at the southeast corners of Sections 31, 32, 33, 34, and 35, and traversing true North setting interior corners at 80.00 chains for 5 miles to the southeast corners of Sections 6, 5, 4, 3 and 2. The North-South distances and bearings of Sections 6, 5, 4, 3 and 2 are the distances and bearings required to tie in to the monuments on the North boundary set by the USBLM in 1939.

All distances and bearings from the U. S. Government plats of 1911 and 1939 are the criteria for this reconstruction of this township.




JOHN W. WEST



JOHN W. SHEARMAN

Township No. 10 South Range 32 East NMPM

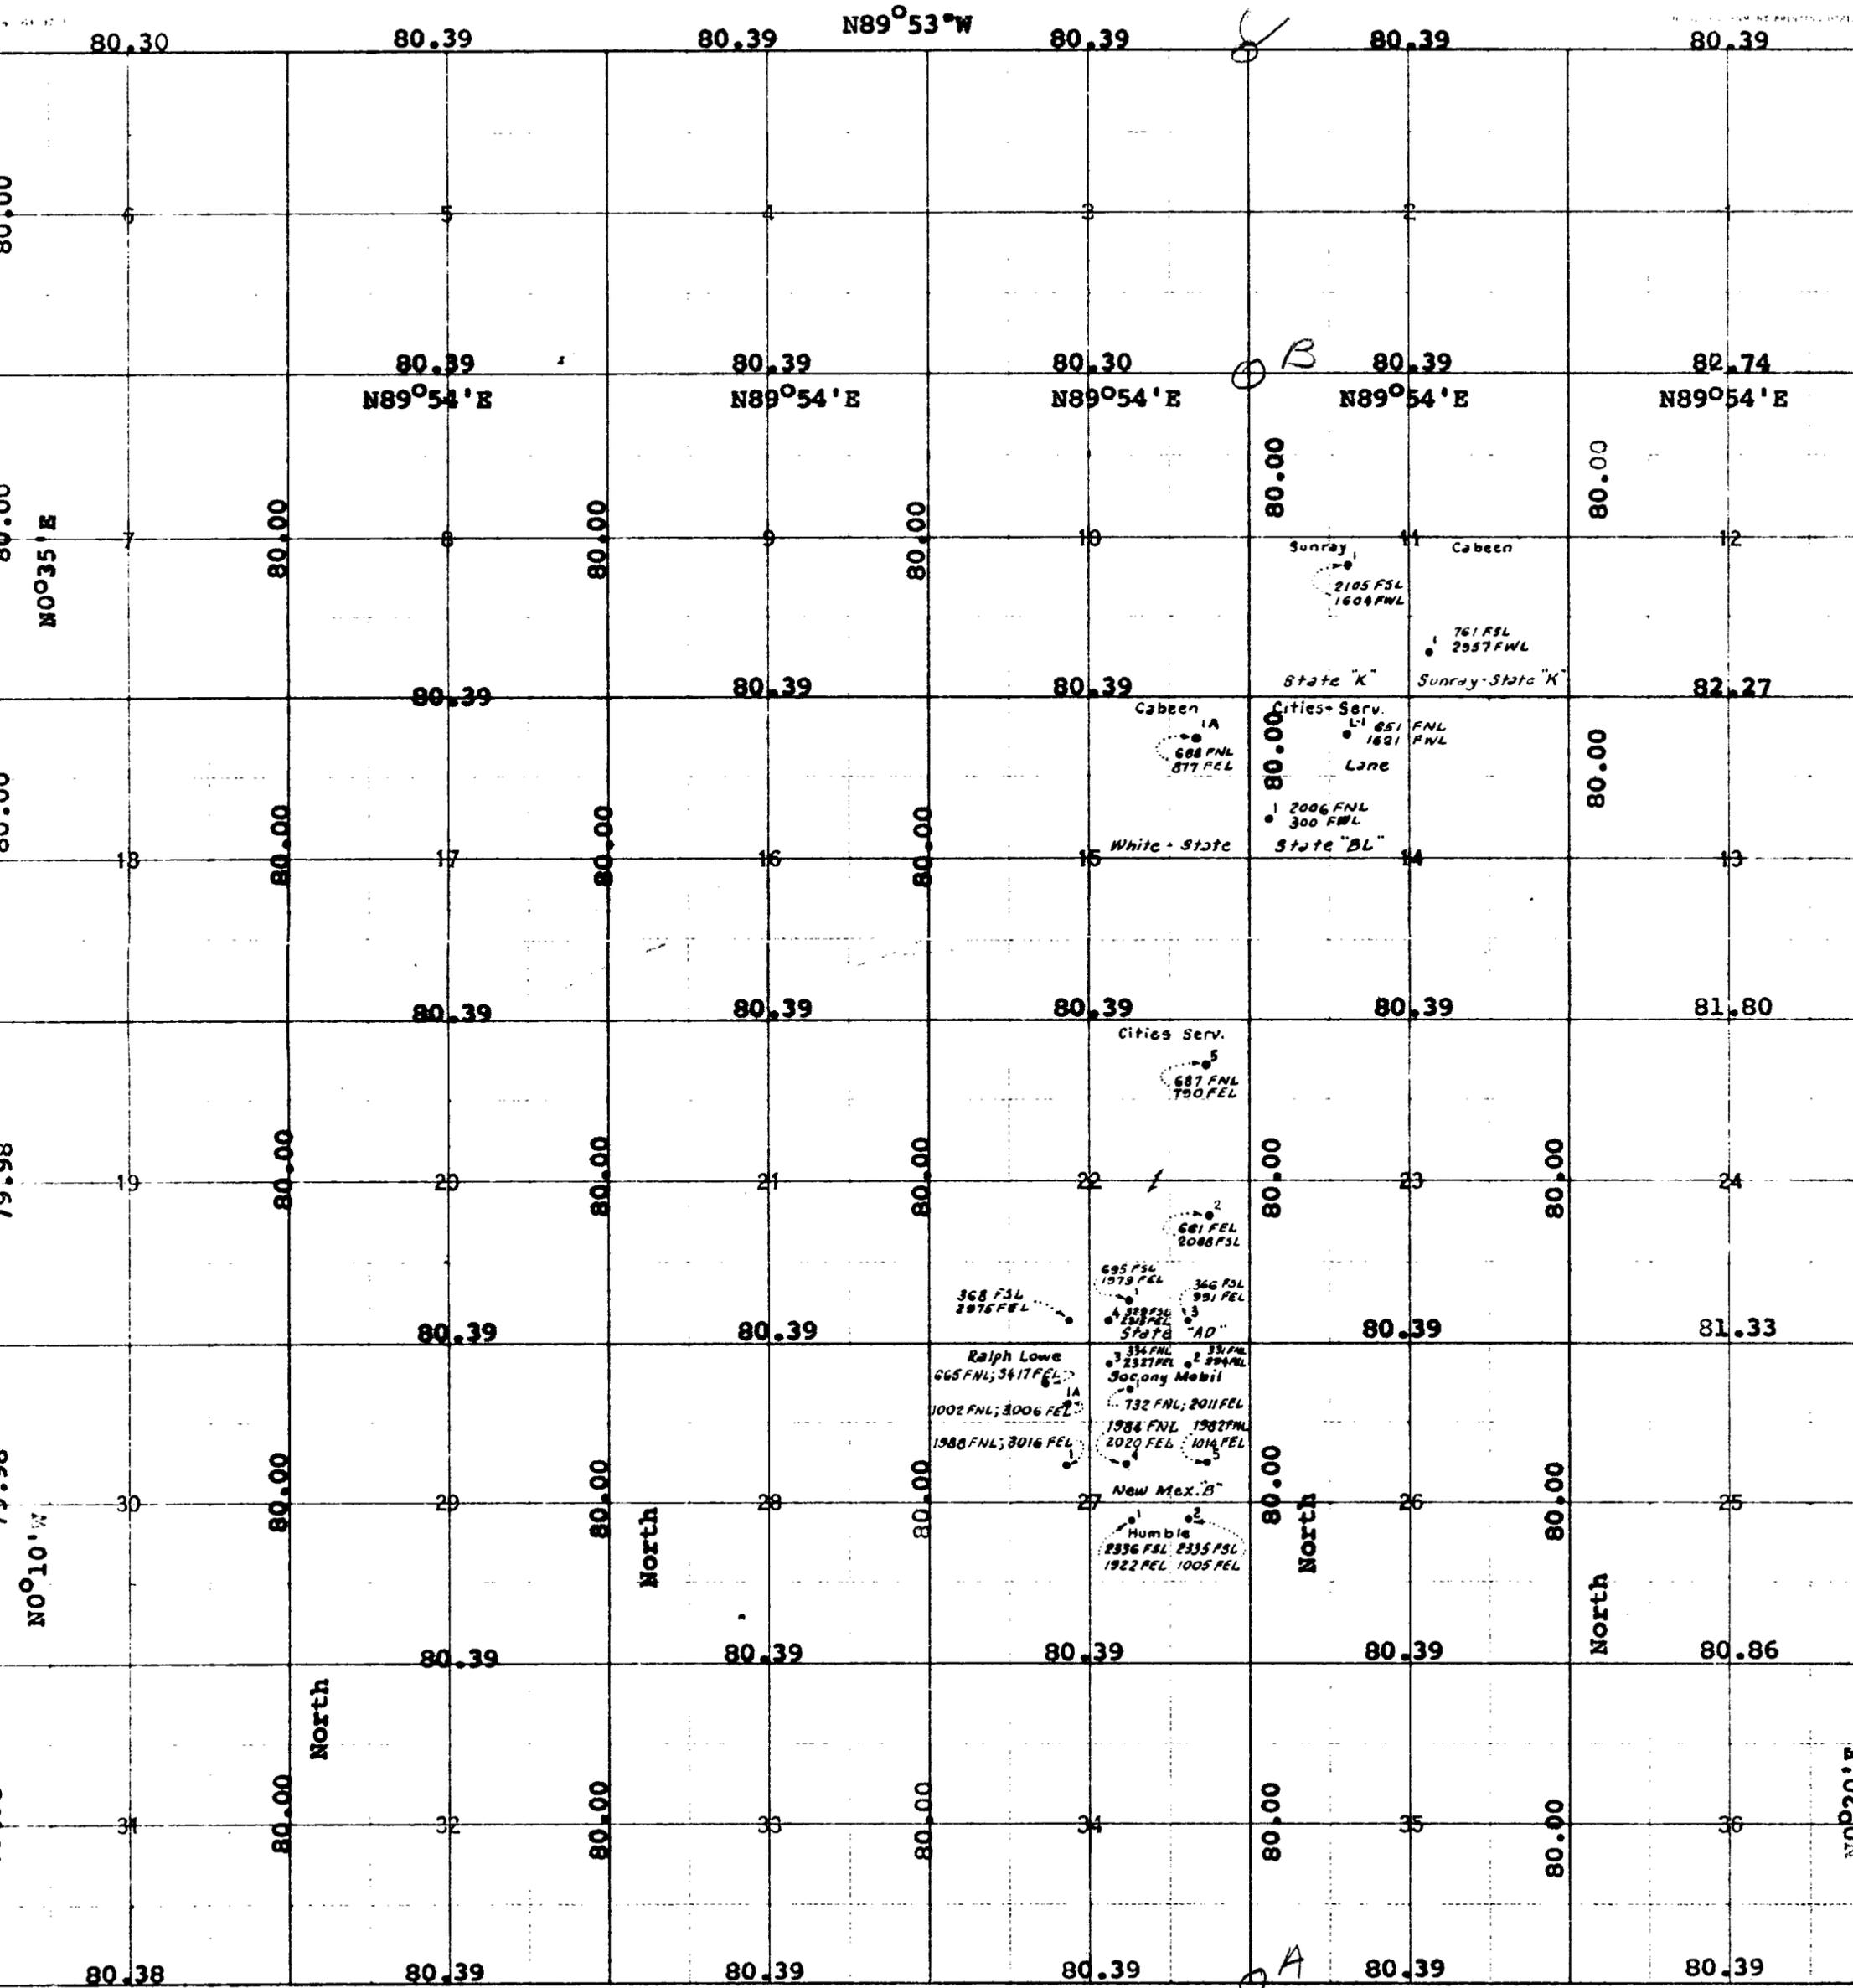

N89°54'E