

Case 5637




GUARD LOG

COMPANY WELL FIELD County State	COMPANY <u>RC BENNETT + J C RYAN</u>	
	WELL <u>EXXON STATE # 2</u>	
	FIELD <u>WILDCAT</u>	
	COUNTY <u>EDDY</u>	STATE <u>NEW MEXICO</u>
	Location <u>1980 FNL + 1980 FWL</u>	
		Other Services: <u>GRC DEN</u> <u>NEUTRON</u>
Sec. <u>25</u> Twp. <u>19S</u> Rge. <u>28E</u>		
Permanent Datum <u>GL</u> Elev. <u>3345</u>		Elev.: K.B. <u>3362.8</u>
Log Measured From <u>KB 17.8</u> Ft. Above Perm. Datum		D.F. <u>3345</u>
Drilling Measured From <u>KB</u>		G.L. <u>3345</u>
Date	<u>1-22-76</u>	
Run No.	<u>-1-</u>	
Depth—Driller	<u>11375</u>	
Depth—Welex	<u>11377</u>	
Btm. Log Inter.	<u>11372</u>	
Top Log Inter.		
Casing—Driller	<u>8 5/8 @ 2500</u>	@ @ @
Casing—Welex		
Bit Size	<u>7 7/8</u>	
Type Fluid in Hole	<u>MUD</u>	
Dens. Visc.	<u>10.1 33</u>	
pH Fluid Loss	<u>15.2 ml</u>	ml ml
Source of Sample	<u>CIRCULATED</u>	
R _m @ Meas. Temp.	<u>.06 @ 75°F</u>	@ °F @ °F @ °F
R _{ml} @ Meas. Temp.	<u>.06 @ 60°F</u>	@ °F @ °F @ °F
R _{mx} @ Meas. Temp.	<u>@ °F</u>	@ °F @ °F @ °F
Source R _{ml} R _{mx}	<u>MEAS</u>	
R _m @ BHT	<u>.026 @ 175°F</u>	@ °F @ °F @ °F
Time Since Circ.		
Max. Rec. Temp.	<u>175°F @ BH</u>	°F @ °F @ °F @
Equip. Location	<u>9433 HOBBS</u>	
Recorded By	<u>R. STROUD</u>	
Witnessed By	<u>MR RYAN</u>	

VTG

DUAL (TUBING-ANNULAS)
TUBING CONVEYED
COMPLETION INSTALLATION

FILING NO.		COMPANY <u>R.C. BENNETT & J.C. RYAN</u>					
		WELL <u>EXXON STATE #2</u>					
		FIELD <u>WILDCAT</u>					
		COUNTY <u>EDDY</u>			STATE <u>NEW MEXICO</u>		
LOCATION: <u>1980' FNL & 1980' FWL</u>					OTHER SERVICES:		
SEC. <u>25</u> TWP. <u>19-5</u> RGE. <u>28-E</u>							
PERMANENT DATUM: <u>G.L.</u>		ELEV. <u>3345</u>				ELEV.: K.B. <u>3362.8</u>	
LOG MEASURED FROM <u>K.B.</u>		<u>17.8</u> FT. ABOVE PERM. DATUM				D.F. _____	
DRILLING MEASURED FROM <u>K.B.</u>						G.I. <u>3345.0</u>	
DATE		<u>1-31-76</u>					
RUN NO.							
TYPE LOG		<u>TUBING CONVEYED (DUAL) INSTALLATION</u>					
DEPTH-DRILLER		<u>11379</u>					
DEPTH-LOGGER							
BOTTOM LOGGED INTERVAL							
TOP LOGGED INTERVAL							
TYPE FLUID IN HOLE							
SALINITY, PPM CL.							
DENSITY							
LEVEL							
MAX. REC. TEMP., DEG F.							
OPERATING RIG TIME							
RECORDED BY							
WITNESSED BY							
RUN		BORE-HOLE RECORD			CASING RECORD		
NO	BIT	FROM	TO	SIZE	WGT.	FROM	TO
				<u>13 3/8</u>		<u>SURF</u>	<u>350</u>
				<u>8 5/8</u>		<u>SURF</u>	<u>2500</u>
				<u>5 1/2</u>	<u>17920</u>	<u>SURF</u>	<u>TD</u>

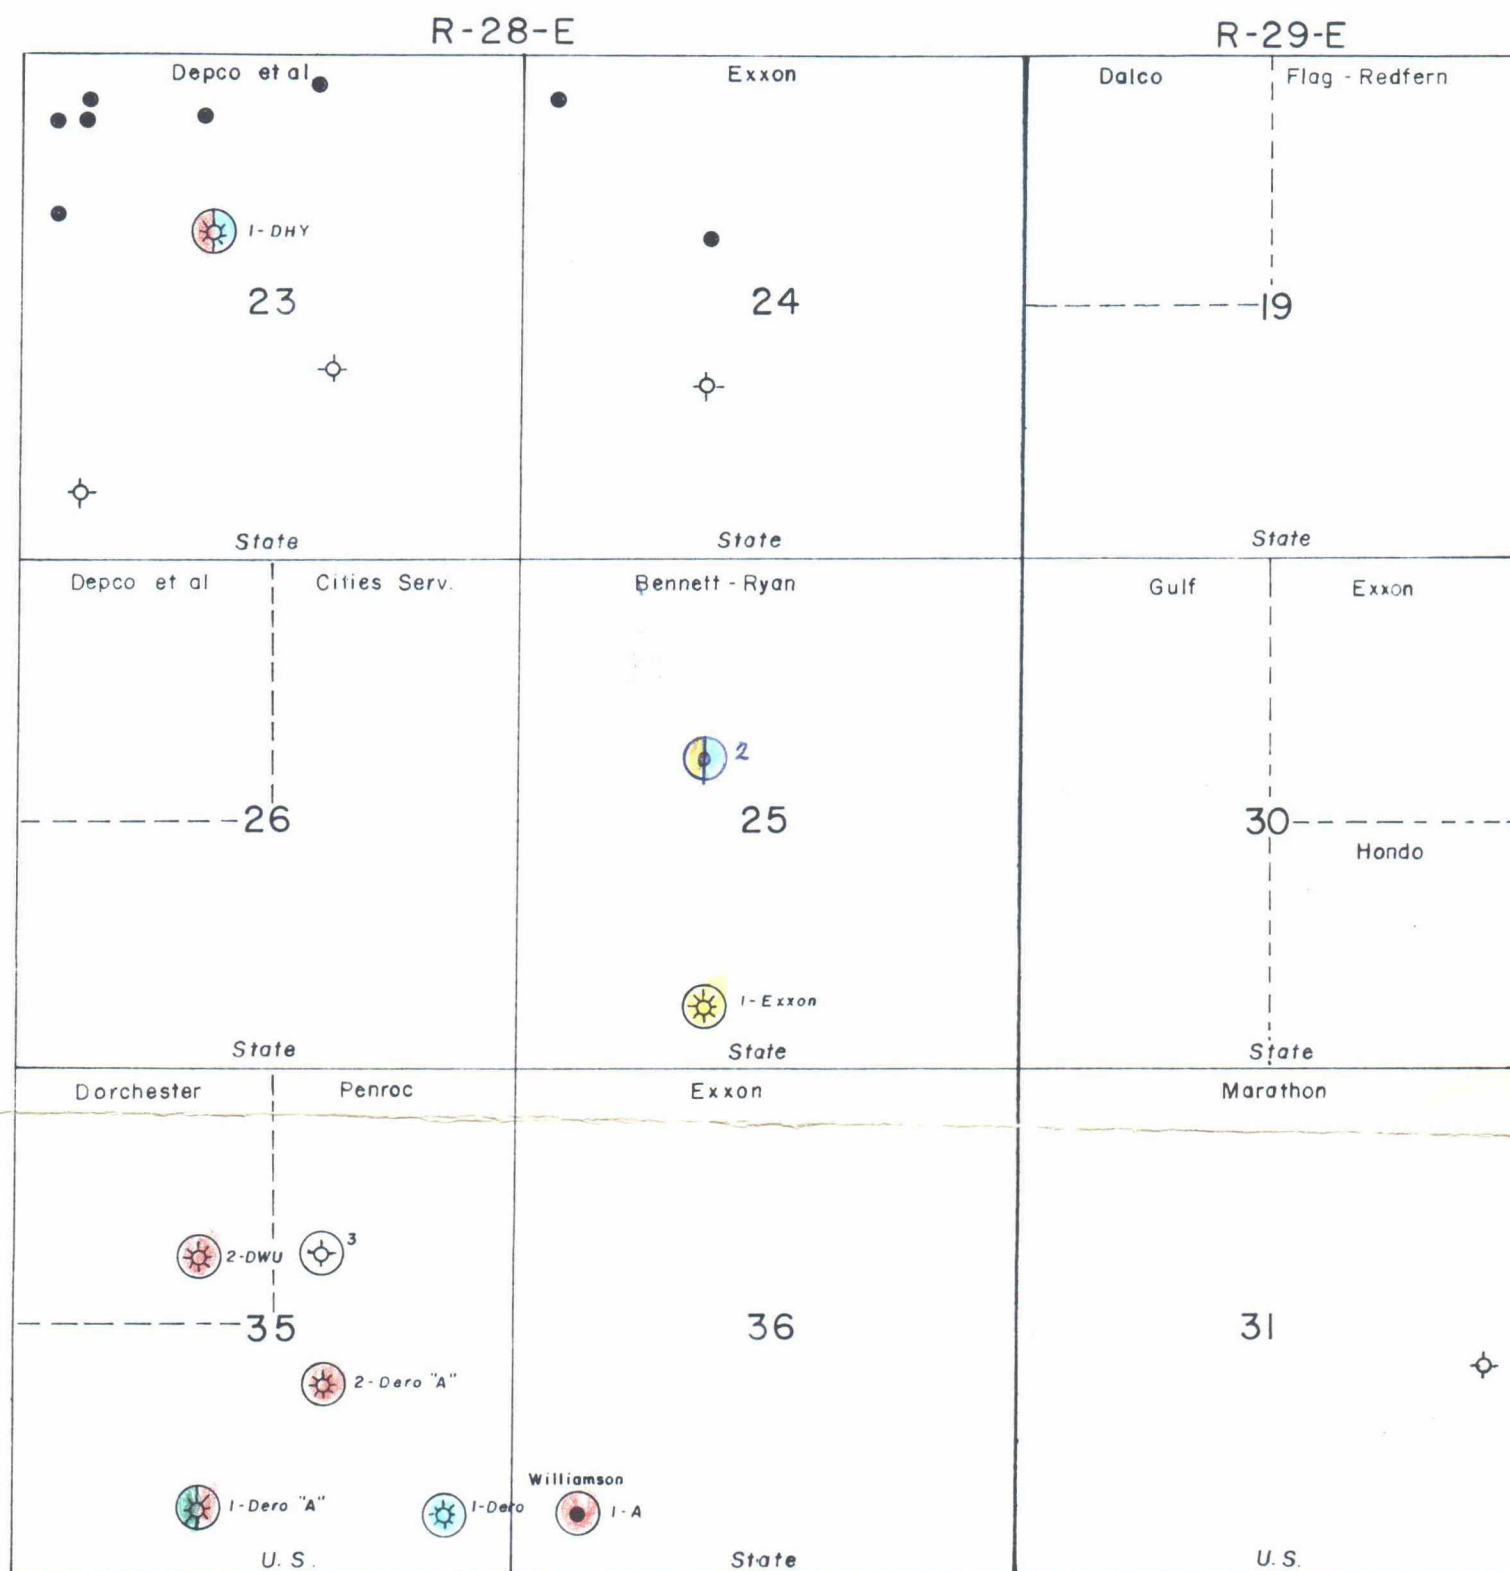

- Qn., Grbg., SA
- WOLFCAMP
- STRAWN
- MORROW
- PENN

Exhibit 1
Case 5633

BENNETT & RYAN

EXHIBIT I

APPLICATION FOR DUAL COMPLETION

EXXON STATE NO. 2

SEC. 25 T 19 S R 28 E


NORTH WINCHESTER AREA

EDDY COUNTY, NEW MEXICO

Scale: 1" = 2000'

Date: 3-1-76

File No:

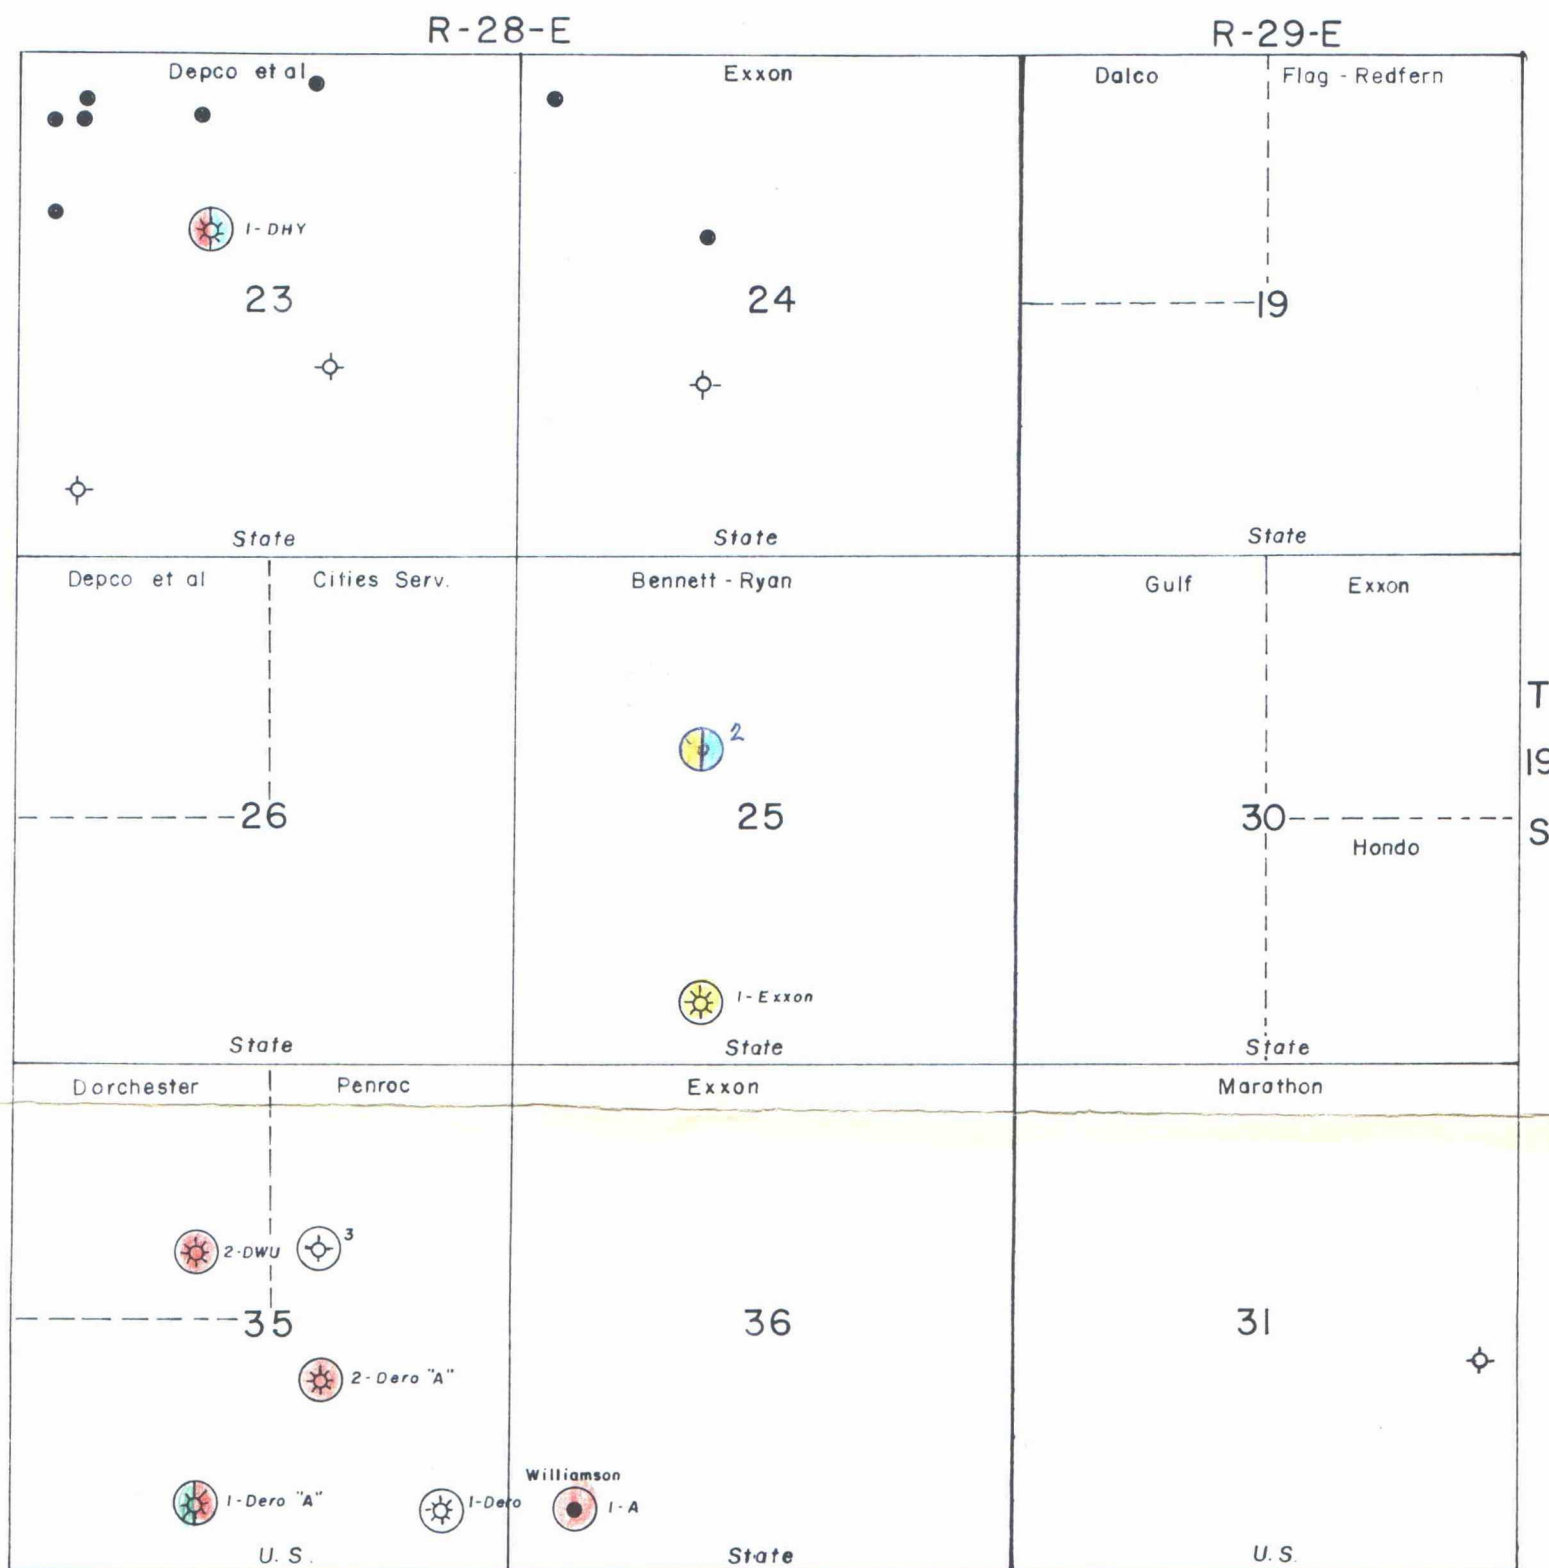

- Qn., Gr bg., SA
- WOLFCAMP
- STRAWN
- MORROW
- PENN

BEFORE EXAMINER STAMETS
OIL CONSERVATION COMMISSION

EXHIBIT NO. 1

CASE NO. 5637

Submitted by BENNETT + RYAN

Hearing Date 3-3-76

BENNETT & RYAN

EXHIBIT I

APPLICATION FOR DUAL COMPLETION

EXXON STATE NO. 2

SEC. 25 T 19 S R 28 E

NORTH WINCHESTER AREA

EDDY COUNTY, NEW MEXICO

Scale: 1"=2000'

Date: 3-1-76

File No: