



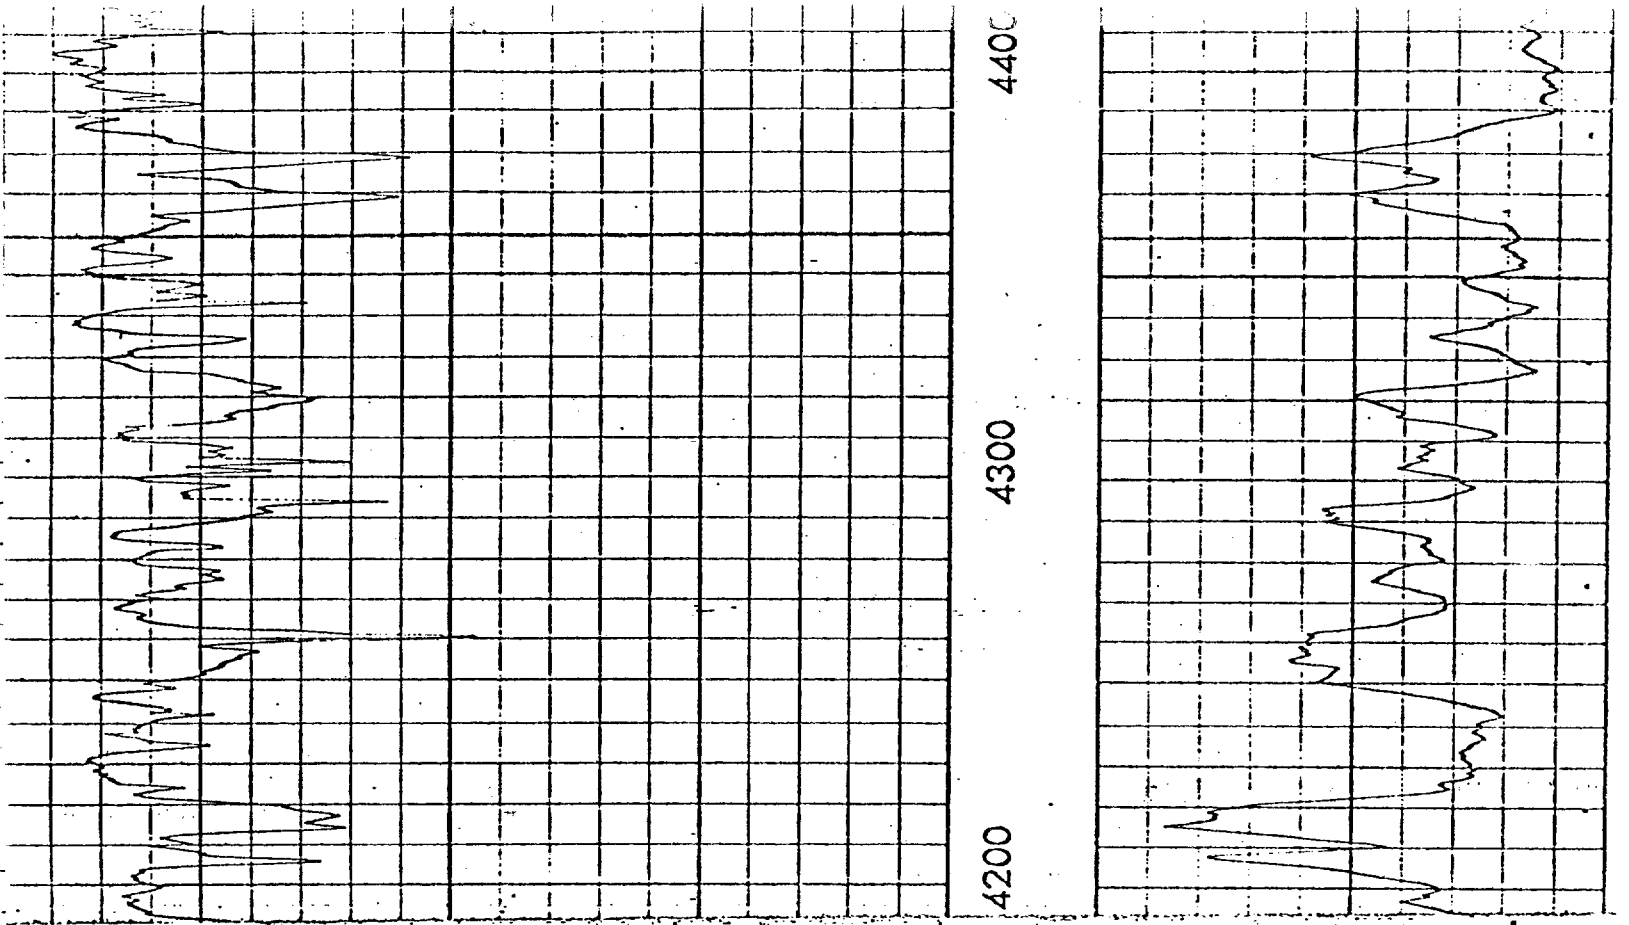

4200 4300 4400

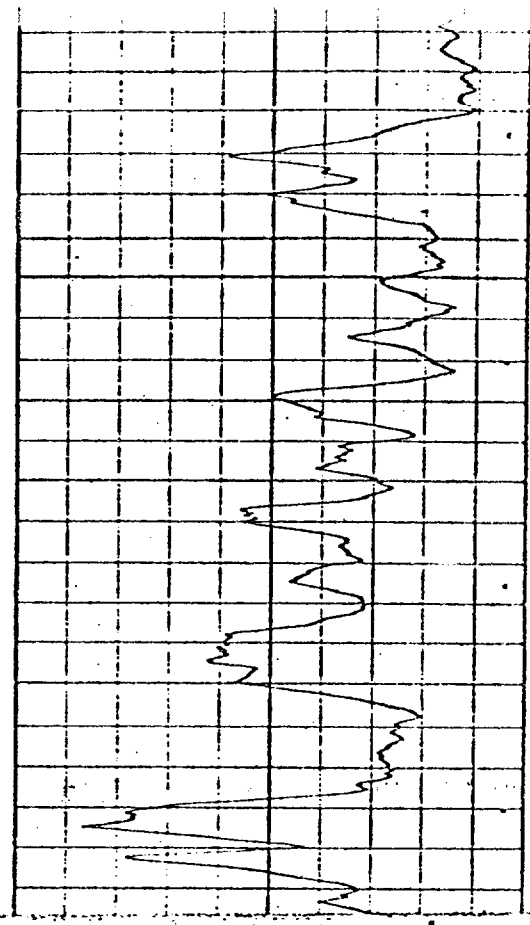

Fold Here

COMPANY <u>Texaco Inc</u>		WELL <u>STATE R (NOT-2) #5</u>	
FIELD <u>Vacuum B. Loreto</u>		COUNTY <u>N</u> STATE <u>New Mexico</u>	
Location <u>330 FISH</u> <u>1650 FEL</u>		Other Services: <u>GUARD</u> <u>FORXO</u>	
Sec. <u>2</u>	Twp <u>18-S</u>	Rge <u>34-E</u>	Elev.: <u>X.B. 4023</u> <u>EST D.F. 4022</u> <u>GL 4011</u>
Permanent Datum <u>Ground Level</u> Elev. <u>4011</u>			
Log Measured From <u>Reel Bushing</u> 11 Ft. Above Perm. Datum			
Drilling Measured From <u>Reel Bushing</u>			
Date <u>4-4-65</u>	Run No. <u>-1-</u>		
Depth-Driller <u>6250</u>	Depth-Well <u>6248</u>		
Run Log Inter. <u>6242</u>	Run Log Inter. <u>5424</u>		
Log Log Inter. <u>1034 @ 1550</u>	Log Log Inter. <u>@</u>		
Drilling-Driller <u>978 - 1550 to 3400</u>	Drilling-Driller <u>634 - 3400 to 6250</u>		
Casing-Well <u>WUD</u>	Casing-Well <u>WUD</u>		
Log Size <u>9 7/8</u>	Log Size <u>12.8</u>		
Type Fluid in Hole <u>STARCH Flo-seal paper</u>	Type Fluid in Hole <u>STARCH Flo-seal paper</u>		
Dens. <u>9.9</u>	Visc. <u>37</u>	ml	ml
pH <u>-</u>	Fluid Loss <u>12.8</u>	ml	ml
Source of Sample <u>WECULATID</u>	Source of Sample <u>WECULATID</u>	ml	ml
R _m @ Max. Temp. <u>0.65 @ 80°F</u>	R _m @ Max. Temp. <u>0.65 @ 80°F</u>	°F	°F
R _{int} @ Max. Temp. <u>0.55 @ 93°F</u>	R _{int} @ Max. Temp. <u>0.55 @ 93°F</u>	°F	°F
R _{int} @ Meas. Temp. <u>- @ - °F</u>	R _{int} @ Meas. Temp. <u>- @ - °F</u>	°F	°F
Source R _{int} <u>Rees</u>	Source R _{int} <u>Rees</u>	°F	°F
R _m @ BHT <u>0.48 @ 113°F</u>	R _m @ BHT <u>0.48 @ 113°F</u>	°F	°F
Time Since Circ. <u>3 Hrs</u>	Time Since Circ. <u>3 Hrs</u>	°F	°F
Max. Rec. Temp. <u>113°F @ BHT</u>	Max. Rec. Temp. <u>113°F @ BHT</u>	°F	°F
Temp. Location <u>3303 HOBBS</u>	Temp. Location <u>3303 HOBBS</u>	°F	°F
Recorded By <u>G.E. Apple</u>	Recorded By <u>G.E. Apple</u>	°F	°F
Witnessed By <u>Mr. Moberg</u>	Witnessed By <u>Mr. Moberg</u>	°F	°F