


## INJECTION WELL DATA SHEET

The Eastland Oil Company Sibly Federal  
 OPERATOR LEASE  
 2 330' FFL & 1650' FNL 1 T18S R30E  
 WELL NO. FOOTAGE LOCATION SECTION TOWNSHIP RANGE  
 Producing well from Power Grayburg. Completed 9-4-71

## Schematic

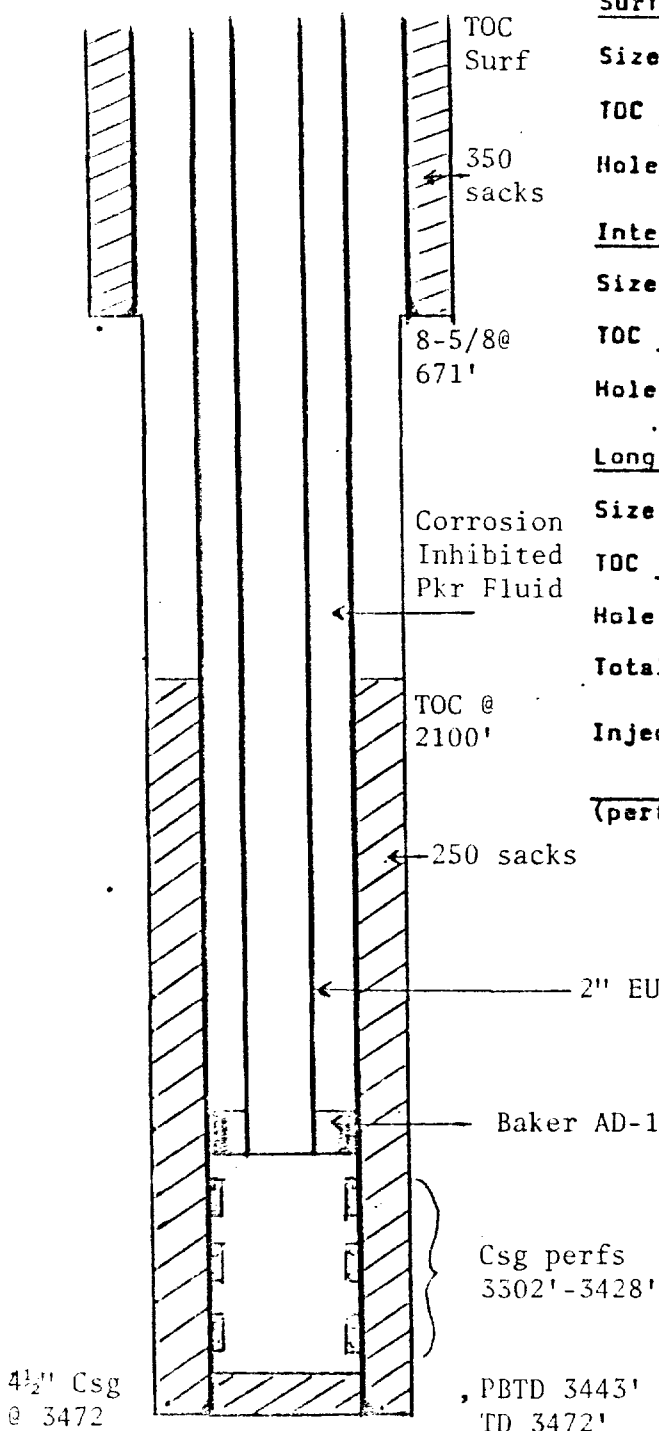

## Tabular Data

## Surface Casing

Size 8-5/8" Cemented with 350 sx.TOC Surface feet determined by CirculationHole size 11"

## Intermediate Casing

Size       " Cemented with        sx.TOC        feet determined by       Hole size       

## Long string

Size 4-1/2" Cemented with 250 sx.TOC 2100 feet determined by CalcHole size 7-7/8Total depth 3472' 3443' PBTD

## Injection interval (perforated)

3428 feet to 3423 feet  
(perforated or open-hole, indicate which)3365 to 33613312 to 3302Tubing size 2-3/8" EUE lined with TK-75 (fusion applied powder epoxy) set in a  
(material)Baker Model AD-1 Tension packer at 3280 feet.  
(brand and model)

(or describe any other casing-tubing seal).

## Other Data

1. Name of the injection formation Grayburg2. Name of Field or Pool (if applicable) Power Grayburg - San Andres3. Is this a new well drilled for injection? ☐ Yes ☒ NoIf no, for what purpose was the well originally drilled? Oil & Gas4. Has the well ever been perforated in any other zone(s)? List all such perforated intervals and give plugging detail (sacks of cement or bridge plug(s) used) No5. Give the depth to and name of any overlying and/or underlying oil or gas zones (pools) in this area. Harvey E. Yates Co. Power Deep "52" State #1 producing from Bone Springs (7742' - 7926') in undesignated pool. No other producing zones in area.