


The Eastland Oil Company
 Arco-Federal No. 2
 Schematic of Plugging Detail
 Form C-108 Item VI

P+A 5-10-75

PLUG from surface
 to 45' w/ 15 sx.

LOCATION: E-5-18-31

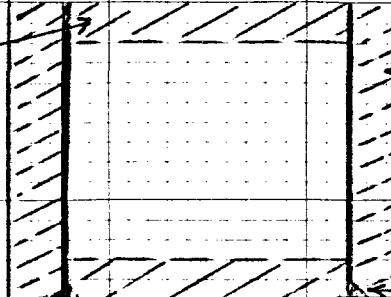

PLUG from 656' to
 756' w/ 35 sx.

8 5/8" csg cemented to
 surface w/ 350 sx.

11" hole

8 5/8" csg set @ 713'

7 7/8" hole

PLUG from 1580' to
 1680' w/ 35 sx.

Cut 4 1/2" csg @ 1700'

and pulled

CIBP @ 2100' w/ cement
 to 2060'

TOC @ 2030' by temp. survey

casing perfs. 2150'-2160'

CIBP @ 2230' w/ cement
 to 2220'

casing perfs. 2653'-2663'

CIBP @ 2750' w/ cement
 to 2740'

casing perfs 3456'-3723'

CIBP @ 3800' w/ cement
 to 3790'

casing perfs 3868'-3878'
 PBYD 3939'
 TD 3963'