

BEFORE THE

OIL CONSERVATION DIVISION

NEW MEXICO DEPARTMENT OF ENERGY, MINERALS AND NATURAL RESOURCES

IN THE MATTER OF THE APPLICATION  
OF YATES DRILLING COMPANY FOR  
STATUTORY UNITIZATION,  
CHAVES COUNTY, NEW MEXICO.

CASE NO. 9809

IN THE MATTER OF THE APPLICATION  
OF YATES DRILLING COMPANY FOR  
A WATERFLOOD PROJECT,  
CHAVES COUNTY, NEW MEXICO.

CASE NO. 9810

IN THE MATTER OF THE APPLICATION  
OF YATES DRILLING COMPANY FOR  
A UNIT AGREEMENT,  
CHAVES COUNTY, NEW MEXICO.

CASE NO. 9823


AFFIDAVIT

STATE OF NEW MEXICO     )  
  )ss.  
COUNTY OF SANTA FE     )


BEFORE EXAMINER STOGNER	
OIL CONSERVATION DIVISION	
YATES	EXHIBIT NO. 8
CASE NO. 9809, 9810, 9823	

WILLIAM F. CARR, attorney in fact and authorized representative of Yates Drilling Company, the Applicant herein, being first duly sworn, upon oath, states that the notice provisions of Rule 1207 of the New Mexico Oil Conservation Division have been complied with, that Applicant has caused to be conducted a good faith diligent effort to find the correct addresses of all interested persons entitled to receive notice in the above-

referenced cases as shown by Exhibit "A" attached hereto, and that pursuant to Rule 1207, notice has been given at the correct addresses provided by such rule.

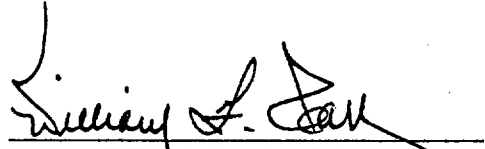  
WILLIAM F. CARR

SUBSCRIBED AND SWORN to before me this 28th day of November, 1989.

  
Notary Public

My Commission Expires:

January 7, 1991

EXHIBIT A

Mr. Raymond Spears  
307 N. 7th Street  
Lovington, New Mexico 88260

Enserch Exploration, Inc.  
6 Desta Drive, Suite 5250  
Midland, Texas 79705  
Attn: Steve Wright

Reading & Bates Petroleum Company  
2412 N. Grandview, Suite 201  
Odessa, Texas 79761  
Attn: Don Kipgen

Rich Partnership  
Post Office Box 3402  
Casper, Wyoming 82602  
Attn: Ken Snyder

Dalport Oil Corporation  
3471 Interfirst One  
Dallas, Texas 75202

C. R. Gallagher, Jr.  
1005 Texas Commerce Bank  
1208 - 14th Street  
Lubbock, Texas 79401

Robin C. Herndon, III  
c/o Robin C. Herndon, Jr.  
Post Office Box 2031  
Mobile, Alabama 36601

Floyd V. Doyal  
919 E. McGaffey  
Roswell, New Mexico 88201

Paul J. Doyal  
Post Office Box 2877  
Roswell, New Mexico 88201

Mrs. J. D. Spears  
Box 1017  
Carlsbad, New Mexico 88220

Phillips Petroleum Company  
4001 Penbrook  
Odessa, Texas 79762  
Attn: Frank Hulse

Burk Royalty  
Post Office Box BRC  
Wichita Falls, Texas 76307

Great Western Drilling Company  
Box 1659  
Midland, Texas 79702  
Attn: Pat L. Shannahan

E. S. Mayer, Jr.  
c/o Reading & Bates Petroleum Co.  
2412 N. Grandview, Suite 201  
Odessa, Texas 79761  
Attn: Don Kipgen

Gregory J. Gallagher  
8550 Kathy Freeway, Suite 208  
Houston, Texas 77024

Yates Drilling Company  
105 South Fourth Street  
Artesia, New Mexico 88210  
Attn: Toby Rhodes

Clarence Doyal  
308 S. Kansas  
Roswell, New Mexico 88201

F. G. Breckenridge  
Post Office Drawer 4667  
Midland, Texas 79704

Etoile M. Bennett  
c/o F.G. Breckenridge  
Post Office Drawer 3000  
Midland, Texas 79702

G & P Exploration, Inc.  
4800 San Felipe, Suite 620  
Houston, Texas 77056  
Attn: John W.T. Mediary

Mary B. Gallagher  
1005 Texas Commerce Bank Bldg.  
1208 - 14th Street  
Lubbock, Texas 79401

R.F. Partnership, Ltd.  
Post Office Box 243  
Wheat Ridge, Colorado 80034

Raymond Stanley Herndon  
c/o Robin C. Herndon, Jr.  
Post Office Box 1283  
Mobile, Alabama 36601

Charleen G. Knieriem  
10889 Wilshire Blvd.  
Suite 1100  
Los Angeles, California 90024

Natalie G. Pope  
10889 Wilshire Blvd., Suite 1100  
Los Angeles, California 90024

Veronica Herndon  
Post Office Box 1283  
Mobile, Alabama 36601

Frances Herndon  
Post Office Box 1283  
Mobile, Alabama 36601

Christine Gallagher Seger  
4607 - 20th Street  
Lubbock, Texas 79407

W. G. Ross  
Post Office Box 86  
Midland, Texas 79702

Erlon E. Nowell  
2735 South St. Paul  
Denver, Colorado 80210

George Globe  
Post Office Box 40577  
Bakersfield, California 93384

C. E. Strange  
Post Office Box 6438  
Incline Village, Nevada 89450

Susan Gallagher Grey  
1322 Marc Anthony Drive  
Baton Rouge, Louisiana 70816

Charles Bernard Gallagher  
1380 Asbury  
Winnetka, Illinois 60093

Mary G. Herndon  
Post Office Box 1283  
Mobile, Alabama 36601

Mary Herndon Ray  
Post Office Box 1283  
Mobile, Alabama 36601

Peter G. Herndon  
Post Office Box 1283  
Mobile, Alabama 36601

William G. Pope, Jr.  
4417 Tracy  
Meraux, Louisiana 70075

Mary Margaret Pope  
8550 Katy Freeway, Suite 208  
Houston, Texas 77024

Marguerite Gallagher Price  
8550 Katy Freeway, Suite 208  
Houston, Texas 77024

Gregory Charles Gallagher  
8550 Katy Freeway, Suite 208  
Houston, Texas 77024

Delphine Pope Keller  
9330 NE Schuyler  
Portland, Oregon 97220

Mary Knieriem Taylor  
4535 Miller Oak Drive  
Auburn, California 95603

Veda D. Williamson  
c/o United New Mexico Bank  
Post Office Box 1977  
Roswell, New Mexico 88201

Louis Doyal  
810 Meadow Place  
Roswell, New Mexico 88201

Ruth J. Penka  
c/o James T. Hill, Attorney  
Post Office Box 421  
Durham, North Carolina 27702

Natalie Pope  
8550 Katy Freeway, Suite 208  
Houston, Texas 77024

Stephen Lawrence Knieriem  
8550 Katy Freeway, Suite 208  
Houston, Texas 77024

Michael J. Gallagher  
8550 Katy Freeway, Suite 208  
Houston, Texas 77024

Christopher W. Knieriem  
Post Office Box 5404  
Petaleuma, California 94953

Kathleen Gallagher Cooper  
Post Office Box 814  
Vacaville, California 95688

Dorothy Vargas  
2055 Dalis  
Concord, California 94520

Leo Doyal  
Box 183  
Elida, New Mexico 88116

CAMPBELL & BLACK, P.A.

LAWYERS

JACK M. CAMPBELL  
BRUCE D. BLACK  
MICHAEL B. CAMPBELL  
WILLIAM F. CARR  
BRADFORD C. BERGE  
MARK F. SHERIDAN  
J. SCOTT HALL  
JOHN H. BEMIS  
WILLIAM P. SLATTERY  
PATRICIA A. MATTHEWS

JEFFERSON PLACE  
SUITE 1 - 110 NORTH GUADALUPE  
POST OFFICE BOX 2208  
SANTA FE, NEW MEXICO 87504-2208  
TELEPHONE: (505) 988-4421  
TELECOPIER: (505) 983-6043

November 8, 1989

**CERTIFIED MAIL**  
**RETURN RECEIPT REQUESTED**

TO ALL AFFECTED INTEREST OWNERS IN THE CACTUS QUEEN UNIT:


Re: Applications of Yates Drilling Company for Approval of Waterflood Projects,  
Chaves County, New Mexico

Gentlemen:

This letter is to advise you that Yates Drilling Company has filed the enclosed applications with the New Mexico Oil Conservation Division seeking authority to institute waterflood projects by injection of water into the Queen formation in its proposed Cactus Queen Unit, underlying portions of Sections 27 and 34, and on its adjoining Doyal lease in Sections 26, 27 and 34, both in Township 12 South, Range 31 East, Southeast Chaves Queen Field, Chaves County, New Mexico.

This application has been set for hearing before an Examiner of the Oil Conservation Division on November 29, 1989. You do not need to be present at the hearing, but failure to appear at the hearing or otherwise become a party of record in this case will preclude you from challenging this matter at a later date.

Very truly yours,

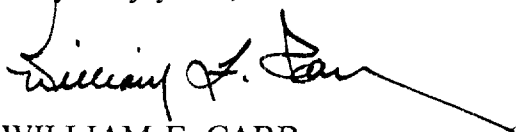

WILLIAM F. CARR  
ATTORNEY FOR YATES DRILLING COMPANY  
WFC:mlh

P-106 679 097

RECEIPT FOR CERTIFIED MAIL  
REQUIRES INSURANCE COVERAGE PRIOR TO USE  
NOT FOR INTERNATIONAL MAIL

Dalport Oil Corporation  
3471 Interfirst One  
Dallas, TX 75202

Postage	\$
Certified Fee	
Special Delivery Fee	
Restricted Delivery Fee	
Return Receipt showing to whom and Date Delivered	
Return Receipt showing to whom Date and Address of Delivery	
TOTAL Postage and Fees	\$ 4.15
Postmark or Date	NOV 8 - 1989

PS Form 3800, June 1985

**SENDER: Complete items 1 and 2 when additional services are desired, and complete items 3 and 4.**  
Put your address in the "RETURN TO" space on the reverse side. Failure to do this will prevent the card from being returned to you. The return receipt fee will provide you the name of the person delivered to and the date of delivery. For additional fees the following services are available. Consult postmaster for fees and check boxes for additional service(s) requested.  
1.  Show to whom delivered, date, and addressee's address. 2.  Restricted Delivery (Extra charge)

3. Article Addressed to:  
Dalport Oil Corporation  
3471 Interfirst One  
Dallas, TX 75202

4. Article Number  
P-106 679 097

Type of Service:  
 Registered  
 Certified  
 Express Mail  
 Insured  
 COD  
 Return Receipt for Merchandise  
 Always obtain signature of addressee or agent and DATE DELIVERED.

5. Addressee's Address (ONLY if requested and fee paid)

6. Signature - Agent  
X *Victoria Bruce*

7. Date of Delivery  
*11-10-89*

8. Signature - Address  
X

PS Form 3811, Mar. 1988 \* U.S.G.P.O. 1988-212-865 DOMESTIC RETURN RECEIPT

P-106 679 096

RECEIPT FOR CERTIFIED MAIL

NO POSTAGE AND COVERAGE FEES  
APPLY FOR INTERNATIONAL MAIL

Rich Partnership  
Post Office Box 3402  
Casper, Wyoming 82602  
Attn: Ken Snyder

Postage	\$
Certified Fee	
Special Delivery Fee	
Restricted Delivery Fee	
Return Receipt showing to whom and Date Delivered	
Return Receipt showing to whom Date, and Address of Delivery	
TOTAL Postage and Fees	\$ 4.15
Postmark or Date	NOV 8 - 1989

PS Form 3800, June 1985

**SENDER: Complete items 1 and 2 when additional services are desired, and complete items 3 and 4.**  
 Put your address in the "RETURN TO". Space on the reverse side. Failure to do this will prevent the card from being returned to you. The return receipt fee will provide you the name of the person delivered to and the date of delivery. For additional fees the following services are available. Consult postmaster for fees and check boxes for additional service(s) requested.  
 1.  Show to whom delivered, date, and addressee's address. 2.  Restricted Delivery (Extra charge)  
 3. Article Addressed to:  
 Rich Partnership  
 Post Office Box 3402  
 Casper, Wyoming 82602  
 Attn: Ken Snyder  
 4. Article Number  
 P-106679 096  
 Type of Service:  
 Registered  Insured  
 Certified  COD  
 Express Mail  Return Receipt for Merchandise  
 Always obtain signature of addressee or agent and DATE DELIVERED.  
 5. Addressee's Address (ONLY if requested and fee paid)  
 6. Signature - Address  
 X  
 6. Signature - Agent  
 X  
 7. Date of Delivery  
 11-10-89  
 PS Form 3811, Mar. 1988 \* U.S.G.P.O. 1988-212-865 DOMESTIC RETURN RECEIPT



P-106 679 095

U.S. AIR MAIL  
FIRST CLASS PERMIT NO. 100  
ODessa, TEXAS

Reading & Bates  
Petroleum Company  
2412 N. Grandview, # 201  
Odessa, TX 79761  
Attn: Don Kipgen

Postage	\$
Certified Fee	
Special Delivery Fee	
Restricted Delivery Fee	
Return Receipt showing to whom and Date Delivered	
Return Receipt showing to whom, Date, and Address of Delivery	
TOTAL Postage and Fees	\$ 4.15
Postmark or Date	NOV 8 - 1989

PS Form 3800, June 1985

**SENDER:** Complete items 1 and 2 when additional services are desired, and complete items 3 and 4.

Put your address in the "RETURN TO" space on the reverse side. Failure to do this will prevent this card from being returned to you. The return receipt fee will provide you the name of the person delivered to and the date of delivery. For additional fees the following services are available. Consult postmaster for fees and check boxes for additional service(s) requested.

1.  Show to whom delivered, date, and addressee's address. (Extra charge)

2.  Restricted Delivery (Extra charge)

3. Article Addressed to:

Reading & Bates  
Petroleum Company  
2412 N. Grandview, # 201  
Odessa, TX 79761  
Attn: Don Kipgen

4. Article Number  
P106679 095

Type of Service:  
 Registered  
 Certified  
 Express Mail  
 Insured  
 COD  
 Return Receipt for Merchandise

Always obtain signature of addressee or agent and DATE DELIVERED.

5. Addressee's Address (ONLY if requested and fee paid)

6. Signature - Agent  
X *Philip Kipgen*

7. Date of Delivery  
X 11/8/89

8. Addressee's Address (ONLY if requested and fee paid)

PS Form 3811, Mar 1988 \* U.S.G.P.O. 1988-212-865 DOMESTIC RETURN RECEIPT

P-106 679 094

RECEIPT FOR CERTIFIED MAIL

NO POSTAGE NECESSARY IF MAILED IN THE UNITED STATES

Enserch Exploration, Inc.  
 6 Desta Drive, Suite 5250  
 Midland, TX 79705  
 Attn: Steve Wright

Postage	\$
Certified Fee	
Special Delivery Fee	
Restricted Delivery Fee	
Return Receipt showing to whom and Date Delivered	
Return Receipt showing to whom, Date, and Address of Delivery	
TOTAL Postage and Fees	\$ 4.15
Postmark or Date	NOV 8 - 1989

PS Form 3800, June 1985

**SENDER:** Complete items 1 and 2 when additional services are desired, and complete items 3 and 4.  
 Put your address in the "RETURN TO" Space on the reverse side. Failure to do this will prevent this card from being returned to you. The return receipt fee will provide you the name of the person delivered to and the date of delivery. For additional fees the following services are available. Consult postmaster for fees and check boxes for additional service(s) requested.

1.  Show to whom delivered, date, and addressee's address. (Extra charge)  
 2.  Restricted Delivery (Extra charge)

3. Article Addressed to:  
 Enserch Exploration, Inc.  
 6 Desta Drive, Suite 5250  
 Midland, TX 79705  
 Attn: Steve Wright

4. Article Number: P106 679 094

Type of Service:  
 Registered  
 Certified  
 Express Mail  
 Insured  
 COD  
 Return Receipt for Merchandise

Always obtain signature of addressee or agent and DATE DELIVERED.

5. Signature - Address  
 X

6. Signature - Agent  
 X *Steve Wright*

7. Date of Delivery  
 11-14

8. Addressee's Address (ONLY if requested and fee paid)

PS Form 3811, Mar. 1988 \* U.S.G.P.O. 1988-212-885 DOMESTIC RETURN RECEIPT

P-106 679 093

RECEIPT FOR CERTIFIED MAIL  
NO POSTAGE NECESSARY IF MAILED IN THE UNITED STATES  
NO POSTAGE NECESSARY IF MAILED IN THE UNITED STATES

Mr. Raymond Spears  
307 N. 7th Street  
Lovington, NM 88260

Postage	5
Certified Fee	
Special Delivery Fee	
Restricted Delivery Fee	
Return Receipt showing to whom and Date Delivered	
Return Receipt showing to whom, Date, and Address of Delivery	
TOTAL Postage and Fees	\$ 4.15
Postmark or Date	NOV 8 - 1989

PS Form 3800, June 1985

**SENDER:** Complete items 1 and 2 when additional services are desired, and complete items 3 and 4. Put your address in the "RETURN TO" space on the reverse side. Failure to do this will prevent the card from being returned to you. The return receipt fee will provide you the name of the person delivered to and the date of delivery. For additional fees the following services are available. Consult postmaster for fees and check boxes for additional services requested.

1.  Show to whom delivered, date, and addressee's address. 2.  Restricted Delivery (Extra charge)

3. Article Addressed to: Mr. Raymond Spears  
307 N. 7th Street  
Lovington, NM 88260

4. Article Number P 106-679-093

Type of Service:  
 Registered  
 Certified  
 Express Mail  
 Insured  
 COD  
 Return Receipt for Merchandise

Always obtain signature of addressee or agent and DATE DELIVERED.

8. Addressee's Address (ONLY if requested and fee paid)

5. Signature - Address  
X Raymond Spears

6. Signature - Agent  
X

7. Date of Delivery  
X 11-13-89

PS Form 3811, Mar. 1988 \* U.S.G.P.O. 1988-212-865 DOMESTIC RETURN RECEIPT

P-106 679 099

RECEIPT FOR POSTAGE MAIL  
NO POSTAGE NECESSARY IF MAILED IN THE UNITED STATES

Robin C. Herndon, III  
c/o Robin C. Herndon, Jr.  
Post Office Box 2031  
Mobile, Alabama 36601

Postage	\$
Certified Fee	
Special Delivery Fee	
Restricted Delivery Fee	
Return Receipt showing to whom and Date Delivered	
Return Receipt showing to whom Date, and Address of Delivery	
TOTAL Postage and Fees	\$ 4.15
Postmark or Date <b>NOV 8 - 1989</b>	

PS Form 3800, June 1985

**SENDER:** Complete items 1 and 2 when additional services are desired, and complete items 3 and 4.  
 Put your address in the "RETURN TO" space on the reverse side. Failure to do this will prevent the card from being returned to you. The return receipt fee will provide you the name of the person delivered to and the date of delivery. For additional fees the following services are available. Consult postmaster for fees and check boxes for additional service(s) requested.  
 Show to whom delivered, date, and addressee's address. 2.  Restricted Delivery (Extra charge)

3. Article Addressed to:  
 C. R. Gallagher, Jr.  
 1005 Texas Commerce Bank  
 1208 - 14th Street  
 Lubbock, Texas 79401

4. Article Number  
 P106679 098

Type of Service:  
 Registered  
 Certified  
 Express Mail  
 Insured  
 COD  
 Return Receipt for Merchandise

Always obtain signature of addressee or agent and DATE DELIVERED.  
 8. Addressee's Address (ONLY if requested and fee paid)

5. Signature - Address  
 X

6. Signature - Agent  
 X *C. R. Gallagher by Date*

7. Date of Delivery  
 11/08/89

PS Form 3811, Mar. 1988 \* U.S.G.P.O. 1988-212-865 DOMESTIC RETURN RECEIPT

P-106 679 098

RECEIVED WITH CERTIFIED MAIL  
 NOV 8 1989

C. R. Gallagher, Jr.  
 1005 Texas Commerce Bank  
 1208 - 14th Street  
 Lubbock, Texas 79401

Postage	S
Certified Fee	
Special Delivery Fee	
Restricted Delivery Fee	
Return Receipt showing to whom and Date Delivered	
Return Receipt showing to whom Date and Address of Delivery	
TOTAL Postage and Fees	S 4.15
Postmark or Date	NOV 8 - 1989

PS Form 3800, June 1985

P-106 679 100

RECEIPT FOR CERTIFIED MAIL

NO IN GRANDE CAJONIA IL PROV. EPID  
NE. AIR INTERNATIONAL MAIL

E. S. Mayer, Jr.  
c/o Reading & Bates  
Petroleum Company  
2412 N. Grandview, # 201  
Odessa, TX 79761  
Attn: Don Kipgen

Postage	
Certified Fee	
Special Delivery Fee	
Restricted Delivery Fee	
Return Receipt showing to whom and Date Delivered	
Return Receipt showing to whom Date and Address of Delivery	
TOTAL Postage and Fees	\$ 4.15
Postmark or Date	NOV 8 - 1989

PS Form 3800, June 1985

**SENDER:** Complete items 1 and 2 when additional services are desired, and complete items 3 and 4.  
Put your address in the "RETURN TO" Space on the reverse side. Failure to do this will prevent this card from being returned to you. The return receipt fee will provide you the name of the person delivered to and the date of delivery. For additional fees the following services are available. Consult postmaster for fees and check boxes for additional service(s) requested.

1.  Show to whom delivered, date, and addressee's address. **2.**  Restricted Delivery (Extra charge)

3. Article Addressed to:  
E.S. Mayer, Jr.  
c/o Reading & Bates  
Petroleum Company  
2412 N. Grandview, # 201  
Odessa, TX 79761  
Attn: Don Kipgen

4. Article Number  
P-106679100

Type of Service:  
 Registered  
 Certified  
 Express Mail  
 Insured  
 COD  
 Return Receipt for Merchandise

Always obtain signature of addressee or agent and DATE DELIVERED.

5. Signature - Address  
X *Hubby Allen*

6. Signature - Agent  
X

7. Date of Delivery  
11-10-89

8. Addressee's Address (ONLY if requested and fee paid)

PS Form 3811, Mar. 1988 \* U.S.G.P.O. 1988-212-865 DOMESTIC RETURN RECEIPT

P-106 679 106

RECEIPT FOR CERTIFIED MAIL  
NO INSURANCE COVERAGE PROVIDED  
EXCEPT FOR INTERNATIONAL MAIL

Phillips Petroleum Co.  
4001 Penbrook  
Odessa, TX 79762  
Attn: Frank Hulse

Postage	\$
Certified Fee	
Special Delivery Fee	
Restricted Delivery Fee	
Return Receipt showing to whom and Date Delivered	
Return Receipt showing to whom Date, and Address of Delivery	
TOTAL Postage and Fees	\$ 4.15
Postmark or Date	NOV 8 - 1989

PS Form 3800, June 1985

PS Form 3811, Mar. 1988

\* U.S.G.P.O. 1988-212-865

DOMESTIC RETURN RECEIPT

**SENDER:** Complete items 1 and 2 when additional services are desired, and complete items 3 and 4.

Put your address in the "RETURN TO" Space on the reverse side. Failure to do this will prevent this card from being returned to you. The return receipt fee will provide you the name of the person delivered to and the date of delivery. For additional fees the following services are available. Consult postmaster for fees and check boxes for additional service(s) requested.

1. Show to whom delivered, date, and addressee's address.  2. Restricted Delivery (Extra charge)

**3. Article Addressed to:** Phillips Petroleum Co.  
4001 Penbrook  
Odessa, TX 79762  
Attn: Frank Hulse

**4. Article Number:** 106 679 106

Type of Service:  
 Registered  
 Certified  
 Express Mail  
 Insured  
 COD  
 Return Receipt for Merchandise

Always obtain signature of addressee or agent and DATE DELIVERED.

**5. Addressee's Address (ONLY if requested and fee paid)**

**6. Signature - Agent**  
X *[Signature]*

**7. Date of Delivery**  
11-8-89

P-106 679 105

RECEIPT FOR CERTIFIED MAIL  
 RECEIPT FOR CERTIFIED MAIL  
 RECEIPT FOR CERTIFIED MAIL

Yates Drilling Company  
 105 South Fourth Street  
 Artesia, NM 88210  
 Attn: Toby Rhodes

Postage	S
Certified Fee	
Special Delivery Fee	
Restricted Delivery Fee	
Return Receipt showing to whom and Date Delivered	
Return Receipt showing to whom Date and Address of Delivery	
TOTAL Postage and Fees	S 4.15
Postmark or Date	NOV 8 - 1989

PS Form 3800, June 1985

**SENDER: Complete items 1 and 2 when additional services are desired, and complete items 3 and 4.**  
 Put your address in the "RETURN TO" Space on the reverse side. Failure to do this will prevent the card from being returned to you. The return receipt fee will provide you the name of the person delivered to and the date of delivery. For additional fees the following services are available. Consult postmaster for fees and check boxes for additional service(s) requested.

1.  Show to whom delivered, date, and addressee's address. 2.  Restricted Delivery (Extra charge)

3. Article Addressed to:  
 Yates Drilling Company  
 105 South Fourth Street  
 Artesia, NM 88210  
 Attn: Toby Rhodes

4. Article Number: P-106 679 105

Type of Service:  
 Registered  
 Certified  
 Express Mail  
 Insured  
 COD  
 Return Receipt for Merchandise

Always obtain signature of addressee or agent and DATE DELIVERED.

5. Signature - Address  
 X

6. Signature - Agent  
 X

7. Date of Delivery  
 11-9-89

8. Addressee's Address (ONLY if requested and fee paid)

PS Form 3811, Mar. 1988 \* U.S.G.P.O. 1988-212-865 DOMESTIC RETURN RECEIPT



● **SENDER:** Complete items 1 and 2 when additional services are desired, and complete items 3 and 4. Put your address in the "RETURN TO" Space on the reverse side. Failure to do this will prevent this card from being returned to you. The return receipt fee will provide you the name of the person delivered to and the date of delivery. For additional fees the following services are available. Consult postmaster for fees and check box(es) for additional service(s) requested.

1.  Show to whom delivered, date, and addressee's address. 2.  Restricted Delivery (Extra charge)

3. Article Addressed to:

Gregory J. Gallagher  
 8550 Kathy Freeway  
 Suite 208  
 Houston, Texas 77024

4. Article Number

P-106 679 104

Type of Service:  
 Registered  
 Certified  
 Express Mail  
 Insured  
 COD  
 Return Receipt for Merchandise

Always obtain signature of addressee or agent and DATE DELIVERED.  
 8. Addressee's Address (ONLY if requested and fee paid)

5. Signature - Address

X

6. Signature - Agent

X

*[Handwritten Signature]*

7. Date of Delivery

11-10-89

PS Form 3811, Mar. 1988 \* U.S.G.P.O. 1988-212-865

DOMESTIC RETURN RECEIPT

P-106 679 104

RECEIVED BY THE ADDRESSEE

Gregory J. Gallagher  
 8550 Kathy Freeway  
 Suite 208  
 Houston, Texas 77024

Postage	\$
Certified Fee	
Special Delivery Fee	
Restricted Delivery Fee	
Return Receipt showing to whom and Date Delivered	
Return Receipt showing to whom Date, and Address of Delivery	
TOTAL Postage and Fees	\$ 4.15
Postmark or Date	NOV 8 - 1989

PS Form 3800, June 1985

**SENDER:** Complete items 1 and 2 when additional services are desired, and complete items 3 and 4.  
 Put your address in the "RETURN TO" space on the reverse side. Failure to do this will prevent this card from being returned to you. The return receipt fee will provide you the name of the person delivered to and the date of delivery. For additional fees the following services are available. Consult postmaster for fees and check boxes for additional service(s) requested.  
 1.  Show to whom delivered, date, and addressee's address. 2.  Restricted Delivery (Extra charge)

3. Article Addressed to:

Great Western Drilling  
 Box 1659  
 Midland, TX 79702  
 Attn: Pat L. Shannahan

4. Article Number

P106 679 103

Type of Service:  
 Registered  
 Certified  
 Insured  
 Express Mail  
 COD  
 Return Receipt for Merchandise

Always obtain signature of addressee or agent and DATE DELIVERED.

8. Addressee's Address (ONLY if requested and fee paid)

5. Signature - Address  
 X

6. Signature - Agent  
 X

7. Date of Delivery

NOV 1 1989

PS Form 3811, Mar. 1988 \* U.S.G.P.O. 1988-212-865 DOMESTIC RETURN RECEIPT

P-106 679 103

RECEIPT FOR DELIVERED MAIL  
 RECEIPT FOR DELIVERED MAIL  
 RECEIPT FOR DELIVERED MAIL

Great Western Drilling  
 Box 1659  
 Midland, TX 79702  
 Attn: Pat L. Shannahan

Postage	\$
Certified Fee	
Special Delivery Fee	
Restricted Delivery Fee	
Return Receipt showing to whom and Date Delivered	
Return Receipt showing to whom, Date, and Address of Delivery	
TOTAL Postage and Fees	\$ 4.15
Postmark or Date	NOV 8 - 1989

PS Form 3800, June 1985

● **SENDER:** Complete items 1 and 2 when additional services are desired, and complete items 3 and 4.  
 Put your address in the "RETURN TO" Space on the reverse side. Failure to do this will prevent the card from being returned to you. The return receipt fee will provide you the name of the person delivered to and the date of delivery. For additional fees the following services are available. Consult postmaster for fees and check boxes for additional service(s) requested.  
 1.  Show to whom delivered, date, and addressee's address. 2.  Restricted Delivery (Extra charge)

3. Article Addressed to:

Burk Royalty  
 Post Office Box BRC  
 Wichita Falls, TX 76307

4. Article Number

PS106 679 102

Type of Service:  
 Registered  
 Certified  
 Express Mail  
 Insured  
 COD  
 Return Receipt for Merchandise

Always obtain signature of addressee or agent and DATE DELIVERED.

8. Addressee's Address (ONLY if requested and fee paid)

6. Signature - Address  
 X *[Signature]*

6. Signature - Agent  
 X

7. Date of Delivery  
 NOV 13 1989

PS Form 3811, Mar. 1988 \* U.S.G.P.O. 1988-212-865 DOMESTIC RETURN RECEIPT

P-106 679 102

RECEIPT FOR RETURNED MAIL  
 NO POSTAGE NECESSARY IF MAILED IN THE UNITED STATES

Burk Royalty  
 Post Office Box BRC  
 Wichita Falls, TX 76307

Postage	\$	
Certified Fee		
Special Delivery Fee		
Restricted Delivery Fee		
Return Receipt showing to whom and Date Delivered		
Return Receipt showing to whom Date and Address of Delivery		
TOTAL Postage and Fees	\$	4.15
Postmark or Date	NOV 8 - 1989	



YATES DRILLING COMPANY  
PROPOSED CACTUS QUEEN VOLUNTARY UNIT  
CHAVES COUNTY, NEW MEXICO

NMOCD FORM C-108

## APPLICATION FOR AUTHORIZATION TO INJECT

I. Purpose:  Secondary Recovery  Pressure Maintenance  Disposal  Storage  
Application qualifies for administrative approval?  yes  no

II. Operator: Yates Drilling Company

Address: 105 South 4th Street, Artesia, New Mexico 88210

Contact party: Tobin L. Rhodes Phone: (505) 748-1471

III. Well data: Complete the data required on the reverse side of this form for each well proposed for injection. Additional sheets may be attached if necessary.

IV. Is this an expansion of an existing project?  yes  no  
If yes, give the Division order number authorizing the project \_\_\_\_\_

V. Attach a map that identifies all wells and leases within two miles of any proposed injection well with a one-half mile radius circle drawn around each proposed injection well. This circle identifies the well's area of review.

VI. Attach a tabulation of data on all wells of public record within the area of review which penetrate the proposed injection zone. Such data shall include a description of each well's type, construction, date drilled, location, depth, record of completion, and a schematic of any plugged well illustrating all plugging detail.

VII. Attach data on the proposed operation, including:

1. Proposed average and maximum daily rate and volume of fluids to be injected;
2. Whether the system is open or closed;
3. Proposed average and maximum injection pressure;
4. Sources and an appropriate analysis of injection fluid and compatibility with the receiving formation if other than reinjected produced water; and
5. If injection is for disposal purposes into a zone not productive of oil or gas and within one mile of the proposed well, attach a chemical analysis of the disposal zone formation water (may be measured or inferred from existing literature, studies, nearby wells, etc.).

VIII. Attach appropriate geological data on the injection zone including appropriate lithologic detail, geological name, thickness, and depth. Give the geologic name, and depth to bottom of all underground sources of drinking water (aquifers containing waters with total dissolved solids concentrations of 10,000 mg/l or less) overlying the proposed injection zone as well as any such source known to be immediately underlying the injection interval.

IX. Describe the proposed stimulation program, if any.

X. Attach appropriate logging and test data on the well. (If well logs have been filed with the Division they need not be resubmitted.)

XI. Attach a chemical analysis of fresh water from two or more fresh water wells (if available and producing) within one mile of any injection or disposal well showing location of wells and dates samples were taken.

XII. Applicants for disposal wells must make an affirmative statement that they have examined available geologic and engineering data and find no evidence of open faults or any other hydrologic connection between the disposal zone and any underground source of drinking water.

XIII. Applicants must complete the "Proof of Notice" section on the reverse side of this form.

XIV. Certification

I hereby certify that the information submitted with this application is true and correct to the best of my knowledge and belief.

Name: Tobin L. Rhodes Title Petroleum Engineer

Signature: Tobin L. Rhodes Date: 10-13-89

\* If the information required under Sections VI, VIII, X, and XI above has been previously submitted, it need not be duplicated and resubmitted. Please show the date and circumstance of the earlier submittal.

## III. WELL DATA

A. The following well data must be submitted for each injection well covered by this application. The data must be both in tabular and schematic form and shall include:

- (1) Lease name; Well No.; location by Section, Township, and Range; and footage location within the section.
- (2) Each casing string used with its size, setting depth, sacks of cement used, hole size, top of cement, and how such top was determined.
- (3) A description of the tubing to be used including its size, lining material, and setting depth.
- (4) The name, model, and setting depth of the packer used or a description of any other seal system or assembly used.

Division District offices have supplies of Well Data Sheets which may be used or which may be used as models for this purpose. Applicants for several identical wells may submit a "typical data sheet" rather than submitting the data for each well.

B. The following must be submitted for each injection well covered by this application. All items must be addressed for the initial well. Responses for additional wells need be shown only when different. Information shown on schematics need not be repeated.

- (1) The name of the injection formation and, if applicable, the field or pool name.
- (2) The injection interval and whether it is perforated or open-hole.
- (3) State if the well was drilled for injection or, if not, the original purpose of the well.
- (4) Give the depths of any other perforated intervals and detail on the sacks of cement or bridge plugs used to seal off such perforations.
- (5) Give the depth to and name of the next higher and next lower oil or gas zone in the area of the well, if any.

## XIV. PROOF OF NOTICE

All applicants must furnish proof that a copy of the application has been furnished, by certified or registered mail, to the owner of the surface of the land on which the well is to be located and to each leasehold operator within one-half mile of the well location.

Where an application is subject to administrative approval, a proof of publication must be submitted. Such proof shall consist of a copy of the legal advertisement which was published in the county in which the well is located. The contents of such advertisement must include:

- (1) The name, address, phone number, and contact party for the applicant;
- (2) the intended purpose of the injection well; with the exact location of single wells or the section, township, and range location of multiple wells;
- (3) the formation name and depth with expected maximum injection rates and pressures; and
- (4) a notation that interested parties must file objections or requests for hearing with the Oil Conservation Division, P. O. Box 20888, Santa Fe, New Mexico 87501 within 15 days.

NO ACTION WILL BE TAKEN ON THE APPLICATION UNTIL PROPER PROOF OF NOTICE HAS BEEN SUBMITTED.

---

NOTICE: Surface owners or offset operators must file any objections or requests for hearing of administrative applications within 15 days from the date this application was mailed to them.

OIL CONSERVATION DIVISION  
FORM C-108 (Supplement)

Application of Yates Drilling Company  
For a Secondary Recovery Project  
(Proposed Cactus Queen Unit)  
Voluntary Unit  
Chaves County, New Mexico

I. Purpose:

Application is made for authorization to inject water into the Queen formation underlying the boundaries of the proposed Voluntary Cactus Queen Unit. The proposed unit consists of 320 acres, more or less, of Federal, State, and Fee lands in Units J, K, M, N, O, (W/2 SE/4, E/2 SW/4, SW/4 SW/4) of Section 27, and Units B, C, D, (N/2 NW/4, NW/4 NE/4) of Section 34, Township 12 South, Range 31 East, Chaves County New Mexico. This project would be classified as a secondary recovery project with the objective of recovering hydrocarbons that will not and can not be recovered by primary means.

Many wells in the proposed unit area are primary depleted or are very near primary depletion. Our studies show that the injection of water into selected wells will result in the recovery of oil in economic quantities not otherwise recoverable. This project should provide economic benefits to all parties holding any type of interest in the unit acreage.

II. Operator:

Yates Drilling Company  
105 South Fourth Street  
Artesia, New Mexico 88210

Phone Number: (505) 748-1471

III. Injection Well Data:

A well data sheet is attached for each of the three wells proposed for water injection. Each injection well data sheet includes a downhole schematic of how each individual well will be configured if this application is approved.



IV. Existing Project:

The proposed project is not an expansion of an existing project and will be a totally new project.

V. Ownership:

A lease ownership map is attached which identifies all wells and lease ownership within two miles of any of the six proposed injection wells. A map is also attached on which the area of review has been identified by drawing a one-half mile circle around each injection well.

VI. Well Data:

There are presently sixteen wells including proposed injection wells that fall within the boundaries of the proposed unit or within the area of review. One of these wells has been plugged and abandoned, one well is temporarily abandoned, and the remaining fourteen wells are active pumping oil wells producing from the Queen formation. Available data for each of the wells is included in the attached well data sheets. Additionally a downhole schematic has been drawn depicting the one plugged and abandoned well.

VII. Project Data:

1. The proposed daily average water injection rate is approximately 200 barrels per day for each of the three proposed water injection wells. Total water injection for the unit would be 600 barrels per day. The maximum injection rate for any individual well will be based on fracture pressure as determined by step-rate pressure tests to be conducted on each injection well.

2. Produced water will be stored in covered steel storage tank(s) and in open top fiberglass tanks making the produced water system an open system. Any fresh water will be stored in a covered steel tank. Produced oil will immediately be separated from produced water. The oil will be stored in a steel covered production tank until sold.

3. Initially the injection wells may take water on a vacuum, but as the reservoir fills a positive surface injection pressure will be required to inject water. The maximum injection pressure will also be determined by proposed step-rate pressure tests. At no time prior to the step-rate tests will the injection pressure exceed a pressure limitation of 0.2 PSIG per foot of depth to the top of the injection interval.

4. The source of injection fluid will be produced water from the producing wells within the unit and fresh water from the Ogollala aquifer in the area. No commitment has been made but commercial sources of fresh water are available in the area.

5. No water compatibility problems are expected as Ogollala water has been successfully injected into the Queen formation, throughout the Caprock Queen Field, without excessive problems. Compatibility tests have been run commingling the produced water and fresh water and no adverse problems were observed.

#### VIII. Geologic Data:

The Proposed Cactus Queen Unit produces from the upper sandstone member of the Queen formation, upper Guadalupian series, Permian system. The average producing depth in the field is approximately 2989 feet. The existing producing formation will be the interval into which water will be injected.

The productive/injection interval, as indicated from a whole core analysis on the DeLuna Federal #3 (330' FNL & 1980' FEL, 34-12s-31e) and sidewall core data from numerous wells, is fine grained, friable, gray, quartz sandstone. The grains are sub-angular to sub-rounded and well sorted. The cementing material is variously from anhydrite and dolomite. The exact depositional environment is unknown. Porosity and permeability are intergranular in nature. The sandstone is not naturally fractured.

The Cactus Queen Field is a stratigraphic trap. Cementation of the sandstone results in the loss of porosity and permeability, creating a barrier on all sides with the exception of the east. A tilted oil-water contact limits the production in that direction. The oil/water contact has been established at (+1440) in the southeast end of the field and (+1446) at the northeast edge.

The primary underground source of fresh water in this area is the Ogollala formation of Tertiary age, the base of which is estimated to be 300 feet below the surface. This aquifer is protected behind the surface pipe and cement of all existing wells in the unit area. The Chinlee formation is also a fresh water aquifer which immediately underlies the Ogollala formation. The Base of the Chinlee is estimated to be approximately 500 feet below the surface in the unit area. The Chinlee is behind the production casing in all existing wells in the unit area.

IX. Stimulation Program:

Each of the currently producing wells has previously received a fracture treatment. The details of these treatments are outlined in the data sheet for each individual well. There are no plans to stimulate any of the existing wells which will be producing wells in this project.

The wells which will be injection wells may require a small clean-up acid treatment prior to injection. We plan to treat each of the proposed injection wells with 1000 to 2000 gallons of 15% hydrochloric acid. This treatment should insure that existing perforations are open and that each well will accept water or gas at the lowest possible pressure.

X. Well Logs:

Well logs for each of the existing wells in the proposed unit have previously been submitted to the Hobbs office of the NMOCD. Attached for zone identification purposes is a cross section containing portions of the logs from wells in the reservoir.

XI. Fresh Water:

The Office of the State Engineer in Roswell has a record of six wells within one mile of the proposed unit. The total depths of two of the wells are unknown, however all six wells are assumed to be producing from the Ogollala formation. Analysis reports for water taken from three of the wells are attached.

XII. Injection Zone Isolation:

Available engineering and geologic data has been examined and no evidence of open faulting or any other hydrologic connection between the injection zone and any underground source of drinking water has been found.

XIII. Proof of Notice:

A listing of off-set leasehold operators within 1/2 mile of any injection wells and the surface owners that have received a copy of this application by certified mail is attached.

XIV. Certification:

I hereby certify that the information submitted with this application is true and correct to best of my knowledge and belief.


Tobin L. Rhodes

*Tobin L. Rhodes*

Petroleum Engineer

October 13, 1989



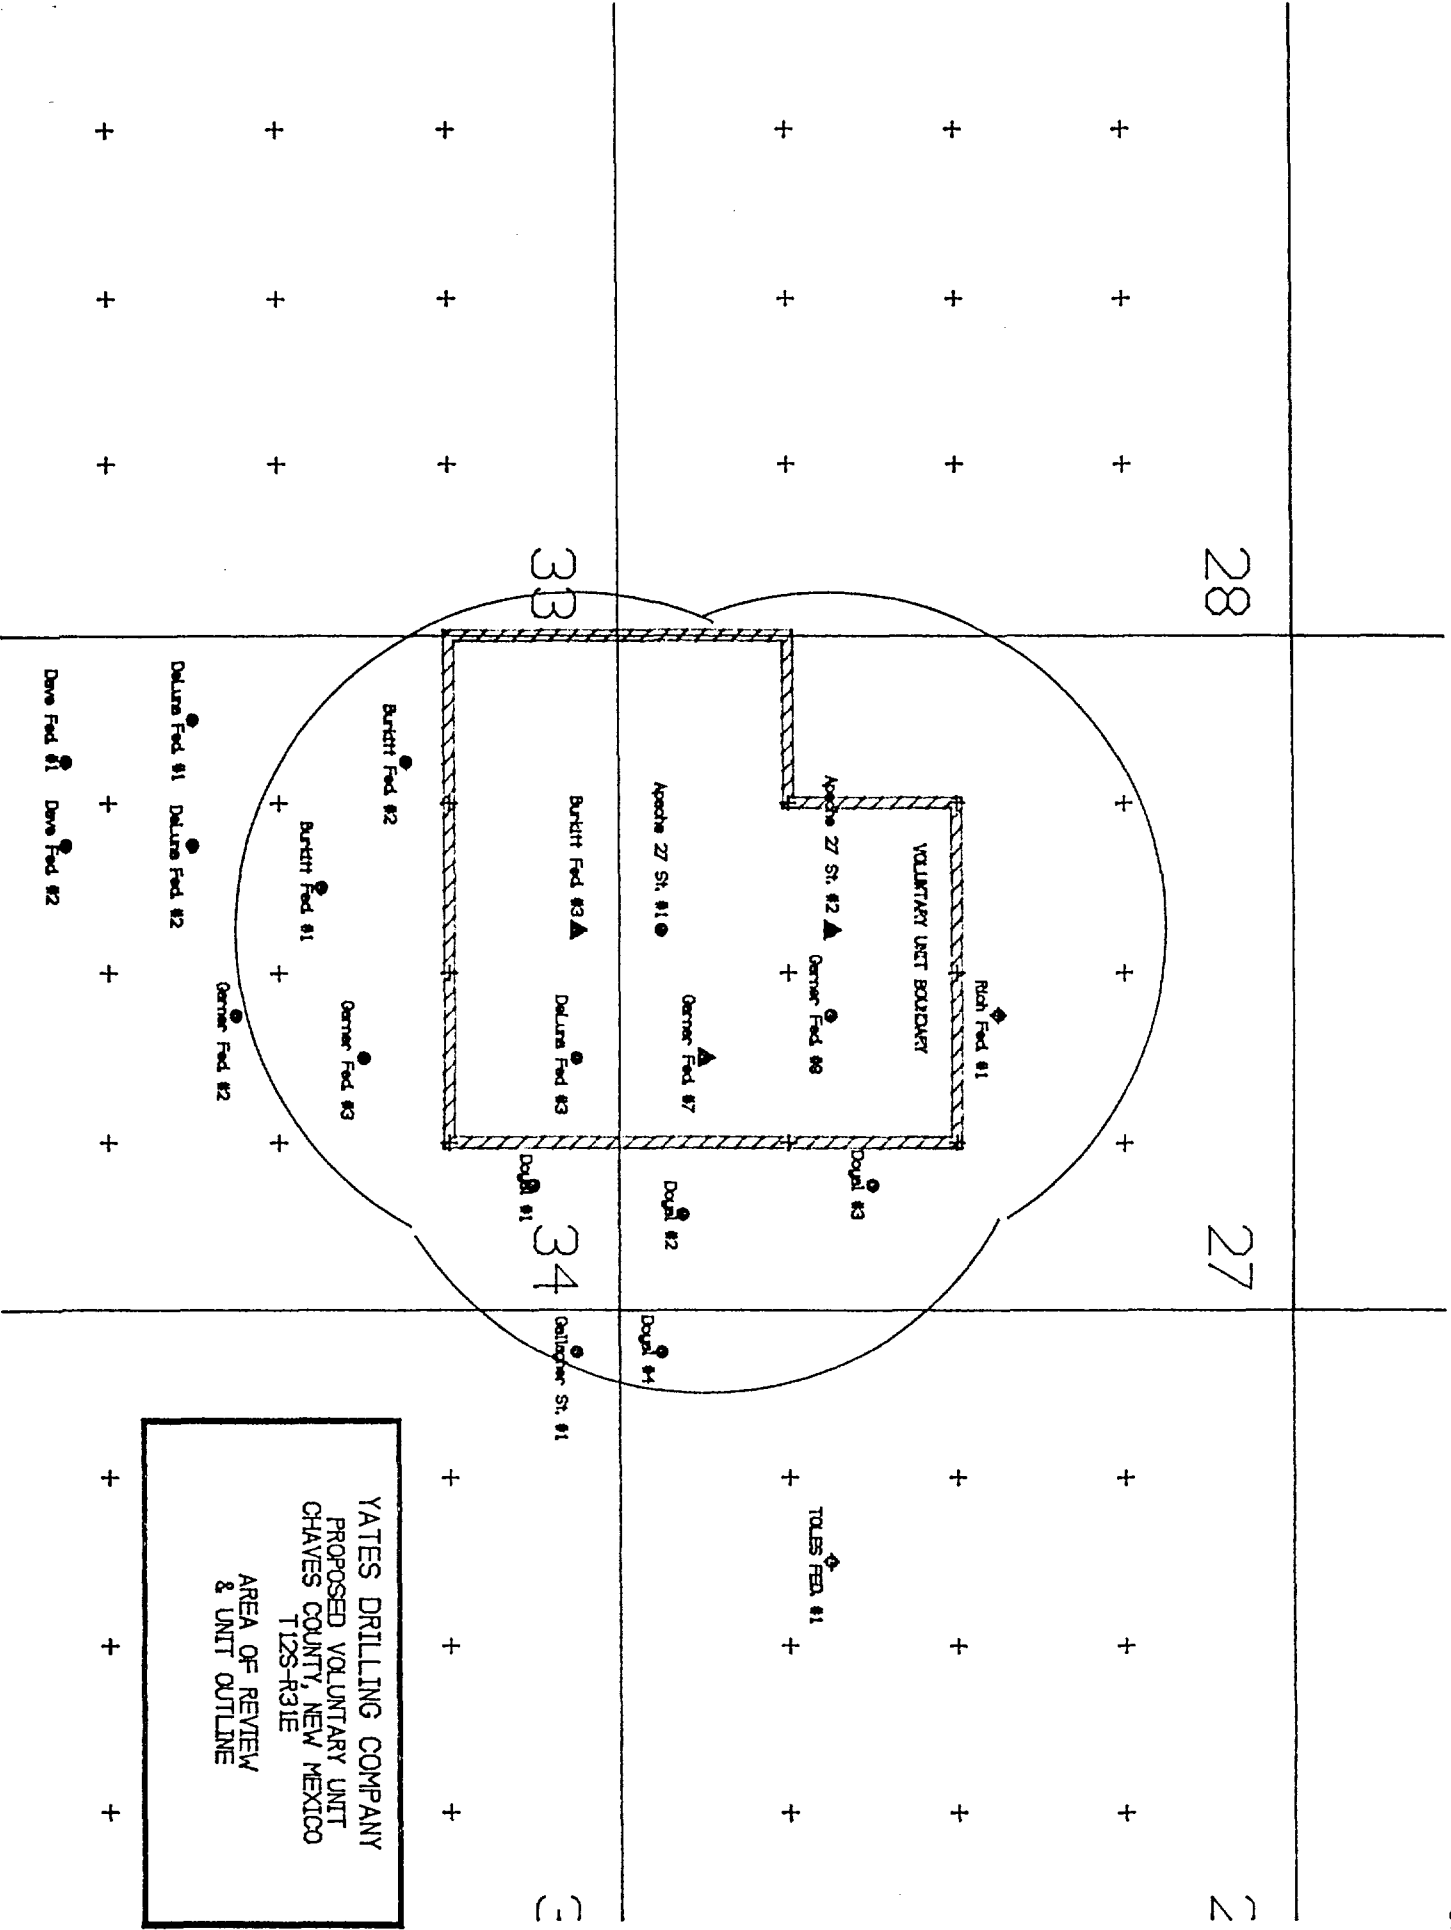

YATES DRILLING COMPANY  
 PROPOSED VOLUNTARY UNIT  
 CHAVES COUNTY, NEW MEXICO  
 T12S-R31E  
 AREA OF REVIEW  
 & UNIT OUTLINE

INJECTION WELL DATA SHEET

OPERATOR: Yates Drilling Company LEASE: Apache "27" State

WELL NO.: 2 FOOTAGE: 1650' FSL-2310' FEL SEC: 27-T12s-R31e

TUBULAR DATA

SURFACE CASING

SIZE: 8-5/8" 24# CEMENTED WITH: \_\_\_\_\_ SX.  
TOC: Surface FEET DETERMINED BY: Circulation  
HOLE SIZE: 12-1/4" SETTING DEPTH: 454

INTERMEDIATE CASING

SIZE: None CEMENTED WITH: \_\_\_\_\_ SX.  
TOC: \_\_\_\_\_ FEET DETERMINED BY: \_\_\_\_\_  
HOLE SIZE: \_\_\_\_\_ SETTING DEPTH: \_\_\_\_\_

LONG STRING

SIZE: 4-1/2" CEMENTED WITH: \_\_\_\_\_ SX.  
TOC: Surface FEET DETERMINED BY: Circulation  
HOLE SIZE: 7-7/8" SETTING DEPTH: 3150'  
TOTAL DEPTH: 3150'

INJECTION INTERVAL

2996' FEET TO 3000' FEET - PERFORATED

TUBING

TUBING SIZE: 2-3/8" LINED WITH: Plastic SET IN A  
Baker OD-1 PACKER AT: 2946' FEET

OTHER DATA

1. NAME OF INJECTION FORMATION: Queen
2. NAME OF FIELD OR POOL (IF APPLICABLE): SE Chaves Queen
3. IS THIS A NEW WELL DRILLED FOR INJECTION? No  
IF NO, FOR WHAT PURPOSE WAS THE WELL ORIGINALLY DRILLED?  
This well was drilled as a Queen producing well.
4. HAS WELL EVER BEEN PERFORATED IN ANY OTHER ZONE(S)? No  
LIST ALL SUCH PERFORATED INTERVALS AND GIVE PLUGGING  
DETAILS (SACKS OF CEMENT OR BRIDGE PLUG(S) USED): \_\_\_\_\_
5. GIVE DEPTH TO AND NAME OF ANY OVERLYING AND/OR  
UNDERLYING OIL OR GAS ZONES (POOLS) IN THIS AREA: \_\_\_\_\_  
None known.

APACHE STATE '27' #02  
NE-SW 27-T12S-R31E  
CHAVES COUNTY, NEW MEXICO


8 5/8 SURFACE CASING  
AT 454' WITH  
CEMENT CIRCULATED


2 3/8 PLASTIC LINED TUBING

INJECTION PACKER  
AT APPROX. 2950

PERFORATIONS  
2996-3000

5 1/2 PRODUCTION CASING  
AT 3150' (TD) WITH  
CEMENT CIRCULATED

 CEMENT

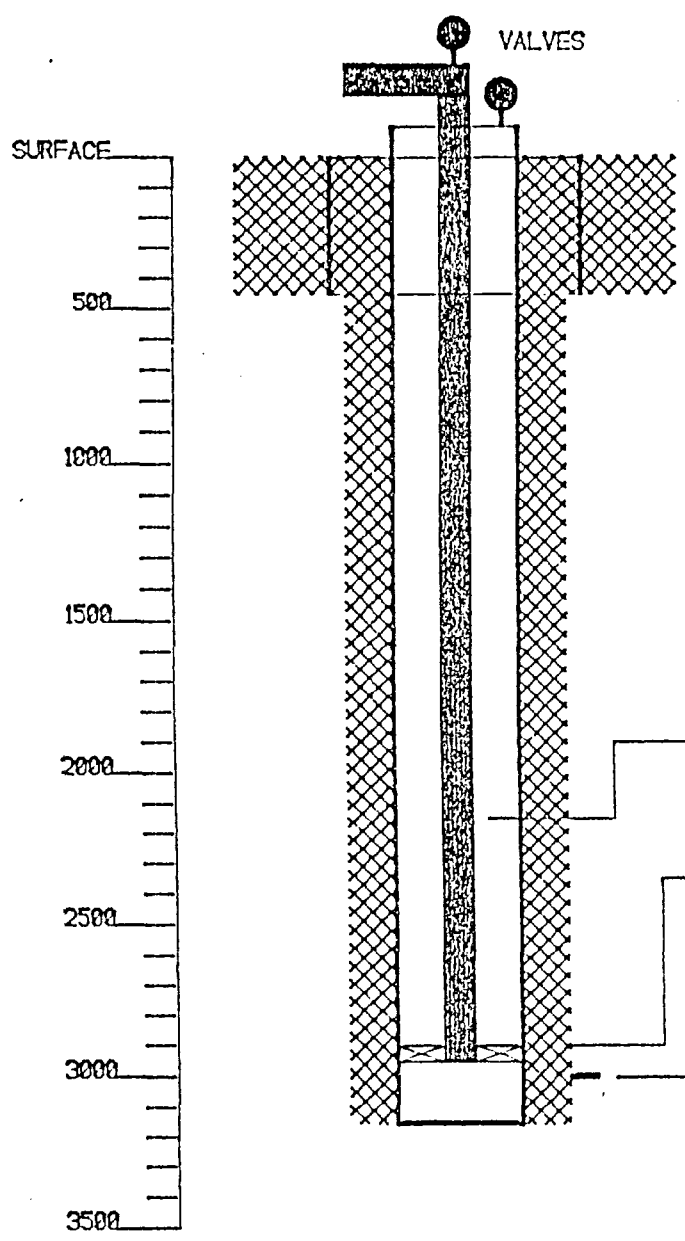



INJECTION WELL DATA SHEET

OPERATOR: Yates Drilling Co. LEASE: Burkitt Federal

WELL NO.: 3 FOOTAGE: 330' ENL-2310' FWL SEC: 34-T125-R31e

TUBULAR DATA

SURFACE CASING

SIZE: 8-5/8" 24# CEMENTED WITH: 270 SX.  
TOC: Surface FEET DETERMINED BY: Circulation  
HOLE SIZE: 12-1/4" SETTING DEPTH: 424

INTERMEDIATE CASING

SIZE: None CEMENTED WITH: \_\_\_\_\_ SX.  
TOC: \_\_\_\_\_ FEET DETERMINED BY: \_\_\_\_\_  
HOLE SIZE: \_\_\_\_\_ SETTING DEPTH: \_\_\_\_\_

LONG STRING

SIZE: 5-1/2" 14# CEMENTED WITH: 260 SX.  
TOC: 1640' FEET DETERMINED BY: Temp. Survey  
HOLE SIZE: 7-7/8" SETTING DEPTH: 3083'  
TOTAL DEPTH: 3100'

INJECTION INTERVAL


2988' FEET TO 2992' FEET - PERFORATED

TUBING

TUBING SIZE: 2-3/8" LINED WITH: Plastic SET IN A  
Baker AD-1 PACKER AT: 2939' FEET

OTHER DATA

1. NAME OF INJECTION FORMATION: Queen
2. NAME OF FIELD OR POOL (IF APPLICABLE): SE Chaves Queen
3. IS THIS A NEW WELL DRILLED FOR INJECTION? No  
IF NO, FOR WHAT PURPOSE WAS THE WELL ORIGINALLY DRILLED?  
This well was drilled as a Queen producing well.
4. HAS WELL EVER BEEN PERFORATED IN ANY OTHER ZONE(S)? No  
LIST ALL SUCH PERFORATED INTERVALS AND GIVE PLUGGING  
DETAILS (SACKS OF CEMENT OR BRIDGE PLUG(S) USED): \_\_\_\_\_
5. GIVE DEPTH TO AND NAME OF ANY OVERLYING AND/OR  
UNDERLYING OIL OR GAS ZONES (POOLS) IN THIS AREA: \_\_\_\_\_  
None known.

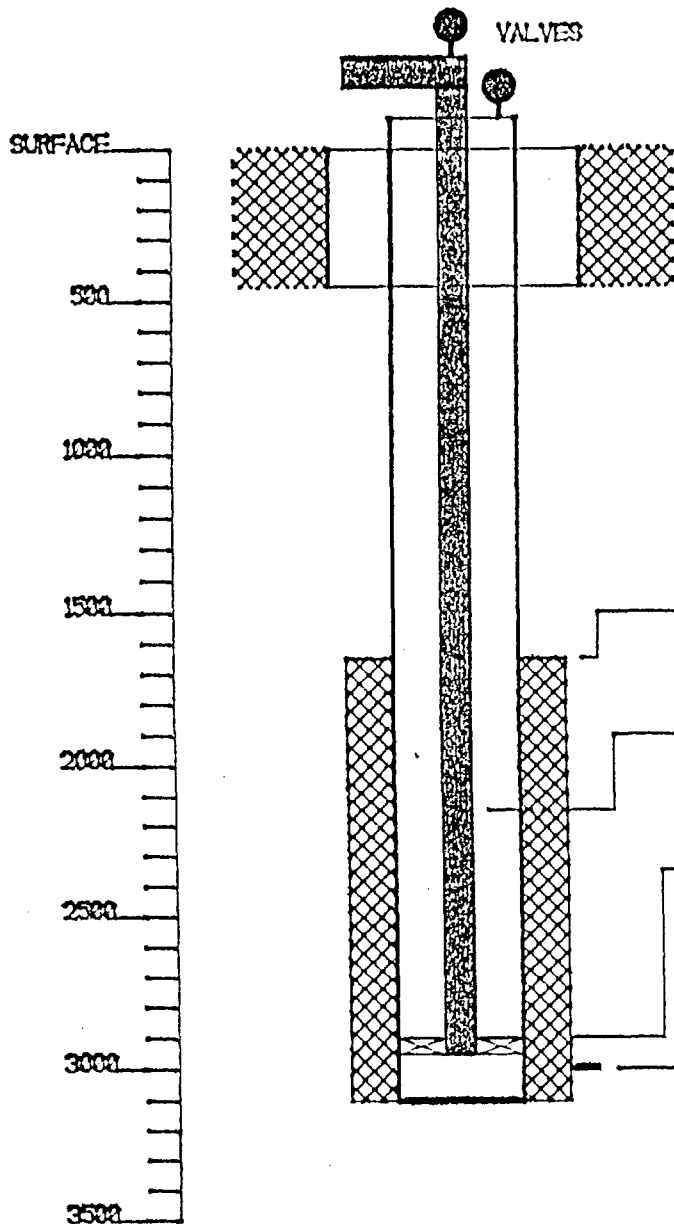

BURKITT FED. #103  
 NE-NW 34-T12S-R31E  
 CHAVES COUNTY, NEW MEXICO

8 5/8 SURFACE CASING  
 AT 424' WITH  
 CEMENT CIRCULATED


CEMENT TOP- 1840  
 BY TEMP. SURVEY

2 3/8 PLASTIC LINED TUBING

INJECTION PACKER  
 AT APPROX. 2938

PERFORATIONS  
 2988-2992

5 1/2 PRODUCTION CASING  
 AT 3083' (TD) WITH  
 260 SACKS CEMENT

 CEMENT

INJECTION WELL DATA SHEET

OPERATOR: Yates Drilling Co. LEASE: Garner Federal  
 WELL NO.: 7 FOOTAGE: 660' FSL-1980' FEL SEC: 27-T12s-R31e

TUBULAR DATA

SURFACE CASING

SIZE: 8-5/8" 24# CEMENTED WITH: 250 SX.  
 TOC: Surface FEET DETERMINED BY: Circulation  
 HOLE SIZE: 12-1/4" SETTING DEPTH: 424

INTERMEDIATE CASING

SIZE: None CEMENTED WITH: \_\_\_\_\_ SX.  
 TOC: \_\_\_\_\_ FEET DETERMINED BY: \_\_\_\_\_  
 HOLE SIZE: \_\_\_\_\_ SETTING DEPTH: \_\_\_\_\_

LONG STRING

SIZE: 5-1/2" 14# CEMENTED WITH: 270 SX.  
 TOC: 1900' FEET DETERMINED BY: Temp. Survey  
 HOLE SIZE: 7-7/8" SETTING DEPTH: 3098.54'  
 TOTAL DEPTH: 3100'

INJECTION INTERVAL

2987' FEET TO 2993' FEET - PERFORATED



TUBING

TUBING SIZE: 2-3/8" LINED WITH: Plastic SET IN A  
Baker AD-1 PACKER AT: 2937' FEET

OTHER DATA

1. NAME OF INJECTION FORMATION: Queen
2. NAME OF FIELD OR POOL (IF APPLICABLE): SE Chaves Queen
3. IS THIS A NEW WELL DRILLED FOR INJECTION? No  
 IF NO, FOR WHAT PURPOSE WAS THE WELL ORIGINALLY DRILLED?  
This well was drilled as a Queen producing well.
4. HAS WELL EVER BEEN PERFORATED IN ANY OTHER ZONE(S)? No  
 LIST ALL SUCH PERFORATED INTERVALS AND GIVE PLUGGING  
 DETAILS (SACKS OF CEMENT OR BRIDGE PLUG(S) USED): \_\_\_\_\_
5. GIVE DEPTH TO AND NAME OF ANY OVERLYING AND/OR  
 UNDERLYING OIL OR GAS ZONES (POOLS) IN THIS AREA:  
None known.

GARNER FED #07  
SW-SE 27-T12S-R31E  
CHAVES COUNTY, NEW MEXICO

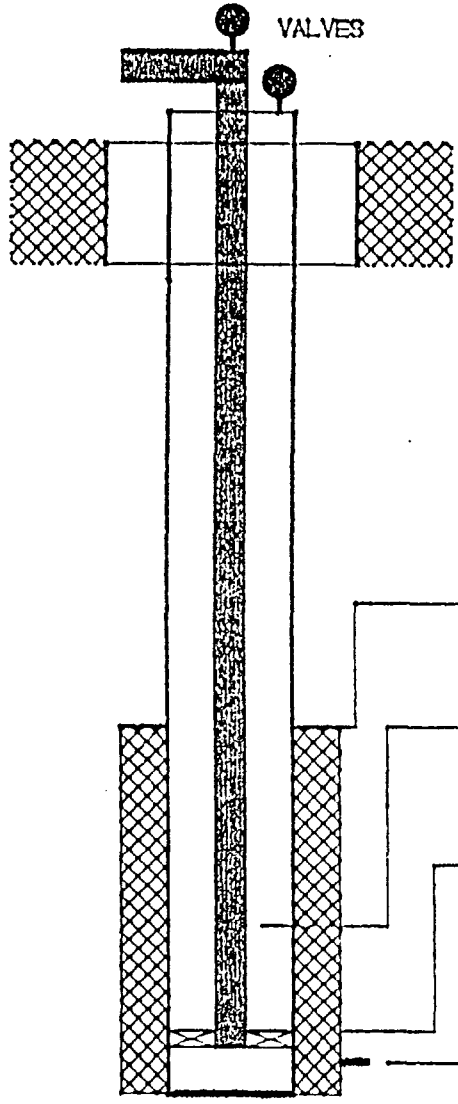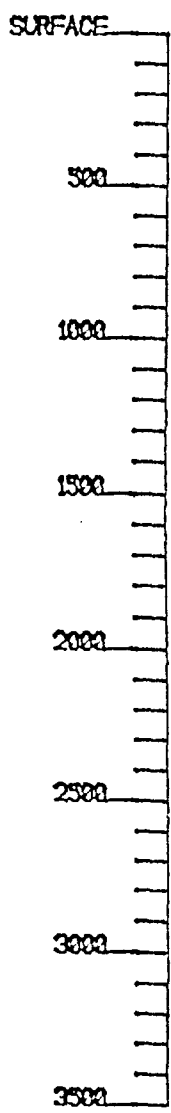

8 5/8 SURFACE CASING  
AT 424' WITH  
CEMENT CIRCULATED

CEMENT TOP - 1900  
BY TEMP. SURVEY

2 3/8 PLASTIC LINED TUBING

INJECTION PACKER  
AT APPROX. 2937

PERFORATIONS  
2987-2993

5 1/2 PRODUCTION CASING  
AT 3098' (TD) WITH  
270 SACKS CEMENT

 CEMENT

WELL DATA SHEET

OPERATOR: Yates Drilling Company LEASE: Apache "27" State

WELL NO.: 1 FOOTAGE: 330'FSL-2310'FWL SEC: 27-T12s-R31e

TUBULAR DATA

SURFACE CASING

SIZE: 8-5/8" CEMENTED WITH: \_\_\_\_\_ SX.  
TOC: Surface FEET DETERMINED BY: Circulation  
HOLE SIZE: 12-1/4" SETTING DEPTH: 422'

INTERMEDIATE CASING

SIZE: None CEMENTED WITH: \_\_\_\_\_ SX.  
TOC: \_\_\_\_\_ FEET DETERMINED BY: \_\_\_\_\_  
HOLE SIZE: \_\_\_\_\_ SETTING DEPTH: \_\_\_\_\_

LONG STRING

SIZE: 4-1/2" CEMENTED WITH: \_\_\_\_\_ SX.  
TOC: 210' FEET DETERMINED BY: \_\_\_\_\_  
HOLE SIZE: 7-7/8" SETTING DEPTH: 3150'  
TOTAL DEPTH: 3150'

PRODUCING INTERVAL

FORMATION: Queen POOL OR FIELD: SE Chaves Queen  
SPUD DATE: 5-9-85 COMPLETION DATE: 6-27-85  
PERFORATED: 2984 FEET TO 2991 FEET

STIMULATION: 100 gals. 15% HCl acid, 12000 gals. gel water  
4000 gals. CO2, 10500# 20/40 sand, 10000# 12/20 sand

OTHER PERFORATED ZONES: None

CURRENT STATUS

WHAT IS CURRENT STATUS OF WELL? Pumping oil well

IF P&A, LIST PLUGGING DETAILS: \_\_\_\_\_  
\_\_\_\_\_  
\_\_\_\_\_  
\_\_\_\_\_

WELL DATA SHEET

OPERATOR: Yates Drilling Company LEASE: Apache "27" State

WELL NO.: 2 FOOTAGE: 1650' FSL-2310' FEL SEC: 27-T12s-R31e

TUBULAR DATA

SURFACE CASING

SIZE: 8-5/8" CEMENTED WITH: \_\_\_\_\_ SX.  
TOC: Surface FEET DETERMINED BY: Circulation  
HOLE SIZE: 12-1/4" SETTING DEPTH: 454'

INTERMEDIATE CASING

SIZE: None CEMENTED WITH: \_\_\_\_\_ SX.  
TOC: \_\_\_\_\_ FEET DETERMINED BY: \_\_\_\_\_  
HOLE SIZE: \_\_\_\_\_ SETTING DEPTH: \_\_\_\_\_

LONG STRING

SIZE: 4-1/2" CEMENTED WITH: \_\_\_\_\_ SX.  
TOC: Surface FEET DETERMINED BY: Circulation  
HOLE SIZE: 7-7/8" SETTING DEPTH: 3150'  
TOTAL DEPTH: 3150'

PRODUCING INTERVAL

FORMATION: Queen POOL OR FIELD: SE Chaves Queen  
SPUD DATE: 7-29-85 COMPLETION DATE: 8-23-85  
PERFORATED: 2996 FEET TO 3000 FEET

STIMULATION: 850 gals. 15% HCl acid, 16000 gals. gel water  
25% CO2, 10500# 20/40 sand, 10000# 12/20 sand

OTHER PERFORATED ZONES: None

CURRENT STATUS

WHAT IS CURRENT STATUS OF WELL? Pumping oil well

IF P&A, LIST PLUGGING DETAILS: \_\_\_\_\_

WELL DATA SHEET

OPERATOR: Yates Drilling Co. LEASE: Burkitt Federal

WELL NO.: 1 FOOTAGE: 2310'FNL-1980'FEL SEC: 34-T12s-R31e

TUBULAR DATA

SURFACE CASING

SIZE: 8-5/8" 24# CEMENTED WITH: 300 SX.  
TOC: Surface FEET DETERMINED BY: Circulation  
HOLE SIZE: 12-1/4" SETTING DEPTH: 450'

INTERMEDIATE CASING

SIZE: None CEMENTED WITH: \_\_\_\_\_ SX.  
TOC: \_\_\_\_\_ FEET DETERMINED BY: \_\_\_\_\_  
HOLE SIZE: \_\_\_\_\_ SETTING DEPTH: \_\_\_\_\_

LONG STRING

SIZE: 5-1/2" 14# CEMENTED WITH: 360 SX.  
TOC: 1650' FEET DETERMINED BY: Temp. Survey  
HOLE SIZE: 7-7/8" SETTING DEPTH: 3080'  
TOTAL DEPTH: 3100'

PRODUCING INTERVAL

FORMATION: Queen POOL OR FIELD: SE Chaves Queen  
SPUD DATE: 3-23-84 COMPLETION DATE: 4-7-84  
PERFORATED: 2874 FEET TO 2882 FEET

STIMULATION: 750 gals. 15% HCl acid, 20000 gals. 30# gel,  
25% CO2, 16500# 20/40 sand, 6000# 12/20 sand

OTHER PERFORATED ZONES: None

CURRENT STATUS

WHAT IS CURRENT STATUS OF WELL? Pumping oil well

IF P&A, LIST PLUGGING DETAILS: \_\_\_\_\_

\_\_\_\_\_  
\_\_\_\_\_  
\_\_\_\_\_

WELL DATA SHEET

OPERATOR: Yates Drilling Co. LEASE: Burkitt Federal

WELL NO.: 2 FOOTAGE: 1650' FNL - 990' FWL SEC: 34-T12s-R31e

TUBULAR DATA

SURFACE CASING

SIZE: 8-5/8" 24# CEMENTED WITH: 375 SX.  
TOC: Surface FEET DETERMINED BY: Circulation  
HOLE SIZE: 12-1/4" SETTING DEPTH: 370'

INTERMEDIATE CASING

SIZE: None CEMENTED WITH: \_\_\_\_\_ SX.  
TOC: \_\_\_\_\_ FEET DETERMINED BY: \_\_\_\_\_  
HOLE SIZE: \_\_\_\_\_ SETTING DEPTH: \_\_\_\_\_

LONG STRING

SIZE: 5-1/2" 14# CEMENTED WITH: 250 SX.  
TOC: 1678' FEET DETERMINED BY: Cement Bond Log  
HOLE SIZE: 7-7/8" SETTING DEPTH: 2845'  
TOTAL DEPTH: 2850'

PRODUCING INTERVAL

FORMATION: Queen POOL OR FIELD: SE Chaves Queen  
SPUD DATE: 5-5-84 COMPLETION DATE: 7-10-84  
PERFORATED: 2754 FEET TO 2760 FEET

STIMULATION: 750 gals. 15% HCl acid, 15000 gals. 30# gel,  
5000 gals CO2, 14500# 20/40 sand, 2500# 12/20 sand

OTHER PERFORATED ZONES: None

CURRENT STATUS

WHAT IS CURRENT STATUS OF WELL? Pumping oil well

IF P&A, LIST PLUGGING DETAILS: \_\_\_\_\_

\_\_\_\_\_  
\_\_\_\_\_  
\_\_\_\_\_



WELL DATA SHEET

OPERATOR: Yates Drilling Co. LEASE: Burkitt Federal

WELL NO.: 3 FOOTAGE: 330' FNL-2310' FWL SEC: 34-T12s-R31e

TUBULAR DATA

SURFACE CASING

SIZE: 8-5/8" 24# CEMENTED WITH: 270 SX.  
TOC: Surface FEET DETERMINED BY: Circulation  
HOLE SIZE: 12-1/4" SETTING DEPTH: 424'

INTERMEDIATE CASING

SIZE: None CEMENTED WITH: \_\_\_\_\_ SX.  
TOC: \_\_\_\_\_ FEET DETERMINED BY: \_\_\_\_\_  
HOLE SIZE: \_\_\_\_\_ SETTING DEPTH: \_\_\_\_\_

LONG STRING

SIZE: 5-1/2" 14# CEMENTED WITH: 260 SX.  
TOC: 1640' FEET DETERMINED BY: Temp. Survey  
HOLE SIZE: 7-7/8" SETTING DEPTH: 3083'  
TOTAL DEPTH: 3100'

PRODUCING INTERVAL

FORMATION: Queen POOL OR FIELD: SE Chaves Queen  
SPUD DATE: 8-9-85# COMPLETION DATE: 10-1-85  
PERFORATED: 2988 FEET TO 2992 FEET

STIMULATION: 750 gals. 15% HCl acid, 15000 gals. gel water  
24 tons CO2, 12000# 20/40 sand, 7000# 12/20 sand

OTHER PERFORATED ZONES: None

CURRENT STATUS

WHAT IS CURRENT STATUS OF WELL? Pumping oil well

IF P&A, LIST PLUGGING DETAILS: \_\_\_\_\_

\_\_\_\_\_  
\_\_\_\_\_  
\_\_\_\_\_

WELL DATA SHEET

OPERATOR: Yates Drilling Co. LEASE: DeLuna Federal

WELL NO.: 3 FOOTAGE: 330'FNL-1990'FEL SEC: 34-T12s-R31e

TUBULAR DATA

SURFACE CASING

SIZE: 8-5/8" 24# CEMENTED WITH: 300 SX.  
TOC: Surface FEET DETERMINED BY: Circulation  
HOLE SIZE: 12-1/4" SETTING DEPTH: 433'

INTERMEDIATE CASING

SIZE: None CEMENTED WITH: \_\_\_\_\_ SX.  
TOC: \_\_\_\_\_ FEET DETERMINED BY: \_\_\_\_\_  
HOLE SIZE: \_\_\_\_\_ SETTING DEPTH: \_\_\_\_\_

LONG STRING

SIZE: 5-1/2" 14# CEMENTED WITH: 410 SX.  
TOC: 1700' FEET DETERMINED BY: Cement Bond Log  
HOLE SIZE: 7-7/8" SETTING DEPTH: 3094'  
TOTAL DEPTH: 3100'

PRODUCING INTERVAL

FORMATION: Queen POOL OR FIELD: SE Chaves Queen  
SPUD DATE: 2-11-85 COMPLETION DATE: 3-20-85  
PERFORATED: 2987-1/2 FEET TO 2993 FEET

STIMULATION: 750 gals. 15% hcl, 15000 gals. 30# gel, 23-1/2  
tons CO2, 13000# 20/40 sand, 10000# 10/20 sand

OTHER PERFORATED ZONES: None

CURRENT STATUS

WHAT IS CURRENT STATUS OF WELL? Pumping oil well

IF P&A, LIST PLUGGING DETAILS: \_\_\_\_\_  
\_\_\_\_\_  
\_\_\_\_\_  
\_\_\_\_\_

WELL DATA SHEET

OPERATOR: Yates Drilling Co. LEASE: Doyal

WELL NO.: 1 FOOTAGE: 660'FNL- 990'FEL SEC: 34-T12s-R31e

TUBULAR DATA

SURFACE CASING

SIZE: 8-5/8" 24# CEMENTED WITH: 250 SX.  
TOC: Surface FEET DETERMINED BY: Circulation  
HOLE SIZE: 12-1/4" SETTING DEPTH: 409.46'

INTERMEDIATE CASING

SIZE: None CEMENTED WITH: \_\_\_\_\_ SX.  
TOC: \_\_\_\_\_ FEET DETERMINED BY: \_\_\_\_\_  
HOLE SIZE: \_\_\_\_\_ SETTING DEPTH: \_\_\_\_\_

LONG STRING

SIZE: 5-1/2" CEMENTED WITH: 250 SX.  
TOC: 2200' FEET DETERMINED BY: Temp. Survey  
HOLE SIZE: 7-7/8" SETTING DEPTH: 3098'  
TOTAL DEPTH: 3100'

PRODUCING INTERVAL

FORMATION: Queen POOL OR FIELD: SE Chaves Queen  
SPUD DATE: 7-31-84 COMPLETION DATE: 8-25-84  
PERFORATED: 2982' FEET TO 2989' FEET

STIMULATION: 750 gallons of 15 % HCl, 15000 gallons 30# gel  
, 5000 SCF N2 per barrel, 10900# 20/40 sand, and 4200# 10/20  
sand.

OTHER PERFORATED ZONES: None

CURRENT STATUS

WHAT IS CURRENT STATUS OF WELL? Pumping oil well.

IF P&A, LIST PLUGGING DETAILS: \_\_\_\_\_

\_\_\_\_\_

\_\_\_\_\_

\_\_\_\_\_

WELL DATA SHEET

OPERATOR: Yates Drilling Co. LEASE: Doyal

WELL NO.: 2 FOOTAGE: 500'FSL - 760'FEL SEC: 27-T12s-R31e

TUBULAR DATA

SURFACE CASING

SIZE: 8-5/8" 24# CEMENTED WITH: 275 SX.  
TOC: Surface FEET DETERMINED BY: Circulation  
HOLE SIZE: 12-1/4" SETTING DEPTH: 411'

INTERMEDIATE CASING

SIZE: None CEMENTED WITH: \_\_\_\_\_ SX.  
TOC: \_\_\_\_\_ FEET DETERMINED BY: \_\_\_\_\_  
HOLE SIZE: \_\_\_\_\_ SETTING DEPTH: \_\_\_\_\_

LONG STRING

SIZE: 5-1/2" CEMENTED WITH: 250 SX.  
TOC: 2200' FEET DETERMINED BY: Temp. Survey  
HOLE SIZE: 7-7/8" SETTING DEPTH: 3098'  
TOTAL DEPTH: 3100'

PRODUCING INTERVAL

FORMATION: Queen POOL OR FIELD: SE Chaves Queen  
SPUD DATE: 9-7-84 COMPLETION DATE: 9-20-84  
PERFORATED: 2981' FEET TO 2987' FEET

STIMULATION: 750 gallons of 15% HCl, 15000 gallons 30# gel  
, 25% CO2 12000# 20/40 sand, 10000# 10/20 sand.

OTHER PERFORATED ZONES: None

CURRENT STATUS

WHAT IS CURRENT STATUS OF WELL? Pumping oil well.

IF P&A, LIST PLUGGING DETAILS: \_\_\_\_\_

\_\_\_\_\_

\_\_\_\_\_

\_\_\_\_\_

WELL DATA SHEET

OPERATOR: Yates Drilling Co. LEASE: Doyal

WELL NO.: 3 FOOTAGE: 1980' FSL - 990' FEL SEC: 27-T12s-R31e

TUBULAR DATA

SURFACE CASING

SIZE: 8-5/8" 24# CEMENTED WITH: 260 SX.  
TOC: Surface FEET DETERMINED BY: Circulation  
HOLE SIZE: 12-1/4" SETTING DEPTH: 409'

INTERMEDIATE CASING

SIZE: None CEMENTED WITH: \_\_\_\_\_ SX.  
TOC: \_\_\_\_\_ FEET DETERMINED BY: \_\_\_\_\_  
HOLE SIZE: \_\_\_\_\_ SETTING DEPTH: \_\_\_\_\_

LONG STRING

SIZE: 5-1/2" 14# CEMENTED WITH: 850 SX.  
TOC: 630' FEET DETERMINED BY: Temp. Survey  
HOLE SIZE: 7-7/8" SETTING DEPTH: 3099'  
TOTAL DEPTH: 3100'

PRODUCING INTERVAL

FORMATION: Queen POOL OR FIELD: SE Chaves Queen  
SPUD DATE: 9-20-84 COMPLETION DATE: NONE  
PERFORATED: 2991' FEET TO 2997' FEET

STIMULATION: 750 gallons of 15 % HCl, 15000 gallons 30# gel  
, 25% CO2 20000# 20/40 sand, 10000# 10/20 sand.

OTHER PERFORATED ZONES: None

CURRENT STATUS

WHAT IS CURRENT STATUS OF WELL? Temp. Abandoned

IF P&A, LIST PLUGGING DETAILS: \_\_\_\_\_

\_\_\_\_\_  
\_\_\_\_\_  
\_\_\_\_\_

WELL DATA SHEET

OPERATOR: Yates Drilling Co. LEASE: Doyal

WELL NO.: 4 FOOTAGE: 330'ESL- 330'FWL SEC: 26-T12s-R31e

TUBULAR DATA

SURFACE CASING

SIZE: 8-5/8" 24# CEMENTED WITH: 250 SX.  
TOC: Surface FEET DETERMINED BY: Circulation  
HOLE SIZE: 12-1/4" SETTING DEPTH: 400'

INTERMEDIATE CASING

SIZE: None CEMENTED WITH: \_\_\_\_\_ SX.  
TOC: \_\_\_\_\_ FEET DETERMINED BY: \_\_\_\_\_  
HOLE SIZE: \_\_\_\_\_ SETTING DEPTH: \_\_\_\_\_

LONG STRING

SIZE: 5-1/2" 14# CEMENTED WITH: 975 SX.  
TOC: 310' FEET DETERMINED BY: Temp. Survey  
HOLE SIZE: 7-7/8" SETTING DEPTH: 3088'  
TOTAL DEPTH: 3100'

PRODUCING INTERVAL

FORMATION: Queen POOL OR FIELD: SE Chaves Queen  
SFUD DATE: 11-18-84 COMPLETION DATE: 1-24-87  
PERFORATED: 2982' FEET TO 2985' FEET

STIMULATION: 750 gallons of 15 % HCl, 15000 gallons 30# gel  
, 22 tons CO2, 12000# 20/40 sand, 8500 # 12/20 sand.

OTHER PERFORATED ZONES: None

CURRENT STATUS

WHAT IS CURRENT STATUS OF WELL? Pumping oil well

IF P&A, LIST PLUGGING DETAILS: \_\_\_\_\_  
\_\_\_\_\_  
\_\_\_\_\_  
\_\_\_\_\_

WELL DATA SHEET

OPERATOR: Yates Drilling Co. LEASE: Gallagher State

WELL NO.: 1 FOOTAGE: 330'FNL- 330'FWL SEC: 35-T12s-R31e

TUBULAR DATA

SURFACE CASING

SIZE: 8-5/8" 24# CEMENTED WITH: 250 SX.  
TOC: Surface FEET DETERMINED BY: Circulation  
HOLE SIZE: 12-1/4" SETTING DEPTH: 433'

INTERMEDIATE CASING

SIZE: None CEMENTED WITH: \_\_\_\_\_ SX.  
TOC: \_\_\_\_\_ FEET DETERMINED BY: \_\_\_\_\_  
HOLE SIZE: \_\_\_\_\_ SETTING DEPTH: \_\_\_\_\_

LONG STRING

SIZE: 5-1/2" 14# CEMENTED WITH: 900 SX.  
TOC: Surface FEET DETERMINED BY: Circulation  
HOLE SIZE: 7-7/8" SETTING DEPTH: 3084'  
TOTAL DEPTH: 3100'

PRODUCING INTERVAL

FORMATION: Queen POOL OR FIELD: SE Chaves Queen  
SPUD DATE: 10-28-84 COMPLETION DATE: 11-9-84  
PERFORATED: 2982' FEET TO 2987' FEET

STIMULATION: 650 gallons of 15 % HCl, 15000 gallons 30# gel  
, 22 tons CO2, 12000# 20/40 sand, 10750# 10/20 sand.

OTHER PERFORATED ZONES: None

CURRENT STATUS

WHAT IS CURRENT STATUS OF WELL? Pumping oil well

IF P&A, LIST PLUGGING DETAILS: \_\_\_\_\_

\_\_\_\_\_  
\_\_\_\_\_  
\_\_\_\_\_

WELL DATA SHEET

OPERATOR: Yates Drilling Co. LEASE: Garner Federal

WELL NO.: 2 FOOTAGE: 2310' FSL-2310' FEL SEC: 34-T12s-R31e

TUBULAR DATA

SURFACE CASING

SIZE: 8-5/8" 24# CEMENTED WITH: 250 SX.  
TOC: Surface FEET DETERMINED BY: Circulation  
HOLE SIZE: 12-1/4" SETTING DEPTH: 410'

INTERMEDIATE CASING

SIZE: None CEMENTED WITH: \_\_\_\_\_ SX.  
TOC: \_\_\_\_\_ FEET DETERMINED BY: \_\_\_\_\_  
HOLE SIZE: \_\_\_\_\_ SETTING DEPTH: \_\_\_\_\_

LONG STRING

SIZE: 5-1/2" 14# CEMENTED WITH: 550 SX.  
TOC: 1992' FEET DETERMINED BY: Cement Bond Log  
HOLE SIZE: 7-7/8" SETTING DEPTH: 3098'  
TOTAL DEPTH: 3100'

PRODUCING INTERVAL

FORMATION: Queen POOL OR FIELD: SE Chaves Queen  
SPUD DATE: 4-29-84 COMPLETION DATE: 6-1-84  
PERFORATED: 2982 FEET TO 2990 FEET

STIMULATION: 750 gals. 15% HCl acid, 20000 gals. 30# gel,  
25% CO2, 16500# 20/40 sand, 1700# 12/20 sand

OTHER PERFORATED ZONES: None

CURRENT STATUS

WHAT IS CURRENT STATUS OF WELL? Pumping oil well

IF P&A, LIST PLUGGING DETAILS: \_\_\_\_\_  
\_\_\_\_\_  
\_\_\_\_\_  
\_\_\_\_\_



WELL DATA SHEET

OPERATOR: Yates Drilling Co. LEASE: Garner Federal

WELL NO.: 3 FOOTAGE: 1980' ENL-1980' FEL SEC: 34-T12s-R31e

TUBULAR DATA

SURFACE CASING

SIZE: 8-5/8" 24# CEMENTED WITH: 225 SX.  
TOC: Surface FEET DETERMINED BY: Circulation  
HOLE SIZE: 12-1/4" SETTING DEPTH: 408'

INTERMEDIATE CASING

SIZE: None CEMENTED WITH: \_\_\_\_\_ SX.  
TOC: \_\_\_\_\_ FEET DETERMINED BY: \_\_\_\_\_  
HOLE SIZE: \_\_\_\_\_ SETTING DEPTH: \_\_\_\_\_

LONG STRING

SIZE: 5-1/2" 14# CEMENTED WITH: 250 SX.  
TOC: 1810' FEET DETERMINED BY: Temp. Survey  
HOLE SIZE: 7-7/8" SETTING DEPTH: 3100'  
TOTAL DEPTH: 3100'

PRODUCING INTERVAL

FORMATION: Queen POOL OR FIELD: SE Chaves Queen  
SPUD DATE: 7-2-84 COMPLETION DATE: 8-12-84  
PERFORATED: 2981 FEET TO 2986 FEET

STIMULATION: 750 gals. 15% HCl acid, 15000 gals. 30# gel,  
5000 SCF N2 per barre, 1500# 20/40 sand, 1700# 12/20 sand

OTHER PERFORATED ZONES: None

CURRENT STATUS

WHAT IS CURRENT STATUS OF WELL? Pumping oil well

IF P&A, LIST PLUGGING DETAILS: \_\_\_\_\_  
\_\_\_\_\_  
\_\_\_\_\_  
\_\_\_\_\_

WELL DATA SHEET

OPERATOR: Yates Drilling Co. LEASE: Garner Federal

WELL NO.: 7 FOOTAGE: 660'FSL-1980'FEL SEC: 27-T12s-R31e

TUBULAR DATA

SURFACE CASING

SIZE: 8-5/8" 24# CEMENTED WITH: 250 SX.  
TOC: Surface FEET DETERMINED BY: Circulation  
HOLE SIZE: 12-1/4" SETTING DEPTH: 424'

INTERMEDIATE CASING

SIZE: None CEMENTED WITH: \_\_\_\_\_ SX.  
TOC: \_\_\_\_\_ FEET DETERMINED BY: \_\_\_\_\_  
HOLE SIZE: \_\_\_\_\_ SETTING DEPTH: \_\_\_\_\_

LONG STRING

SIZE: 5-1/2" 14# CEMENTED WITH: 270 SX.  
TOC: 1900' FEET DETERMINED BY: Temp. Survey  
HOLE SIZE: 7-7/8" SETTING DEPTH: 3098.54'  
TOTAL DEPTH: 3100'

PRODUCING INTERVAL

FORMATION: Queen POOL OR FIELD: SE Chaves Queen  
SPUD DATE: 10-14-84 COMPLETION DATE: 10-30-84  
PERFORATED: 2987' FEET TO 2993' FEET

STIMULATION: 750 gallons of 15 % HCl, 15000 gallons 30# gel  
, 1000 SCE/BEL CO2 13000# 20/40 sand, 9000# 10/20 sand

OTHER PERFORATED ZONES: None

CURRENT STATUS

WHAT IS CURRENT STATUS OF WELL? Pumping oil well

IF P&A, LIST PLUGGING DETAILS: \_\_\_\_\_  
\_\_\_\_\_  
\_\_\_\_\_  
\_\_\_\_\_

WELL DATA SHEET

OPERATOR: Yates Drilling Co. LEASE: Garner Federal  
WELL NO.: 9 FOOTAGE: 1650' FSL-2310' FEL SEC: 27-T12s-R31e

TUBULAR DATA

SURFACE CASING

SIZE: 8-5/8" 24# CEMENTED WITH: 250 SX.  
TOC: Surface FEET DETERMINED BY: Circulation  
HOLE SIZE: 12-1/4" SETTING DEPTH: 428'

INTERMEDIATE CASING

SIZE: None CEMENTED WITH: \_\_\_\_\_ SX.  
TOC: \_\_\_\_\_ FEET DETERMINED BY: \_\_\_\_\_  
HOLE SIZE: \_\_\_\_\_ SETTING DEPTH: \_\_\_\_\_

LONG STRING

SIZE: 5-1/2" 14# CEMENTED WITH: 320 SX.  
TOC: 1920' FEET DETERMINED BY: Temp. Survey  
HOLE SIZE: 7-7/8" SETTING DEPTH: 3098'  
TOTAL DEPTH: 3100'

PRODUCING INTERVAL

FORMATION: Queen POOL OR FIELD: SE Chaves Queen  
SPUD DATE: 11-11-84 COMPLETION DATE: 11-30-84  
PERFORATED: 2985' FEET TO 2995' FEET

STIMULATION: 750 gallons of 15% HCl, 15000 gallons 30# gel, 16 tons of CO2, 18000# 20/40 sand, 12500# 10/20 sand

OTHER PERFORATED ZONES: None

CURRENT STATUS

WHAT IS CURRENT STATUS OF WELL? Pumping oil well

IF P&A, LIST PLUGGING DETAILS: \_\_\_\_\_

\_\_\_\_\_

\_\_\_\_\_

\_\_\_\_\_

WELL DATA SHEET

OPERATOR: Yates Drilling Co. LEASE: Rich Federal

WELL NO.: 1 FOOTAGE: 2310' FNL-2310' FEL SEC: 27-T12s-R31e

TUBULAR DATA

SURFACE CASING

SIZE: 8-5/8" 24# CEMENTED WITH: 250 SX.  
TOC: Surface FEET DETERMINED BY: Circulation  
HOLE SIZE: 12-1/4" SETTING DEPTH: 412'

INTERMEDIATE CASING

SIZE: None CEMENTED WITH: \_\_\_\_\_ SX.  
TOC: \_\_\_\_\_ FEET DETERMINED BY: \_\_\_\_\_  
HOLE SIZE: \_\_\_\_\_ SETTING DEPTH: \_\_\_\_\_

LONG STRING

SIZE: None CEMENTED WITH: \_\_\_\_\_ SX.  
TOC: \_\_\_\_\_ FEET DETERMINED BY: \_\_\_\_\_  
HOLE SIZE: 7-7/8" SETTING DEPTH: \_\_\_\_\_  
TOTAL DEPTH: 3100'

PRODUCING INTERVAL

FORMATION: None POOL OR FIELD: SE Chaves Queen  
SPUD DATE: 11-30-84 COMPLETION DATE: None  
PERFORATED: \_\_\_\_\_ FEET TO \_\_\_\_\_ FEET

STIMULATION: None  
\_\_\_\_\_  
\_\_\_\_\_  
\_\_\_\_\_



OTHER PERFORATED ZONES: None  
\_\_\_\_\_  
\_\_\_\_\_

CURRENT STATUS

WHAT IS CURRENT STATUS OF WELL? Plugged and Abandoned

IF P&A, LIST PLUGGING DETAILS: P&A 12-12-84  
Plug 3040-2940' 35 sx Class "C" neat, Plug 2100-2000' 75 sx  
Class "C" w/2% CaCl2, plug 1500-1400' 35 sx Class "C" neat,  
Plug 462-362' 50 sx Class "C" w/2% CaCl2, Plug 50-Sur. 20sx  
Class "C" neat

RICH FED. #101  
SW-NE 27-T12S-R31E  
CHAVES COUNTY, NEW MEXICO

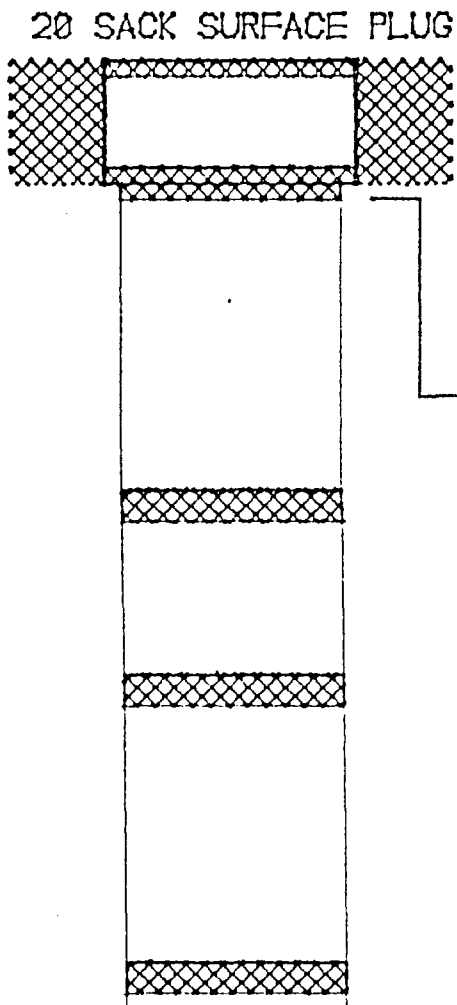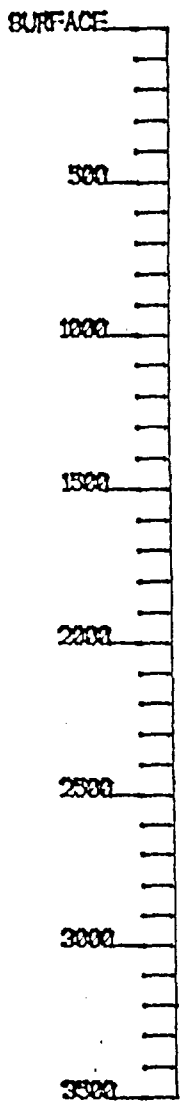

8 5/8 SURFACE CASING  
AT 412' WITH  
CEMENT CIRCULATED


50 SACK PLUG  
362-482

35 SACK PLUG  
1400-1500

75 SACK PLUG  
2000-2100

35 SACK PLUG  
2940-3040

 CEMENT



YATES DRILLING COMPANY

105 SOUTH FOURTH STREET — (505) 746-9889

FAX (505) 746-6480

TELEX 508891 (YPCART)

ARTESIA, NEW MEXICO 88210

May 31, 1989


PEYTON YATES  
PRESIDENT

S. P. YATES  
VICE PRESIDENT

RANDY G. PATTERSON  
SECRETARY

DENNIS G. KINSEY  
TREASURER

New Mexico State Engineer  
District 2 Office  
P.O. Box 1717  
Roswell, New Mexico 88202

Attention: Glen Brim, District Supervisor 

Gentlemen:

Yates Drilling Company is proposing to waterflood the Queen formation underlying portions of Township 12 South, Range 31 East and Township 13 South, Range 31 East, Chaves County, New Mexico.

To insure the protection of fresh water aquifers in this area we would like to obtain the location, depth and geological name of the producing formation for any water wells located in either described township. Additionally, the identification of any commercial water wells in the area would be helpful.

Any information that your office can provide concerning this matter will be greatly appreciated.


Sincerely yours,

YATES DRILLING COMPANY



Tobin L. Rhodes  
Petroleum Engineer

'89 JUN 1 AM 8 35  
STATE ENGINEER OFFICE  
ROSWELL, NEW MEXICO

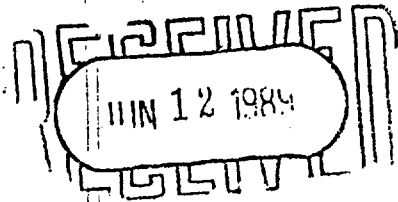

June 9, 1989

Yates Drilling Company  
ATTN: Tobin L. Rhodes, Petroleum Engineer

Enclosed are well locations and some information pertaining to these wells. They were drilled and finished in the Ogallala Formation (TO). Record of other wells finished deeper on other water formations were found north of Township 12 South in Township 11 South, Range 31 East. These wells are finished in the Triassic Formation (TRC), depth of wells are between + 200 feet to 300 feet.

Johnny R. Hernandez  
Basin Supervisor

L-4993

NE 1/4 SW 1/4

Dom.

T.D. 146

5 1/2" casing - shallow

L-6649

SE 1/4 SE 1/4

Dom & Stk

T.D. 160'

4 1/2" casing - shallow

Section 26

Township 12 South Range 31 East

L-2117

NW 1/4 SW 1/4

Irr.

L-6746

SW 1/4 NW 1/4

Dom. & Stk

L-6749

SW 1/4 SE 1/4

Comm. & DOM & STK

\*\*L-9566

SW 1/4 SE 1/4

COM, Oil & Gas

\*\*Well L-9566 is stock well L-6749\*\*

Comm.

T.D. 166'  
T.D. 198'  
Same

Not cased - shallow  
6" casing - shallow

Section 27

Township 12 S

Range 31 E.

L-6650

SE 1/4 NE 1/4

Dom & Stk

T.D. 160'

4 1/2" casing - shallow

Section 35

Township 12 South

Range 31 East

L-2932

SE 1/4

OWD

L-4170

NW 1/4 SE 1/4 NW 1/4

Dom.

L-4296

NW 1/4 NW 1/4

WF

L-4296-X

SW 1/4 SW 1/4

WF

L-4296-X-2

NE 1/4 NE 1/4

WF

L-4296-X-3

SE 1/4 SE 1/4

WF

T.D. 55'  
Cancelled  
Cancelled  
Cancelled  
Cancelled

Casing 8" shallow  
↑  
NO WELLS  
↓



Section 23

Township 13 South Range 31 East

L-3914-X-10	SE $\frac{1}{4}$ SE $\frac{1}{4}$	Ind.
L-3914-X-11	SE $\frac{1}{4}$ NW $\frac{1}{4}$	Ind.
L-3914-X-12	NE $\frac{1}{4}$ NE $\frac{1}{4}$	Ind.
L-3914-X-13	SE $\frac{1}{4}$ SW $\frac{1}{4}$	Ind.
L-3914-X-14	NW $\frac{1}{4}$ SE $\frac{1}{4}$	Ind.

↑  
WELLS NOT DRILLED  
↓

Section 24

Township 13 South Range 31 East

L-3914	NE $\frac{1}{4}$ SE $\frac{1}{4}$ SW $\frac{1}{4}$ NE $\frac{1}{4}$	Ind.
L-3914-X	NE $\frac{1}{4}$ SW $\frac{1}{4}$	Ind.
L-3914-X-2	NE $\frac{1}{4}$ NW $\frac{1}{4}$	Ind.
L-3914-X-3	SW $\frac{1}{4}$ SE $\frac{1}{4}$	Ind.
L-3914-X-4	SE $\frac{1}{4}$ NE $\frac{1}{4}$	Ind.
L-3914-X-5	NE $\frac{1}{4}$ SE $\frac{1}{4}$	Ind.
L-3914-X-6	NW $\frac{1}{4}$ NE $\frac{1}{4}$	Ind.
L-3914-X-7	NE $\frac{1}{4}$ NE $\frac{1}{4}$	Ind.
L-3914-X-8	SW $\frac{1}{4}$ NW $\frac{1}{4}$	Ind.
L-3914-X-9	SE $\frac{1}{4}$ NW $\frac{1}{4}$	Ind.

T.D. 196' 8 $\frac{5}{8}$ " casing - Shallow  
↑  
WELLS NOT DRILLED  
↓

Section 35

Township 13 South Range 31 East

L-2849	SW $\frac{1}{4}$ SE $\frac{1}{4}$ NW $\frac{1}{4}$	Dom.
--------	--	------

No well record info.

Township 13 South Range 31 East

-3460  
-3461  
-3837  
-3837-X

SE 1/4 NE 1/4 SW 1/4  
SE 1/4 SE 1/4 SE 1/4  
SW 1/4 SW 1/4 SW 1/4  
SW 1/4 SW 1/4 SW 1/4

WF  
WF  
Com. & Stock  
Com. & Stock

-TD. 190' 8 5/8" casing - shallow  
-TD. 220' 8 5/8" casing - shallow  
- Rptd TD 165' 6" casing - shallow  
- Rptd TD. 190' 7" casing - shallow

Section 2

Township 13 South Range 31 East

-3806  
-3833  
-3834  
-3835  
-4295

SE 1/4 SE 1/4 SE 1/4  
NE 1/4 NE 1/4 SE 1/4  
SW 1/4 SE 1/4 NE 1/4  
SW 1/4 SE 1/4 NE 1/4  
SE 1/4 NE 1/4

Stock  
Com.  
Dec.  
Dec.  
WF

NO well record info.  
with drawn. no well  
- Rptd - TD 165' 6 7/8" casing - shallow  
- Rptd - TD 165' 6 7/8" casing - shallow

-3914

NE 1/4 SE 1/4 NE 1/4

SRO

-TD. 194' 8 5/8" casing - shallow

-2745

NE 1/4 NE 1/4 SE 1/4

SRO

-TD. 216' 6 7/8" casing - shallow

Section 12

Township 13 South Range 31 East

-2934  
-3460

NE 1/4  
NE 1/4 NE 1/4

OWD

NO well record info.  
-TD. 217' - 8 5/8" casing - shallow

Section 13

Township 13 South Range 31 East


L-2933

NE 1/2

OWD

NO well record info.

SEC	TWN	RNG	UNIT LTR	QTR OF UNIT	TD	TYPE	#
24	12S	131E	K	?	148	DOM.	L4993
24	12S	131E	P	?	160	DOM.	L6649
26	12S	131E	E	?	166	DOM. & STK	L6746
✓26	12S	131E	L	?	?	IRR.	L2117
✓26	12S	131E	O	?	198	COM. (OIL & GAS)	L9566
✓26	12S	131E	O	?	198	COM., DOM. & STK	L6749
✓27	12S	131E	H	?	160	DOM. & STK	L6650
✓35	12S	131E	F	NW	55	DOM.	L4170
✓35	12S	131E	IJOP	?	?	?	L2932
1	13S	131E	K	SE	190	WF	L3460
1	13S	131E	P	SE	220	WF	L3461
1	13S	131E	M	SW	190	COM. & STK	L3837X
1	13S	131E	M	SW	165	COM. & STK	L3837
2	13S	131E	H	SW	165	DEC.	L3834
2	13S	131E	H	?	?	WF	L4295
2	13S	131E	H	NE	196	SRO	L3914
2	13S	131E	H	SW	165	DEC.	L3835
2	13S	131E	P	SE	?	?	L3806
2	13S	131E	I	NE	216	SRO	L2745
12	13S	131E	A	?	217	SRO	L3460
13	13S	131E	ABCD	?	?	OWD	L2933
24	13S	131E	H	NE	196	IND.	L3914
35	13S	131E	F	SW	?	DOM.	L2849

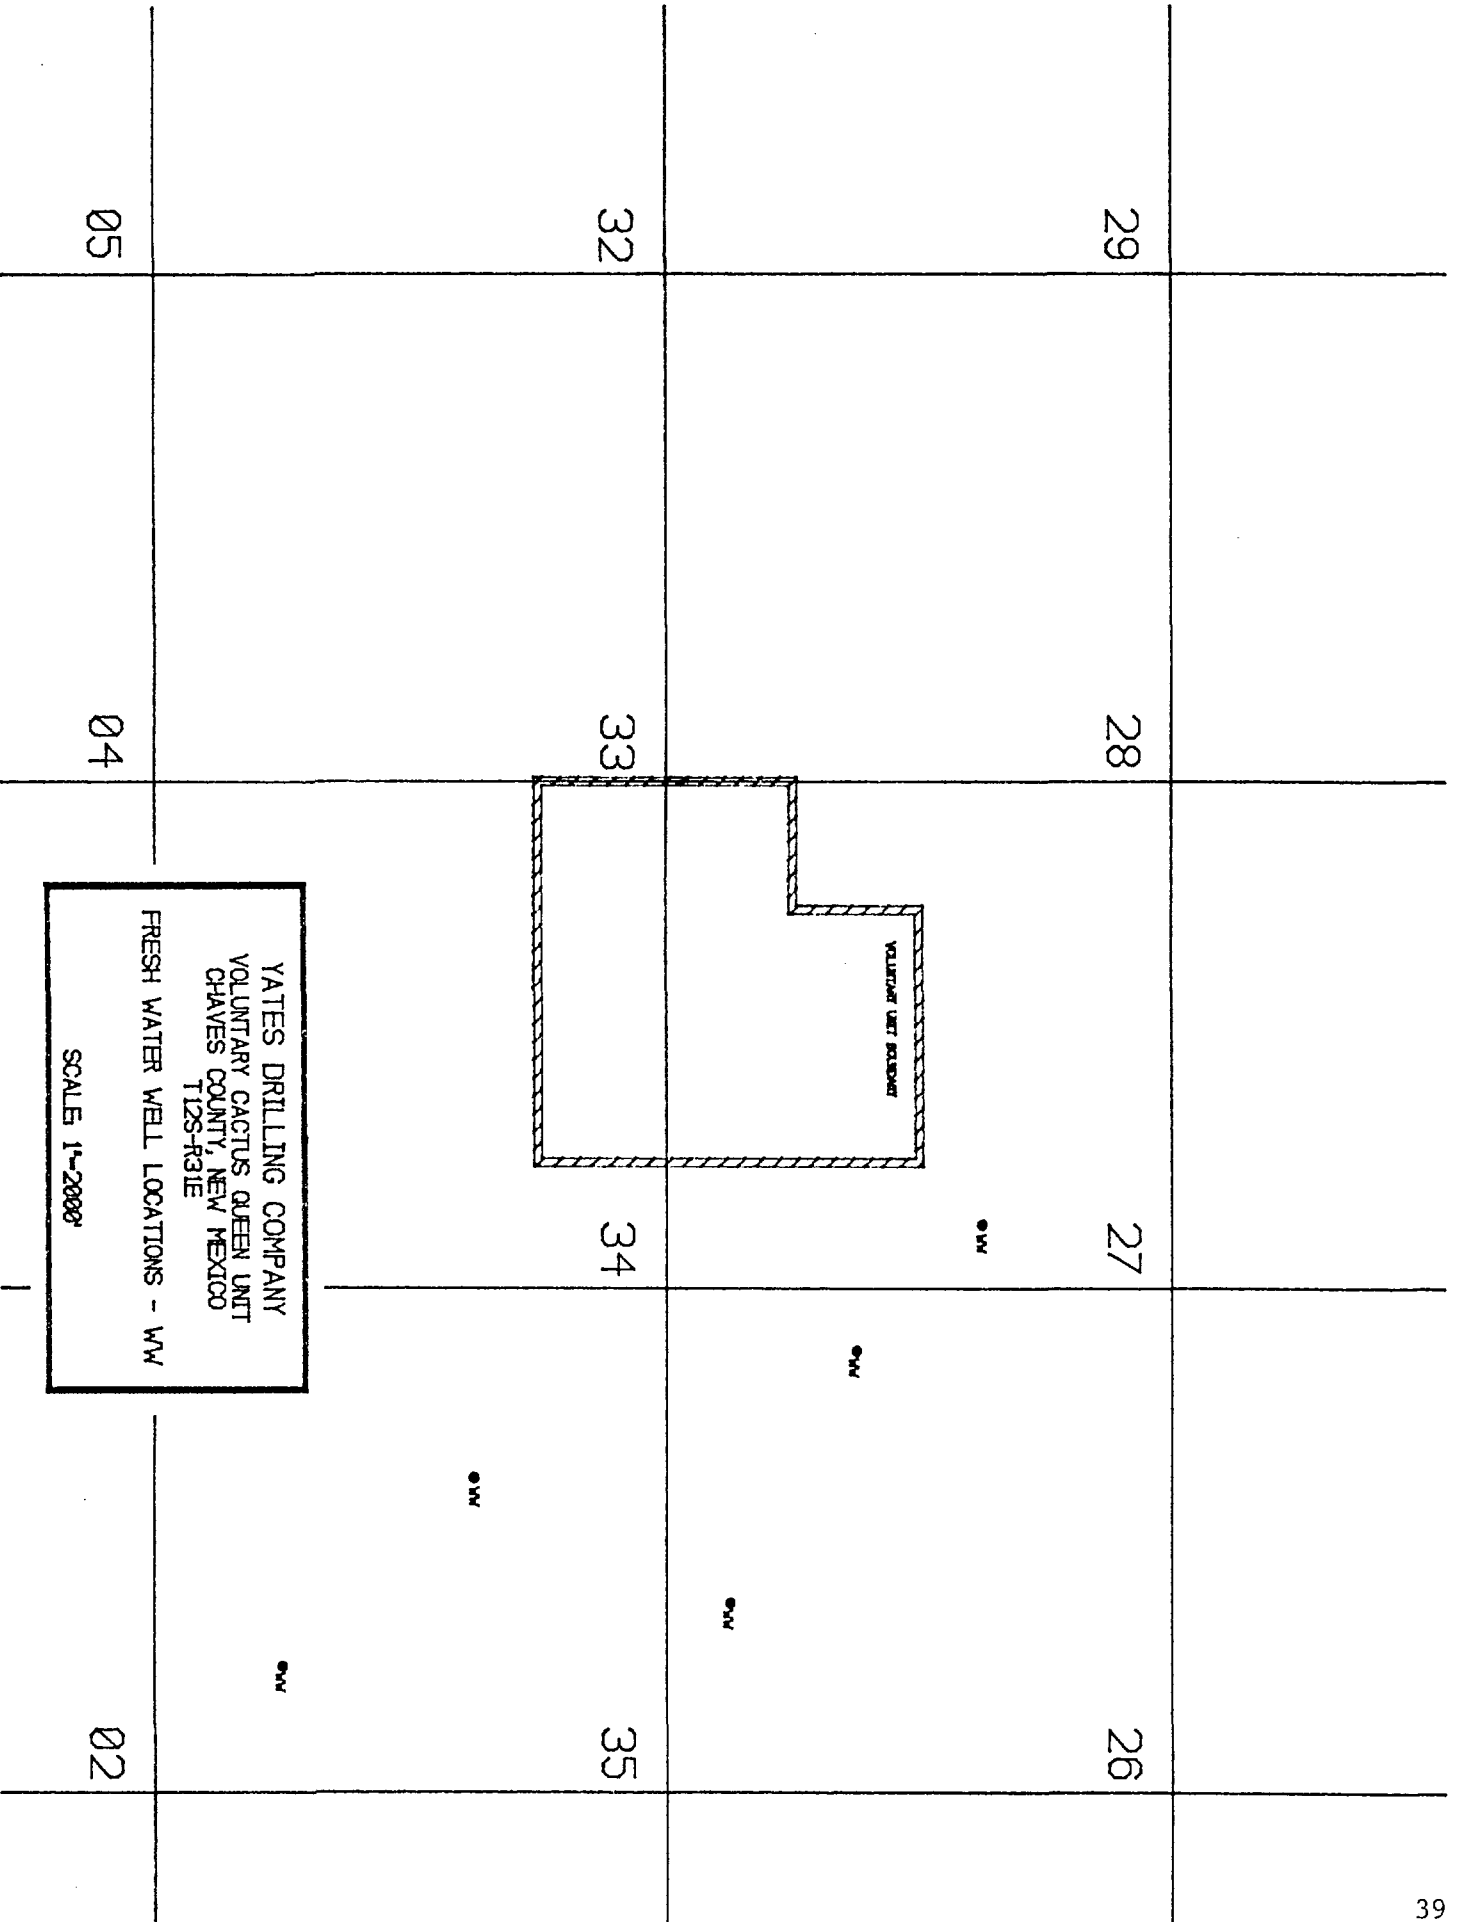

# PERMIAN

Treating Chemicals, Inc.

P. O. BOX 728  
 LOVINGTON, N.M. 88263  
 PHONE (505) 396-5674

## WATER ANALYSIS REPORT

Company Yates Drilling Date Sampled 1-22-88  
 Field Caprock County Chavez  
 Lease Graham Water Station State NM  
 Well \_\_\_\_\_ Formation \_\_\_\_\_  
 Type of Water Fresh Water, B/D \_\_\_\_\_  
 Sampling Point Water Tanks Sampled By Blackwell

### DISSOLVED SOLIDS

#### CATIONS

	mg/l	meq/l
Sodium, Na+(Calc)	230 ± 23	10
Calcium, Ca++	120 ± 20	6
Magnesium, Mg++	24 ± 12.2	2
Barium, Ba++	neg ± 68.7	-
Iron, Fe (Total)		

### OTHER PROPERTIES

pH 8.2  
 Specific Gravity 1.000  
 H<sub>2</sub>S neg  
 Total Dissolved Solids 1144  
 Total Hardness 400

#### ANIONS

Chloride, Cl-	350 ± 35.5	10
Sulfate, So <sub>4</sub> =	120 ± 48	3
Carbonate, Co <sub>3</sub> =	0 ± 30	0
Bicarbonate, HCo <sub>3</sub> -	300 ± 61	5

Remarks and Recommendations \_\_\_\_\_

WATER ANALYSIS REPORT

Company Yates Drilling Date Sampled 1-22-88  
 Field Caprock County Chavez  
 Lease Graham Water well (fresh) State NM  
 Well North of Lease Formation \_\_\_\_\_  
 Type of Water Fresh Water, B/D Blackwell  
 Sampling Point Well head Sampled By \_\_\_\_\_

DISSOLVED SOLIDS

CATIONS

	mg/l	meq/l
Sodium, Na+(Calc)	115	5
Calcium, Ca <sup>++</sup>	120	6
Magnesium, Mg <sup>++</sup>	15	1
Barium, Ba <sup>++</sup>	Neg	68.7
Iron, Fe (Total)		

OTHER PROPERTIES

pH 8.3  
 Specific Gravity 1.000  
 H<sub>2</sub>S Neg  
 Total Dissolved Solids 817  
 Total Hardness 360

ANIONS

Chloride, Cl <sup>-</sup>	200	35.5	6
Sulfate, So <sub>4</sub> <sup>=</sup>	55	48	1
Carbonate, Co <sub>3</sub> <sup>=</sup>	0	30	0
Bicarbonate, HCo <sub>3</sub> <sup>-</sup>	312	61	5

Remarks and Recommendations \_\_\_\_\_

WATER ANALYSIS REPORT

Company Yates Drilling Report Date Sampled 1-22-88  
 Field Caprock County Lea  
 Lease Williams Ranch State NM  
 Well Williams Fresh Water Formation \_\_\_\_\_  
 Type of Water Fresh Water Water, B/D \_\_\_\_\_  
 Sampling Point Well head Sampled By Blackwell

DISSOLVED SOLIDS

<u>CATIONS</u>	mg/l	meq/l
Sodium, Na+(Calc)	<u>70</u> ± 23	<u>3.0</u>
Calcium, Ca++	<u>80</u> ± 20	<u>4.0</u>
Magnesium, Mg++	<u>20</u> ± 12.2	<u>1.6</u>
Barium, Ba++	<u>Neg</u> ± 68.7	
Iron, Fe (Total)		

OTHER PROPERTIES

pH	<u>8.2</u>
Specific Gravity	<u>1.000</u>
H <sub>2</sub> S	<u>Neg</u>
Total Dissolved Solids	<u>602</u>
Total Hardness	<u>271</u>

ANIONS

Chloride, Cl-	<u>100</u> ± 35.5	<u>2.8</u>
Sulfate, So <sub>4</sub> =	<u>40</u> ± 48	<u>0.8</u>
Carbonate, Co <sub>3</sub> =	<u>0</u> ± 30	<u>0</u>
Bicarbonate, HCo <sub>3</sub> -	<u>292</u> ± 61	<u>4.8</u>

Remarks and Recommendations \_\_\_\_\_  
 \_\_\_\_\_  
 \_\_\_\_\_

# PERMIAN

Treating Chemicals, Inc.

P.O. BOX 72  
LOVINGTON, NM  
PHONE (505) 396

## WATER ANALYSIS REPORT

Company	Yates Drilling	Date Sampled	1-22-88
Field	Caprock	County	Lea
Lease	Gallagher	State	NM
Well	1	Formation	Queens
Type of Water	Produced	Water, B/D	
Sampling Point	Treater	Sampled By	Blackwell

### DISSOLVED SOLIDS

### OTHER PROPERTIES

#### CATIONS

	mg/l	meq/l
Sodium, Na+(Calc)	98100	23
Calcium, Ca++	3750	20
Magnesium, Mg++	12900	12.2
Barium, Ba++	neg	0.7
Iron, Fe (Total)		

pH	5.9
Specific Gravity	1.200
H <sub>2</sub> S	Neg
Total Dissolved Solids	314,240
Total Hardness	62,800

#### ANIONS

Chloride, Cl-	198000	35.5
Sulfate, So <sub>4</sub> <sup>=</sup>	1350	4.8
Carbonate, Co <sub>3</sub> <sup>=</sup>	0	0
Bicarbonate, HCo <sub>3</sub> <sup>-</sup>	140	6.1

Remarks and Recommendations



# PERMIAN

Treating Chemicals, Inc.

P.O. BOX 72  
LOVINGTON, N.M.  
PHONE (505) 396

## WATER ANALYSIS REPORT

Company	Yates Drilling	Date Sampled	1-22-88
Field	Caprock	County	Lea
Lease	Doyle	State	NM
Well	12 & 4	Formation	Queens
Type of Water	Produced	Water, B/D	
Sampling Point	Treater	Sampled By	Blackwell

### DISSOLVED SOLIDS

#### CATIONS

	mg/l	meq/l
Sodium, Na+(Calc)	97900	23.4257
Calcium, Ca++	3800	20.190
Magnesium, Mg++	13300	12.21090
Barium, Ba++	0	68.7
Iron, Fe (Total)	58	

### OTHER PROPERTIES

pH	5.7
Specific Gravity	1.200
H <sub>2</sub> S	neg.
Total Dissolved Solids	312,598
Total Hardness	64,900

#### ANIONS

Chloride, Cl-	196,000	35.5	5521
Sulfate, So <sub>4</sub> <sup>=</sup>	1400	48	29
Carbonate, Co <sub>3</sub> <sup>=</sup>	0	30	0
Bicarbonate, HCo <sub>3</sub> <sup>-</sup>	140	61	2.3

Remarks and Recommendations

# PERMIAN

Treating Chemicals, Inc.

P. O. BOX 728  
LOVINGTON, N.M. 88263  
PHONE (505) 396-5674

## WATER ANALYSIS REPORT

Company Yates Drilling Date Sampled 1-22-88  
Field Caprock County Lea  
Lease Burkett State NM  
Well \_\_\_\_\_ Formation Queens  
Type of Water Produced Water, B/D \_\_\_\_\_  
Sampling Point Treater Sampled By Blackwell

### DISSOLVED SOLIDS

#### CATIONS

	mg/l		meq/l
Sodium, Na+(Calc)	<u>98000</u>	÷ 23	<u>4261</u>
Calcium, Ca++	<u>4100</u>	÷ 20	<u>205</u>
Magnesium, Mg++	<u>12800</u>	÷ 12.2	<u>1049</u>
Barium, Ba++	<u>Neg</u>	÷ 68.7	_____
Iron, Fe (Total)	_____		_____

### OTHER PROPERTIES

pH 5.9  
Specific Gravity \_\_\_\_\_  
1.200  
H<sub>2</sub>S Neg.  
Total Dissolved  
Solids 313,220  
Total Hardness  
6300

#### ANIONS

Chloride, Cl-	<u>197,000</u>	÷ 35.5	<u>5549</u>
Sulfate, So <sub>4</sub> =	<u>1200</u>	÷ 48	<u>25</u>
Carbonate, Co <sub>3</sub> =	<u>0</u>	÷ 30	_____
Bicarbonate, HCo <sub>3</sub> -	<u>120</u>	÷ 61	<u>2</u>

Remarks and Recommendations \_\_\_\_\_  
\_\_\_\_\_  
\_\_\_\_\_

# ERMIAN

Coating Chemicals, Inc.

P.C. EGA 728  
 100-00-101-8926  
 100-00-101-394-5678

WATER ANALYSIS REPORT

Company	Yates Drilling	Date Sampled	1-22-88
Field		County	Lea
Lease	Deluna	State	NM
Well		Location	Queens
Type of Water	Produced	Depth, ft	
Sampling Point	Treater	Sampled by	Blackwell

DISSOLVED SOLID CATIONS

Sodium, Na (Calc)	97600	4243
Calcium, Ca	3960	198
Magnesium, Mg	12900	1075
Barium, Ba		
Iron, Fe (Total)	0	

OTHER PROPERTIES

pH	6.0
Specific Gravity	1.200
H <sub>2</sub> S	Neg
Total Dissolved Solids	135,148
Total Hardness	63,000

ANIONS

Chloride, Cl <sup>-</sup>	194,000	5465
Sulfate, SO <sub>4</sub> <sup>2-</sup>	1200	25
Carbonate, CO <sub>3</sub> <sup>2-</sup>	0	
Bicarbonate, HCO <sub>3</sub> <sup>-</sup>	88	1.1

Remarks and Recommendations

# ERMIAN

ating Chemicals, Inc.

P.C. BOX 726  
 10000 C.S. Rd. #8200  
 Houston, Texas 77036

WATER ANALYSIS

Company Yates Drilling  
 Field  
 Lease Garner  
 Well 7  
 Type of Water Produced

Date Sampled 1-22-88  
 Locality Lea  
 State NM  
 Location Queens

Sampling Point

Water, B/L  
 Sampled by Blackwell

DISSOLVED SOLIDS

OTHER PROPERTIES

CATIONS

Sodium, Na<sup>+</sup> 105,000  
 Calcium, Ca<sup>2+</sup> 4,750  
 Magnesium, Mg<sup>2+</sup> 11,900  
 Barium, Ba<sup>2+</sup>  
 Iron, Fe (Total)

mg/l 4565  
 238  
 975

5.8  
 Specific Gravity 1.200  
 H<sub>2</sub>S Neg

Total Dissolved Solids 326,955

Total Hardness 60,700

ANIONS

Chloride, Cl<sup>-</sup> 204,000  
 Sulfate, SO<sub>4</sub><sup>2-</sup> 1,100  
 Carbonate, CO<sub>3</sub><sup>2-</sup> 0  
 Bicarbonate, HCO<sub>3</sub><sup>-</sup> 205

mg/l 5746  
 23  
 3.4

anions and other anions

HALLIBURTON DIVISION LABORATORY

HALLIBURTON SERVICES

ARTESIA DISTRICT

LABORATORY REPORT

No. W539, W540 & W541-89

TO Yates Drilling  
105 South Fourth Street  
Artesia, NM 88210

Date October 17, 1989

This report is the property of Halliburton Services and neither it nor any part thereof, nor a copy thereof, is to be published or disclosed without first securing the express written approval of laboratory management. It may however, be used in the course of regular business operations by any person or concern and employees thereof receiving such report from Halliburton Services.


Submitted by \_\_\_\_\_ Date Rec. October 16, 1989

Well No. \_\_\_\_\_ Depth \_\_\_\_\_ Formation \_\_\_\_\_

Field \_\_\_\_\_ County \_\_\_\_\_ Source \_\_\_\_\_

	SPEAR WW #1	GF #7	DEL FED. #3
Resistivity .....	0.74 @ 70°	0.052 @ 70°	0.054 @ 70°
Specific Gravity ..	1.006 @ 70°	1.1730 @ 70°	1.1571 @ 70°
pH .....	6.4	6.6	6.6
Calcium .....	1,686	6,744	7,418
Magnesium .....	546	10,230	7,979
Chlorides .....	5,000	159,000	143,000
Sulfates .....	Nil	Nil	Medium
Bicarbonates .....	305	214	183
Soluble Iron .....	Nil	10	3
-----			
-----			
-----			

Remarks:

  
 \_\_\_\_\_  
 Respectfully submitted

Analyst: Eric Jacobson - EIT

HALLIBURTON SERVICES

**NOTICE:**

This report is for information only and the content is limited to the sample described. Halliburton makes no warranties, express or implied, as to the accuracy of the contents or results. Any user of this report agrees Halliburton shall not be liable for any loss or damage, regardless of cause, including any act or omission of Halliburton, resulting from the use hereof.

**HALLIBURTON DIVISION LABORATORY**

**HALLIBURTON SERVICES**

**ARTESIA DISTRICT**

**LABORATORY REPORT**

No. W536, W537 & W538-89

**TO** Yates Drilling  
105 South Fourth Street  
Artesia, NM 88210

**Date** October 17, 1989

This report is the property of Halliburton Services and neither it nor any part thereof nor a copy thereof is to be published or disclosed without first securing the express written approval of laboratory management. It may however, be used in the course of regular business operations by any person or concern and employees thereof receiving such report from Halliburton Services.

**Submitted by** \_\_\_\_\_ **Date Rec.** October 16, 1989

**Well No.** \_\_\_\_\_ **Depth** \_\_\_\_\_ **Formation** \_\_\_\_\_

**Field** \_\_\_\_\_ **County** \_\_\_\_\_ **Source** \_\_\_\_\_

	<u>BUR FEDERAL #3</u>	<u>GALLAHAN ST. #1</u>	<u>AP STATE #1</u>
<b>Resistivity .....</b>	<u>0.051 @ 70°</u>	<u>0.051 @ 70°</u>	<u>0.058 @ 70°</u>
<b>Specific Gravity ..</b>	<u>1.1200 @ 70°</u>	<u>1.196 @ 70°</u>	<u>1.137 @ 70°</u>
<b>pH .....</b>	<u>6.5</u>	<u>6.6</u>	<u>6.8</u>
<b>Calcium .....</b>	<u>6,070</u>	<u>5,620</u>	<u>6,407</u>
<b>Magnesium .....</b>	<u>10,912</u>	<u>12,685</u>	<u>6,615</u>
<b>Chlorides .....</b>	<u>184,000</u>	<u>180,000</u>	<u>122,000</u>
<b>Sulfates .....</b>	<u>Heavy</u>	<u>Medium</u>	<u>Medium</u>
<b>Bicarbonates .....</b>	<u>214</u>	<u>183</u>	<u>305</u>
<b>Soluble Iron .....</b>	<u>10</u>	<u>25</u>	<u>0</u>
-----	-----	-----	-----
-----	-----	-----	-----
-----	-----	-----	-----

**Remarks:**

*Eric Jacobson*  
 \_\_\_\_\_  
 Respectfully submitted

**Analyst:** Eric Jacobson - EIT

**HALLIBURTON SERVICES**

HALLIBURTON DIVISION LABORATOR.

HALLIBURTON SERVICES

ARTESIA DISTRICT

LABORATORY REPORT

No. W542, W543 & W544-89

TO Yates Drilling
105 South Fourth Street
Artesia, NM 88210

Date October 17, 1989

This report is the property of Halliburton Services and neither it nor any part thereof nor a copy thereof is to be published or disclosed without first securing the express written approval of laboratory management. It may however, be used in the course of regular business operations by any person or concern and employees thereof receiving such report from Halliburton Services.

Submitted by \_\_\_\_\_ Date Rec. October 16, 1989

Well No. \_\_\_\_\_ Depth \_\_\_\_\_ Formation \_\_\_\_\_

Field \_\_\_\_\_ County \_\_\_\_\_ Source \_\_\_\_\_

Table with 4 columns: Test Name, Graham WW #1, Graham WW #2, Doy #1. Rows include Resistivity, Specific Gravity, pH, Calcium, Magnesium, Chlorides, Sulfates, Bicarbonates, Soluble Iron.

Remarks:

Eric Jacobson
Respectfully submitted

Analyst: Eric Jacobson - EIT

HALLIBURTON SERVICES

YATES DRILLING COMPANY  
PROPOSED DOYAL FEE LEASE WATERFLOOD PROJECT  
CHAVES COUNTY, NEW MEXICO

NMOCD FORM C-108



## APPLICATION FOR AUTHORIZATION TO INJECT

I. Purpose:  Secondary Recovery  Pressure Maintenance  Disposal  Storage  
Application qualifies for administrative approval?  yes  no

II. Operator: Yates Drilling Company

Address: 105 South 4th Street, Artesia, New Mexico 88210

Contact party: Tobin L. Rhodes Phone: (505) 748-1471

III. Well data: Complete the data required on the reverse side of this form for each well proposed for injection. Additional sheets may be attached if necessary.

IV. Is this an expansion of an existing project?  yes  no  
If yes, give the Division order number authorizing the project \_\_\_\_\_

V. Attach a map that identifies all wells and leases within two miles of any proposed injection well with a one-half mile radius circle drawn around each proposed injection well. This circle identifies the well's area of review.

VI. Attach a tabulation of data on all wells of public record within the area of review which penetrate the proposed injection zone. Such data shall include a description of each well's type, construction, date drilled, location, depth, record of completion, and a schematic of any plugged well illustrating all plugging detail.

VII. Attach data on the proposed operation, including:

1. Proposed average and maximum daily rate and volume of fluids to be injected;
2. Whether the system is open or closed;
3. Proposed average and maximum injection pressure;
4. Sources and an appropriate analysis of injection fluid and compatibility with the receiving formation if other than reinjected produced water; and
5. If injection is for disposal purposes into a zone not productive of oil or gas at or within one mile of the proposed well, attach a chemical analysis of the disposal zone formation water (may be measured or inferred from existing literature, studies, nearby wells, etc.).

VIII. Attach appropriate geological data on the injection zone including appropriate lithologic detail, geological name, thickness, and depth. Give the geologic name, and depth to bottom of all underground sources of drinking water (aquifers containing waters with total dissolved solids concentrations of 10,000 mg/l or less) overlying the proposed injection zone as well as any such source known to be immediately underlying the injection interval.

IX. Describe the proposed stimulation program, if any.

X. Attach appropriate logging and test data on the well. (If well logs have been filed with the Division they need not be resubmitted.)

XI. Attach a chemical analysis of fresh water from two or more fresh water wells (if available and producing) within one mile of any injection or disposal well showing location of wells and dates samples were taken.

XII. Applicants for disposal wells must make an affirmative statement that they have examined available geologic and engineering data and find no evidence of open faults or any other hydrologic connection between the disposal zone and any underground source of drinking water.

XIII. Applicants must complete the "Proof of Notice" section on the reverse side of this form.

XIV. Certification

I hereby certify that the information submitted with this application is true and correct to the best of my knowledge and belief.

Name: Tobin L. Rhodes Title Petroleum Engineer

Signature: Tobin L. Rhodes Date: 10-13-89

\* If the information required under Sections VI, VIII, X, and XI above has been previously submitted, it need not be duplicated and resubmitted. Please show the date and circumstance of the earlier submittal.

## III. WELL DATA

A. The following well data must be submitted for each injection well covered by this application. The data must be both in tabular and schematic form and shall include:

- (1) Lease name; Well No.; location by Section, Township, and Range; and footage location within the section.
- (2) Each casing string used with its size, setting depth, sacks of cement used, hole size, top of cement, and how such top was determined.
- (3) A description of the tubing to be used including its size, lining material, and setting depth.
- (4) The name, model, and setting depth of the packer used or a description of any other seal system or assembly used.

Division District offices have supplies of Well Data Sheets which may be used or which may be used as models for this purpose. Applicants for several identical wells may submit a "typical data sheet" rather than submitting the data for each well.

B. The following must be submitted for each injection well covered by this application. All items must be addressed for the initial well. Responses for additional wells need be shown only when different. Information shown on schematics need not be repeated.

- (1) The name of the injection formation and, if applicable, the field or pool name.
- (2) The injection interval and whether it is perforated or open-hole.
- (3) State if the well was drilled for injection or, if not, the original purpose of the well.
- (4) Give the depths of any other perforated intervals and detail on the sacks of cement or bridge plugs used to seal off such perforations.
- (5) Give the depth to and name of the next higher and next lower oil or gas zone in the area of the well, if any.

## XIV. PROOF OF NOTICE

All applicants must furnish proof that a copy of the application has been furnished, by certified or registered mail, to the owner of the surface of the land on which the well is to be located and to each leasehold operator within one-half mile of the well location.

Where an application is subject to administrative approval, a proof of publication must be submitted. Such proof shall consist of a copy of the legal advertisement which was published in the county in which the well is located. The contents of such advertisement must include:

- (1) The name, address, phone number, and contact party for the applicant;
- (2) the intended purpose of the injection well; with the exact location of single wells or the section, township, and range location of multiple wells;
- (3) the formation name and depth with expected maximum injection rates and pressures; and
- (4) a notation that interested parties must file objections or requests for hearing with the Oil Conservation Division, P. O. Box 2000, Santa Fe, New Mexico 87501 within 15 days.

NO ACTION WILL BE TAKEN ON THE APPLICATION UNTIL PROPER PROOF OF NOTICE HAS BEEN SUBMITTED.

---

NOTICE: Surface owners or offset operators must file any objections or requests for hearing of administrative applications within 15 days from the date this application was mailed to them.

OIL CONSERVATION DIVISION  
FORM C-108 (Supplement)

Application of Yates Drilling Company  
For a Secondary Recovery Project  
Doyal Fee Lease Project  
Chaves County, New Mexico

I. Purpose:

Application is made for authorization to inject water into the Queen formation underlying the Doyal Fee Lease. The proposed project consists of 160 acres, more or less, of Fee lands in Unit M, (SW/4 SW/4) Section 26, Units I, P, (E/2 SE/4) of Section 27, and Unit A, (NE/4 NE/4) of Section 34, Township 12 South, Range 31 East, Chaves County New Mexico. This project would be classified as a secondary recovery project with the objective of recovering hydrocarbons that will not and can not be recovered by primary means.

Many wells in the proposed project area are primary depleted or are very near primary depletion. Our studies show that the injection of water into selected wells will result in the recovery of oil in economic quantities not otherwise recoverable. This project should provide economic benefits to all parties holding any type of interest in the project acreage.

II. Operator:

Yates Drilling Company  
105 South Fourth Street  
Artesia, New Mexico 88210

Phone Number: (505) 748-1471

III. Injection Well Data:

A well data sheet is attached for each of the three wells proposed for water injection. Each injection well data sheet includes a downhole schematic of how each individual well will be configured if this application is approved.

IV. Existing Project:

The proposed project is not an expansion of an existing project and will be a totally new project.

V. Ownership:

A lease ownership map is attached which identifies all wells and lease ownership within two miles of any of the six proposed injection wells. A map is also attached on which the area of review has been identified by drawing a one-half mile circle around each injection well.

VI. Well Data:

There are presently fifteen wells including proposed injection wells that fall within the boundaries of the proposed project or within the area of review. Two of these wells has been plugged and abandoned, one well is temporarily abandoned, and the remaining twelve wells are active pumping oil wells producing from the Queen formation. Available data for each of the wells is included in the attached well data sheets. Additionally a downhole schematic has been drawn depicting each of the two plugged and abandoned wells.

VII. Project Data:

1. The proposed daily average water injection rate is approximately 200 barrels per day for each of the three proposed water injection wells. Total water injection for the project would be 600 barrels per day. The maximum injection rate for any individual well will be based on fracture pressure as determined by step-rate pressure tests to be conducted on each injection well.

2. Produced water will be stored in covered steel storage tank(s) and in open top fiberglass tanks making the produced water system an open system. Any fresh water will be stored in a covered steel tank. Produced oil will immediately be separated from produced water. The oil will be stored in a steel covered production tank until sold.

3. Initially the injection wells may take water on a vacuum, but as the reservoir fills a positive surface

injection pressure will be required to inject water. The maximum injection pressure will also be determined by proposed step-rate pressure tests. At no time prior to the step-rate tests will the injection pressure exceed a pressure limitation of 0.2 PSIG per foot of depth to the top of the injection interval.

4. The source of injection fluid will be produced water from the producing wells within the unit and fresh water from the Ogollala aquifer in the area. No commitment has been made but commercial sources of fresh water are available in the area.

5. No water compatibility problems are expected as Ogollala water has been successfully injected into the Queen formation, throughout the Caprock Queen Field, without excessive problems. Compatibility tests have been run commingling the produced water and fresh water and no adverse problems were observed.

#### VIII. Geologic Data:

The proposed project area produces from the upper sandstone member of the Queen formation, upper Guadalupian series, Permian system. The average producing depth in the field is approximately 2989 feet. The existing producing formation will be the interval into which water will be injected.

The productive/injection interval, as indicated from a whole core analysis on the DeLuna Federal #3 (330' FNL & 1980' FEL, 34-12s-31e) and sidewall core data from numerous wells, is fine grained, friable, gray, quartz sandstone. The grains are sub-angular to sub-rounded and well sorted. The cementing material is variously from anhydrite and dolomite. The exact depositional environment is unknown. Porosity and permeability are intergranular in nature. The sandstone is not naturally fractured.

The Cactus Queen Field is a stratigraphic trap. Cementation of the sandstone results in the loss of porosity and permeability, creating a barrier on all sides with the exception of the east. A tilted oil-water contact limits the production in that direction. The oil/water contact has been established at (+1440) in the southeast end of the field and (+1446) at the northeast edge.

The primary underground source of fresh water in this area is the Ogollala formation of Tertiary age, the base of which is estimated to be 300 feet below the

surface. This aquifer is protected behind the surface pipe and cement of all existing wells in the unit area. The Chinlee formation is also a fresh water aquifer which immediately underlies the Ogollala formation. The Base of the Chinlee is estimated to be approximately 500 feet below the surface in the project area. The Chinlee is behind the production casing in all existing wells in the project area.

IX. Stimulation Program:

Each of the currently producing wells has previously received a fracture treatment. The details of these treatments are outlined in the data sheet for each individual well. There are no plans to stimulate any of the existing wells which will be producing wells in this project.

The wells which will be injection wells may require a small clean-up acid treatment prior to injection. We plan to treat each of the proposed injection wells with 1000 to 2000 gallons of 15% hydrochloric acid. This treatment should insure that existing perforations are open and that each well will accept water or gas at the lowest possible pressure.

X. Well Logs:

Well logs for each of the existing wells in the proposed unit have previously been submitted to the Hobbs office of the NMOCD.

XI. Fresh Water:

The Office of the State Engineer in Roswell has a record of six wells within one mile of the proposed project. The total depths of two of the wells are unknown, however all six wells are assumed to be producing from the Ogollala formation. Analysis reports for water taken from three of the wells are attached.

XII. Injection Zone Isolation:

Available engineering and geologic data has been examined and no evidence of open faulting or any other hydrologic connection between the injection zone and

any underground source of drinking water has been found.

XIII. Proof of Notice:

A listing of off-set leasehold operators within 1/2 mile of any injection wells and the surface owners that have received a copy of this application by certified mail is attached.

XIV. Certification:

I hereby certify that the information submitted with this application is true and correct to best of my knowledge and belief.

Tobin L. Rhodes


*Tobin L. Rhodes*

Petroleum Engineer

October 13, 1989





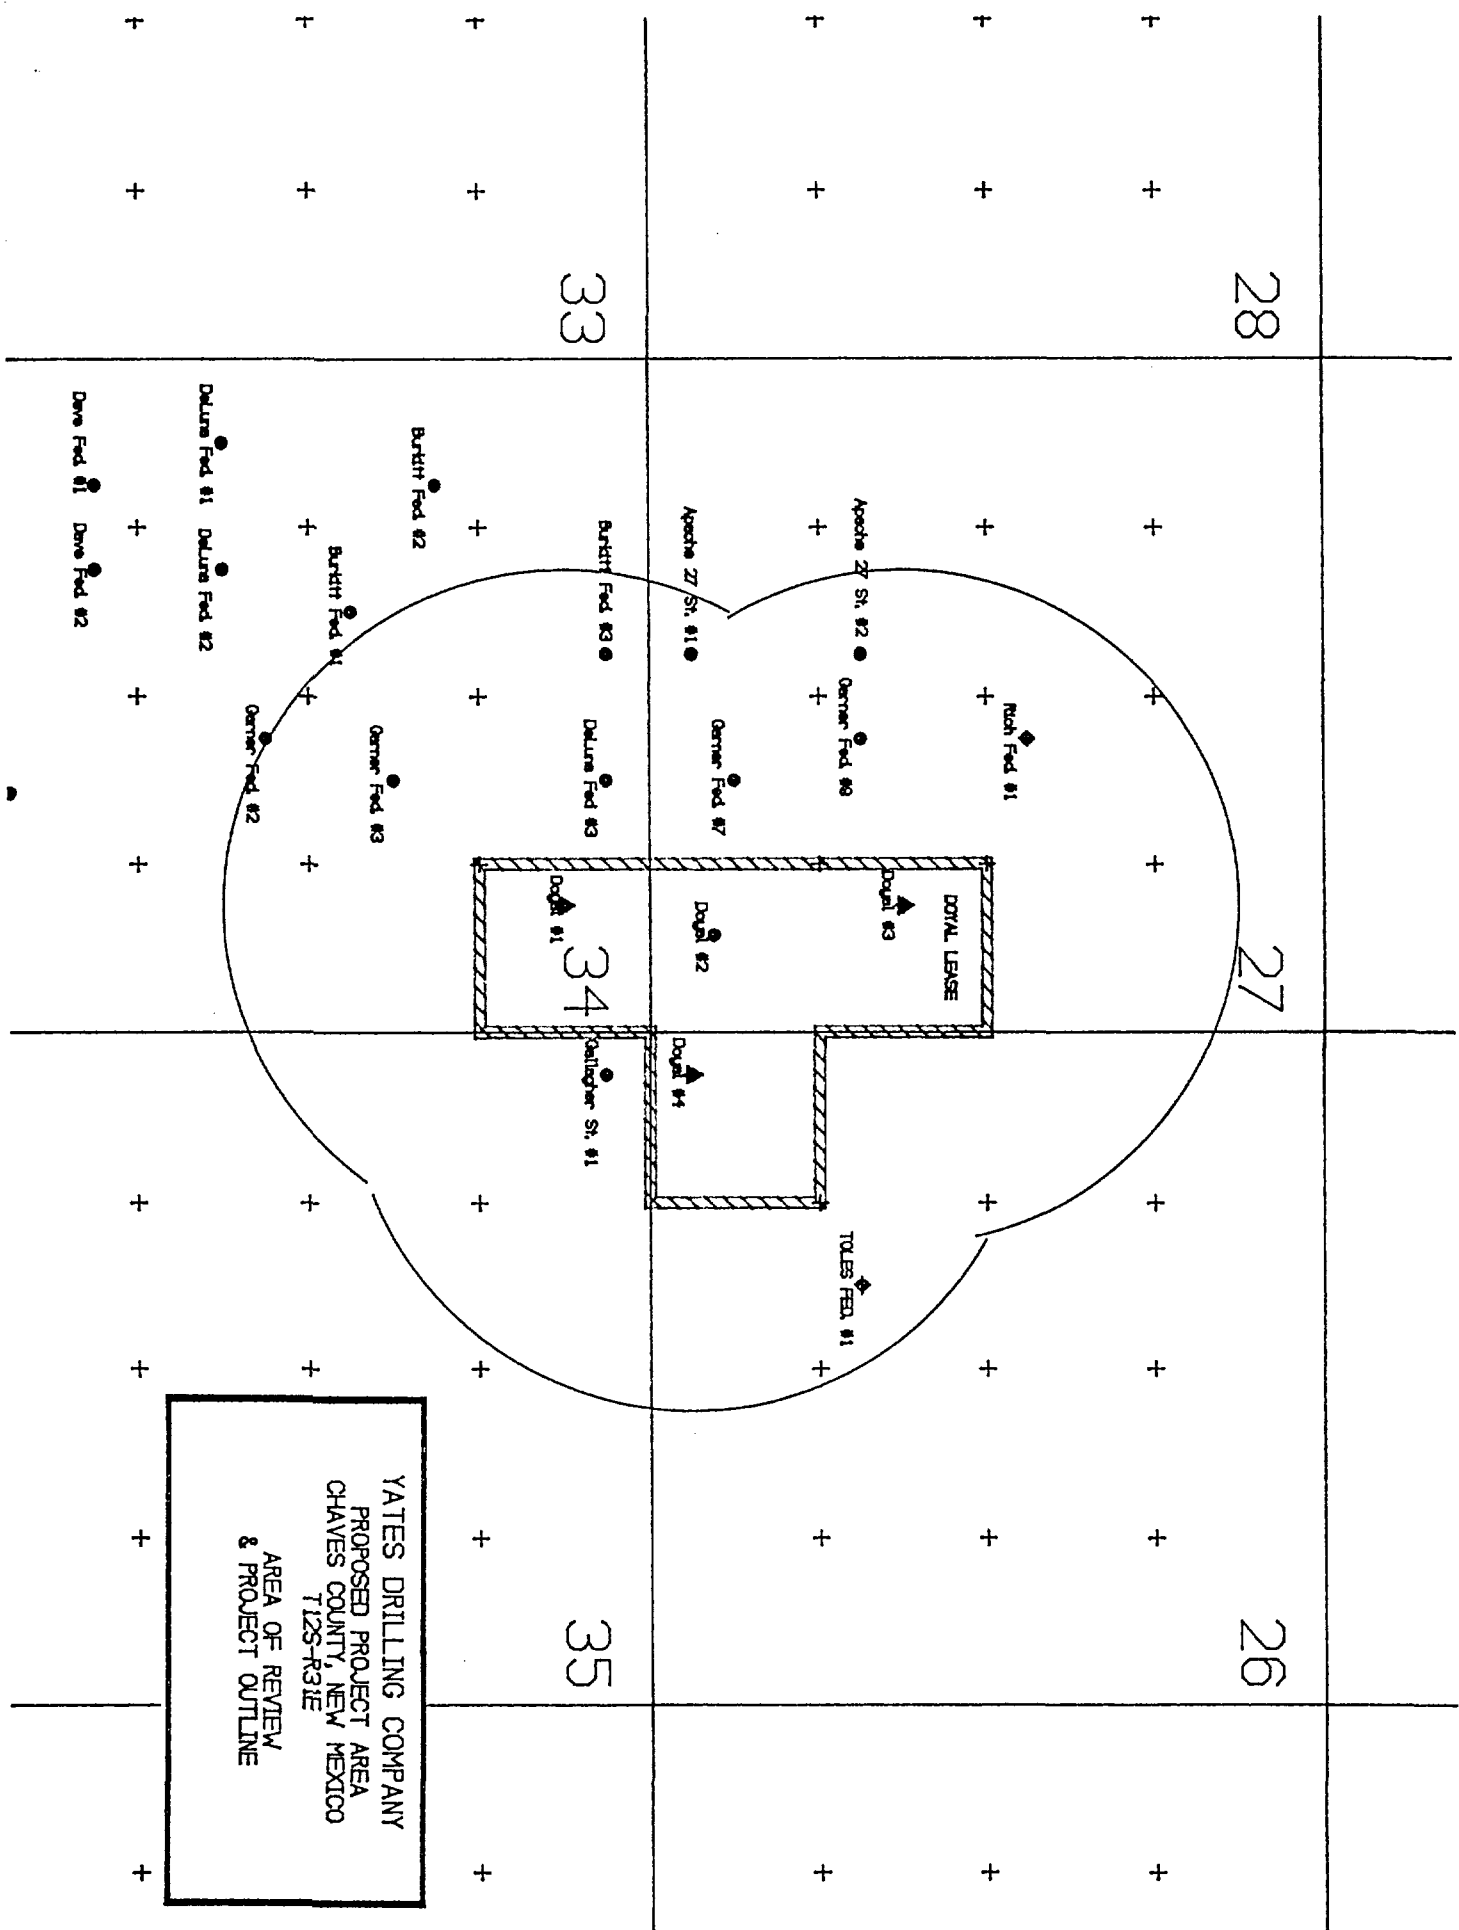

YATES DRILLING COMPANY  
 PROPOSED PROJECT AREA  
 CHAVES COUNTY, NEW MEXICO  
 T12S-R31E  
 AREA OF REVIEW  
 & PROJECT OUTLINE

INJECTION WELL DATA SHEET

OPERATOR: Yates Drilling Co. LEASE: Doyal  
WELL NO.: 1 FOOTAGE: 660'FNL- 990'FEL SEC: 34-T12s-R31e

TUBULAR DATA

SURFACE CASING

SIZE: 8-5/8" 24# CEMENTED WITH: 250 SX.  
TOC: Surface FEET DETERMINED BY: Circulation  
HOLE SIZE: 12-1/4" SETTING DEPTH: 409.46

INTERMEDIATE CASING

SIZE: None CEMENTED WITH: \_\_\_\_\_ SX.  
TOC: \_\_\_\_\_ FEET DETERMINED BY: \_\_\_\_\_  
HOLE SIZE: \_\_\_\_\_ SETTING DEPTH: \_\_\_\_\_

LONG STRING

SIZE: 5-1/2" 14# CEMENTED WITH: 250 SX.  
TOC: 2200' FEET DETERMINED BY: Temp. Survey  
HOLE SIZE: 7-7/8" SETTING DEPTH: 3100'  
TOTAL DEPTH: 3100'

INJECTION INTERVAL


2982' FEET TO 2989' FEET - PERFORATED

TUBING

TUBING SIZE: 2-3/8" LINED WITH: Plastic SET IN A  
Baker AD-1 PACKER AT: 2932' FEET

OTHER DATA

1. NAME OF INJECTION FORMATION: Queen
2. NAME OF FIELD OR POOL (IF APPLICABLE): SE Chaves Queen
3. IS THIS A NEW WELL DRILLED FOR INJECTION? No  
IF NO, FOR WHAT PURPOSE WAS THE WELL ORIGINALLY DRILLED?  
This well was drilled as a Queen producing well.
4. HAS WELL EVER BEEN PERFORATED IN ANY OTHER ZONE(S)? No  
LIST ALL SUCH PERFORATED INTERVALS AND GIVE PLUGGING  
DETAILS (SACKS OF CEMENT OR BRIDGE PLUG(S) USED): \_\_\_\_\_
5. GIVE DEPTH TO AND NAME OF ANY OVERLYING AND/OR  
UNDERLYING OIL OR GAS ZONES (POOLS) IN THIS AREA: \_\_\_\_\_  
None known.

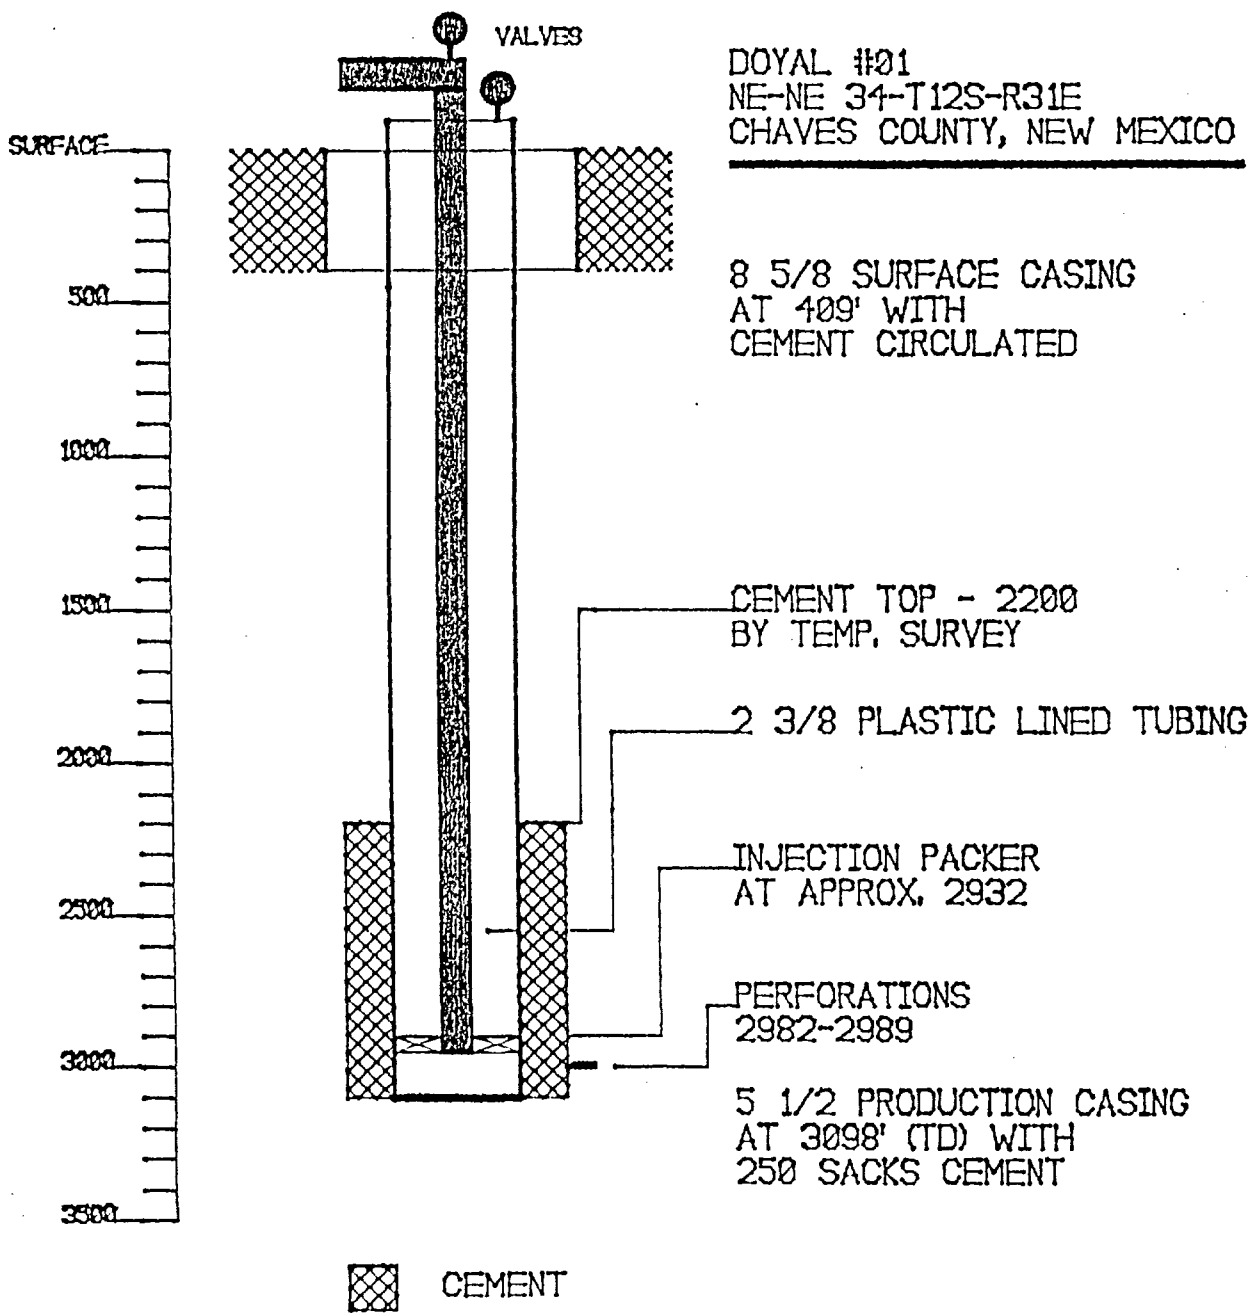

DOYAL #01  
 NE-NE 34-T12S-R31E  
 CHAVES COUNTY, NEW MEXICO

INJECTION WELL DATA SHEET

OPERATOR: Yates Drilling Co. LEASE: Doyal

WELL NO.: 3 FOOTAGE: 1990'ESL- 990'FEL SEC: 27-T12s-R31e

TUBULAR DATA

SURFACE CASING

SIZE: 8-5/8" 24# CEMENTED WITH: 260 SX.  
TOC: Surface FEET DETERMINED BY: Circulation  
HOLE SIZE: 12-1/4" SETTING DEPTH: 409'

INTERMEDIATE CASING

SIZE: None CEMENTED WITH: \_\_\_\_\_ SX.  
TOC: \_\_\_\_\_ FEET DETERMINED BY: \_\_\_\_\_  
HOLE SIZE: \_\_\_\_\_ SETTING DEPTH: \_\_\_\_\_

LONG STRING

SIZE: 5-1/2" 14# CEMENTED WITH: 850 SX.  
TOC: 630' FEET DETERMINED BY: Cement Bond Log  
HOLE SIZE: 7-7/8" SETTING DEPTH: 3099'  
TOTAL DEPTH: 3100'

INJECTION INTERVAL


2991' FEET TO 2997' FEET - PERFORATED

TUBING

TUBING SIZE: 2-3/8" LINED WITH: Plastic SET IN A  
Baker AD-1 PACKER AT: 2941' FEET

OTHER DATA

1. NAME OF INJECTION FORMATION: Queen
2. NAME OF FIELD OR POOL (IF APPLICABLE): SE Chaves Queen
3. IS THIS A NEW WELL DRILLED FOR INJECTION? No  
IF NO, FOR WHAT PURPOSE WAS THE WELL ORIGINALLY DRILLED?  
This well was drilled as a Queen producing well.  
This well is temp. aban. due to high water production
4. HAS WELL EVER BEEN PERFORATED IN ANY OTHER ZONE(S)? No  
LIST ALL SUCH PERFORATED INTERVALS AND GIVE PLUGGING  
DETAILS (SACKS OF CEMENT OR BRIDGE PLUG(S) USED): \_\_\_\_\_  
\_\_\_\_\_  
\_\_\_\_\_
5. GIVE DEPTH TO AND NAME OF ANY OVERLYING AND/OR  
UNDERLYING OIL OR GAS ZONES (POOLS) IN THIS AREA: \_\_\_\_\_  
None known.  
\_\_\_\_\_

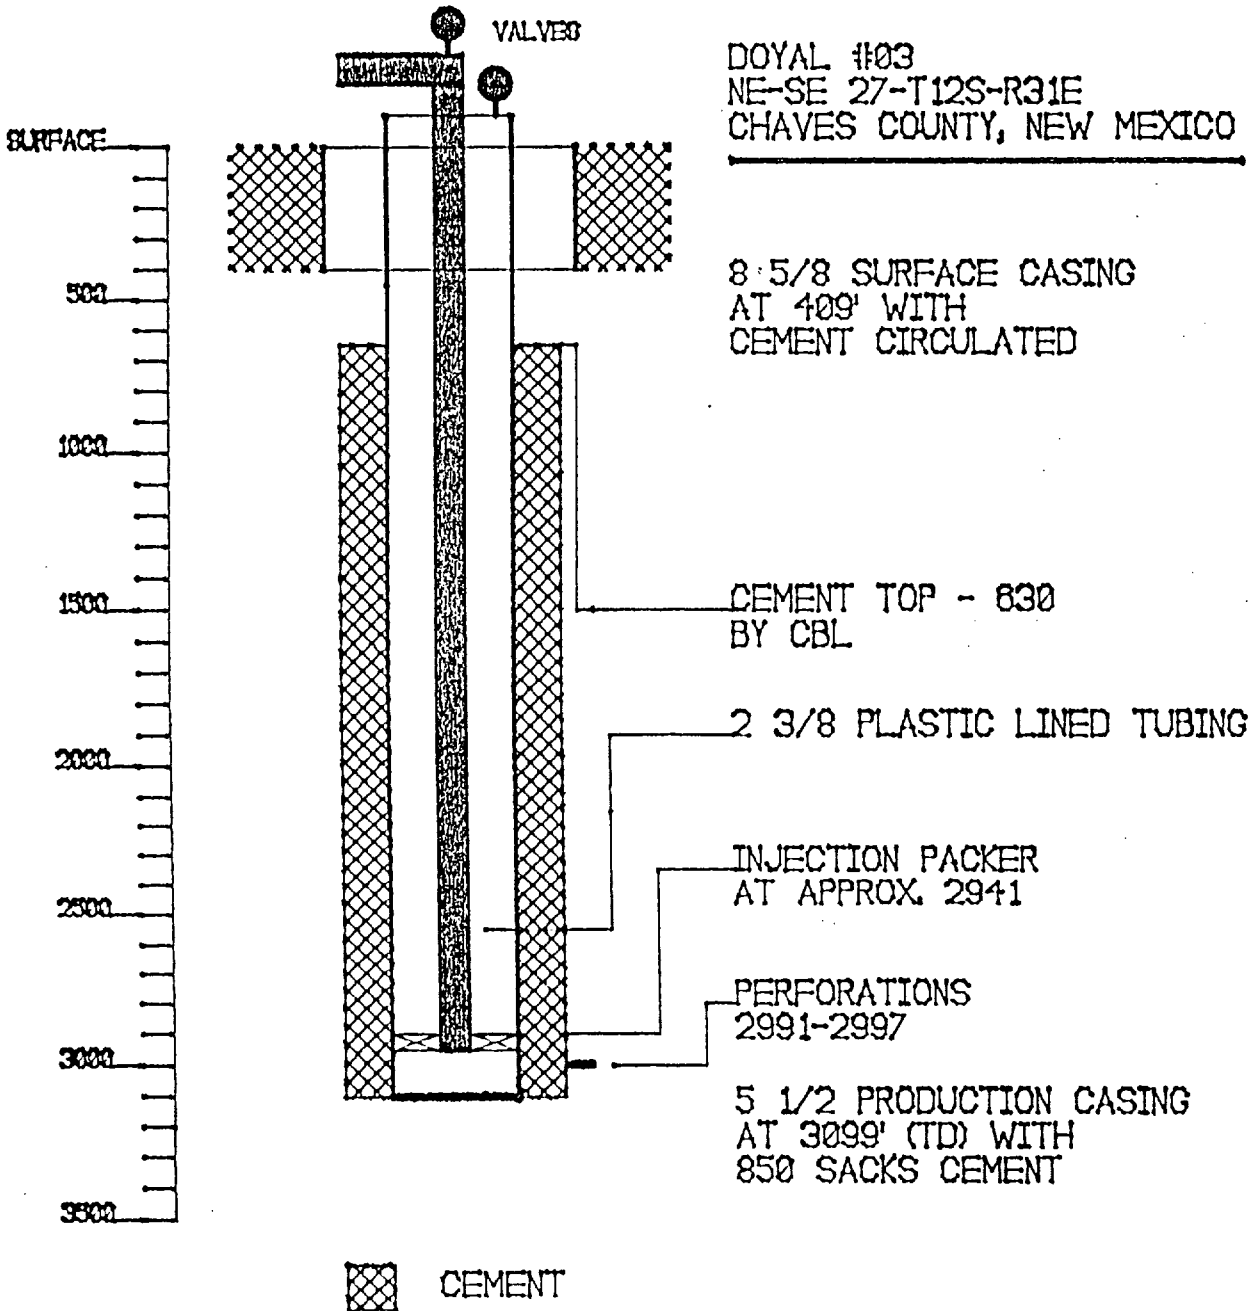

INJECTION WELL DATA SHEET

OPERATOR: Yates Drilling Co. LEASE: Doyal  
WELL NO.: 4 FOOTAGE: 330' FSL- 330' FWL SEC: 26-T12s-R31e

TUBULAR DATA

SURFACE CASING

SIZE: 8-5/8" 24# CEMENTED WITH: 250 SX.  
TOC: Surface FEET DETERMINED BY: Circulation  
HOLE SIZE: 12-1/4" SETTING DEPTH: 400

INTERMEDIATE CASING

SIZE: None CEMENTED WITH: \_\_\_\_\_ SX.  
TOC: \_\_\_\_\_ FEET DETERMINED BY: \_\_\_\_\_  
HOLE SIZE: \_\_\_\_\_ SETTING DEPTH: \_\_\_\_\_

LONG STRING

SIZE: 5-1/2" 14# CEMENTED WITH: 975 SX.  
TOC: 310' FEET DETERMINED BY: Temp. Survey  
HOLE SIZE: 7-7/8" SETTING DEPTH: 3088'  
TOTAL DEPTH: 3100'

INJECTION INTERVAL


2982' FEET TO 2985' FEET - PERFORATED

TUBING

TUBING SIZE: 2-3/8" LINED WITH: Plastic SET IN A  
Baker AD-1 PACKER AT: 2932' FEET

OTHER DATA

1. NAME OF INJECTION FORMATION: Queen
2. NAME OF FIELD OR POOL (IF APPLICABLE): SE Chaves Queen
3. IS THIS A NEW WELL DRILLED FOR INJECTION? No  
IF NO, FOR WHAT PURPOSE WAS THE WELL ORIGINALLY DRILLED?  
This well was drilled as a Queen producing well.
4. HAS WELL EVER BEEN PERFORATED IN ANY OTHER ZONE(S)? No  
LIST ALL SUCH PERFORATED INTERVALS AND GIVE PLUGGING  
DETAILS (SACKS OF CEMENT OR BRIDGE PLUG(S) USED): \_\_\_\_\_
5. GIVE DEPTH TO AND NAME OF ANY OVERLYING AND/OR  
UNDERLYING OIL OR GAS ZONES (POOLS) IN THIS AREA: \_\_\_\_\_  
None known.

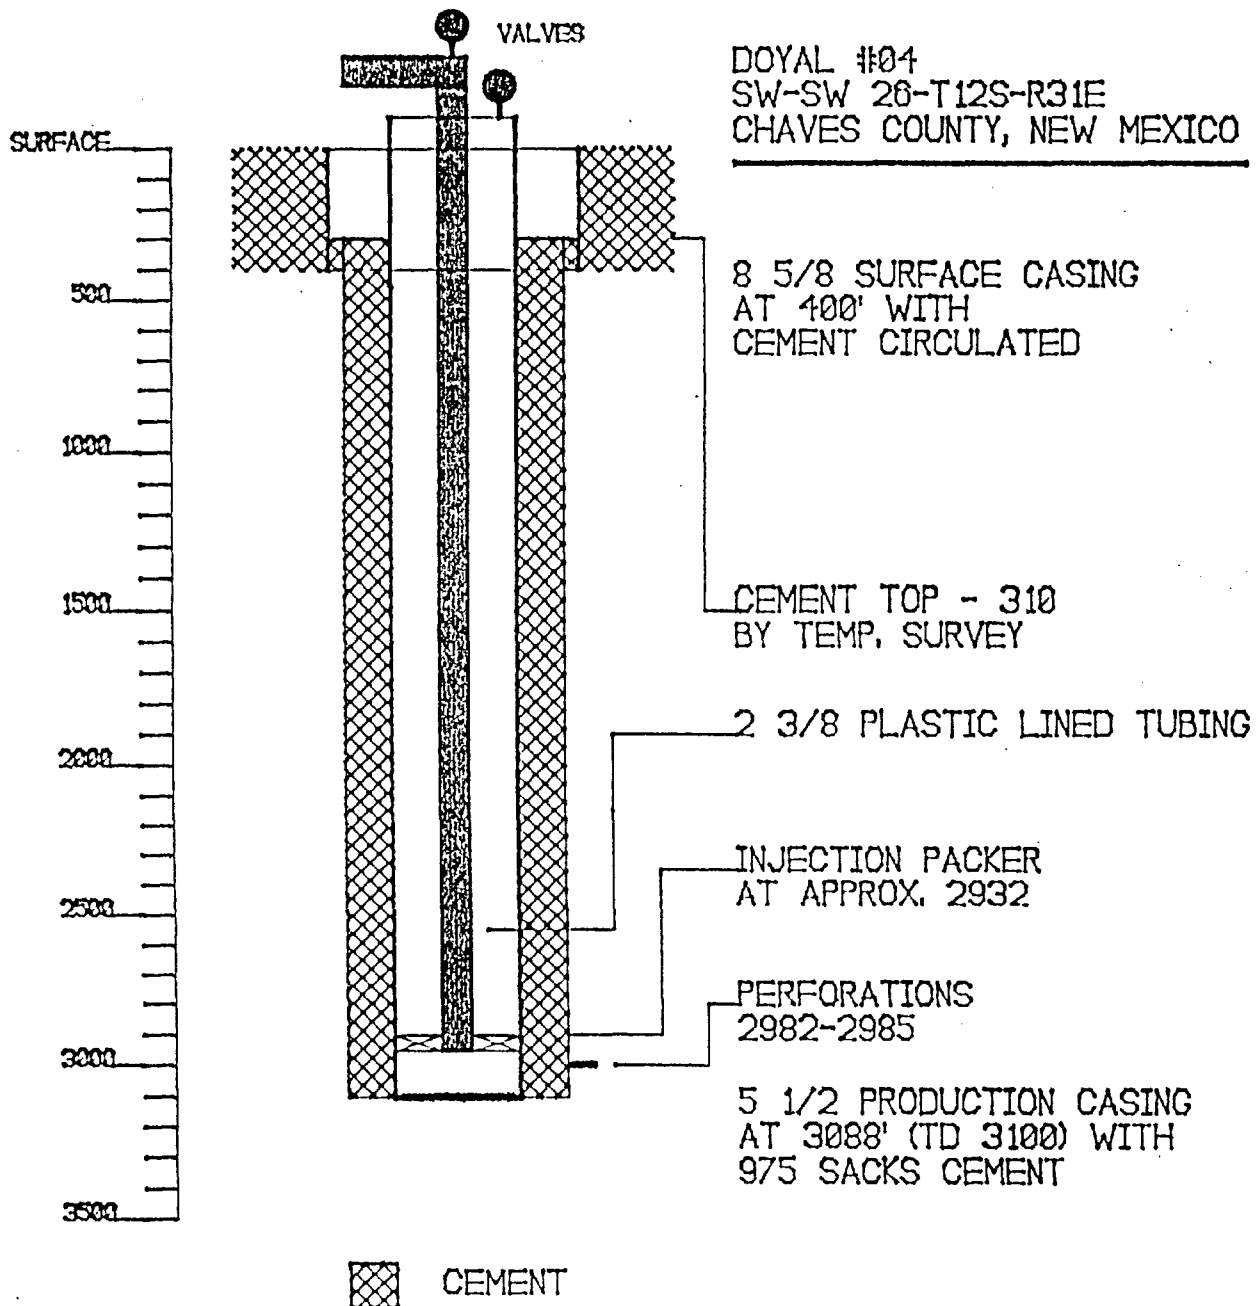

WELL DATA SHEET

OPERATOR: Yates Drilling Company LEASE: Apache "27" State

WELL NO.: 1 FOOTAGE: 330' FSL-2310' FWL SEC: 27-T12s-R31e

TUBULAR DATA

SURFACE CASING

SIZE: 8-5/8" CEMENTED WITH: \_\_\_\_\_ SX.  
TOC: Surface FEET DETERMINED BY: Circulation  
HOLE SIZE: 12-1/4" SETTING DEPTH: 422'

INTERMEDIATE CASING

SIZE: None CEMENTED WITH: \_\_\_\_\_ SX.  
TOC: \_\_\_\_\_ FEET DETERMINED BY: \_\_\_\_\_  
HOLE SIZE: \_\_\_\_\_ SETTING DEPTH: \_\_\_\_\_

LONG STRING

SIZE: 4-1/2" CEMENTED WITH: \_\_\_\_\_ SX.  
TOC: 210' FEET DETERMINED BY: \_\_\_\_\_  
HOLE SIZE: 7-7/8" SETTING DEPTH: 3150'  
TOTAL DEPTH: 3150'

PRODUCING INTERVAL

FORMATION: Queen POOL OR FIELD: SE Chaves Queen  
SPUD DATE: 5-9-85 COMPLETION DATE: 6-27-85  
PERFORATED: 2984 FEET TO 2991 FEET

STIMULATION: 100 gals. 15% HCl acid, 12000 gals. gel water  
4000 gals. CO2, 10500# 20/40 sand, 10000# 12/20 sand

OTHER PERFORATED ZONES: None

CURRENT STATUS

WHAT IS CURRENT STATUS OF WELL? Pumping oil well

IF P&A, LIST PLUGGING DETAILS: \_\_\_\_\_  
\_\_\_\_\_  
\_\_\_\_\_  
\_\_\_\_\_



WELL DATA SHEET

OPERATOR: Yates Drilling Company LEASE: Apache "27" State

WELL NO.: 2 FOOTAGE: 1650' FSL-2310' FEL SEC: 27-T12s-R31e

TUBULAR DATA

SURFACE CASING

SIZE: 8-5/8" CEMENTED WITH: \_\_\_\_\_ SX.  
TOC: Surface FEET DETERMINED BY: Circulation  
HOLE SIZE: 12-1/4" SETTING DEPTH: 454'

INTERMEDIATE CASING

SIZE: None CEMENTED WITH: \_\_\_\_\_ SX.  
TOC: \_\_\_\_\_ FEET DETERMINED BY: \_\_\_\_\_  
HOLE SIZE: \_\_\_\_\_ SETTING DEPTH: \_\_\_\_\_

LONG STRING

SIZE: 4-1/2" CEMENTED WITH: \_\_\_\_\_ SX.  
TOC: Surface FEET DETERMINED BY: Circulation  
HOLE SIZE: 7-7/8" SETTING DEPTH: 3150'  
TOTAL DEPTH: 3150'

PRODUCING INTERVAL

FORMATION: Queen POOL OR FIELD: SE Chaves Queen  
SPUD DATE: 7-29-85 COMPLETION DATE: 8-23-85  
PERFORATED: 2996 FEET TO 3000 FEET

STIMULATION: 850 gals. 15% HCl acid, 16000 gals. gel water  
25% CO2, 10500# 20/40 sand, 10000# 12/20 sand

OTHER PERFORATED ZONES: None

CURRENT STATUS

WHAT IS CURRENT STATUS OF WELL? Pumping oil well

IF P&A, LIST PLUGGING DETAILS: \_\_\_\_\_

\_\_\_\_\_  
\_\_\_\_\_  
\_\_\_\_\_

WELL DATA SHEET

OPERATOR: Yates Drilling Co. LEASE: Burkitt Federal

WELL NO.: 3 FOOTAGE: 330'FNL-2310'FWL SEC: 34-T12s-R31e

TUBULAR DATA

SURFACE CASING

SIZE: 8-5/8" 24# CEMENTED WITH: 270 SX.  
TOC: Surface FEET DETERMINED BY: Circulation  
HOLE SIZE: 12-1/4" SETTING DEPTH: 424'

INTERMEDIATE CASING

SIZE: None CEMENTED WITH: \_\_\_\_\_ SX.  
TOC: \_\_\_\_\_ FEET DETERMINED BY: \_\_\_\_\_  
HOLE SIZE: \_\_\_\_\_ SETTING DEPTH: \_\_\_\_\_

LONG STRING

SIZE: 5-1/2" 14# CEMENTED WITH: 260 SX.  
TOC: 1640' FEET DETERMINED BY: Temp. Survey  
HOLE SIZE: 7-7/8" SETTING DEPTH: 3083'  
TOTAL DEPTH: 3100'

PRODUCING INTERVAL

FORMATION: Queen POOL OR FIELD: SE Chaves Queen  
SPUD DATE: 8-9-85# COMPLETION DATE: 10-1-85  
PERFORATED: 2988 FEET TO 2992 FEET

STIMULATION: 750 gals. 15% HCl acid, 15000 gals. gel water  
24 tons CO2, 12000# 20/40 sand, 7000# 12/20 sand

OTHER PERFORATED ZONES: None

CURRENT STATUS

WHAT IS CURRENT STATUS OF WELL? Pumping oil well

IF P&A, LIST PLUGGING DETAILS: \_\_\_\_\_

\_\_\_\_\_  
\_\_\_\_\_  
\_\_\_\_\_

WELL DATA SHEET

OPERATOR: Yates Drilling Co. LEASE: DeLuna Federal

WELL NO.: 3 FOOTAGE: 330'FNL-1980'FEL SEC: 34-T12s-R31e

TUBULAR DATA

SURFACE CASING

SIZE: 8-5/8" 24# CEMENTED WITH: 300 SX.  
TOC: Surface FEET DETERMINED BY: Circulation  
HOLE SIZE: 12-1/4" SETTING DEPTH: 433'

INTERMEDIATE CASING

SIZE: None CEMENTED WITH: \_\_\_\_\_ SX.  
TOC: \_\_\_\_\_ FEET DETERMINED BY: \_\_\_\_\_  
HOLE SIZE: \_\_\_\_\_ SETTING DEPTH: \_\_\_\_\_

LONG STRING

SIZE: 5-1/2" 14# CEMENTED WITH: 410 SX.  
TOC: 1900' FEET DETERMINED BY: Cement Bond Log  
HOLE SIZE: 7-7/8" SETTING DEPTH: 3094'  
TOTAL DEPTH: 3100'

PRODUCING INTERVAL

FORMATION: Queen POOL OR FIELD: SE Chaves Queen  
SPUD DATE: 2-11-85 COMPLETION DATE: 3-20-85  
PERFORATED: 2987-1/2 FEET TO 2993 FEET

STIMULATION: 750 gals. 15% hcl, 15000 gals. 30# gel, 23-1/2  
tons CO2, 13000# 20/40 sand, 10000# 10/20 sand

OTHER PERFORATED ZONES: None

CURRENT STATUS

WHAT IS CURRENT STATUS OF WELL? Pumping oil well

IF P&A, LIST PLUGGING DETAILS: \_\_\_\_\_

\_\_\_\_\_  
\_\_\_\_\_  
\_\_\_\_\_

WELL DATA SHEET

OPERATOR: Yates Drilling Co. LEASE: Doyal

WELL NO.: 1 FOOTAGE: 660'FNL-990'FEL SEC: 34-T12s-R31e

TUBULAR DATA

SURFACE CASING

SIZE: 8-5/8" 24# CEMENTED WITH: 250 SX.  
TOC: Surface FEET DETERMINED BY: Circulation  
HOLE SIZE: 12-1/4" SETTING DEPTH: 409.46'

INTERMEDIATE CASING

SIZE: None CEMENTED WITH: \_\_\_\_\_ SX.  
TOC: \_\_\_\_\_ FEET DETERMINED BY: \_\_\_\_\_  
HOLE SIZE: \_\_\_\_\_ SETTING DEPTH: \_\_\_\_\_

LONG STRING

SIZE: 5-1/2" CEMENTED WITH: 250 SX.  
TOC: 2200' FEET DETERMINED BY: Temp. Survey  
HOLE SIZE: 7-7/8" SETTING DEPTH: 3098'  
TOTAL DEPTH: 3100'

PRODUCING INTERVAL

FORMATION: Queen POOL OR FIELD: SE Chaves Queen  
SPUD DATE: 7-31-84 COMPLETION DATE: 8-25-84  
PERFORATED: 2982' FEET TO 2989' FEET

STIMULATION: 750 gallons of 15% HCl, 15000 gallons 30# gel  
5000 SCF N2 per barrel, 10900# 20/40 sand, and 4200# 10/20  
sand.

OTHER PERFORATED ZONES: None

CURRENT STATUS

WHAT IS CURRENT STATUS OF WELL? Pumping oil well.

IF P&A, LIST PLUGGING DETAILS: \_\_\_\_\_

\_\_\_\_\_  
\_\_\_\_\_  
\_\_\_\_\_

WELL DATA SHEET

OPERATOR: Yates Drilling Co. LEASE: Doyal  
WELL NO.: 2 FOOTAGE: 500' FSL - 760' FEL SEC: 27-T12s-R31e

TUBULAR DATA

SURFACE CASING

SIZE: 8-5/8" 24# CEMENTED WITH: 275 SX.  
TOC: Surface FEET DETERMINED BY: Circulation  
HOLE SIZE: 12-1/4" SETTING DEPTH: 411'

INTERMEDIATE CASING

SIZE: None CEMENTED WITH: \_\_\_\_\_ SX.  
TOC: \_\_\_\_\_ FEET DETERMINED BY: \_\_\_\_\_  
HOLE SIZE: \_\_\_\_\_ SETTING DEPTH: \_\_\_\_\_

LONG STRING

SIZE: 5-1/2" CEMENTED WITH: 250 SX.  
TOC: 2200' FEET DETERMINED BY: Temp. Survey  
HOLE SIZE: 7-7/8" SETTING DEPTH: 3098'  
TOTAL DEPTH: 3100'

PRODUCING INTERVAL

FORMATION: Queen POOL OR FIELD: SE Chaves Queen  
SPUD DATE: 9-7-84 COMPLETION DATE: 9-20-84  
PERFORATED: 2981' FEET TO 2987' FEET

STIMULATION: 750 gallons of 15 % HCl, 15000 gallons 30# gel  
, 25% CO2 12000# 20/40 sand, 10000# 10/20 sand.

OTHER PERFORATED ZONES: None

CURRENT STATUS

WHAT IS CURRENT STATUS OF WELL? Pumping oil well.

IF P&A, LIST PLUGGING DETAILS: \_\_\_\_\_  
\_\_\_\_\_  
\_\_\_\_\_  
\_\_\_\_\_

WELL DATA SHEET

OPERATOR: Yates Drilling Co. LEASE: Doyal

WELL NO.: 3 FOOTAGE: 1980' FSL- 990' FEL SEC: 27-I12s-R31e

TUBULAR DATA

SURFACE CASING

SIZE: 8-5/8" 24# CEMENTED WITH: 260 SX.  
TOC: Surface FEET DETERMINED BY: Circulation  
HOLE SIZE: 12-1/4" SETTING DEPTH: 409'

INTERMEDIATE CASING

SIZE: None CEMENTED WITH: \_\_\_\_\_ SX.  
TOC: \_\_\_\_\_ FEET DETERMINED BY: \_\_\_\_\_  
HOLE SIZE: \_\_\_\_\_ SETTING DEPTH: \_\_\_\_\_

LONG STRING

SIZE: 5-1/2" 14# CEMENTED WITH: 850 SX.  
TOC: 630' FEET DETERMINED BY: Temp. Survey  
HOLE SIZE: 7-7/8" SETTING DEPTH: 3099'  
TOTAL DEPTH: 3100'

PRODUCING INTERVAL

FORMATION: Queen POOL OR FIELD: SE Chaves Queen  
SPUD DATE: 9-20-84 COMPLETION DATE: NONE  
PERFORATED: 2991' FEET TO 2997' FEET

STIMULATION: 750 gallons of 15 % HCl, 15000 gallons 30# gel  
, 25% CO2 20000# 20/40 sand, 10000# 10/20 sand.

OTHER PERFORATED ZONES: None

CURRENT STATUS

WHAT IS CURRENT STATUS OF WELL? Temp. Abandoned

IF P&A, LIST PLUGGING DETAILS: \_\_\_\_\_

\_\_\_\_\_  
\_\_\_\_\_  
\_\_\_\_\_

WELL DATA SHEET

OPERATOR: Yates Drilling Co. LEASE: Doyal

WELL NO.: 4 FOOTAGE: 330' FSL- 330' FWL SEC: 26-T12s-R31e

TUBULAR DATA

SURFACE CASING

SIZE: 8-5/8" 24# CEMENTED WITH: 250 SX.  
TOC: Surface FEET DETERMINED BY: Circulation  
HOLE SIZE: 12-1/4" SETTING DEPTH: 400'

INTERMEDIATE CASING

SIZE: None CEMENTED WITH: \_\_\_\_\_ SX.  
TOC: \_\_\_\_\_ FEET DETERMINED BY: \_\_\_\_\_  
HOLE SIZE: \_\_\_\_\_ SETTING DEPTH: \_\_\_\_\_

LONG STRING

SIZE: 5-1/2" 14# CEMENTED WITH: 975 SX.  
TOC: 310' FEET DETERMINED BY: Temp. Survey  
HOLE SIZE: 7-7/8" SETTING DEPTH: 3088'  
TOTAL DEPTH: 3100'

PRODUCING INTERVAL

FORMATION: Queen POOL OR FIELD: SE Chaves Queen  
SPUD DATE: 11-18-84 COMPLETION DATE: 1-24-87  
PERFORATED: 2982' FEET TO 2985' FEET

STIMULATION: 750 gallons of 15 % HCl, 15000 gallons 30# gel  
, 22 tons CO2, 12000# 20/40 sand, 8500 # 12/20 sand.

OTHER PERFORATED ZONES: None

CURRENT STATUS

WHAT IS CURRENT STATUS OF WELL? Pumping oil well

IF P&A, LIST PLUGGING DETAILS:  
\_\_\_\_\_  
\_\_\_\_\_  
\_\_\_\_\_  
\_\_\_\_\_

WELL DATA SHEET

OPERATOR: Yates Drilling Co. LEASE: Gallagher State

WELL NO.: 1 FOOTAGE: 330'FNL- 330'FWL SEC: 35-T12s-R31e

TUBULAR DATA

SURFACE CASING

SIZE: 8-5/8" 24# CEMENTED WITH: 250 SX.  
TOC: Surface FEET DETERMINED BY: Circulation  
HOLE SIZE: 12-1/4" SETTING DEPTH: 433'

INTERMEDIATE CASING

SIZE: None CEMENTED WITH: \_\_\_\_\_ SX.  
TOC: \_\_\_\_\_ FEET DETERMINED BY: \_\_\_\_\_  
HOLE SIZE: \_\_\_\_\_ SETTING DEPTH: \_\_\_\_\_

LONG STRING

SIZE: 5-1/2" 14# CEMENTED WITH: 900 SX.  
TOC: Surface FEET DETERMINED BY: Circulation  
HOLE SIZE: 7-7/8" SETTING DEPTH: 3084'  
TOTAL DEPTH: 3100'

PRODUCING INTERVAL

FORMATION: Queen POOL OR FIELD: SE Chaves Queen  
SPUD DATE: 10-28-84 COMPLETION DATE: 11-9-84  
PERFORATED: 2982' FEET TO 2987' FEET

STIMULATION: 650 gallons of 15% HCl, 15000 gallons 30# gel  
. 22 tons CO2, 12000# 20/40 sand, 10750# 10/20 sand.

OTHER PERFORATED ZONES: None

CURRENT STATUS

WHAT IS CURRENT STATUS OF WELL? Pumping oil well

IF P&A, LIST PLUGGING DETAILS: \_\_\_\_\_

\_\_\_\_\_  
\_\_\_\_\_  
\_\_\_\_\_



WELL DATA SHEET

OPERATOR: Yates Drilling Co. LEASE: Garner Federal

WELL NO.: 2 FOOTAGE: 2310' FSL-2310' FEL SEC: 34-I12s-R31e

TUBULAR DATA

SURFACE CASING

SIZE: 8-5/8" 24# CEMENTED WITH: 250 SX.  
TOC: Surface FEET DETERMINED BY: Circulation  
HOLE SIZE: 12-1/4" SETTING DEPTH: 410'

INTERMEDIATE CASING

SIZE: None CEMENTED WITH: \_\_\_\_\_ SX.  
TOC: \_\_\_\_\_ FEET DETERMINED BY: \_\_\_\_\_  
HOLE SIZE: \_\_\_\_\_ SETTING DEPTH: \_\_\_\_\_

LONG STRING

SIZE: 5-1/2" 14# CEMENTED WITH: 550 SX.  
TOC: 1992' FEET DETERMINED BY: Cement Bond Log  
HOLE SIZE: 7-7/8" SETTING DEPTH: 3098'  
TOTAL DEPTH: 3100'

PRODUCING INTERVAL

FORMATION: Queen POOL OR FIELD: SE Chaves Queen  
SPUD DATE: 4-29-84 COMPLETION DATE: 6-1-84  
PERFORATED: 2982 FEET TO 2990 FEET

STIMULATION: 750 gals. 15% HCl acid, 20000 gals. 30# gel,  
25% CO2, 16500# 20/40 sand, 1700# 12/20 sand

OTHER PERFORATED ZONES: None

CURRENT STATUS

WHAT IS CURRENT STATUS OF WELL? Pumping oil well

IF P&A, LIST PLUGGING DETAILS: \_\_\_\_\_  
\_\_\_\_\_  
\_\_\_\_\_  
\_\_\_\_\_

WELL DATA SHEET

OPERATOR: Yates Drilling Co. LEASE: Garner Federal

WELL NO.: 3 FOOTAGE: 1980' ENL-1980' FEL SEC: 34-T12s-R31e

TUBULAR DATA

SURFACE CASING

SIZE: 8-5/8" 24# CEMENTED WITH: 225 SX.  
TOC: Surface FEET DETERMINED BY: Circulation  
HOLE SIZE: 12-1/4" SETTING DEPTH: 408'

INTERMEDIATE CASING

SIZE: None CEMENTED WITH: \_\_\_\_\_ SX.  
TOC: \_\_\_\_\_ FEET DETERMINED BY: \_\_\_\_\_  
HOLE SIZE: \_\_\_\_\_ SETTING DEPTH: \_\_\_\_\_

LONG STRING

SIZE: 5-1/2" 14# CEMENTED WITH: 250 SX.  
TOC: 1810' FEET DETERMINED BY: Temp. Survey  
HOLE SIZE: 7-7/8" SETTING DEPTH: 3100'  
TOTAL DEPTH: 3100'

PRODUCING INTERVAL

FORMATION: Queen POOL OR FIELD: SE Chaves Queen  
SPUD DATE: 7-2-84 COMPLETION DATE: 8-12-84  
PERFORATED: 2981 FEET TO 2986 FEET

STIMULATION: 750 gals. 15% HCl acid, 13000 gals. 30# gel,  
5000 SCF N2 per barre, 1500# 20/40 sand, 1700# 12/20 sand

OTHER PERFORATED ZONES: None

CURRENT STATUS

WHAT IS CURRENT STATUS OF WELL? Pumping oil well

IF P&A, LIST PLUGGING DETAILS: \_\_\_\_\_

\_\_\_\_\_  
\_\_\_\_\_  
\_\_\_\_\_

WELL DATA SHEET

OPERATOR: Yates Drilling Co. LEASE: Garner Federal

WELL NO.: 7 FOOTAGE: 660' FSL-1980' FEL SEC: 27-T12s-R31e

TUBULAR DATA

SURFACE CASING

SIZE: 8-5/8" 24# CEMENTED WITH: 250 SX.  
TOC: Surface FEET DETERMINED BY: Circulation  
HOLE SIZE: 12-1/4" SETTING DEPTH: 424'

INTERMEDIATE CASING

SIZE: None CEMENTED WITH: \_\_\_\_\_ SX.  
TOC: \_\_\_\_\_ FEET DETERMINED BY: \_\_\_\_\_  
HOLE SIZE: \_\_\_\_\_ SETTING DEPTH: \_\_\_\_\_

LONG STRING

SIZE: 5-1/2" 14# CEMENTED WITH: 270 SX.  
TOC: 1900' FEET DETERMINED BY: Temp. Survey  
HOLE SIZE: 7-7/8" SETTING DEPTH: 3098.54'  
TOTAL DEPTH: 3100'

PRODUCING INTERVAL

FORMATION: Queen POOL OR FIELD: SE Chaves Queen  
SPUD DATE: 10-14-84 COMPLETION DATE: 10-30-84  
PERFORATED: 2987' FEET TO 2993' FEET

STIMULATION: 750 gallons of 15 % HCl, 15000 gallons 30# gel  
1 1000 SCF/BBL CO2 13000# 20/40 sand, 9000# 10/20 sand

OTHER PERFORATED ZONES: None

CURRENT STATUS

WHAT IS CURRENT STATUS OF WELL? Pumping oil well

IF P&A, LIST PLUGGING DETAILS: \_\_\_\_\_  
\_\_\_\_\_  
\_\_\_\_\_  
\_\_\_\_\_

WELL DATA SHEET

OPERATOR: Yates Drilling Co. LEASE: Garner Federal

WELL NO.: 9 FOOTAGE: 1650'ESL-2310'FEL SEC: 27-T12s-R31e

TUBULAR DATA

SURFACE CASING

SIZE: 8-5/8" 24# CEMENTED WITH: 250 SX.  
TOC: Surface FEET DETERMINED BY: Circulation  
HOLE SIZE: 12-1/4" SETTING DEPTH: 428'

INTERMEDIATE CASING

SIZE: None CEMENTED WITH: \_\_\_\_\_ SX.  
TOC: \_\_\_\_\_ FEET DETERMINED BY: \_\_\_\_\_  
HOLE SIZE: \_\_\_\_\_ SETTING DEPTH: \_\_\_\_\_

LONG STRING

SIZE: 5-1/2" 14# CEMENTED WITH: 320 SX.  
TOC: 1820' FEET DETERMINED BY: Temp. Survey  
HOLE SIZE: 7-7/8" SETTING DEPTH: 3098'  
TOTAL DEPTH: 3100'

PRODUCING INTERVAL

FORMATION: Queen POOL OR FIELD: SE Chaves Queen  
SPUD DATE: 11-11-84 COMPLETION DATE: 11-30-84  
PERFORATED: 2985' FEET TO 2995' FEET

STIMULATION: 750 gallons of 15% HCl, 15000 gallons 30# gel  
. 16 tons of CO2, 18000# 20/40 sand, 12500# 10/20 sand

OTHER PERFORATED ZONES: None

CURRENT STATUS

WHAT IS CURRENT STATUS OF WELL? Pumping oil well

IF P&A, LIST PLUGGING DETAILS: \_\_\_\_\_

\_\_\_\_\_  
\_\_\_\_\_  
\_\_\_\_\_

WELL DATA SHEET

OPERATOR: Yates Drilling Co. LEASE: Rich Federal

WELL NO.: 1 FOOTAGE: 2310'FNL-2310'FEL SEC: 27-T12s-R31e

TUBULAR DATA

SURFACE CASING

SIZE: 8-5/8" 24# CEMENTED WITH: 250 SX.  
TOC: Surface FEET DETERMINED BY: Circulation  
HOLE SIZE: 12-1/4" SETTING DEPTH: 412'

INTERMEDIATE CASING

SIZE: None CEMENTED WITH: \_\_\_\_\_ SX.  
TOC: \_\_\_\_\_ FEET DETERMINED BY: \_\_\_\_\_  
HOLE SIZE: \_\_\_\_\_ SETTING DEPTH: \_\_\_\_\_

LONG STRING

SIZE: None CEMENTED WITH: \_\_\_\_\_ SX.  
TOC: \_\_\_\_\_ FEET DETERMINED BY: \_\_\_\_\_  
HOLE SIZE: 7-7/8" SETTING DEPTH: \_\_\_\_\_  
TOTAL DEPTH: 3100'

PRODUCING INTERVAL

FORMATION: None POOL OR FIELD: SE Chaves Queen  
SPUD DATE: 11-30-84 COMPLETION DATE: None  
PERFORATED: \_\_\_\_\_ FEET TO \_\_\_\_\_ FEET

STIMULATION: None  
\_\_\_\_\_  
\_\_\_\_\_  
\_\_\_\_\_



OTHER PERFORATED ZONES: None  
\_\_\_\_\_  
\_\_\_\_\_

CURRENT STATUS

WHAT IS CURRENT STATUS OF WELL? Plugged and Abandoned

IF P&A, LIST PLUGGING DETAILS: P&A 12-12-84  
Plug 3040-2940' 35 sx Class "C" neat, Plug 2100-2000' 75 sx  
Class "C" w/2% CaCl2, plug 1500-1400' 35 sx Class "C" neat,  
Plug 462-362' 50 sx Class "C" w/2% CaCl2, Plug 50-Sur. 20sx  
Class "C" neat

RICH FED. #101  
SW-NE 27-T12S-R31E  
CHAVES COUNTY, NEW MEXICO

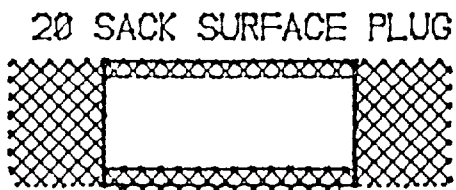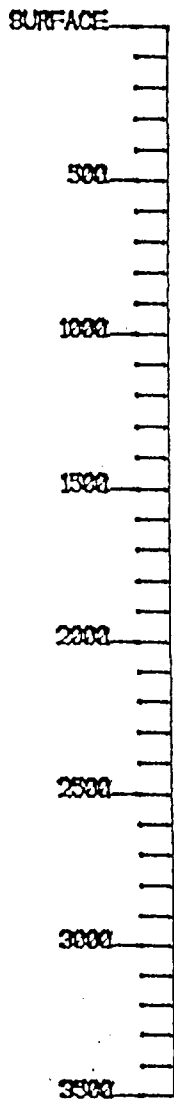


8 5/8 SURFACE CASING  
AT 412' WITH  
CEMENT CIRCULATED

50 SACK PLUG  
362-462

35 SACK PLUG  
1400-1500

75 SACK PLUG  
2000-2100

35 SACK PLUG  
2940-3040

 CEMENT

WELL DATA SHEET

OPERATOR: Snow Oil Company LEASE: Toles Federal

WELL NO.: 1 FOOTAGE: 1980' FSL-1650' FWL SEC: 26-T12s-R31e

TUBULAR DATA

SURFACE CASING

SIZE: 8-5/8" CEMENTED WITH: \_\_\_\_\_ SX.  
TOC: Surface FEET DETERMINED BY: Circulation  
HOLE SIZE: 12-1/4" SETTING DEPTH: 473'

INTERMEDIATE CASING

SIZE: None CEMENTED WITH: \_\_\_\_\_ SX.  
TOC: \_\_\_\_\_ FEET DETERMINED BY: \_\_\_\_\_  
HOLE SIZE: \_\_\_\_\_ SETTING DEPTH: \_\_\_\_\_

LONG STRING

SIZE: 4-1/2" CEMENTED WITH: \_\_\_\_\_ SX.  
TOC: 900' FEET DETERMINED BY: Estimate  
HOLE SIZE: \_\_\_\_\_ SETTING DEPTH: 3115'  
TOTAL DEPTH: 3115'

PRODUCING INTERVAL

FORMATION: Queen POOL OR FIELD: SE Chaves Queen  
SPUD DATE: 1-8-85 COMPLETION DATE: None  
PERFORATED: 2344 FEET TO 2845 FEET

STIMULATION: \_\_\_\_\_  
\_\_\_\_\_  
\_\_\_\_\_


OTHER PERFORATED ZONES: None  
\_\_\_\_\_

CURRENT STATUS


WHAT IS CURRENT STATUS OF WELL? Plugged and Abandoned

IF P&A, LIST PLUGGING DETAILS: 3sx plug on CIRP @ 2990'  
3sx plug on CIRP @ 2290', cut and pulled 4-1/2" casing @ 825  
35sx plug @ 867', 35sx plug @ 524', 10sx plug @ surface

TOLES FED. #01  
NE-SW 28-T12S-R31E  
CHAVES COUNTY, NEW MEXICO

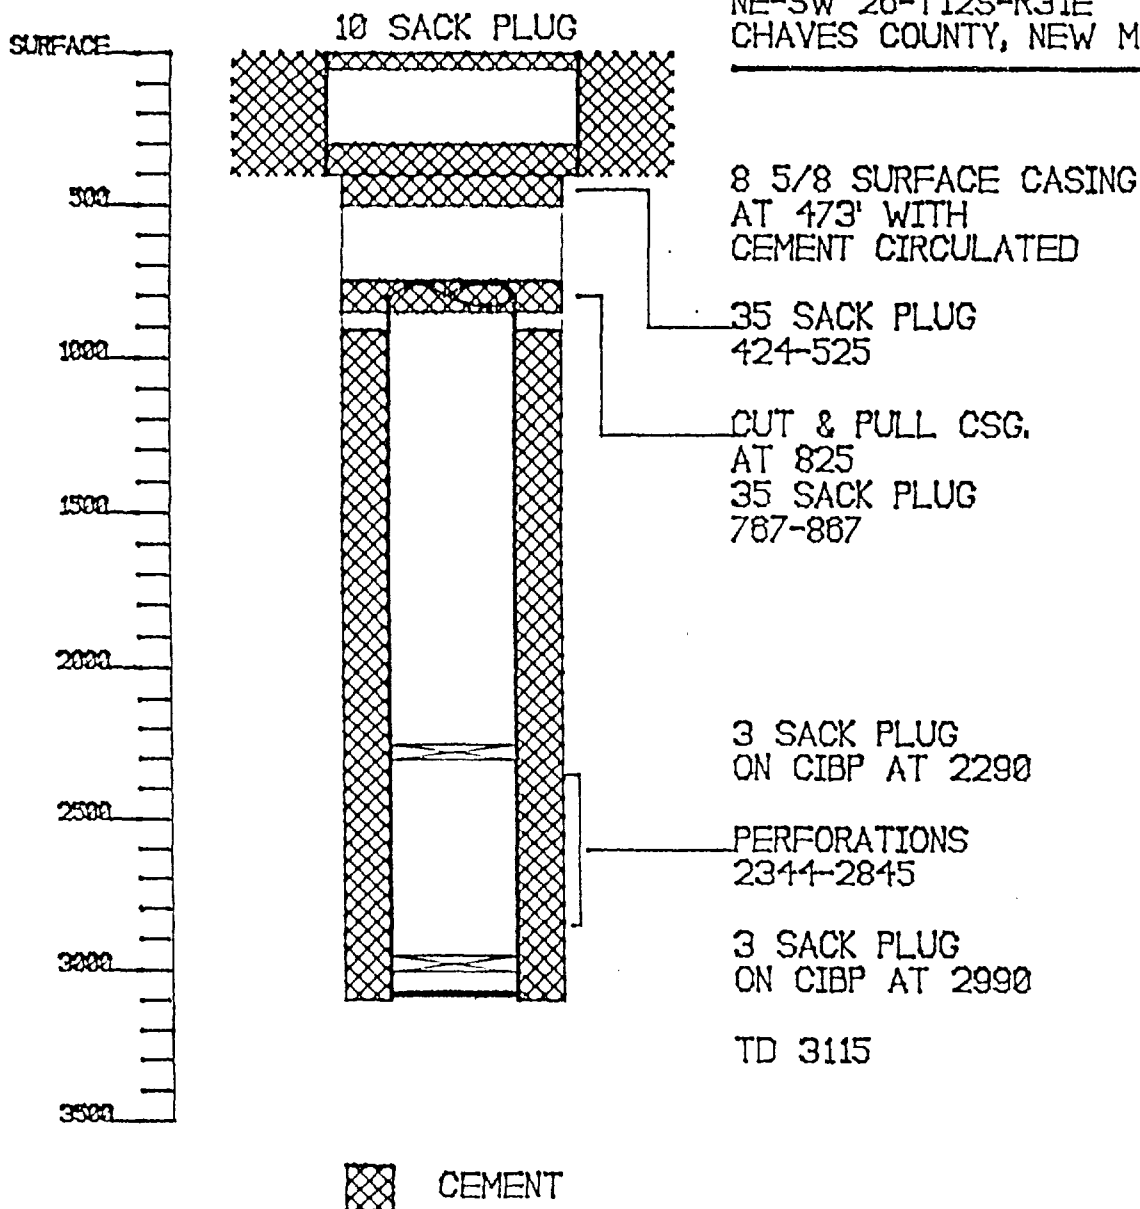





# YATES DRILLING COMPANY

105 SOUTH FOURTH STREET -- (505) 746-9889

FAX (505) 746-6480

TELEX 508891 (YPCART)

ARTESIA, NEW MEXICO 88210

May 31, 1989


PEYTON YATES  
PRESIDENT

S. P. YATES  
VICE PRESIDENT

RANDY G. PATTERSON  
SECRETARY

DENNIS G. KINSEY  
TREASURER

New Mexico State Engineer  
District 2 Office  
P.O. Box 1717  
Roswell, New Mexico 88202

Attention: Glen Brim, District Supervisor 

Gentlemen:

Yates Drilling Company is proposing to waterflood the Queen formation underlying portions of Township 12 South, Range 31 East and Township 13 South, Range 31 East, Chaves County, New Mexico.

To insure the protection of fresh water aquifers in this area we would like to obtain the location, depth and geological name of the producing formation for any water wells located in either described township. Additionally, the identification of any commercial water wells in the area would be helpful.

Any information that your office can provide concerning this matter will be greatly appreciated.

Sincerely yours,

YATES DRILLING COMPANY



Tobin L. Rhodes  
Petroleum Engineer

'89 JUN 1 AM 8 35  
STATE ENGINEER OFFICE  
ROSWELL, NEW MEXICO

RECEIVED  
JUN 12 1989

June 9, 1989

Yates Drilling Company

ATTN: Tobin L. Rhodes, Petroleum Engineer

Enclosed are well locations and some information pertaining to these wells. They were drilled and finished in the Ogallala Formation (TO). Record of other wells finished deeper on other water formations were found north of Township 12 South in Township 11 South, Range 31 East. These wells are finished in the Triassic Formation (TRC), depth of wells are between + 200 feet to 300 feet.



Johnny R. Hernandez  
Basin Supervisor

Section 24

Township 12 South Range 31 East

-4993 NE 1/4 SW 1/4 Dom. T.D. 140 5 1/2" casing - shallow

-6649 SE 1/4 SE 1/4 Dom, STK T.D. 160' 4 1/2" casing - shallow

Section 26

Township 12 South Range 31 East

-2117 NW 1/4 SW 1/4 Irr. T.D. 166' Not cased - shallow

L-6746 SW 1/4 NW 1/4 Dom. & Stk T.D. 198' 6" casing - shallow

L-6749 SW 1/4 SE 1/4 Comm. & DOM & STK Same

\*L-9566 SW 1/4 SE 1/4 COM, Oil & Gas

\*Well L-9566 is stock well L-6749\*\* Comm.

Section 27

Township 12 S Range 31 E.

L-6650 SE 1/4 NE 1/4 Dom & Stk - T.D. 160' 4 1/2" casing - shallow

Section 35

Township 12 South Range 31 East

L-2932 SE 1/4 OWD T.D. 55' casing 8" shallow

L-4170 NW 1/4 SE 1/4 NW 1/4 Dom. —

L-4296 NW 1/4 NW 1/4 WF — cancelled

L-4296-X SW 1/4 SW 1/4 WF — cancelled

L-4296-X-2 NE 1/4 NE 1/4 WF — cancelled

L-4296-X-3 SE 1/4 SE 1/4 WF — cancelled

↑  
NO wells  
↓

Section 23

Township 13 South Range 31 East

L-3914-X-10	SE $\frac{1}{4}$ SE $\frac{2}{4}$	Ind.
L-3914-X-11	SE $\frac{1}{4}$ NW $\frac{1}{4}$	Ind.
L-3914-X-12	NE $\frac{1}{4}$ NE $\frac{1}{4}$	Ind.
L-3914-X-13	SE $\frac{1}{4}$ SW $\frac{1}{4}$	Ind.
L-3914-X-14	NW $\frac{1}{4}$ SE $\frac{1}{4}$	Ind.

↑  
WELLS NOT DRILLED  
↓

Section 24

Township 13 South Range 31 East

L-3914	NE $\frac{1}{4}$ SE $\frac{1}{4}$ SW $\frac{1}{4}$ NE $\frac{1}{4}$	Ind.
L-3914-X	NE $\frac{1}{4}$ SW $\frac{1}{4}$	Ind.
L-3914-X-2	NE $\frac{1}{4}$ NW $\frac{1}{4}$	Ind.
L-3914-X-3	SW $\frac{1}{4}$ SE $\frac{1}{4}$	Ind.
L-3914-X-4	SE $\frac{1}{4}$ NE $\frac{1}{4}$	Ind.
L-3914-X-5	NE $\frac{1}{4}$ SE $\frac{1}{4}$	Ind.
L-3914-X-6	NW $\frac{1}{4}$ NE $\frac{1}{4}$	Ind.
L-3914-X-7	NE $\frac{1}{4}$ NE $\frac{1}{4}$	Ind.
L-3914-X-8	SW $\frac{1}{4}$ NW $\frac{1}{4}$	Ind.
L-3914-X-9	SE $\frac{1}{4}$ NW $\frac{1}{4}$	Ind.

T.D. 196' 3 $\frac{5}{8}$ " casing - Shallow  
↑  
WELLS NOT DRILLED  
↓

Section 35

Township 13 South Range 31 East

L-2849	SW $\frac{1}{4}$ SE $\frac{1}{4}$ NW $\frac{1}{4}$	Dom.
--------	--	------

No well record info.

Township 13 South Range 31 East

-3460  
-3461  
-3837  
-3837-X

SE 1/4 NE 1/4 SW 1/4  
SE 1/4 SE 1/4 SE 1/4  
SW 1/4 SW 1/4 SW 1/4  
SW 1/4 SW 1/4 SW 1/4

WF  
WF  
Com. & Stock  
Com. & Stock

- T.D. 190' 8 5/8" casing - shallow  
- T.D. 220' 8 5/8" casing - shallow  
- Rptd TD 165' 6" casing - shallow  
- Rptd TD 190' 7" casing - shallow

Section 2

Township 13 South Range 31 East

3806  
3833  
3834  
3835  
4295

SE 1/4 SE 1/4 SE 1/4  
NE 1/4 NE 1/4 SE 1/4  
SW 1/4 SE 1/4 NE 1/4  
SW 1/4 SE 1/4 NE 1/4  
SE 1/4 NE 1/4

Stock  
Com.  
Dec.  
Dec.  
WF

NO well record info.  
with drawn no well  
- Rptd - TD 165' 6 7/8" casing - shallow  
- Rptd - TD 165' 6 7/8" casing - shallow

-3914  
-2745

NE 1/4 SE 1/4 NE 1/4  
NE 1/4 NE 1/4 SE 1/4

SRO  
SRO

- T.D. 194' 8 5/8" casing - shallow  
- T.D. 216' 6 7/8" casing - shallow

Section 12

Township 13 South Range 31 East

-2934  
-3460

NE 1/4  
NE 1/4 NE 1/4

OWD  
SRO

NO well record info.  
- T.D. 217' - 8 5/8" casing - shallow

Section 13

Township 13 South Range 31 East


-2933

NE 1/4

OWD

NO well record info.

SEC	TWN	RNG	UNIT LTR	QTR OF UNIT	TD	TYPE	#
24	12S	31E	K	?	148	DOM.	L4993
24	12S	31E	P	?	160	DOM.	L6649
26	12S	31E	E	?	166	DOM. & STK	L6746
✓26	12S	31E	L	?	?	IRR.	L2117
✓26	12S	31E	O	?	198	COM. (OIL & GAS)	L9566
✓26	12S	31E	O	?	198	COM., DOM. & STK	L6749
✓27	12S	31E	H	?	160	DOM. & STK	L6650
✓35	12S	31E	F	NW	55	DOM.	L4170
✓35	12S	31E	IJOP	?	?	?	L2932
1	13S	31E	K	SE	190	WF	L3460
1	13S	31E	P	SE	220	WF	L3461
1	13S	31E	M	SW	190	COM. & STK	L3837X
1	13S	31E	M	SW	165	COM. & STK	L3837
2	13S	31E	H	SW	165	DEC.	L3834
2	13S	31E	H	?	?	WF	L4295
2	13S	31E	H	NE	196	SRO	L3914
2	13S	31E	H	SW	165	DEC.	L3835
2	13S	31E	P	SE	?	?	L3806
2	13S	31E	I	NE	216	SRO	L2745
12	13S	31E	A	?	217	SRO	L3460
13	13S	31E	ABCD	?	?	OWD	L2933
24	13S	31E	H	NE	196	IND.	L3914
35	13S	31E	F	SW	?	DOM.	L2849

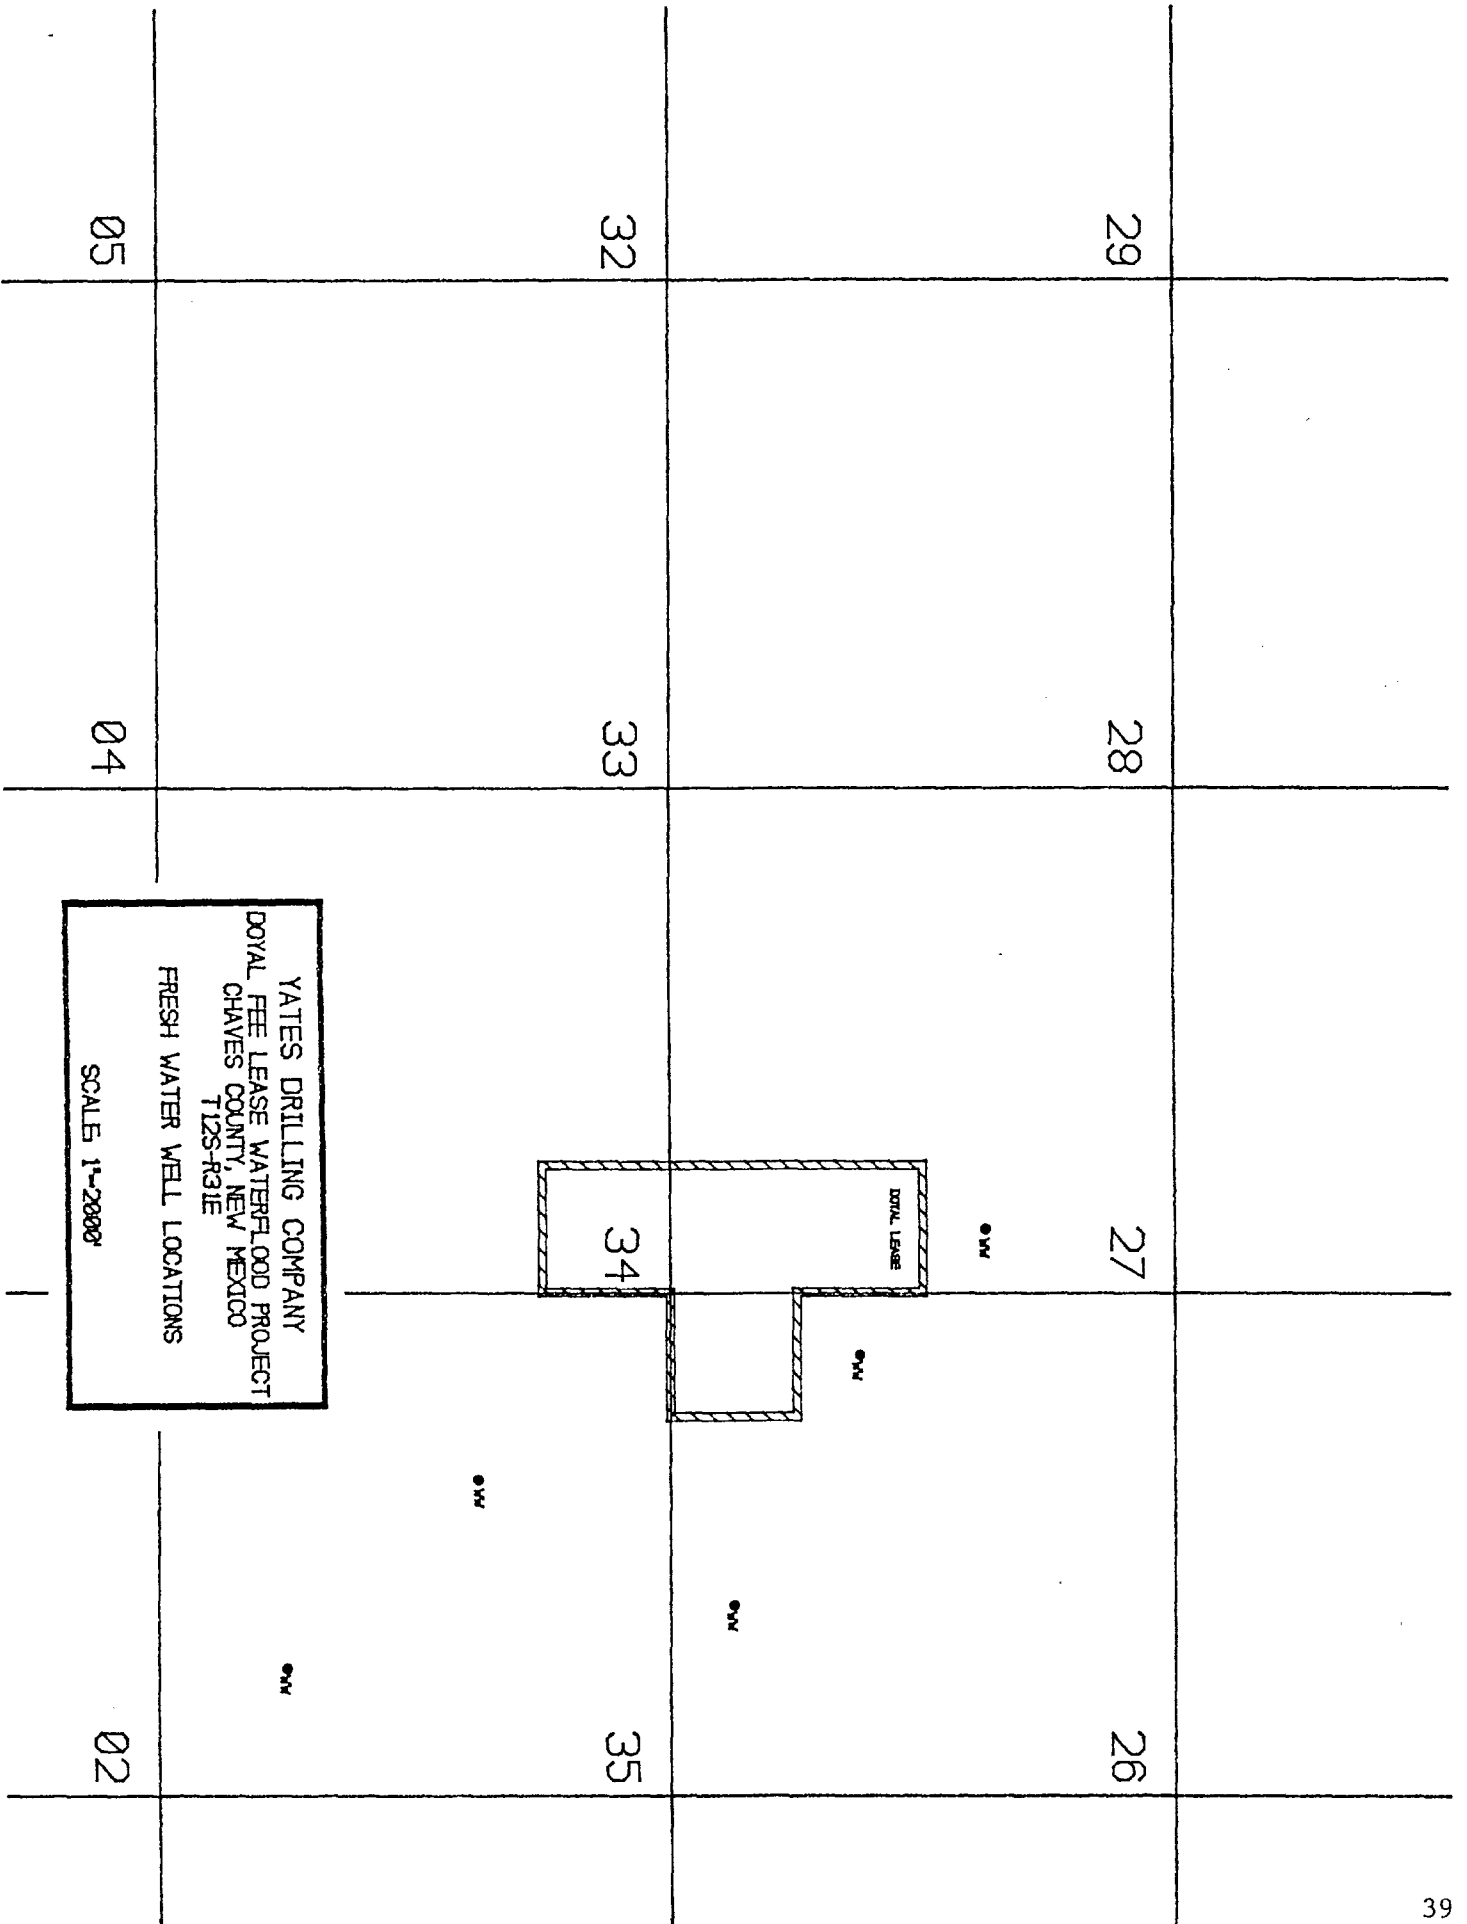

29

28

27

26

32

33

34

35

05

04

02

DRILL LEASE

W

W

W

W

W

WATER ANALYSIS REPORT

Company Yates Drilling Date Sampled 1-22-88  
 Field Caprock County Chavez  
 Lease Graham Water Station State NM  
 Well \_\_\_\_\_ Formation \_\_\_\_\_  
 Type of Water Fresh Water, B/D \_\_\_\_\_  
 Sampling Point Water Tanks Sampled By Blackwell

DISSOLVED SOLIDS

CATIONS

	mg/l		meq/l
Sodium, Na+(Calc)	230	÷ 23	10
Calcium, Ca++	120	÷ 20	6
Magnesium, Mg++	24	÷ 12.2	2
Barium, Ba++	neg	÷ 68.7	-
Iron, Fe (Total)			

OTHER PROPERTIES

pH 8.2  
 Specific Gravity 1.000  
 H<sub>2</sub>S neg  
 Total Dissolved Solids 1144  
 Total Hardness 400

ANIONS

Chloride, Cl-	350	÷ 35.5	10
Sulfate, So <sub>4</sub> =	120	÷ 48	3
Carbonate, Co <sub>3</sub> =	0	÷ 30	0
Bicarbonate, HCo <sub>3</sub> -	300	÷ 61	5

Remarks and Recommendations \_\_\_\_\_  
 \_\_\_\_\_  
 \_\_\_\_\_



WATER ANALYSIS REPORT

Company Yates Drilling Date Sampled 1-22-88  
 Field Caprock County Chavez  
 Lease Graham Water well (fresh) State NM  
 Well North of Lease Formation \_\_\_\_\_  
 Type of Water Fresh Water, B/D Blackwell  
 Sampling Point Well head Sampled By \_\_\_\_\_

DISSOLVED SOLIDS

<u>CATIONS</u>	mg/l		meq/l
Sodium, Na+(Calc)	<u>115</u>	÷ 23	<u>5</u>
Calcium, Ca++	<u>120</u>	÷ 20	<u>6</u>
Magnesium, Mg++	<u>15</u>	÷ 12.2	<u>1</u>
Barium, Ba++	<u>Neg</u>	÷ 68.7	<u></u>
Iron, Fe (Total)	<u></u>		<u></u>
	<u></u>		<u></u>
	<u></u>		<u></u>

OTHER PROPERTIES

pH 8.3  
 Specific Gravity 1.000  
 H<sub>2</sub>S Neg  
 Total Dissolved Solids 817  
 Total Hardness 360

ANIONS

Chloride, Cl-	<u>200</u>	÷ 35.5	<u>6</u>
Sulfate, So <sub>4</sub> <sup>=</sup>	<u>55</u>	÷ 48	<u>1</u>
Carbonate, Co <sub>3</sub> <sup>=</sup>	<u>0</u>	÷ 30	<u>0</u>
Bicarbonate, HCo <sub>3</sub> <sup>-</sup>	<u>312</u>	÷ 61	<u>5</u>

Remarks and Recommendations \_\_\_\_\_  
 \_\_\_\_\_  
 \_\_\_\_\_

WATER ANALYSIS REPORT

Company Yates Drilling Report Date Sampled 1-22-88  
 Field Caprock County Lea  
 Lease Williams Ranch State NM  
 Well Williams Fresh Water Formation \_\_\_\_\_  
 Type of Water Fresh Water Water, B/D \_\_\_\_\_  
 Sampling Point Well head Sampled By Blackwell

DISSOLVED SOLIDS

CATIONS	mg/l	meq/l
Sodium, Na+(Calc)	70	3.0
Calcium, Ca++	80	4.0
Magnesium, Mg++	20	1.6
Barium, Ba++	Neg	68.7
Iron, Fe (Total)		

OTHER PROPERTIES

pH 8.2  
 Specific Gravity 1.000  
 H<sub>2</sub>S Neg  
 Total Dissolved Solids 602  
 Total Hardness 271

ANIONS

Chloride, Cl-	100	35.5	2.8
Sulfate, So <sub>4</sub> =	40	48	0.8
Carbonate, Co <sub>3</sub> =	0	30	0
Bicarbonate, HCo <sub>3</sub> -	292	61	4.8

Remarks and Recommendations \_\_\_\_\_  
 \_\_\_\_\_  
 \_\_\_\_\_

# PERMIAN

Treating Chemicals, Inc.

P. O. BOX 72  
 LOVINGTON, N.M.  
 PHONE (505) 396

## WATER ANALYSIS REPORT

Company	Yates Drilling	Date Sampled	1-22-88
Field	Caprock	County	Lea
Lease	Gallagher	State	NM
Well	1	Formation	Queens
Type of Water	Produced	Water, B/D	
Sampling Point	Treater	Sampled By	Blackwell

### DISSOLVED SOLIDS

#### CATIONS

	mg/l	meq/l
Sodium, Na+(Calc)	98100	23 4265
Calcium, Ca++	3750	20 188
Magnesium, Mg++	12900	12.2 1057
Barium, Ba++	neg	08.7
Iron, Fe (Total)		

### OTHER PROPERTIES

pH	5.9
Specific Gravity	1.200
H <sub>2</sub> S	Neg
Total Dissolved Solids	314,240
Total Hardness	62,800

#### ANIONS

Chloride, Cl-	198000	35.5	5577
Sulfate, So <sub>4</sub> <sup>=</sup>	1350	48	28
Carbonate, Co <sub>3</sub> <sup>=</sup>	0	30	0
Bicarbonate, HCo <sub>3</sub> <sup>-</sup>	140	61	2.3

Remarks and Recommendations

# PERMIAN

Treating Chemicals, Inc.

P. O. BOX 72  
 LOVINGTON, N.M.  
 PHONE (505) 396

## WATER ANALYSIS REPORT

Company	Yates Drilling	Date Sampled	1-22-88
Field	Caprock	County	Lea
Lease	Doyle	State	NM
Well	12 & 4	Formation	Queens
Type of Water	Produced	Water, B/D	
Sampling Point	Treater	Sampled By	Blackwell

### DISSOLVED SOLIDS

CATIONS	mg/l	meq/l
Sodium, Na+(Calc)	97900	4257
Calcium, Ca++	3800	190
Magnesium, Mg++	13300	1090
Barium, Ba++	0	0
Iron, Fe (Total)	58	

### OTHER PROPERTIES

pH	5.7
Specific Gravity	1.200
H <sub>2</sub> S	neg.
Total Dissolved Solids	312,598
Total Hardness	64,900

### ANIONS

Chloride, Cl-	196,000	35.5	5521
Sulfate, So <sub>4</sub> <sup>=</sup>	1400	48	29
Carbonate, Co <sub>3</sub> <sup>=</sup>	0	30	0
Bicarbonate, HCo <sub>3</sub> <sup>-</sup>	140	61	2.3

Remarks and Recommendations

# PERMIAN

Treating Chemicals, Inc.

P. O. BOX 728  
 LOVINGTON, N.M. 88263  
 PHONE (505) 396-5674

## WATER ANALYSIS REPORT

Company Yates Drilling Date Sampled 1-22-88  
 Field Caprock County Lea  
 Lease Burkett State NM  
 Well \_\_\_\_\_ Formation Queens  
 Type of Water Produced Water, B/D \_\_\_\_\_  
 Sampling Point Treater Sampled By Blackwell

### DISSOLVED SOLIDS

<u>CATIONS</u>	mg/l	meq/l
Sodium, Na+(Calc)	98000	4261
Calcium, Ca++	4100	205
Magnesium, Mg++	12800	1049
Barium, Ba++	Neg	68.7
Iron, Fe (Total)		

### OTHER PROPERTIES

pH 5.9  
 Specific Gravity 1.200  
 H<sub>2</sub>S Neg.  
 Total Dissolved Solids 313,220  
 Total Hardness 6300

<u>ANIONS</u>	mg/l	meq/l
Chloride, Cl-	197,000	5549
Sulfate, So <sub>4</sub> =	1200	25
Carbonate, Co <sub>3</sub> =	0	30
Bicarbonate, HCo <sub>3</sub> -	120	61

Remarks and Recommendations \_\_\_\_\_

# ERMFAN

ating Chemicals, Inc.

P.O. BOX 728  
 NEW YORK, N.Y. 10120  
 PHONE 405-344-5674

## WATER ANALYSIS REPORT

Company Yates Drilling

Date Sampled 1-22-88

Field

County Lea

Lease Deluna

Section NM

Well

Location Queens

Type of Water Produced

Water, R/W

Sampling Point Treater

Sampled by Blackwell

### DISSOLVED SOLIDS

### OTHER PROPERTIES

#### CATIONS

Sodium, Na (Calc)

97600

4243

pH 6.0

Calcium, Ca

3960

198

Specific Gravity 1.200

Magnesium, Mg

12900

1075

H<sub>2</sub>S Neg

Barium, Ba

Iron, Fe (Total)

0

Total Dissolved Solids 135,148

Total Hardness

63,000

#### ANIONS

Chloride, Cl

194,000

5465

Sulfate, SO<sub>4</sub>

1200

25

Carbonate, CO<sub>3</sub>

0

Bicarbonate, HCO<sub>3</sub>

88

1.1

Remarks and Recommendations

# ERMIAN

Coating Chemicals, Inc.

P.C. BOX 726

NEW YORK, N.Y. 10020

PHONE 212-351-4672

WATER ANALYSIS REPORT

Company Yates Drilling

Well

Lease Garner

Well 7

Type of Water Produced

Sampling Point

DISSOLVED SOLI

CATIONS

Sodium, Na<sup>+</sup> 105,000

Calcium, Ca<sup>2+</sup> 4,750

Magnesium, Mg<sup>2+</sup> 11,900

Barium, Ba<sup>2+</sup>

Iron, Fe (Total)

ANIONS

Chloride, Cl<sup>-</sup> 204,000

Sulfate, SO<sub>4</sub><sup>2-</sup> 1,100

Carbonate, CO<sub>3</sub><sup>2-</sup> 0

Bicarbonate, HCO<sub>3</sub><sup>-</sup> 205

anion and total anions

Date Sampled 1-22-88

Locality Lea

State NM

Location Queens

Water, B/L

Sampled by Blackwell

OTHER PROPERTIES

pH 5.8

Specific Gravity 1.200

H<sub>2</sub>S Neg

Total Dissolved

Solids 326,955

Total Hardness

60,700

HALLIBURTON DIVISION LABORATORY

HALLIBURTON SERVICES

ARTESIA DISTRICT

LABORATORY REPORT

No. W539, W540 & W541-89

TO Yates Drilling  
105 South Fourth Street  
Artesia, NM 88210

Date October 17, 1989

This report is the property of Halliburton Services and neither it nor any part thereof, nor a copy thereof, is to be published or disclosed without first securing the express written approval of laboratory management. It may however, be used in the course of regular business operations by any person or concern and employees thereof receiving such report from Halliburton Services

Submitted by \_\_\_\_\_ Date Rec. October 16, 1989

Well No. \_\_\_\_\_ Depth \_\_\_\_\_ Formation \_\_\_\_\_

Field \_\_\_\_\_ County \_\_\_\_\_ Source \_\_\_\_\_

	SPEAR WW #1	GF #7	DEL FED. #3
Resistivity .....	0.74 @ 70°	0.052 @ 70°	0.054 @ 70°
Specific Gravity ..	1.006 @ 70°	1.1730 @ 70°	1.1571 @ 70°
pH .....	6.4	6.6	6.6
Calcium .....	1,686	6,744	7,418
Magnesium .....	546	10,230	7,979
Chlorides .....	5,000	159,000	143,000
Sulfates .....	Nil	Nil	Medium
Bicarbonates .....	305	214	183
Soluble Iron .....	Nil	10	3
-----			
-----			
-----			

Remarks:

Eric Jacobson  
 Respectfully submitted

Analyst: Eric Jacobson - EIT

HALLIBURTON SERVICES

NOTICE:

This report is for information only and the content is limited to the sample described. Halliburton makes no warranties, express or implied, as to the accuracy of the contents or results. Any user of this report agrees Halliburton shall not be liable for any loss or damage, regardless of cause, including any act or omission of Halliburton, resulting from the use hereof



**HALLIBURTON DIVISION LABORATORY  
HALLIBURTON SERVICES  
ARTESIA DISTRICT  
LABORATORY REPORT**

No. W536, W537 & W538-89

**TO** Yates Drilling  
105 South Fourth Street  
Artesia, NM 88210

**Date** October 17, 1989

This report is the property of Halliburton Services and neither it nor any part thereof nor a copy thereof is to be published or disclosed without first securing the express written approval of laboratory management. It may however, be used in the course of regular business operations by any person or concern and employees thereof receiving such report from Halliburton Services.

**Submitted by** \_\_\_\_\_ **Date Rec.** October 16, 1989

**Well No.** \_\_\_\_\_ **Depth** \_\_\_\_\_ **Formation** \_\_\_\_\_

**Field** \_\_\_\_\_ **County** \_\_\_\_\_ **Source** \_\_\_\_\_

	<u>BUR FEDERAL #3</u>	<u>GALLAHAN ST. #1</u>	<u>AP STATE #1</u>
<b>Resistivity .....</b>	<u>0.051 @ 70°</u>	<u>0.051 @ 70°</u>	<u>0.058 @ 70°</u>
<b>Specific Gravity ..</b>	<u>1.1200 @ 70°</u>	<u>1.196 @ 70°</u>	<u>1.137 @ 70°</u>
<b>pH .....</b>	<u>6.5</u>	<u>6.6</u>	<u>6.8</u>
<b>Calcium .....</b>	<u>6,070</u>	<u>5,620</u>	<u>6,407</u>
<b>Magnesium .....</b>	<u>10,912</u>	<u>12,685</u>	<u>6,615</u>
<b>Chlorides .....</b>	<u>184,000</u>	<u>180,000</u>	<u>122,000</u>
<b>Sulfates .....</b>	<u>Heavy</u>	<u>Medium</u>	<u>Medium</u>
<b>Bicarbonates .....</b>	<u>214</u>	<u>183</u>	<u>305</u>
<b>Soluble Iron .....</b>	<u>10</u>	<u>25</u>	<u>0</u>
-----	-----	-----	-----
-----	-----	-----	-----
-----	-----	-----	-----

**Remarks:**

*Eric Jacobson*  
\_\_\_\_\_  
Respectfully submitted

**Analyst:** Eric Jacobson - EIT

**HALLIBURTON SERVICES**

This report is for information only and the content is limited to the sample described. Halliburton makes no warranties, expressed or implied, as to the accuracy of the contents or results. If used for other than the original purpose, Halliburton shall not be liable.

HALLIBURTON DIVISION LABORATOR.

HALLIBURTON SERVICES

ARTESIA DISTRICT

LABORATORY REPORT

No. W542, W543 & W544-89

TO Yates Drilling
105 South Fourth Street
Artesia, NM 88210

Date October 17, 1989

This report is the property of Halliburton Services and neither it nor any part thereof nor copy thereof is to be published or disclosed without first securing the express written approval of Laboratory Management. It may however, be used in the course of regular business operations by any person or concern and employees thereof receiving such report from Halliburton Services.

Submitted by Date Rec. October 16, 1989

Well No. Depth Formation

Field County Source

Table with 4 columns: Test Name, Graham WW #1, Graham WW #2, Doy #1. Rows include Resistivity, Specific Gravity, pH, Calcium, Magnesium, Chlorides, Sulfates, Bicarbonates, Soluble Iron.

Remarks:

Eric Jacobson
Respectfully submitted

Analyst: Eric Jacobson - EIT

HALLIBURTON SERVICES

NOTICE

This report is for information only and the content is limited to the sample described. Halliburton makes no warranties, express or implied, as to the accuracy of the contents or results. Any user of the report agrees Halliburton shall not be liable.