


STATE OF NEW MEXICO
ENERGY AND MINERALS DEPARTMENT

NO. OF COPIES RECEIVED	
DISTRIBUTION	
SANTA FE	
FILE	
U.S.G.S.	
LAND OFFICE	
OPERATOR	

OIL CONSERVATION DIVISION
P. O. BOX 2088
SANTA FE, NEW MEXICO 87501

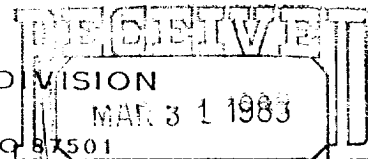

Form C-103
Revised 10-1-78

OIL CONSERVATION DIVISION
SANTA FE

1. Indicate Type of Lease
State ☐ Fee ☒
5. State Oil & Gas Lease No.

SUNDRY NOTICES AND REPORTS ON WELLS

(DO NOT USE THIS FORM FOR PROPOSALS TO DRILL OR TO DEEPEN OR PLUG BACK TO A DIFFERENT RESERVOIR. USE "APPLICATION FOR PERMIT - " (FORM C-101) FOR SUCH PROPOSALS.)

1. <input type="checkbox"/> OIL WELL <input checked="" type="checkbox"/> GAS WELL <input type="checkbox"/> OTHER	7. Unit Agreement Name
2. Name of Operator Yates Petroleum Corporation	8. Farm or Lease Name T-4 Cattle Co.
3. Address of Operator 207 South 4th St., Artesia, NM 88210	9. Well No. 2
4. Location of Well UNIT LETTER N 660 FEET FROM THE South LINE AND 1980 FEET FROM THE West LINE, SECTION 32 TOWNSHIP 11N RANGE 27E NMPM.	10. Field and Pool, or WHdcat Undes. Penn
15. Elevation (Show whether DF, RT, GR, etc.) 4330.2' GR	12. County Quay

Check Appropriate Box To Indicate Nature of Notice, Report or Other Data

NOTICE OF INTENTION TO:

SUBSEQUENT REPORT OF:

PERFORM REMEDIAL WORK <input type="checkbox"/>	PLUG AND ABANDON <input type="checkbox"/>	REMEDIAL WORK <input type="checkbox"/>	ALTERING CASING <input type="checkbox"/>
TEMPORARILY ABANDON <input type="checkbox"/>	CHANGE PLANS <input type="checkbox"/>	COMMENCE DRILLING OPS. <input checked="" type="checkbox"/>	PLUG AND ABANDONMENT <input type="checkbox"/>
PULL OR ALTER CASING <input type="checkbox"/>	OTHER <input type="checkbox"/>	CASING TEST AND CEMENT JOBS <input checked="" type="checkbox"/>	

16. Describe Proposed or Completed Operations (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work) SEE RULE 1103.

Spudded 17-1/2" hole 5:00 PM 3-16-83. Ran 11 joints of 13-3/8" 54.5# J-55 ST&C casing set 377'. 1-Type "M" notched guide shoe set 377'. Insert float set 333'. Cemented w/550 sacks Class "C" 2% CaCl2. Compressive strength of cement - 1250 psi in 12 hours. PD 12:45 PM 3-17-83. Bumped plug to 750 psi, released pressure and float held okay. Cement circulated 65 sacks. WOC. Drilled out 6:45 AM 3-18-83. WOC 18 hours. Nipped up and tested to 1500# for 30 minutes, okay. Reduced hole to 7-7/8". Drilled plug and resumed drilling.

18. I hereby certify that the information above is true and complete to the best of my knowledge and belief.

SIGNED <u>[Signature]</u>	TITLE <u>Production Supervisor</u>	DATE <u>3-28-83</u>
APPROVED BY <u>[Signature]</u>	TITLE <u>DISTRICT SUPERVISOR</u>	DATE <u>3-31-83</u>
CONDITIONS OF APPROVAL, IF ANY:		