


N

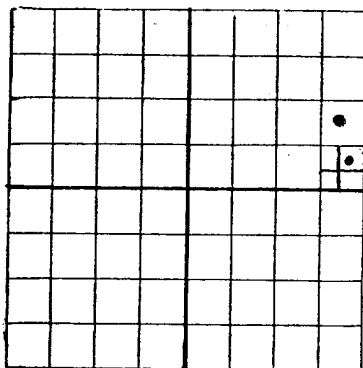

AREA 640 ACRES
LOCATE WELL CORRECTLY

NEW MEXICO OIL CONSERVATION COMMISSION

Santa Fe, New Mexico

WELL RECORD

RECEIVED
JUN 25 1942
HOBES OFFICE

Mail to Oil Conservation Commission, Santa Fe, New Mexico, or its proper agent not more than twenty days after completion of well. Follow instructions in the Rules and Regulations of the Commission. Indicate questionable data by following it with (?). SUBMIT IN TRIPPLICATE.

Drice Co. - First National Bank Bldg. Albuquerque N.M.
Company or Operator Address
Royd Garland Well No. 1 NESE 1/4 NE 1/4 Sec. 32 T. 7 N
Lease
R. 7-E N. M. P. M. Estancia Valley Field, Torrance County.
Well is _____ feet south of the North line and _____ feet west of the East line of _____
If State land the oil and gas lease is No. _____ Assignment No. _____
If patented land the owner is Royd Garland Address Estancia N.M.
If Government land the permittee is _____ Address _____
The Lessee is Drice Co. First Natl Bldg. Address Albuquerque N.M.
Drilling commenced May 15 1938 Drilling was completed Dec 15 1940
Name of drilling contractor Drice Co. Address Albuquerque N.M.
Elevation above sea level at top of casing _____ feet.
The information given is to be kept confidential until _____ 19____

OIL SANDS OR ZONES

No. 1, from 1965 ft. strong odor of C.P. 2. gas. to _____
No. 2, from 1965 to 1995 Light oil color under to Ether test.
No. 3, from _____ to _____ No. 6, from _____ to _____

IMPORTANT WATER SANDS

Include data on rate of water inflow and elevation to which water rose in hole.

No. 1, from No water sands logged water came up in
No. 2, from casing to 350 ft from surface.
No. 3, from _____ to _____ feet.
No. 4, from _____ to _____ feet.

CASING RECORD

SIZE	WEIGHT PER FOOT	THREADS PER INCH	MAKE	AMOUNT	KIND OF SHOE	CUT & FILLED FROM	PERFORATED		PURPOSE
							FROM	TO	
10"	?	?	?	461 ft	—	—	—	—	—
8"	36 lbs.	8	Youngtown	965 ft	Straight	—	—	—	Shut off water
6 5/8"	22 ..	11	"	1428 ft	6 in	Shut off formation + side track lost	—	—	runner.
5 1/2"	15	11	"	1939 ft	2 in	cementing.	—	—	—

MUDDING AND CEMENTING RECORD

SIZE OF HOLE	SIZE OF CASING	WHERE SET	NO. SACKS OF CEMENT	METHOD USED	MUD GRAVITY	AMOUNT OF MUD USED
6"	5 1/2"	1939 ft 2 in	37	Pump	none	Displace water in hole

PLUGS AND ADAPTERS

Heaving plug—Material ✓ Length ✓ Depth Set ✓
 Adapters—Material ✓ Size ✓

RECORD OF SHOOTING OR CHEMICAL TREATMENT

SIZE	SHELL USED	EXPLOSIVE OR CHEMICAL USED	QUANTITY	DATE	DEPTH SHOT OR TREATED	DEPTH CLEANED OUT
4 in	4 in	Dynamite	75 lbs.		1965 to 1995	1995 ft.

Results of shooting or chemical treatment Shot cleaned out - bailed dry and slight showing of C.O₂ gas - and no trace of oil but showed a very light color under Eichen-test.

RECORD OF DRILL-STEM AND SPECIAL TESTS

If drill-stem or other special tests or deviation surveys were made, submit report on separate sheet and attach hereto.

TOOLS USED

Rotary tools were used from _____ feet to _____ feet, and from _____ feet to _____ feet
 Cable tools were used from Start feet to Finish feet, and from _____ feet to 2062 feet

PRODUCTION

Put to producing _____, 19____
 The production of the first 24 hours was _____ barrels of fluid of which _____ % was oil; _____ % emulsion; _____ % water; and _____ % sediment. Gravity, Be _____
 If gas well, cu. ft. per 24 hours _____ Gallons gasoline per 1,000 cu. ft. of gas _____
 Rock pressure, lbs. per sq. in. _____

EMPLOYEES

Ben Stolman Driller _____ Driller
J. C. Mc Donald Driller _____ Driller

FORMATION RECORD ON OTHER SIDE

I hereby swear or affirm that the information given herewith is a complete and correct record of the well and all work done on it so far as can be determined from available records.

Subscribed and sworn to before me this 1st
 day of July 1941
Francis Ward
 Notary Public

Place _____ Date _____
 Name Wm. S. Woolsten
 Position Secretary
 Representing Albion Co
 Company or Operator
 Address Albany, New York

My Commission expires Apr. 4, 1944

FORMATION RECORD

115 17808

FROM	TO	THICKNESS IN FEET	FORMATION
Start	26 ft		Gray lime chat -
26 ft	76 "	50 ft	" "
76 "	91 "	15 "	Red and Gray shale
91 "	115	24 "	Gray lime -
115	120	5	Brown shale
120	132	12	Gray lime
132	249	117	Hard Gray lime -
249	298	49	Black shale
298	575	277	Red - Gray + Brown shale
575	628	53	Hard Black lime -
628	672	44	Brown shale Gray sand + lime
672	719	29	Quartzite sand + hard sharp lime
719	742	23	Black lime
742	768	26	Brown shale
768	918	150	Mixture of above shales - lime -
918	1074	156	Black lime
1074	1076	2	Greenish sandy shale
1076	1164	108	Black lime
1164	1188	24	Gray cherty shale
1188	1420	140	Quartzite lime
1420	1512	92	Brown sand -
1512	1533	21	Gray sand
1533	1549	16	Brown sand -
1549	1560	11	Gray sand
1560	1620	160	Brown sand -
1620	1672	52	Gray sand -
1672	1868	193	" "
1868	1940	72	Brown sand
1940	1989	49	Gray sand -
1989	1996	7	" Sandy lime
1996	1998	2	Arco - hard -
1998	2010	12	Brown sandy lime
1998	2013	100	Arco + Brown sand -
2013	2062	49	Brown sand cleaning cut hole and getting ready to abandon -