NO. OF COPIES RECEIVED								
DISTRIBUTION	Form C - 101							
SANTA FE	NEW MEXICO OIL CONSERVATION COMMISSION  APZ = 30-45-200-55							
FILE			Type of Leane					
U.S.G.S.					STATE	[331		
LAND OFFICE OPERATOR					5, State Off	& Gas Lease No.		
LOVE TOTAL					777777			
APPLICATIO	ON FOR PERMIT TO	DRILL, DEEPEN	, OR PLUG BACK					
Ia, Type of Work					7. Unit Agre	ement Dime		
b. Type of Well DRILLXXX	<b>d</b>	DEEPEN	PL	JG BACK	s, Parm or L	ease Name		
OIL GAS WELL WELL WELL WALLE WALL WALL WALL WAL	O.THER		SINGLE ZONE	MULTIPLE ZONE	Hutcher	son_B		
7. Name of Operator XXX  Amoco Production					9. weil na.			
3. Address of Operator	Company				If, Field on	d Poel, er Wirred		
P. O. Box 68		3.000			Und.	TUUU TITTTTTTTTTTTT		
4, Location of Well unit LETT	ER J LOC	ATED 1980	FEET FROM THE	outh LINE				
AND 1980 FEET FROM	THE East LIN	E OF SEC. 34	TWP. 20-N RSE. 3	14-E HILPH				
					Union			
	444444	<i>{{<del> }}}</del></i>			77777	HHHHH		
			19. Proposed Depth	19A, Formation		20, Hotery or C.T.		
21. Elevations (show whether DF)	ART. etc.) 21 A. Hing	& Status Flug, Bond	2500 '	Tubb	>2 Approx	Rota  Date Work will start		
4809' GL		t-on-file	NA			10-15-80		
23.	P	ROPOSED CASING AN	ID CEMENT PROGRAM	1				
SIZE OF HOLE	SIZE OF CASING	WEIGHT PER FOO	T SETTING DEP	TH SACKS OF	CEMENT	EST. TOP		
12-1/4"	8-5/8"	24#	700'			Surf.		
7-7/8"or 10-3/4"	5-1/2"	14#	2500'	Tie back	< to 8-5	/8" Bottom 8-5/		
	·							
Propose to drill and equip well in the Tubb formation. After reaching TD, logs will be run and evaluated. Perforate and stimulate as necessary in attempting commercial production.								
	O'-700' Native O'-TD Commerc			ies for sat	fe hole (	conditions.		
BOP ATTACHED								
Gas is not dedicated	ated		APP	POVAL VALID	FOR			
OIL CONSERVATIO	NI COMMISSION	TO BE NOTIFI	ED PE?	ROVAL VALID RAIT EXPIRES ILESS DRILLIN	12=13	DAYS		
WITHIN 24 HOU	IRS OF BEGINNIN	G OPERATION	S	ILESS DRILLIN	VG UNDER	WAY		
VIIIII 24 1100		<del></del>		······································		7741		
0+2-NMOCD, SF	1-Hou Susp	1-LBG	1-W. S	tafford, Ho	u			
IN ABOVE SPACE DESCRIBE PR TIVE ZONE. GIVE BLOWOUT PREVENT	OPOSED PROGRAM: IF I	PROPOSAL IS TO DEEPEN	OR PLUG BACK, GIVE DAT	A ON PRESENT PRO	DUCTIVE ZONE	AND PROPOSED NEW PRODUC		
I hereby certify that the information	on above is true and comp	olete to the best of my	knpwledge and belief.					
Signed DOU N	lauro	Title Adminis	trative Analys	<u>t</u>	)ate9-	-12-80		
(This space for								
	Carl Ille	<del>-9</del> -				15730		
Oducielans of Approval, is		AND SACK SAMPI		C	PATE	<del></del>		

SANTARE - NEW MEXICO BURGOU OF MINES, SCOORRO
AT AT LEAST TEN FOOD INTERVALS

## STATE OF NEW MEXICO ENERGY AND MINERALS DEPARTMENT

## OIL CONSERVATION DIVISION

P. O. BOX 2088 SANTA FE, NEW MEXICO 87501

Form C-102 Revised 10-1-78

All distances must be from the outer boundaries of the Section.

Cy-erator			Leoze	Well No.						
AMOCO Unit Letter Section Tempship			HUTCHERS	SON B	1_5					
J	34	T 20 N	R 34 E	UNION						
Actual Fastage Loc		)   T	1980	tom the EAST						
Ground Level Elev.		OUTH line and	Pool fee	t fom the LAST	Une Dedicated Acreage:					
4809	Tubl	b	Und. Tubb		160 Actos					
1. Outline th	e acreage dedica	ted to the subject we	ll by colored pencil o	the plat below.						
1	nan one lease is and royalty).	dedicated to the well	, outline each and ide	ntify the ownership	thereof (both as to working					
3. If more than one lease of different ownership is dedicated to the well, have the interests of all owners been consolidated by communitization, unitization, force-pooling, etc?										
Yes	Yes No Hanswer is "yes," type of consolidation									
If answer i	is "no;" list the c	owners and tract descr	iptions which have ac	tually been consolid	lated. (Use reverse side of					
this form il	f necessary.)		·							
					amunitization, unitization, a approved by the Division.					
torced-poor	ing, or otherwise)	or until a non-standard	Birt, erimmating site	in interests, has been	a approved by the privision.					
			i		CERTIFICATION					
}	1		1							
	į		i	1 1	certify that the information con-					
		•		i I	erein is true and complete to the sy knowledge and belief.					
	į		i .	DEST OF I	y knowledge one devien					
	1		l	Name						
-·				3	50 Navis					
	Į		1	Position   Admini	strative Analyst					
	I		1	Сопрапу						
	i I			Amoco	Production Company					
	1				9-12-80					
	<u> </u>		<del></del>							
	·			1 hereby	certify that the well location					
	1		1980	shown on	this plot was plotted from field					
	1	9-	1,000		actual surveys made by me or supervision, and that the same					
	i	R T	1	<b>a</b> )	and correct to the best of my					
	1		i	knowledg	e and belief.					
	IVIDI									
THE SAME OF THE PARTY OF THE PA		89	1	Date Survey	UST 28, 1980					
) S.J.		0		The state of the s	UE X hills					
	Complete State of the Complete		!	and or Land	Frotesalonal Engineer					
C.E 3011 T S.1	17A [ 3		i L	يع ا	103/0					
		l_			S NO. W 5103					
•	0 (320 1630 1646	• •	, 1000 to 000	• •	NO. S. SHIELDS					
2 330 650 66	0 1320 1680 1686	2310 2640 2000	1500 1000 60	0 0						

- 1. Blow-out preventers and master valve to be fluid operated and oil fittings must be in good condition, 3,000# W.P. (6,000 p.s.i. test), minimum.
- 2. Equipment through which bit must pass shall be as large as the inside diameter of the casing that is being drilled through.
- Nicple above blow-out preventer shall be same size as casing being drilled through.
- 4. Kelly cock required, 3,000# W.P. (6,000 p.s.i. test) minimum.
- OMSCO or comparable safety valve must be available on rig floor at all times with proper connection or sub, 3,000# W.P. (6,000 p.s.i. test), minimum.
- Blow-out preventers and master valve while drilling interrediate hole to 6000' may be 2,000= W.P. (4,000 p.s.i. test), minimum.
- Choke assembly, beyond second valve from cross, may be positioned (Optional) outside of dernick foundation.
- Spool or cross may be climinated if connections are available in the lower part of the blow-out preventer body.
- 9. Plug valves gate valves are optional. Valves shown as 2" are minimum size.
- Casing head and casing head spool, including attached valves, to be furnished by Aroco.
- 11. Pams in preventers will be installed as follows:

When drilling, use: When running casing, use:


Top Preventer - Orill pipe rams Bottom Preventer - Blind rams or

master valve

Top Preventer — Casing rams

Bottom Preventer — Blind rams or

master valve

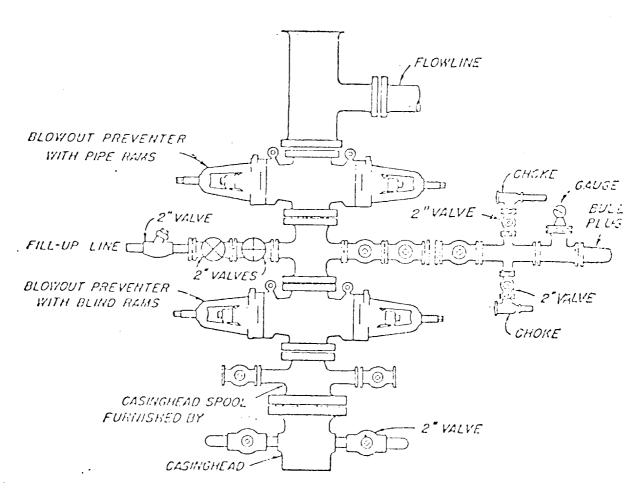

## BLOWOUT PREVENTER HOOK-UP

AMOOD PROMINENT ONTO 11

EXHIBIT D-1 MODIFIED

JUNE 1, 1962