


NO. OF COPIES RECEIVED	
DISTRIBUTION	
SANTA FE	
FILE	
U.S.G.S.	
LAND OFFICE	
OPERATOR	

NEW MEXICO OIL CONSERVATION COMMISSION

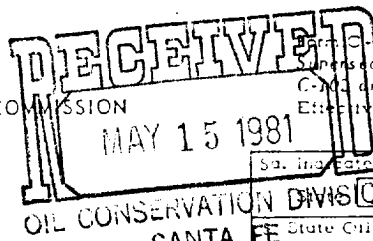

Form C-103
Supersedes Old
C-102 and C-103
Effective 1-1-65

5a. Indicate type of Lease	Fee ☐
State Oil & Gas Lease No.	
L-5859	

SUNDRY NOTICES AND REPORTS ON WELLS

(DO NOT USE THIS FORM FOR PROPOSALS TO DRILL OR TO DEEPEN OR PLUG BACK TO A DIFFERENT RESERVOIR. USE "APPLICATION FOR PERMIT" (FORM C-101) FOR SUCH PROPOSALS.)

1. OIL ☐ GAS ☐ OTHER- CO ₂ Supply	7. Unit Agreement Name
2. Name of Operator Cities Service Company	8. Farm or Lease Name State DS
3. Address of Operator P.O. Box 1919 - Midland, Texas 79702	9. Well No. 1
4. Location of Well UNIT LETTER G 1980 FEET FROM THE North LINE AND 1980 FEET FROM THE East LINE, SECTION 29 TOWNSHIP 18N RANGE 30E NMPM.	10. Field and Pool, or Wildcat Bravo Dome Area
15. Elevation (Show whether DF, RT, GR, etc.) 4395' GR (Est)	12. County Harding

16. Check Appropriate Box To Indicate Nature of Notice, Report or Other Data

NOTICE OF INTENTION TO:		SUBSEQUENT REPORT OF:	
PERFORM REMEDIAL WORK ☐	PLUG AND ABANDON ☐	REMEDIAL WORK ☐	ALTERING CASING ☐
TEMPORARILY ABANDON ☐	CHANGE PLANS ☐	COMMENCE DRILLING OPNS. ☒	PLUG AND ABANDONMENT ☐
PULL OR ALTER CASING ☐	OTHER ☐	CASING TEST AND CEMENT JOB ☒	OTHER ☐

17. Describe Proposed or Completed Operations (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work) SEE RULE 1103.

T.D. 2230' Granite. Waiting on Completion Unit. MIRU cable tools and spudded a 6" hole @ 1500 MST on 4-27-81 and drilled to a T.D. of 67' in Clay & Rock. RD cable tools. MIRU rotary and spudded a 12-1/4" hole @ 2200 MDT on 4-30-81. Reamed 6" hole to a 12-1/4" hole to T.D. of 67' and drilled to a T.D. of 593' in Red Beds. Ran and set 15 Jts (583') 8-5/8"OD 24# K55 casing @ 593' and cemented with 500 sacks of Class H w/2% CaCl₂ cement. Plug down @ 0022 MDT on 5-2-81. Cement circulated to the surface. Bumped float w/850# - OK. NMOCD was notified but did not witness. WOC 18 hrs. Drilled a 7-7/8" hole to a T.D. of 2230' in Granite. Ran and set 54 Jts. (2215.21') 5-1/2"OD 14# K55 casing @ 2225' and cemented with 850 sacks of Class H w/2% Gel, 5% KCl, 0.4% Halad 4, 5# Gilsonite & 1/4# Flocele/sack cement. Plug down @ 1400 MDT on 5-8-81. Cement circulated to the surface. Bumped float w/1400# - OK. NMOCD was notified but did not witness. ND BOP, set slips, CO casing and NU WH.

18. I hereby certify that the information above is true and complete to the best of my knowledge and belief.

SIGNED E. Spaulder TITLE Region Opr. Mgr. - Prod. DATE May 13, 1981

APPROVED BY Carl Ulvog TITLE SENIOR PETROLEUM GEOLOGIST DATE 5/15/81

CONDITIONS OF APPROVAL, IF ANY: