

NEW MEXICO OIL CONSERVATION COMMISSION

Form C-101
Revised 1-4-65

5A. Indicate Type of Lease
STATE ☒ Y FEE ☐

5. State Oil & Gas Lease No.
L-6388

APPLICATION FOR PERMIT TO DRILL, DEEPEN OR CONSERVATION DIVISION

1a. Type of Work		SANTA FE		7. Unit Agreement Name	
b. Type of Well		PLUG BACK ☐		BDCDGU	
OIL WELL ☐		SINGLE ZONE ☒		8. Farm or Lease Name	
GAS WELL ☒ CO2 OTHER		MULTIPLE ZONE ☐		BDCDGU	
2. Name of Operator				9. Well No.	
Amoco Production Company				2033 041G	
3. Address of Operator				10. Field and Pool, or Wildcat	
P. O. Box 68, Hobbs, New Mexico 88240				Und. Tubb	
4. Location of Well					
UNIT LETTER <u>G</u> LOCATED <u>1083.1</u> FEET FROM THE <u>North</u> LINE					
AND <u>1980</u> FEET FROM THE <u>East</u> LINE OF SEC. <u>4</u> TWP. <u>20-N</u> RGE. <u>33-E</u> NMPM					
				12. County	
				Harding	
		19. Proposed Depth	19A. Formation	20. Rotary or C.T.	
		2715'	Tubb	Rotary	
1. Elevations (Show whether D.C., K.T., etc.)	21A. Kind & Status Plug. Bond	21B. Drilling Contractor		22. Approx. Date Work will start	
5080' GL	Blanket-on-file	NA		3rd quarter-1983	

PROPOSED CASING AND CEMENT PROGRAM

SIZE OF HOLE	SIZE OF CASING	WEIGHT PER FOOT	SETTING DEPTH	SACKS OF CEMENT	EST. TOP
12-1/4"	9-5/8"	32.30#	700'	Circ.	Surface
8-3/4"	7"	20#	2715'	Tie back to 9-5/8"	Surface

Propose to drill and equip well in the Tubb formation. After reaching TD logs will be run and evaluated. Perforate and stimulate as necessary in attempting commercial production.

Mud Program: 0 - 700' Native Spud Mud
700 - TD Stable foam using KCL water and foamers

COLLECT AND BACK SAMPLES FOR
NEW MEXICO BUREAU OF MINES, SOCORRO
AT AT LEAST TEN FOOT INTERVALS

BOP Program attached.
Gas is not dedicated.

0+2-NMOCDSF 1-HOU R. E. Ogden RM 21.150 1-SUSP 1-PJS 1-Amerada 1-Amerigas
1-Cities Service 1-Conoco 1-CO2 in Action 1-Excelsior 1-Sun. Tex. 1-Exxon
1-Jim Russell, Clayton 1-F. J. Nash, HOU RM 4.206

IN ABOVE SPACE DESCRIBE PROPOSED PROGRAM: IF PROPOSAL IS TO OPEN OR PLUG BACK, GIVE DATA ON PRESENT PRODUCTIVE ZONE AND PROPOSED NEW PRODUCTION ZONE. GIVE BLOWOUT PREVENTER PROGRAM, IF ANY.

I hereby certify that the information above is true and complete to the best of my knowledge and belief.

Signed _____ Title Assist. Admin. Analyst Date 7-20-83

(This space for State Use)

APPROVED BY _____ TITLE _____ DATE _____

CONDITIONS OF APPROVAL, IF ANY:

OIL CONSERVATION COMMISSION TO BE NOTIFIED WITHIN 24 HOURS OF BEGINNING OPERATIONS

7/25/83

Memo

From

CARL ULVOG

Chief Geologist

To WELL FILE *G-4-20N-33E*

SECTION *4* is a short section.

The N/2 N/2 is less than 500 feet wide (N-S).

The well locates 660 feet from each boundary
of the SW/NE 40-acre tract and is centered
in Unit G.

NEW MEXICO OIL CONSERVATION COMMISSION
WELL LOCATION AND ACREAGE DEDICATION PLAT

Form C-102
Supersedes C-128
Effective 1-1-65

All distances must be from the outer boundaries of the Section


Operator AMOCO PRODUCTION COMPANY			Lease Bravo Dome CO2 Gas Unit		Well No. 2033041G
Unit Letter G	Section 4	Township T20N	Range R33E	County HARDING	
Actual Footage Location of Well: 1083.1 feet from the NORTH line and 1980 feet from the EAST line					
Ground Level Elev. 5080	Producing Formation Tubb		Pool Und. Tubb		Dedicated Acreage: 160 Acres

1. Outline the acreage dedicated to the subject well by colored pencil or hachure marks on the plat below.
2. If more than one lease is dedicated to the well, outline each and identify the ownership thereof (both as to working interest and royalty).
3. If more than one lease of different ownership is dedicated to the well, have the interests of all owners been consolidated by communitization, unitization, force-pooling, etc?

☐ Yes ☐ No If answer is "yes," type of consolidation _____

If answer is "no," list the owners and tract descriptions which have actually been consolidated. (Use reverse side of this form if necessary.) _____

No allowable will be assigned to the well until all interests have been consolidated (by communitization, unitization, forced-pooling, or otherwise) or until a non-standard unit, eliminating such interests, has been approved by the Commission.

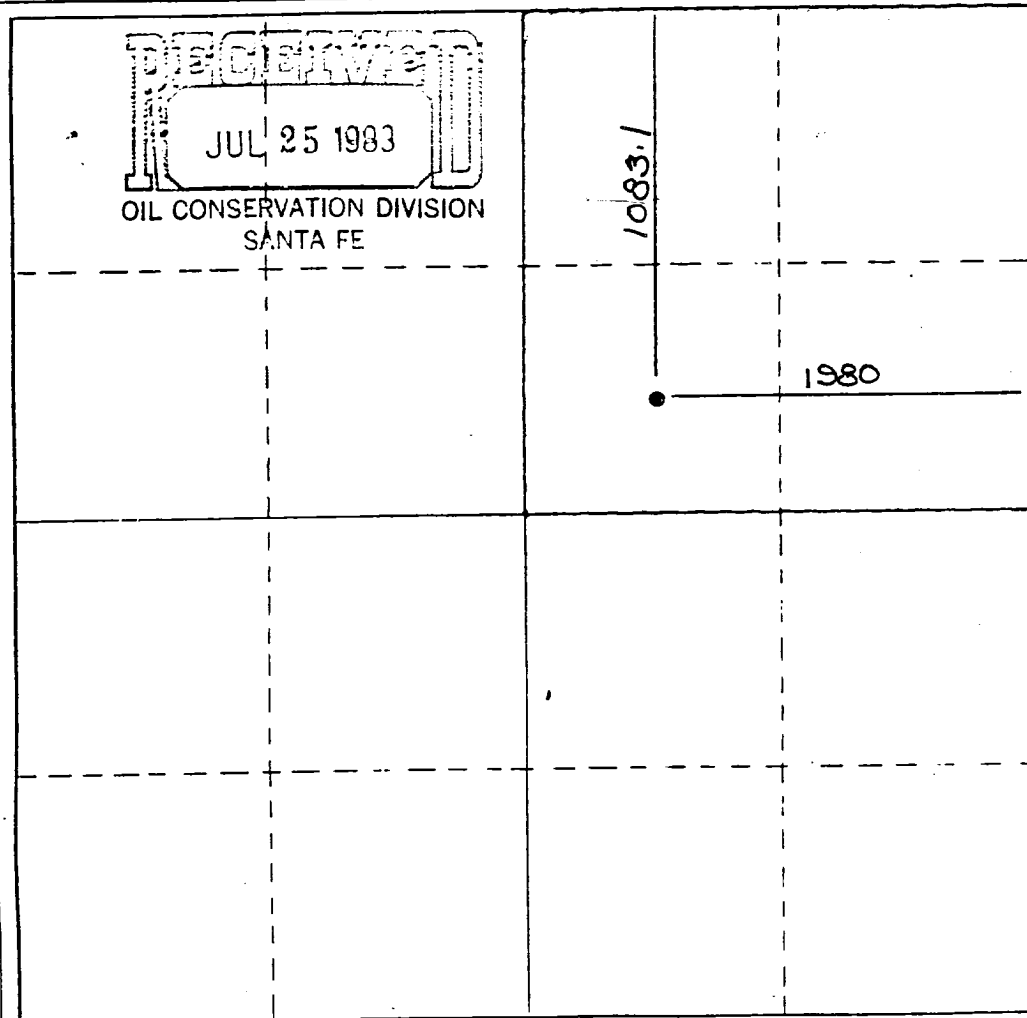

CERTIFICATION

I hereby certify that the information contained herein is true and complete to the best of my knowledge and belief.

Name
Assist. Admin. Analyst
Position
Amoco Production Company
Company
7-22-83

Date

I hereby certify that the well location shown on this plat was plotted from field notes of actual surveys made by me or under my supervision, and that the same is true and correct to the best of my knowledge and belief.

JUNE 25 1983
Date Surveyed
STATE OF NEW MEXICO
Registered Professional Engineer
and/or Land Surveyor
No. 5103
N.M. L. E. SHIELDS
Certificate No. 203

0 330 660 990 1320 1650 1980 2310 2640 2970 3300 3630 3960 4290 4620 4950 5280 5610 5940 6270 6600

STANDARD 2000 PSI W.P. BOP STACK

1. Blow-out preventers may be manually operated.
 2. All equipment must be in good condition, 2,000 psi W.P. (4,000 psi test) minimum.
 3. Bell nipple above blow-out preventer shall be same size as casing being drilled through.
 4. Kelly cock to be installed on kelly.
 5. Full opening safety valve 2,000 psi w.p. (4,000 psi test) minimum must be available on rig floor at all times with proper connection or subs to fit any tool joint in string.
 6. Spool or cross may be eliminated if connections are available in the lower part of the blow-out preventer body.
 7. Double or space saver type preventers may be used in lieu of two single preventers.
 8. BOP rams to be installed as follows:
 - Top preventer - Drill pipe or casing rams
 - Bottom preventer - Blind rams
- *Amoco District Superintendent may reverse location of rams.
9. Extensions and hand wheels to be installed and braced at all times.
 10. Manifold valves may be gate or plug metal to metal seal 2" minimum.

