


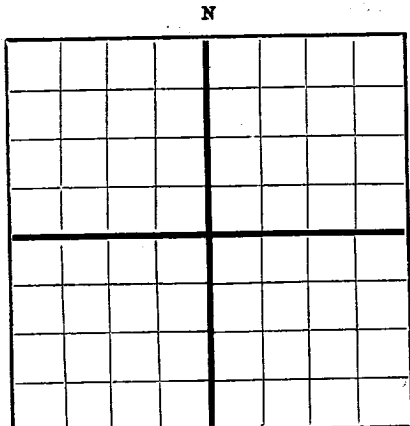

NEW MEXICO OIL CONSERVATION COMMISSION
Santa Fe, New Mexico

WELL RECORD

Mail to Oil Conservation Commission, Santa Fe, New Mexico, or its proper agent not more than twenty days after completion of well. Follow instructions in the Rules and Regulations of the Commission. Indicate questionable data by following it with (?). SUBMIT IN TRIPLICATE. FORM C-110 WILL NOT BE APPROVED UNTIL FORM C-105 IS PROPERLY FILLED OUT.

San Sanders Box 398, Artesia, New Mexico.
Company or Operator Address
San Sanders Well No. State of 1 of Sec. 32 T. 10N
Lease R. 12E N. M. P. M., Wildcat Field, San Miguel County.
Well is 330 feet south of the North line and 1650 feet west of the East line of Sec. 32, T. 10N, R. 12E.
If State land the oil and gas lease is No. 11519 Assignment No. 309
If patented land the owner is Address
If Government land the permittee is Address
The Lessee is San Sanders Address Box 398, Artesia, New Mexico.
Drilling commenced August 27, 1950 Drilling was completed 19
Name of drilling contractor San Sanders Address Box 398, Artesia, New Mexico.
Elevation above sea level at top of casing feet.
The information given is to be kept confidential until 19

OIL SANDS OR ZONES

No. 1, from 12E to No. 4, from to
No. 2, from to No. 5, from to
No. 3, from to No. 6, from to

IMPORTANT WATER SANDS

Include data on rate of water inflow and elevation to which water rose in hole.
No. 1, from to feet.
No. 2, from to feet.
No. 3, from to feet.
No. 4, from to feet.

CASING RECORD

SIZE	WEIGHT PER FOOT	THREADS PER INCH	MAKE	AMOUNT	KIND OF SHOE	CUT & FILLED FROM	PERFORATED		PURPOSE
							FROM	TO	
7"				3640'		Cemented with 50 Sacks Cement -			August 23, 1950
5"				1150'					October 19, 1950

MUDDING AND CEMENTING RECORD

SIZE OF HOLE	SIZE OF CASING	WHERE SET	NO. SACKS OF CEMENT	METHODS USED	MUD GRAVITY	AMOUNT OF MUD USED

PLUGS AND ADAPTERS

Heaving plug—Material Length Depth Set
Adapters — Material Size

RECORD OF SHOOTING OR CHEMICAL TREATMENT

SIZE	SHELL USED	EXPLOSIVE OR CHEMICAL USED	QUANTITY	DATE	DEPTH SHOT OR TREATED	DEPTH CLEANED OUT

Results of shooting or chemical treatment

RECORD OF DRILL-STEM AND SPECIAL TESTS

If drill-stem or other special tests or deviation surveys were made, submit report on separate sheet and attach hereto.

TOOLS USED

Rotary tools were used from feet to feet, and from feet to feet
Cable tools were used from 3650 feet to T.D.P. 4265' feet, and from feet to feet
PRODUCTION
Put to producing 19
The production of the first 24 hours was barrels of fluid of which % was oil; % emulsion; % water; and % sediment. Gravity, Be.
If gas well, cu. ft. per 24 hours Gallons gasoline per 1,000 cu. ft. of gas
Rock pressure, lbs. per sq. in.

EMPLOYEES

Clyde Hicks, Supt. Driller W. I. Freshley Driller
W. T. Martin Driller

FORMATION RECORD ON OTHER SIDE

I hereby swear or affirm that the information given herewith is a complete and correct record of the well and all work done on it so far as can be determined from available records.

Subscribed and sworn to before me this 30th Artesia, New Mexico. October 30, 1950
day of October 1950 Name Owner
Notary Public Position Representing Sam Sanders Company or Operator
My Commission expires February 25, 1951 Address Box 398, Artesia, New Mexico.

FORMATION RECORD

FROM	TO	THICKNESS IN FEET	FORMATION
3650	3658	8	Granite Wash
3658	3923	265	Granite Wash
3923	4127	204	Granite Wash
4127	4265	138	Granite Wash
4265 Total Depth			
Plugged and abandoned			October 21, 1950
August 28, Ran 3640' of 8 1/2" O. D. Casing, Cemented with 50 Sacks Cement.			
10-16 & 10-17 Knocked off 7" Casing, bridged with 10 Sacks Cement at 3650' & Pulled Casing.			
10-19 - Ran 1150' of 5" Casing			
10-20 - Pulled 10" Casing			
Cement 5" Casing			