

file

DISTRICT I

P.O. Box 1980, Hobbs NM 88240

DISTRICT II

P.O. Drawer DD, Artesia NM 88210


DISTRICT III

1000 Rio Brazos Rd., Aztec NM 87410

State of New Mexico
Energy, Minerals and Natural Resources Department

OIL CONSERVATION DIVISION

P.O. Box 2088
Santa Fe, New Mexico 87504-2088



WELL API NO.	30-015-22030
5. Indicate Type of Lease	State <input type="checkbox"/> FEE <input checked="" type="checkbox"/>
6. State Oil & Gas Lease No.	
7. Lease Name or Unit Agreement Name	JOYCE HG
8. Well No	1
9. Pool Name or Wildcat	ATOKA SAN ANDRES

SUNDRY NOTICES AND REPORTS ON WELLS
(DO NOT USE THIS FORM FOR PROPOSALS TO DRILL OR TO DEEPEN OR PLUG BACK TO A DIFFERENT RESERVOIR. USE "APPLICATION FOR PERMIT" (FORM C-101) FOR SUCH PROPOSALS.)

1. Type of Well:
OIL ☐ GAS ☐
WELL ☒ WELL ☐ OTHER ☐

2. Name of Operator
Yates Petroleum Corporation

3. Address of Operator
105 South 4th., Artesia, NM 88210

4. Well Location
Unit Letter P : 990 Feet From The SOUTH Line and 990 Feet From The EAST Line
Section 22 Township T18S Rang R26E NMPM EDDY COUNTY

10. Elevation (Show whether DF, RKB, RT, GR, etc.)

11. Check Appropriate Box to Indicate Nature of Notice, Report, or Other Data

NOTICE OF INTENTION TO:

PERFORM REMEDIAL WORK ☐ PLUG AND ABANDON ☒
TEMPORARILY ABANDON ☐ CHANGE PLANS ☐
PULL OR ALTER CASING ☐
OTHER ☐

SUBSEQUENT REPORT OF:

REMEDIAL WORK ☐ ALTERING CASING ☐
COMMENCE DRILLING OPNS. ☐ PLUG AND ABANDONMENT ☐
CASING TEST AND CEMENT JOB ☐
OTHER ☐

12. Describe Proposed or Completed Operations (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work) SEE RULE 1103.

YATES PETROLEUM CORPORATION respectfully requests permission to plug & abandon this well as follows:

1. MIRU WSU & safety equipment; TOH w/ tubing & production equipment.
2. TIH w/ tubing open-ended to 1850'. Load hole w/ plugging mud & spot 35 sk Class C cement w/ 2% CaCl₂ plug from 1450' - 1850' across perfs. POH; WOC 4 hrs., tag plug. Reset if necessary.
3. TIH to spot a 35 sk Class C cement w/ 2% CaCl₂ plug from 900' - 1250' across surface casing shoe @ 1202' and the San Andres top @ 990'. Pull tubing up hole & circ clean; POH. WOC 4 hrs. & tag plug. Reset if necessary. ← 25 sk Plug @ 686'
4. Spot 15 sk Class C cement plug at surface.
5. Remove all surface equipment & weld dry hole marker per regulations.

Notify OCD 24 hrs. prior to any work done

I hereby certify that the information above a true and complete to the best of my knowledge and belief.

SIGNATURE Donna Clack

TITLE Regulatory Technician

DATE 1/31/03

TYPE OR PRINT NAME DONNA CLACK

TELEPHONE NO. 505-748-1471

(This space for State Use)


APPROVED BY [Signature]

TITLE Field Rep ID

DATE FEB 10 2003

CONDITIONS OF APPROVAL, IF ANY

OPERATOR: Yates Petroleum Corp.Inc.		API# 30-015-22030	
WELL: Joyce HG # 1		LOCATION: P-22-18-26	
SURFACE CSG-HOLE SIZE 9 1/2"	CSG. SIZE 7"	SET @ 1202'	SX. CMT. 500 TOC. Circ
LONG STRING- HOLE SIZE 6 1/4"	CSG. SIZE 5.5"	SET @ 1900'	SX. CMT. 175 TOC. Circ.
OTHER-			

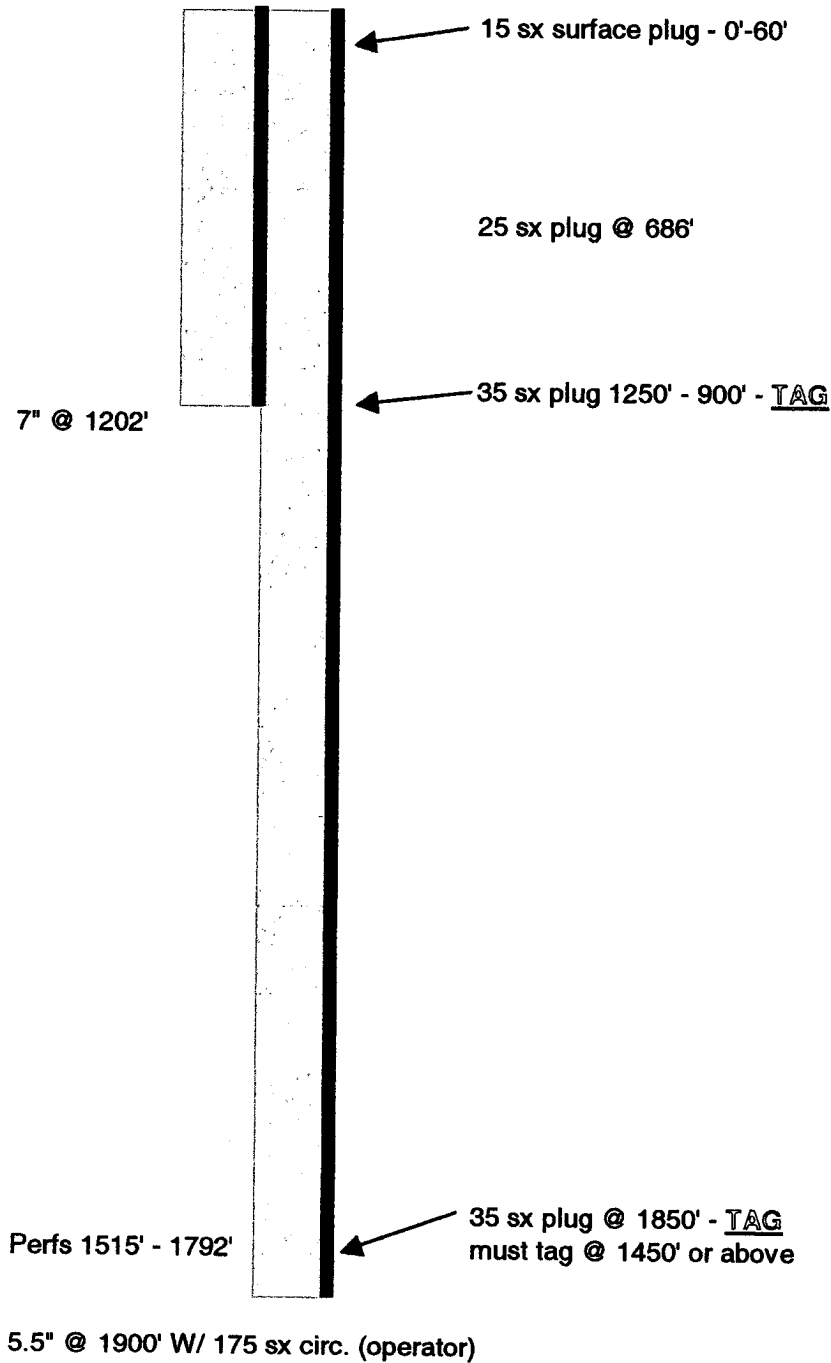

TOPS

Fresh Wtr. _____

T. Salt -----

B. Salt -----

Yates _____

Glorieta -----686'

Delaware -----

Bone Sp -----

Abo -----

Wolfcamp _____

Morrow _____

Devonian _____

Fusselman _____

Other _____