Form 3160-5 (August 2007)

UNITED STATES DEPARTMENT OF THE INTERIOR BUREAU OF LAND MANAGEMENT


SUNDRY NOTICES AND REPORTS ON WELLS Do not use this form for proposals to drill or to re-enter an

OCD Artesia

FORM APPROVED OMB NO. 1004-0135 Expires: July 31, 2010

Lease Serial No NMLC028775A

abandoned well. Use form 3160-3 (APD) for such proposals. SUBMIT IN TRIPLICATE - Other instructions on reverse side.				7 If Unit or CA/Agreement, Name and/or No			
Name of Operator Contact KANICIA CASTILLO COG OPERATING LLC E-Mail kcastillo@conchoresources com				9. API Well No. 30-015-31290			
3a. Address 550 WEST TEXAS AVE, STE 100 MIDLAND, TX 79701		b Phone No. (include area cod Ph: 432-685-4332	e) 10	10 Field and Pool, or Exploratory SWD; CISCO-CANYON			
4. Location of Well (Footage, Sec., 7		1	11. County or Parish, and State				
Sec 34 T17S R29E 1817FNL 1055FEL				EDDY COUNTY, NM			
12. CHECK APPI	ROPRIATE BOX(ES) TO I	NDICATE NATURE OF	NOTICE, REPO	ORT, OR OTH	ER DATA		
TYPE OF SUBMISSION	·	OF ACTION					
☐ Notice of Intent ☐ Subsequent Report ☐ Final Abandonment Notice	☐ Acidize ☐ Alter Casing ☐ Casing Repair ☐ Change Plans	Deepen Fracture Treat New Construction Plug and Abandon	Production Reclamation Recomplet Temporari	e	☐ Water Shut-Off Well Integrity ☐ Other		
	Convert to Injection	☐ Plug Back	☐ Water Disp				
Attach the Bond under which the wo following completion of the involved testing has been completed. Final Additional determined that the site is ready for final following that the site is ready for final	doperations If the operation result bandonment Notices shall be filed final inspection.) pkr @ 9316. Test RBP to 2 500 psi. No leak off in 30 mir and RBP. Redressed nickel ted. tool. Start testing. POP @ 9 s. Ran MIT test for 30 min version.	ts in a multiple completion or re only after all requirements, incl 000 psi, good test. Releas n. coated pkr. Hydro test tbg 0324. Circ 226bbs pkr fluid	ecompletion in a new uding reclamation, I se pkr. Test csg to 5000# above I. plumb to	from the the	A Shall be filed once the shal) A	
Name (Printed/Typed) KANICIA	9035 verified by the BLM WERATING LLC, sent to the	Carlsbad	•	D FOR RECO	OF		
Signature (Electronic Submission)		Date 05/25/					
		FEDERAL OR STATE		001	A 2 4 2001		
Approved By		Title		BUREAU OI	LAND MANAGEME	NT	
Conditions of approval, if any, are attache certify that the applicant holds legal or eq which would entitle the applicant to conditions.	ot warrant or	-	CARLS	BAD FIELD ÖFFICE			
Title 18 U.S.C. Section 1001 and Title 43 States any false, fictitious or fraudulent	U.S.C. Section 1212, make it a cr statements or representations as to	ime for any person knowingly a any matter within its jurisdiction	nd willfully to make	e to any department	or agency of the United	i	

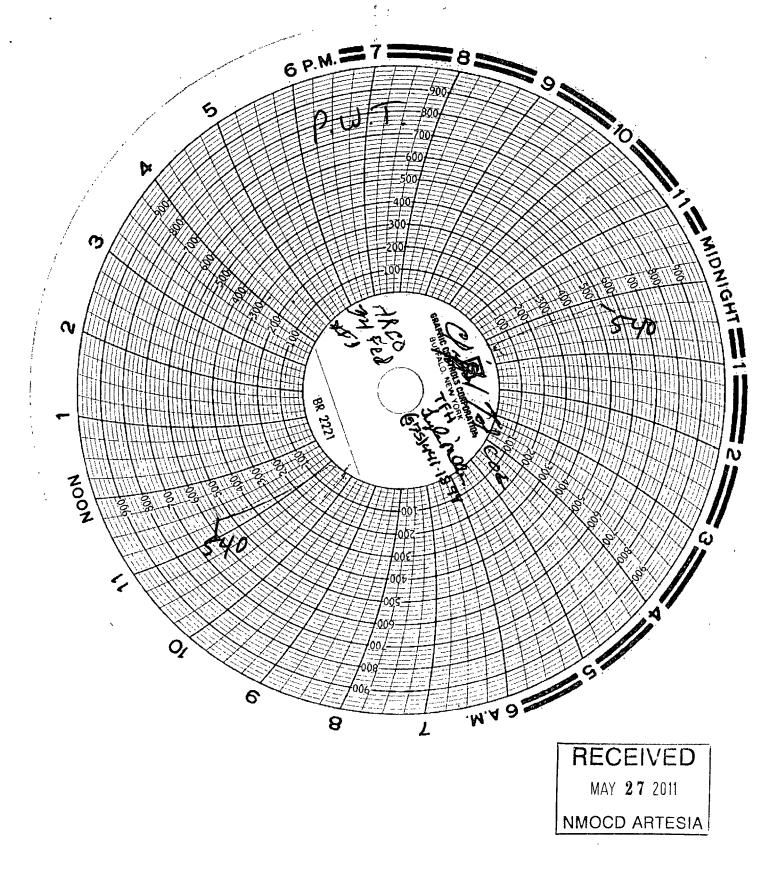

Conditions of Approval: Wells with Packers*

COG Operating LLC Arco 34 Federal SWD 1

June 23, 2011

- Conduct a Mechanical Integrity Test of the tubing/casing annulus after a tubing, packer or casing seal is established. Repair that seal any time more than five barrels of packer fluid is replaced within 30 days.
 - a. The minimum test pressure should be 500 psig for 30 minutes or 300 psig for 60 minutes, with 200 psig differentials between tubing and casing pressure (at test time) but no more than 70% of casing burst pressure as described by Onshore Order 2.III.B.1.h. (The tubing or reservoir pressure may need to be reduced). An alternate method for a BLM approved MIT is to have the fluid filled system open to atmospheric pressure and have a loss of less than five barrels in 30 days witnessed by a BLM authorized officer.
 - b. Document the pressure test on a calibrated recorder chart registering within 25 to 85 per cent of its full range. Greater than 10% pressure leakoff will be viewed as a failed MIT. Less than 10% pressure leakoff will be evaluated site specifically and may restrict injection approval.
 - c. Notify Paul R. Swartz at 575-234-5985 and/or 575-200-7902 at least 24 hours before the test. If there is no response, notify the BLM on call drilling phone, 575-361-2822.
 - d. Submit a subsequent Sundry Form 3160-5 relating the MIT activity. List the name of the BLM witness, or the notified person and date of notification. NMOCD is to retain the original recorded MIT chart.
 - e. Use of tubing internal protection, on/off tubing equipment just above the packer, and a profile nipple installation is required. The setting depths and descriptions of each are to be included in the subsequent sundry. List (by date) descriptions of daily activity of any previously unreported wellbore work.
 - f. Submit the original subsequent sundry with three copies to BLM Carlsbad.
- 2. Compliance with a NMOCD Administrative Order is required, submit documentation of that authorization.
 - a. Approved injection pressure compliance is required.
 - b. If injection pressure exceeds the approved pressure you are required to reduce that pressure and notify the BLM within 24 hours.
 - c. When injection pressure is within 50 psig of the maximum pressure, install automation equipment that will prevent exceeding that maximum.
 - i. Submit a subsequent report (Sundry Form 3160-5) describing the installed automation equipment.
 - e. Other unexplained significant variations of rate or pressure to be reported within 5 days of notice.

- 3. The casing/tubing annulus is required to be monitored for communication with injection fluid or loss of casing integrity.
 - a. The annulus is to be maintained full of packer fluid at atmospheric pressure. Installation of equipment that will display on site, continuous open to the air fluid level is required. A BLM inspector may request verification of this fluid level at any time.
 - b. Loss of packer fluid above five barrels per month requires notification of the BLM authorized officer within 5 days.
 - c. Gain of annular fluid requires notification within 24 hours. Cease injection and maintain a production casing pressure of Opsia. Notify the BLM's authorized officer (Paul R. Swartz at 575-200-7902). If there is no response, notify the BLM on call drilling phone, 575-361-2822.
 - d. Also submit to this office a (Sundry Form 3160-5) Notice of Intent (NOI) for approval by BLM and NMOCD with a detailed plan for correction and the anticipated date of correction. Verbal approval for the plan may be given by a BLM authorized officer, with the NOI filed within five business days.
 - e. After the repairs submit a (Sundry Form 3160-5) Subsequent report, describing the repair(s) and Mechanical Integrity Test as per item 1 above.
 - f. The operator shall keep accurate and current records documenting that the casing annulus is fluid filled. A suggested format for these records is available from the BLM Carlsbad Field Office. Copies of those records shall be furnished at the request of a BLM authorized officer.

*COA's prepared by Paul R. Swartz