District 1
1625 N. French Dr., Hobbs, NM 88240
District II
1301 W. Grand Avenue, Artesia, NM 88210
District III
1060 Rio Brazos Road, Aztec, NM 87410
District IV
1220 S. St. Francis Dr., Santa Fe, NM 87505

State of New Mexico Energy Minerals and Natural Resources

Oil Conservation Division 1220 South St. Francis Dr. Santa Fe, NM 87505 For drilling and production facilities, submit to appropriate NMOCD District Office.
For downstream facilities, submit to Santa Fe office

Form C-144 June 1, 2004


Pit or Below-Grade Tank Registration or Closure

Is pit or below-grade tank covered by a "general plan"? Yes No x e of action: Registration of a pit or below-grade tank Closure of a pit or below-grade tank K

Type of action: Registration of a pit or below-grade tank Closure of a pit or below-grade tank		
Operator: Pogo Producing Company Telephone: 432-685-8100 e-mail address: wrightc@pogoproducing.com		
Address: P. O. Box 10340, Midland, TX 79702-7340		
Facility or well name: Harroun 10 #2 API #: 3	0-015-31709 U/L or Qtr/Qtr M	Sec_10T24R29
County: Eddy County Latitude	32:13:35.65 Longitude 103:58	3:38.82 NAD: 1927 🔀 1983 🗌
Surface Owner: Federal State Private Indian		
<u>Pit</u>	Below-grade tank	
Type: Drilling X Production Disposal	Volume:bbi Type of fluid:	RECEIVED
Workover ☐ Emergency ☐	Construction material:	<i>₹</i>
Lined 🔀 Unlined 🗌	Double-walled, with leak detection? Yes If not, explain why not. JUN 1 0 2005	
Liner type: Synthetic 🖈 Thickness 12 mil Clay 🗌	SOU: AHTEOM	
Pit Volume 2050 Pol		
	Less than 50 feet	(20 points)
Depth to ground water (vertical distance from bottom of pit to seasonal	50 feet or more, but less than 100 feet	(10 points)
high water elevation of ground water.)	100 feet or more X	(0 points) O
	Yes	(20 points)
Wellhead protection area: (Less than 200 feet from a private domestic	No	
water source, or less than 1000 feet from all other water sources.)	X X	(0 points) O
Distance to surface surface (horizontal distance to all worlands players	Less than 200 feet	(20 points)
Distance to surface water: (horizontal distance to all wetlands, playas,	200 feet or more, but less than 1000 feet	(10 points)
irrigation canals, ditches, and perennial and ephemeral watercourses.)	1000 feet or more	(0 points) O
	Ranking Score (Total Points)	**************************************
If this is a pit closure: (1) Attach a diagram of the facility showing the pit's relationship to other equipment and tanks. (2) Indicate disposal location: (check the onsite box if		
your are burying in place) onsite 🗌 offsite 🔀 If offsite, name of facility (3) Attach a general description of remedial action taken including		
remediation start date and end date. (4) Groundwater encountered: No xx Yes I f yes, show depth below ground surface ft. and attach sample results.		
(5) Attach soil sample results and a diagram of sample locations and excavations.		
Additional Comments: Constructed before 4/15/04		
		
I hereby certify that the information above is true and complete to the best of my knowledge and belief. I further certify that the above-described pit or below-grade tank		
has been/will be constructed or closed according to NMOCD guidelines 🔀, a general permit 🔲, or an (attached) alternative OCD-approved plan 🗍.		
Date: 06/09/05		
Your certification and NMOCD approval of this application/closure does not relieve the operator of liability should the contents of the pit or tank contaminate ground water or otherwise endanger public health or the environment. Nor does it relieve the operator of its responsibility for compliance with any other federal, state, or local laws and/or regulations.		
Approval: Printed Name/Title Approval: Signature Signature DJUN 14 2005		

Pit Closing Procedure:

Pits are dewatered. Dirt contractor digs a deep bury pit adjacent to the drilling pit. Deep bury pit is lined with 12 mil plastic. Dirt contractor pushes contents of drilling pit into the deep bury pit. Deep bury pit is capped with 20 mil plastic then covered with 3 feet of fill dirt.

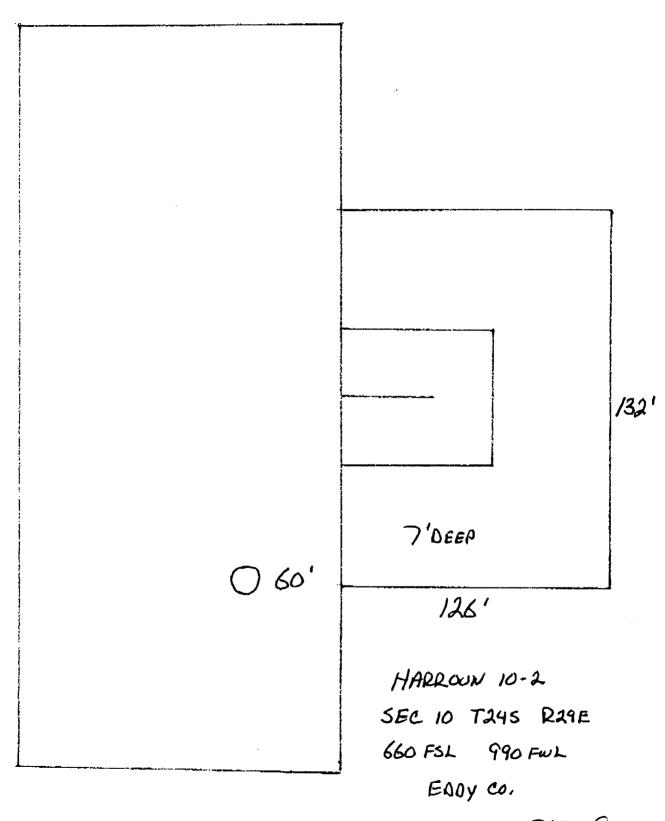

30-015 - 31709 32:13:35.65 103:58:38.82