

Submitt 3 Copies To Appropriate District Office  
 District J  
 1625 N. French Dr., Hobbs, NM 88240  
 District II  
 1301 W. Grand Ave., Artesia, NM 88210  
 District III  
 1000 Rio Brazos Rd., Aztec, NM 87410  
 District IV  
 1220 S. St. Francis Dr., Santa Fe, NM 87505

State of New Mexico  
 Energy, Minerals and Natural Resources  
 OIL CONSERVATION DIVISION  
 1220 South St. Francis Dr.  
 Santa Fe, NM 87505

Form C-103  
 May 27, 2004

SUNDRY NOTICES AND REPORTS ON WELLS (DO NOT USE THIS FORM FOR PROPOSALS TO DRILL OR TO DEEPEN OR PLUG BACK TO A DIFFERENT RESERVOIR. USE "APPLICATION FOR PERMIT" (FORM C-101) FOR SUCH PROPOSALS.)		WELL API NO. 30-015-20747
1. Type of Well: Oil Well <input checked="" type="checkbox"/> Gas Well <input type="checkbox"/> Other <u>Injection</u> <b>RECEIVED</b>		5. Indicate Type of Lease STATE <input checked="" type="checkbox"/> FEE <input type="checkbox"/>
2. Name of Operator Mack Energy Corporation		6. State Oil & Gas Lease No. B-936
3. Address of Operator P. O. Box 960 Artesia, NM 88211-0960		7. Lease Name or Unit Agreement Name ETZ State Unit
4. Well Location Unit Letter <u>K</u> <u>2310</u> feet from the <u>South</u> line and <u>2310</u> feet from the <u>West</u> line Section <u>16</u> Township <u>17S</u> Range <u>30E</u> NMPM County <u>Eddy</u>		8. Well Number <u>111</u>
I 1. Elevation (Show whether DR, RKB, RT, GR, etc.) 3672' GR		9. OGRID Number 013837
Pit or Below-grade Tank Application <input type="checkbox"/> or Closure <input type="checkbox"/>		10. Pool name or Wildcat Grbg Jackson SR Q Grbg SA
Pit type _____ Depth Groundwater _____ Distance from nearest fresh water well _____ Distance from nearest surface water _____ Pit Liner Thickness: _____ mil Below-Grade Tank: Volume _____ bbls; Construction Material _____		

12. Check Appropriate Box to Indicate Nature of Notice, Report or Other Data

NOTICE OF INTENTION TO: PERFORM REMEDIAL WORK <input type="checkbox"/> PLUG AND ABANDON <input checked="" type="checkbox"/> TEMPORARILY ABANDON <input type="checkbox"/> CHANGE PLANS <input type="checkbox"/> PULL OR ALTER CASING <input type="checkbox"/> MULTIPLE COMPL <input type="checkbox"/> OTHER: _____ <input type="checkbox"/>		SUBSEQUENT REPORT OF: REMEDIAL WORK <input type="checkbox"/> ALTERING CASING <input type="checkbox"/> COMMENCE DRILLING OPNS. <input type="checkbox"/> P AND A <input type="checkbox"/> CASING/CEMENT JOB <input type="checkbox"/> OTHER: _____ <input type="checkbox"/>	
--	--	--	--



13. Describe proposed or completed operations. (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work). SEE RULE 1103. For Multiple Completions: Attach wellbore diagram of proposed completion or recompletion.

- Notify OCD 24 hours prior to starting plugging operations.
- Set CIBP at 2483' w/ 35' cement cap.
- Circ hole with mud gel.
- Perf at ~~1000'~~ PERF @ 1092' squeeze plug 50' below and above base of salt. — Set Plug 992'-1092' - in & out - TAG
- Perf at 581' squeeze plug 50' above and below 8 5/8" shoe. — TAG
- Set 10 sx surface plug. — Place 60' of cmt in & out 0'-60' - TAG
- Install dry hole marker.

I hereby certify that the information above is true and complete to the best of my knowledge and belief. I further certify that any pit or below-grade tank has been/will be constructed or closed according to NMOCD guidelines , a general permit  or an (attached) alternative OCD-approved plan

SIGNATURE Jerry W. Sherrell TITLE Production Clerk DATE 6/15/2005  
 Type or print name Jerry W. Sherrell E-mail address: jerrys@mackenergycorp.com Telephone No. (505)748-1288  
 For State Use Only  
 APPROVED BY: [Signature] TITLE Field Rep ID DATE JUN 29 2005  
 Conditions of Approval (if any): \_\_\_\_\_

MACK ENERGY CORPORATION  
 ETZ STATE 111  
 SEC 16 T17S R30E 2310FSL 2310FWL

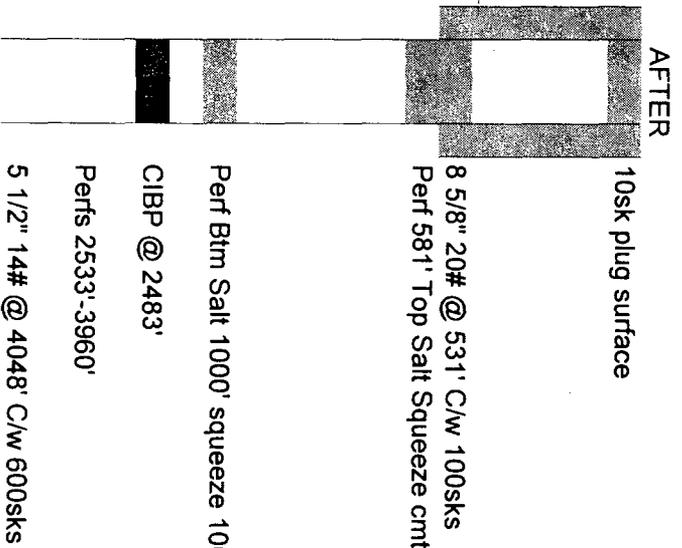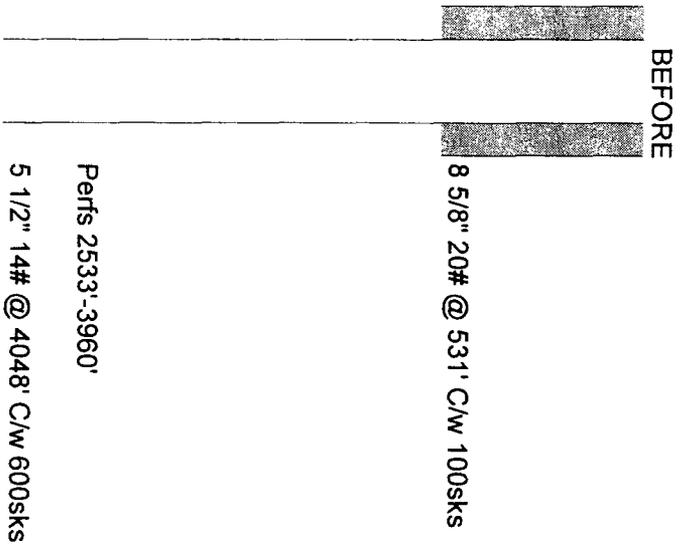

- 1 Notify OCD 24hrs of plugging
- 2 CIBP @ 2483' circ mud
- 3 Perf Btm Salt 1000' squeeze 100sk plug  
Perf 581' Top Salt Squeeze cmt 50' above  
and below surface shoe
- 4 and below surface shoe
- 5 Set 10sk surface plug
- 6 Install dry hole marker

10sk plug surface  
 8 5/8" 20# @ 531' C/w 100sk  
 Perf 581' Top Salt Squeeze cmt 50' above and below surface shoe  
 Perf Btm Salt 1000' squeeze 100sk plug  
 CIBP @ 2483'  
 Perfs 2533'-3960'  
 5 1/2" 14# @ 4048' C/w 600sk