

District I

1625 N. French Dr., Hobbs, NM 88240

District II

1301 W. Grand Ave., Artesia, NM 88210

District III

1000 Rio Brazos Rd., Aztec, NM 87410

District IV

1220 S. St. Francis Dr., Santa Fe, NM 87505

State of New Mexico
Energy, Minerals and Natural Resources

OIL CONSERVATION DIVISION
1220 South St. Francis Dr.
Santa Fe, NM 87505

Form C-103

May 27, 2004

SUNDRY NOTICES AND REPORTS ON WELLS (DO NOT USE THIS FORM FOR PROPOSALS TO DRILL OR TO DEEPEN OR PLUG BACK TO A DIFFERENT RESERVOIR. USE "APPLICATION FOR PERMIT" (FORM C-101) FOR SUCH PROPOSALS.)		WELL API NO. 30-015-21411
1. Type of Well: Oil Well ☒ Gas Well ☐ Other ☐		5. Indicate Type of Lease STATE ☐ FEE ☒
2. Name of Operator Yates Petroleum Corporation		6. State Oil & Gas Lease No.
3. Address of Operator 105 S. 4th Street, Artesia, NM 88210		7. Lease Name or Unit Agreement Name Wilkinson AZ
4. Well Location Unit Letter <u>N</u> : <u>480</u> feet from the <u>South</u> line and <u>1780</u> feet from the <u>West</u> line Section <u>25</u> Township <u>18S</u> Range <u>25E</u> NMPM <u>Eddy</u> County		8. Well Number 3
11. Elevation (Show whether DR, RKB, RT, GR, etc.) 3469'GR		9. OGRID Number 025575
Pit or Below-grade Tank Application ☐ or Closure ☐		10. Pool name or Wildcat Penasco Draw San Andres Yeso
Pit type _____ Depth to Groundwater _____ Distance from nearest fresh water well _____ Distance from nearest surface water _____		
Pit Liner Thickness: _____ mil Below-Grade Tank: Volume _____ bbls; Construction Material _____		

12. Check Appropriate Box to Indicate Nature of Notice, Report or Other Data

NOTICE OF INTENTION TO:

PERFORM REMEDIAL WORK ☐ PLUG AND ABANDON ☒
TEMPORARILY ABANDON ☐ CHANGE PLANS ☐
PULL OR ALTER CASING ☐ MULTIPLE COMPL ☐

OTHER: ☐

SUBSEQUENT REPORT OF:

REMEDIAL WORK ☐ ALTERING CASING ☐
COMMENCE DRILLING OPNS. ☐ PLUG AND ABANDON ☐
CASING/CEMENT JOB ☐

OTHER: ☐

13. Describe proposed or completed operations. (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work). SEE RULE 1103. For Multiple Completions: Attach wellbore diagram of proposed completion or recompletion.

Yates Petroleum Corporation plans to plug and abandon this well as follows:

1. MIRU all safety equipment necessary.
2. Set a 4-1/2" CIBP at 2115' with 35' cement on top.
3. Spot 25 sx cement at 1146'. Tag plug.
4. Spot 25 sx cement at 371'. Tag plug.
5. Spot 15 sx cement from 150' to surface.
6. Cut off wellhead and install marker.

NOTE: Yates Petroleum Corporation will use steel pits and no earth pits

I hereby certify that the information above is true and complete to the best of my knowledge and belief. I further certify that any pit or below-grade tank has been/will be constructed or closed according to NMOCD guidelines ☐, a general permit ☐ or an (attached) alternative OCD-approved plan ☐.

SIGNATURE Tina Huerta TITLE Regulatory Compliance Supervisor DATE July 11, 2005

Type or print name Tina Huerta E-mail address: tinah@ypcnm.com Telephone No. 505-748-1471

For State Use Only

APPROVED BY: [Signature] TITLE Field Supervisor DATE JUL 14 2005


Conditions of Approval (if any):

WELL NAME: Wilkinsor AZ #3 FIELD AREA: Enasco Draw
LOCATION: 480' FSL, 1780' FWL N-25-18S-25E
SL: 3469' ZERO: ' AGL: '
CB: ' ORIG. DRLG./COMPL. DATE: 12-24-74
COMMENTS: Spud 11-26-74

CASING PROGRAM:

SIZE/WT./GR./CONN.	DEPTH SET
10 3/4" 30# J-55	321'
7" 23# J-55	1096'
4 1/2" 9.5# J-55	2341'
2" Ebg.	2297'

Before

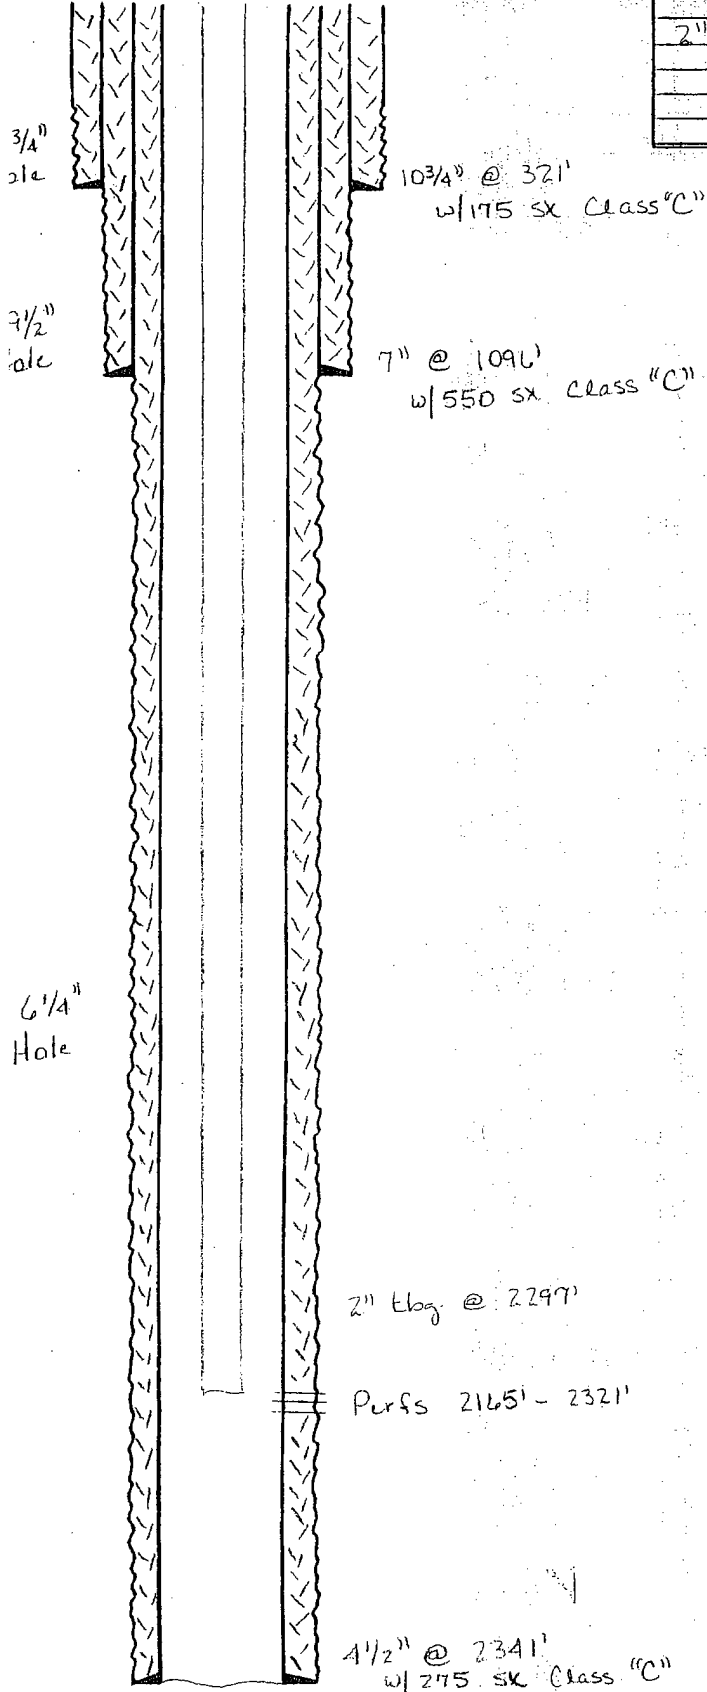

Tops

SA 709'
Glorieta 2062'

WELL NAME: Wilkinson AZ #3 FIELD AREA: Enasco Draw
 LOCATION: 480' FSL, 1780' FWL N-25-185-25E
 GL: 3469' ZERO: ' AGL: '
 KB: ' ORIG. DRLG./COMPL. DATE: 12-24-74
 COMMENTS: Spud 11-26-74

CASING PROGRAM:

SIZE/WT./GR./CONN.	DEPTH SET
10 3/4" 30# J-55	321'
7" 73# J-55	1091'
4 1/2" 9.5# J-55	2341'
2" Ebg.	2297'

