

DISTRICT IV
1220 S. St. Francis Dr., Santa Fe, NM 87505
Phone (505) 476-3460 Fax: (505) 476-3462

Submit one copy to appropriate
District Office

1220 South St. Francis Dr.
Santa Fe, New Mexico 87505

☐ AMENDED REPORT

API Number 30-015-41583	Pool Code 3250	Pool Name ATOKA; 6L-4PS Penasco Draw/Yeso
Property Code 40048	Property Name SEARS "BSR"	Well Number 2H
OGRID No. 025575	Operator Name YATES PETROLEUM CORP.	Elevation 3388'

UL or lot No.	Section	Township	Range	Lot Idn	Feet from the	North/South line	Feet from the	East/West line	County
D	21	18 S	26 E		300	NORTH	220	WEST	EDDY

UL or lot No.	Section	Township	Range	Lot Idn	Feet from the	North/South line	Feet from the	East/West line	County
M	17	18 S	26 E		960	SOUTH	330	WEST	EDDY

Dedicated Acres	Joint or Infill	Consolidation Code	Order No.
160			

NO ALLOWABLE WILL BE ASSIGNED TO THIS COMPLETION UNTIL ALL INTERESTS HAVE BEEN CONSOLIDATED
OR A NON-STANDARD UNIT HAS BEEN APPROVED BY THE DIVISION

Sec. 17

Production Zone

Project Area

Penetration Point:
330' FSL & 330' FEL

SURFACE LOCATION
Lat - N 32°44'23.54"
Long - W 104°23'41.35"
NMSPCE- N 632902.22
E 522432.19
(NAD-83)

PROPOSED BOTTOM HOLE LOCATION
Lat - N 32°44'29.76"
Long - W 104°23'47.76"
NMSPCE- N 633531.36
E 521885.27
(NAD-83)

PENETRATION POINT
Lat - N 32°44'29.76"
Long - W 104°23'47.76"
NMSPCE- N 633531.36
E 521885.27
(NAD-83)

Sec. 21

OPERATOR CERTIFICATION
I hereby certify that the information contained herein is true and complete to the best of my knowledge and belief, and that this organization either owns a working interest or unleased mineral interest in the land including the proposed bottom hole location or has a right to drill this well at this location pursuant to a contract with an owner of such a mineral or working interest, or to a voluntary pooling agreement or a compulsory pooling order heretofore entered by the division.

Signature: T. Hahn Date: 7/30/13

Printed Name: Travish Hahn

Email Address: thahn@yatespetroleum.com

SURVEYOR CERTIFICATION
I hereby certify that the well location shown on this plat was plotted from field notes of actual surveys made by me or under my supervision, and that the same is true and correct to the best of my belief.

Date Surveyed: JULY 09 2013


Signature & Title: GARY L. JONES
Professional Surveyor

Certificate No.: 7877

BASIN SURVEYS 29897




Yates Petroleum
Project: Eddy, NM (NAD-83)
Site: Sears BRS
Well: #2H
Wellbore: OH
Plan: Plan #2 (#2H/OH)



Azimuths to Grid North
True North: 0.03°
Magnetic North: 7.78°

Magnetic Field
Strength: 48627.8snT
Dip Angle: 60.47°
Date: 7/12/2013
Model: IGRF2010

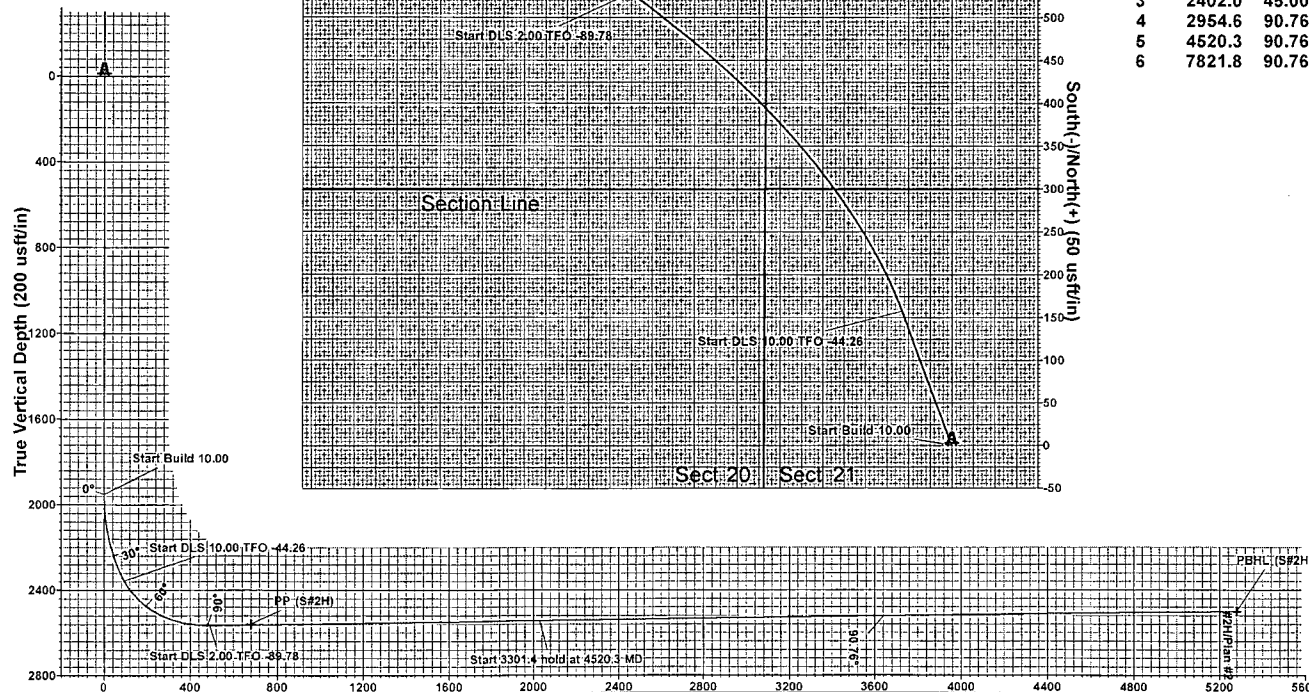

West(-)/East(+) (50 usft/in)

West(-)/East(+) (200 usft/in)

Section Details

Sec	MD	Inc	Azi	TVD	+N/-S	+E/-W	Dleg	TFace	VSec	Target
1	0.0	0.00	0.00	0.0	0.0	0.0	0.00	0.00	0.0	
2	1952.0	0.00	0.00	1952.0	0.0	0.0	0.00	0.00	0.0	
3	2402.0	45.00	340.00	2357.1	157.7	-57.4	10.00	340.00	93.2	
4	2954.6	90.76	305.00	2565.3	529.0	-375.6	10.00	-44.26	490.4	
5	4520.3	90.76	273.68	2543.9	1041.1	-1834.5	2.00	-89.78	2029.2	
6	7821.8	90.76	273.68	2500.0	1253.2	-5128.8	0.00	0.00	5279.7	PBHL (S#2H)

WELL DETAILS: #2H

Ground Elevation:: 3388.0
RKB Elevation: WELL @ 3413.0usft (25' KB)
Rig Name: 25' KB

Surface Hole Location

Northing	Easting	Latitude	Longitude
632902.22	522432.19	32° 44' 23.535 N	104° 23' 41.350 W

DESIGN TARGET DETAILS


Name	TVD	+N/-S	+E/-W	Northing	Easting
PBHL (S#2H)	2500.0	1253.2	-5128.8	634155.40	517303.40
PP (S#2H)	2559.0	629.1	-546.9	633531.36	521885.27

PROJECT DETAILS: Eddy, NM (NAD-83)
Geodetic System: US State Plane 1983
Datum: North American Datum 1983
Ellipsoid: GRS 1980
Zone: New Mexico Eastern Zone
System Datum: Mean Sea Level
Local North: Grid



Crescent Directional Drilling
7715 West Industrial Ave. Midland, Tx 79706
Phone: 432-618-1135

Plan: Plan #2 (#2H/OH)
Created By: Matt Higgins Date: 16:46, July 30 2013

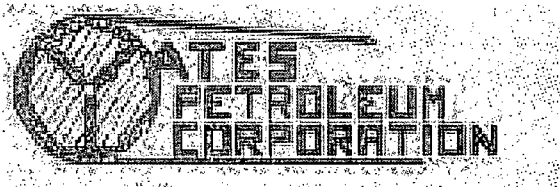

Yates Petroleum

Eddy, NM (NAD-83)

Sears BRS


#2H

OH

Plan: Plan #2

Standard Planning Report

30 July, 2013

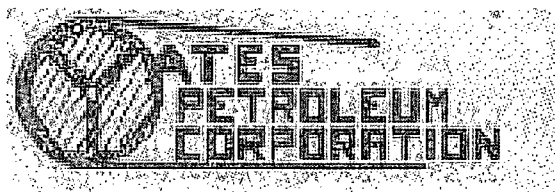



Planning Report



Database:	Houston R5000 Database	Local Co-ordinate Reference:	Well #2H
Company:	Yates Petroleum	TVD Reference:	WELL @ 3413.0usft (25' KB)
Project:	Eddy NM (NAD-83)	MD Reference:	WELL @ 3413.0usft (25' KB)
Site:	Sears BRS	North Reference:	Grid
Well:	#2H	Survey Calculation Method:	Minimum Curvature
Wellbore:	OH		
Design:	Plan #2		

Project: Eddy NM (NAD-83)			
Map System:	US State Plane 1983	System Datum:	Mean Sea Level
Geo Datum:	North American Datum 1983		
Map Zone:	New Mexico Eastern Zone		

Site		Sears_BRS			
Site Position:		Northing:	632,902.22 usft	Latitude:	32° 44' 23.535 N
From:	Map	Easting:	522,432.19 usft	Longitude:	104° 23' 41.350 W
Position Uncertainty:	2.0 usft	Slot Radius:	12-1/4 "	Grid Convergence:	-0.03

Well	#2H					
Well Position	+N/-S	0.0 usft	Northing:	632,902.22 usft	Latitude:	32° 44' 23.535 N
	+E/-W	0.0 usft	Easting:	522,432.19 usft	Longitude:	104° 23' 41.350 W
Position Uncertainty		0.0 usft	Wellhead Elevation:		Ground Level:	3,388.0 usft

Wellbore		OH			
Magnetics	Model Name	Sample Date	Declination (°)	Dip Angle (°)	Field Strength (nT)
	IGRF2010	7/12/2013	7.75	60.47	48,628

Design: Plan #2				
Audit Notes:				
Version:		Phase: PLAN	Tie On Depth:	0.0
Vertical Section:	Depth From (TVD) (usft)	+N/-S (usft)	+E/-W (usft)	Direction (°)
	0.0	0.0	0.0	283.73

Plan Sections										
Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Dogleg Rate (°/100usft)	Build Rate (°/100usft)	Turn Rate (°/100usft)	TFO (°)	Target
0.0	0.00	0.00	0.0	0.0	0.0	0.00	0.00	0.00	0.00	
1,952.0	0.00	0.00	1,952.0	0.0	0.0	0.00	0.00	0.00	0.00	
2,402.0	45.00	340.00	2,357.1	157.7	-57.4	10.00	10.00	0.00	340.00	
2,954.6	90.76	305.00	2,565.3	529.0	-375.6	10.00	8.28	-6.33	-44.26	
4,520.3	90.76	273.68	2,543.9	1,041.1	-1,834.5	2.00	0.00	-2.00	-89.78	
7,821.8	90.76	273.68	2,500.0	1,253.2	-5,128.8	0.00	0.00	0.00	0.00	PBHL (S#2H)



Planning Report



Database:	Houston R5000 Database	Local Co-ordinate Reference:	Well #2H
Company:	Yates Petroleum	TVD Reference:	WELL @ 3413'0usft (25' KB)
Project:	Eddy NM (NAD-83)	MD Reference:	WELL @ 3413'0usft (25' KB)
Site:	Sears BRS	North Reference:	Grid
Well:	#2H	Survey Calculation Method:	Minimum Curvature
Wellbore:	OH		
Design:	Plan #2		

Planned Survey

Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Vertical Section (usft)	Dogleg Rate (°/100usft)	Build Rate (°/100usft)	Turn Rate (°/100usft)
0.0	0.00	0.00	0.0	0.0	0.0	0.0	0.00	0.00	0.00
100.0	0.00	0.00	100.0	0.0	0.0	0.0	0.00	0.00	0.00
200.0	0.00	0.00	200.0	0.0	0.0	0.0	0.00	0.00	0.00
300.0	0.00	0.00	300.0	0.0	0.0	0.0	0.00	0.00	0.00
400.0	0.00	0.00	400.0	0.0	0.0	0.0	0.00	0.00	0.00
500.0	0.00	0.00	500.0	0.0	0.0	0.0	0.00	0.00	0.00
600.0	0.00	0.00	600.0	0.0	0.0	0.0	0.00	0.00	0.00
700.0	0.00	0.00	700.0	0.0	0.0	0.0	0.00	0.00	0.00
800.0	0.00	0.00	800.0	0.0	0.0	0.0	0.00	0.00	0.00
900.0	0.00	0.00	900.0	0.0	0.0	0.0	0.00	0.00	0.00
1,000.0	0.00	0.00	1,000.0	0.0	0.0	0.0	0.00	0.00	0.00
1,100.0	0.00	0.00	1,100.0	0.0	0.0	0.0	0.00	0.00	0.00
1,200.0	0.00	0.00	1,200.0	0.0	0.0	0.0	0.00	0.00	0.00
1,300.0	0.00	0.00	1,300.0	0.0	0.0	0.0	0.00	0.00	0.00
1,400.0	0.00	0.00	1,400.0	0.0	0.0	0.0	0.00	0.00	0.00
1,500.0	0.00	0.00	1,500.0	0.0	0.0	0.0	0.00	0.00	0.00
1,600.0	0.00	0.00	1,600.0	0.0	0.0	0.0	0.00	0.00	0.00
1,700.0	0.00	0.00	1,700.0	0.0	0.0	0.0	0.00	0.00	0.00
1,800.0	0.00	0.00	1,800.0	0.0	0.0	0.0	0.00	0.00	0.00
1,900.0	0.00	0.00	1,900.0	0.0	0.0	0.0	0.00	0.00	0.00
1,952.0	0.00	0.00	1,952.0	0.0	0.0	0.0	0.00	0.00	0.00
Start Build 10.00									
2,000.0	4.80	340.00	1,999.9	1.9	-0.7	1.1	10.00	10.00	0.00
2,050.0	9.80	340.00	2,049.5	7.9	-2.9	4.6	10.00	10.00	0.00
2,100.0	14.80	340.00	2,098.4	17.9	-6.5	10.6	10.00	10.00	0.00
2,150.0	19.80	340.00	2,146.1	31.8	-11.6	18.8	10.00	10.00	0.00
2,200.0	24.80	340.00	2,192.3	49.7	-18.1	29.3	10.00	10.00	0.00
2,250.0	29.80	340.00	2,236.7	71.2	-25.9	42.1	10.00	10.00	0.00
2,300.0	34.80	340.00	2,279.0	96.3	-35.0	56.9	10.00	10.00	0.00
2,350.0	39.80	340.00	2,318.8	124.8	-45.4	73.7	10.00	10.00	0.00
2,402.0	45.00	340.00	2,357.1	157.7	-57.4	93.2	10.00	10.00	0.00
Start DLS 10.00 TFO -44.26									
2,450.0	48.53	335.53	2,390.0	190.0	-70.7	113.7	10.00	7.35	-9.31
2,500.0	52.37	331.37	2,421.9	224.5	-87.9	138.7	10.00	7.68	-8.31
2,550.0	56.34	327.63	2,451.0	259.5	-108.6	167.0	10.00	7.94	-7.48
2,600.0	60.41	324.23	2,477.2	294.7	-132.4	198.6	10.00	8.15	-6.81
2,650.0	64.57	321.09	2,500.3	329.9	-159.3	233.1	10.00	8.31	-6.28
2,700.0	68.78	318.16	2,520.1	364.9	-189.1	270.3	10.00	8.43	-5.86
2,750.0	73.05	315.39	2,536.5	399.3	-221.4	309.9	10.00	8.53	-5.53
2,800.0	77.34	312.75	2,549.2	432.9	-256.2	351.6	10.00	8.60	-5.28
2,850.0	81.67	310.20	2,558.3	465.4	-293.0	395.1	10.00	8.65	-5.11
2,900.0	86.01	307.70	2,563.7	496.7	-331.6	440.0	10.00	8.68	-4.99
2,954.6	90.76	305.00	2,565.3	529.0	-375.6	490.4	10.00	8.70	-4.94
Start DLS 2.00 TFO -89.78									
3,000.0	90.76	304.09	2,564.7	554.7	-413.0	532.8	2.00	0.01	-2.00
3,100.0	90.77	302.09	2,563.3	609.3	-496.7	627.2	2.00	0.01	-2.00
3,200.0	90.78	300.09	2,562.0	661.0	-582.4	722.6	2.00	0.01	-2.00
3,300.0	90.78	298.09	2,560.6	709.6	-669.7	819.0	2.00	0.00	-2.00
3,400.0	90.78	296.09	2,559.2	755.1	-758.7	916.3	2.00	0.00	-2.00
3,500.0	90.79	294.09	2,557.9	797.5	-849.3	1,014.3	2.00	0.00	-2.00
3,600.0	90.79	292.09	2,556.5	836.7	-941.3	1,113.0	2.00	0.00	-2.00
3,700.0	90.79	290.09	2,555.1	872.7	-1,034.6	1,212.1	2.00	0.00	-2.00
3,800.0	90.79	288.09	2,553.7	905.4	-1,129.0	1,311.7	2.00	0.00	-2.00



Planning Report



Database:	Houston R5000 Database	Local Co-ordinate Reference:	Well #2H
Company:	Yates Petroleum	TVD Reference:	WELL @ 3413'0usft (25' KB)
Project:	Eddy NM (NAD-83)	MD Reference:	WELL @ 3413'0usft (25' KB)
Site:	Sears BRS	North Reference:	Grid
Well:	#2H	Survey Calculation Method:	Minimum Curvature
Wellbore:	OH		
Design:	Plan #2		

Planned Survey

Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Vertical Section (usft)	Dogleg Rate (°/100usft)	Build Rate (°/100usft)	Turn Rate (°/100usft)
3,900.0	90.79	286.09	2,552.4	934.8	-1,224.6	1,411.5	2.00	0.00	-2.00
4,000.0	90.79	284.09	2,551.0	960.8	-1,321.2	1,511.5	2.00	0.00	-2.00
4,100.0	90.78	282.09	2,549.6	983.5	-1,418.5	1,611.4	2.00	0.00	-2.00
4,200.0	90.78	280.09	2,548.2	1,002.7	-1,516.7	1,711.3	2.00	0.00	-2.00
4,300.0	90.78	278.09	2,546.9	1,018.5	-1,615.4	1,811.0	2.00	0.00	-2.00
4,400.0	90.77	276.09	2,545.5	1,030.9	-1,714.6	1,910.3	2.00	-0.01	-2.00
4,500.0	90.76	274.09	2,544.2	1,039.7	-1,814.2	2,009.1	2.00	-0.01	-2.00
4,520.3	90.76	273.68	2,543.9	1,041.1	-1,834.5	2,029.2	2.00	-0.01	-2.00
Start 3301.4 hold at 4520.3 MD									
4,600.0	90.76	273.68	2,542.9	1,046.2	-1,914.0	2,107.6	0.00	0.00	0.00
4,700.0	90.76	273.68	2,541.5	1,052.6	-2,013.8	2,206.1	0.00	0.00	0.00
4,800.0	90.76	273.68	2,540.2	1,059.1	-2,113.5	2,304.5	0.00	0.00	0.00
4,900.0	90.76	273.68	2,538.9	1,065.5	-2,213.3	2,403.0	0.00	0.00	0.00
5,000.0	90.76	273.68	2,537.5	1,071.9	-2,313.1	2,501.4	0.00	0.00	0.00
5,100.0	90.76	273.68	2,536.2	1,078.3	-2,412.9	2,599.9	0.00	0.00	0.00
5,200.0	90.76	273.68	2,534.9	1,084.8	-2,512.7	2,698.4	0.00	0.00	0.00
5,300.0	90.76	273.68	2,533.5	1,091.2	-2,612.5	2,796.8	0.00	0.00	0.00
5,400.0	90.76	273.68	2,532.2	1,097.6	-2,712.3	2,895.3	0.00	0.00	0.00
5,500.0	90.76	273.68	2,530.9	1,104.0	-2,812.0	2,993.7	0.00	0.00	0.00
5,600.0	90.76	273.68	2,529.6	1,110.5	-2,911.8	3,092.2	0.00	0.00	0.00
5,700.0	90.76	273.68	2,528.2	1,116.9	-3,011.6	3,190.6	0.00	0.00	0.00
5,800.0	90.76	273.68	2,526.9	1,123.3	-3,111.4	3,289.1	0.00	0.00	0.00
5,900.0	90.76	273.68	2,525.6	1,129.7	-3,211.2	3,387.6	0.00	0.00	0.00
6,000.0	90.76	273.68	2,524.2	1,136.2	-3,311.0	3,486.0	0.00	0.00	0.00
6,100.0	90.76	273.68	2,522.9	1,142.6	-3,410.7	3,584.5	0.00	0.00	0.00
6,200.0	90.76	273.68	2,521.6	1,149.0	-3,510.5	3,682.9	0.00	0.00	0.00
6,300.0	90.76	273.68	2,520.2	1,155.4	-3,610.3	3,781.4	0.00	0.00	0.00
6,400.0	90.76	273.68	2,518.9	1,161.8	-3,710.1	3,879.8	0.00	0.00	0.00
6,500.0	90.76	273.68	2,517.6	1,168.3	-3,809.9	3,978.3	0.00	0.00	0.00
6,600.0	90.76	273.68	2,516.3	1,174.7	-3,909.7	4,076.8	0.00	0.00	0.00
6,700.0	90.76	273.68	2,514.9	1,181.1	-4,009.5	4,175.2	0.00	0.00	0.00
6,800.0	90.76	273.68	2,513.6	1,187.5	-4,109.2	4,273.7	0.00	0.00	0.00
6,900.0	90.76	273.68	2,512.3	1,194.0	-4,209.0	4,372.1	0.00	0.00	0.00
7,000.0	90.76	273.68	2,510.9	1,200.4	-4,308.8	4,470.6	0.00	0.00	0.00
7,100.0	90.76	273.68	2,509.6	1,206.8	-4,408.6	4,569.1	0.00	0.00	0.00
7,200.0	90.76	273.68	2,508.3	1,213.2	-4,508.4	4,667.5	0.00	0.00	0.00
7,300.0	90.76	273.68	2,506.9	1,219.7	-4,608.2	4,766.0	0.00	0.00	0.00
7,400.0	90.76	273.68	2,505.6	1,226.1	-4,707.9	4,864.4	0.00	0.00	0.00
7,500.0	90.76	273.68	2,504.3	1,232.5	-4,807.7	4,962.9	0.00	0.00	0.00
7,600.0	90.76	273.68	2,503.0	1,238.9	-4,907.5	5,061.3	0.00	0.00	0.00
7,700.0	90.76	273.68	2,501.6	1,245.4	-5,007.3	5,159.8	0.00	0.00	0.00
7,800.0	90.76	273.68	2,500.3	1,251.8	-5,107.1	5,258.3	0.00	0.00	0.00
7,821.8	90.76	273.68	2,500.0	1,253.2	-5,128.8	5,279.7	0.00	0.00	0.00
TD @ 7821.8 MD, 2500.0 TVD									



Planning Report



Database:	Houston R5000 Database	Local Co-ordinate Reference:	Well: #2H
Company:	Yates Petroleum	TVD Reference:	WELL @ 3413.0usft (25' KB)
Project:	Eddy NM (NAD-83)	MD Reference:	WELL @ 3413.0usft (25' KB)
Site:	Sears BRS	North Reference:	Grid
Well:	#2H	Survey Calculation Method:	Minimum Curvature
Wellbore:	OH		
Design:	Plan #2		

Design Targets									
Target Name	Dip Angle	Dip Dir.	TVD	+N/-S	+E/-W	Northing	Easting	Latitude	Longitude
hit/miss target	(°)	(°)	(usft)	(usft)	(usft)	(usft)	(usft)		
Shape									
PBHL (S#2H)	0.00	360.00	2,500.0	1,253.2	-5,128.8	634,155.40	517,303.40	32° 44' 35.902 N	104° 24' 41.410 W
- plan hits target center									
- Point									
PP (S#2H)	0.00	360.00	2,559.0	629.1	-546.9	633,531.36	521,885.27	32° 44' 29.758 N	104° 23' 47.758 W
- plan misses target center by 10.1usft at 3153.3usft MD (2562.6 TVD, 637.2 N, -542.1 E)									
- Point									

Plan Annotations:				
Measured Depth	Vertical Depth	Local Coordinates		Comment
(usft)	(usft)	+N/-S (usft)	+E/-W (usft)	
1,952.0	1,952.0	0.0	0.0	Start Build 10.00
2,402.0	2,357.1	157.7	-57.4	Start DLS 10.00 TFO -44.26
2,954.6	2,565.3	529.0	-375.6	Start DLS 2.00 TFO -89.78
4,520.3	2,543.9	1,041.1	-1,834.5	Start 3301.4 hold at 4520.3 MD
7,821.8	2,500.0	1,253.2	-5,128.8	TD @ 7821.8' MD, 2500.0' TVD

**Yates Petroleum Corporation
105 S. Fourth Street
Artesia, NM 88210**



Hydrogen Sulfide (H₂S) Contingency Plan

For

**Sears BRS #2H
300' FNL & 220' FWL
Section 21, T18S-R26E
Eddy County NM**

Sears BRS #2H

This is an open drilling site. H₂S monitoring equipment and emergency response equipment will be used within 500' of zones known to contain H₂S, including warning signs, wind indicators and H₂S monitor.

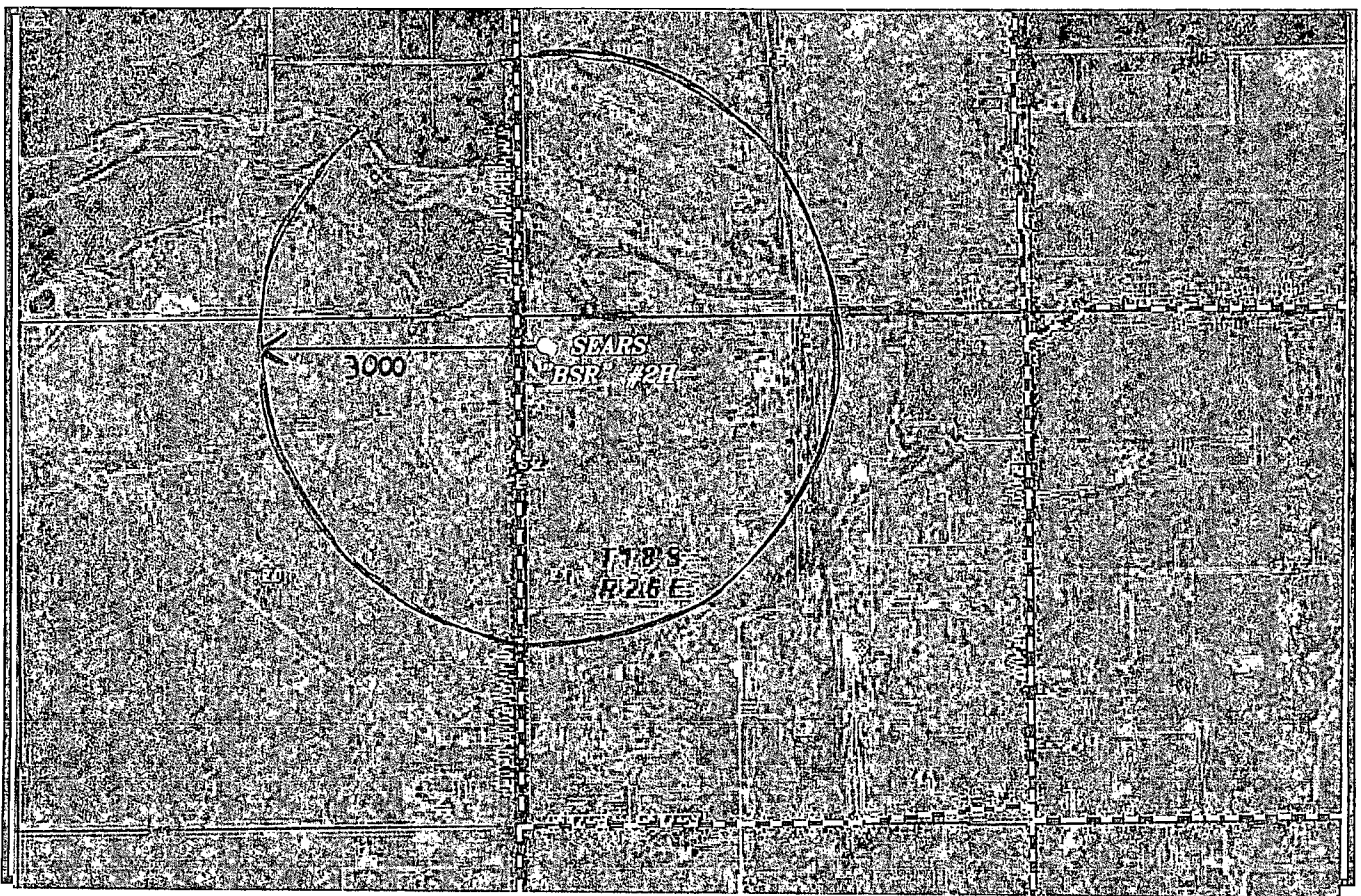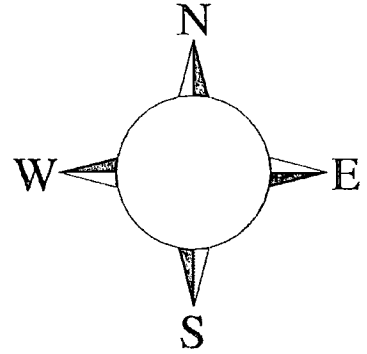

Assumed 100 ppm ROE = 3000'

100 ppm H₂S concentration shall trigger activation of this plan.

Emergency Procedures

In the case of a release of gas containing H₂S, the first responder(s) must isolate the area and prevent entry by other persons into the 100 ppm ROE. Additionally the first responder(s) must evacuate any public places encompassed by the 100 ppm ROE. First responder(s) must take care not to injure themselves during this operation. Company and/or local officials must be contacted to aid in this operation. Evacuation of the public should be beyond the 100 ppm ROE.

All responders must have training in the detection of H₂S, measures for protection against the gas, equipment used for protection and emergency response. Additionally, responders must be equipped with H₂S monitors and air packs in order to control the release. Use the “buddy system” to ensure no injuries during the response.

Ignition of Gas Source

Should control of the well be considered lost and ignition considered, take care to protect against exposure to Sulfur Dioxide (SO₂). Intentional ignition must be coordinated with the NMOCD and local officials. Additionally the NM State Police may become involved. NM State Police shall be the Incident Command on scene of any major release. Take care to protect downwind whenever there is an ignition of the gas

Characteristics of H₂S and SO₂

Common Name	Chemical Formula	Specific Gravity	Threshold Limit	Hazardous Limit	Lethal Concentration
Hydrogen Sulfide	H ₂ S	1.189 Air = 1	10 ppm	100 ppm/hr	600 ppm
Sulfur Dioxide	SO ₂	2.21 Air = 1	2 ppm	N/A	1000 ppm

Contacting Authorities

YPC personnel must liaison with local and state agencies to ensure a proper response to a major release. Additionally, the OCD must be notified of the release as soon as possible but no later than 4 hours. Agencies will ask for information such as type and volume of release, wind direction, location of release, etc. Be prepared with all information available. The following call list of essential and potential responders has been prepared for use during a release. YPC Company response must be in coordination with the State of New Mexico’s ‘Hazardous Materials Emergency Response Plan’ (HMER)

Yates Petroleum Corporation Phone Numbers

YPC Office	(575) 748-1471
Wade Bennett/Prod Superintendent	(575) 748-4236
LeeRoy Richards/Assistant Prod Superintendent	(575) 748-4228
Mike Larkin/Drilling	(575) 748-4222
Paul Hanes/Prod. Foreman/Roswell	(575) 624-2805
Tim Bussell/Drilling Superintendent	(575) 748-4221
Artesia Answering Service	(575) 748-4302
(During non-office hours)	

Agency Call List

Eddy County (575)

Artesia

State Police	746-2703
City Police.....	746-2703
Sheriff's Office	746-9888
Ambulance.....	911
Fire Department.....	746-2701
LEPC (Local Emergency Planning Committee)	746-2122
NMOCD.....	748-1283

Carlsbad

State Police	885-3137
City Police.....	885-2111
Sheriff's Office.....	887-7551
Ambulance.....	911
Fire Department.....	885-2111
LEPC (Local Emergency Planning Committee).....	887-3798
US Bureau of Land Management.....	887-6544
New Mexico Emergency Response Commission (Santa Fe)	(505)476-9600
24 HR	(505) 827-9126
New Mexico State Emergency Operations Center.....	(505) 476-9635
National Emergency Response Center (Washington, DC) ...	(800) 424-8802

Other

Boots & Coots IWC	1-800-256-9688 or (281) 931-8884
Cudd Pressure Control.....	(915) 699-0139 or (915) 563-3356
Halliburton	(575) 746-2757
B. J. Services.....	(575) 746-3569

Flight For Life -4000 24th St, Lubbock, TX	(806) 743-9911
Aerocare -Rr 3 Box 49f, Lubbock, TX	(806) 747-8923
Med Flight Air Amb 2301 Yale Blvd SE #D3, Albuq, NM	(505) 842-4433
S B Air Med Svc 2505 Clark Carr Loop SE, Albuq, NM	(505) 842-4949