Form 3160-5 (August 2007)

UNITED STATES DEPARTMENT OF THE INTERIOR BUREAU OF LAND MANAGEMENT

OCD Artesia

FORM APPROVED OMB NO. 1004-0135 Expires: July 31, 2010

SUNDRY NOTICES AND REPORTS ON WELLS

NMLC030570A

Lease Serial No.

abandoned well. Use form 3160-3 (APD) for such proposals.		6. If Indian, Allottee or Tribe Name	
SUBMIT IN TRIPLICATE - Other instructions on reverse side.		7. If Unit or CA/Agreement, Name and/or No.	
Type of Well Gas Well □ Other		8. Well Name and No. STEVENS A 11	
2. Name of Operator Contact: L BURNETT OIL CO., INC. E-Mail: lgarvis@bur	ESLIE M GARVIS nettoil.com	9. API Well No. 30-015-33131	
3a. Address BURNETT PLAZA - SUITE 1500 801 CHERRY STREE FORT WORTH, TX 76102	3b. Phone No. (include area code) TPHJN 817F-382 F 5NOFFEXI; 63 2 2676102	10. Field and Pool, or Exploratory CEDAR LAKE GLORIETA YESO	
4. Location of Well (Footage, Sec., T., R., M., or Survey Description)		11. County or Parish, and State	
Sec 13 T17S R30E 2310FNL 2310FWL		EDDY COUNTY COUNTY, NM	

12. CHECK APPROPRIATE BOX(ES) TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

TYPE OF SUBMISSION	TYPE OF ACTION			
Notice of Intent ■ Notice of Intent Notice of Intent	☐ Acidize☐ Alter Casing	☐ Deepen ☐ Fracture Treat	☐ Production (Start/Resume) ☐ Reclamation	☐ Water Shut-Off ☐ Well Integrity
☐ Subsequent Report	☐ Casing Repair	☐ New Construction	☐ Recomplete	Other
☐ Final Abandonment Notice	Change Plans Convert to Injection	☐ Plug and Abandon☐ Plug Back☐	☐ Temporarily Abandon ☐ Water Disposal	Site-Facility Diagra- m/Security-Plan

13. Describe Proposed or Completed Operation (clearly state all pertinent details, including estimated starting date of any proposed work and approximate duration thereof. If the proposal is to deepen directionally or recomplete horizontally, give subsurface locations and measured and true vertical depths of all pertinent markers and zones. Attach the Bond under which the work will be performed or provide the Bond No. on file with BLM/BIA. Required subsequent reports shall be filed within 30 days following completion of the involved operations. If the operation results in a multiple completion or recompletion in a new interval, a Form 3160-4 shall be filed once testing has been completed. Final Abandonment Notices shall be filed only after all requirements, including reclamation, have been completed, and the operator has determined that the site is ready for final inspection.)


Burnett Oil is requesting a change to the previously approved BOP/Choke Manifold Diagram for this deepening. Please see the attached revised diagram.

Accepted for record NMOCD 109 2014

FEB 25 2014 NMOCD ARTESIA

SEE ATTACHED FOR CONDITIONS OF APPROVAL

14. I hereby certify that the	ne foregoing is true and correct. Electronic Submission #235909 verifie For BURNETT OIL CO., If Committed to AFMSS for processing	IC., se	nt to the Carlsbad	•	
Name(Printed/Typed)	LESLIE M GARVIS	Title REGULATORY COORDINATOR			
Signature	(Électronic Submission)	Date	02/19/2014	APPROVED	
THIS SPACE FOR FEDERAL OR STATE OFFICE USE					
Approved By		Title		FEB 1 9 204	
Conditions of approval, if any, are attached. Approval of this notice does not warrant or certify that the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon.		Office	;	BY EAU OF LAND MANAGEMENT CARL SBAD FIELD OFFICE	
Title 18 U.S.C. Section 100	1 and Title 43 U.S.C. Section 1212, make it a crime for any pe	rson kno	wingly and willfully to ma		

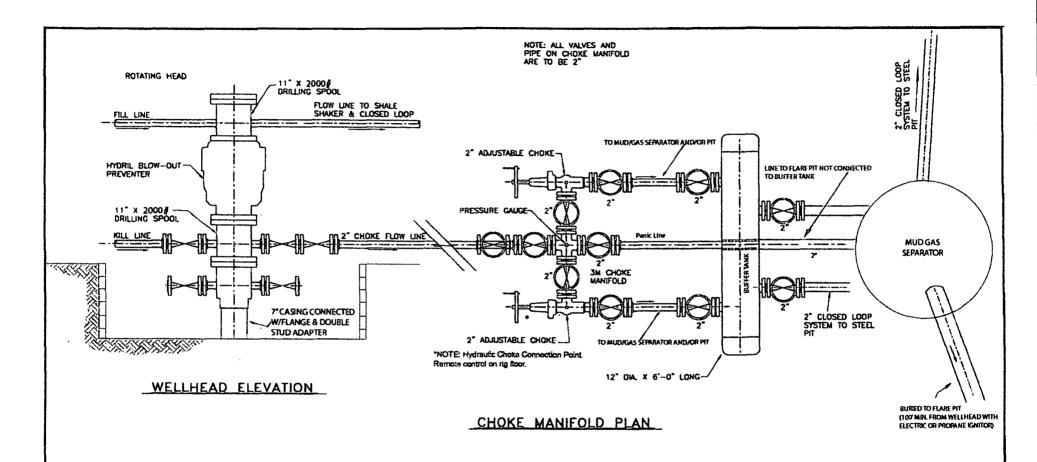

BURNETT OIL COMPANY, INC.
BLOWOUT PREVENTER &
CHOKE MANIFOLD DIAGRAM
2000 PSI WORKING PRESSURE

EPS PROJECT NUMBER - 10-028
DATE: JANUARY 29, 2010
REVISION DATE: FEBRUARY 23, 2010
REVISION DATE (IG): AUGUST 28, 2013
REVISION DATE (IG): SEPTEMBER 30, 2013

Stevens A 11 30-015-33131 Burnet Oil Co. February 19, 2014 Conditions of Approval

- 1. Work to be complete within 180 days.
- 2. Surface disturbance beyond the existing pad requires prior approval.
- 3. Closed loop system to be used.
- 4. H2S monitoring equipment should be onsite for personnel protection from surrounding oil operations. Operator should not encounter H2S while deepening.
- 5. BOP to be tested to 2000 psi based on BHP expected.
- 6. Variance for stand-off of less than 0.422" is approved due to NMOCD classifying the formations in this area as the Yeso group.
- 7. Cement on liner shall tie back to liner top, if this is not achieved contact appropriate BLM office. When plugged, cement plug will be required across this tie back and across squeezed perforations.
- 8. Test casing as per Onshore Order 2.III.B.1.h.
- 9. Subsequent sundry detailing work and current well test data are to be submitted when work is complete.

JAM 021914